



LED	Status	Description
 Power	-Solid -Blinking -Off	-Power is on -Device is in power-saving mode -Power is off
 Ethernet	-Solid -Blinking -Off	-Ethernet is connected, no data transmission -Data is transmitted -No ethernet connection
 Data	-Solid -Blinking -Off	-Device is connected to a powerline network -Device is receiving or sending data -Device not connected to powerline network or in power-saving mode

Button	Description
Factory Reset	Press the Factory Reset button for 1 second, then the Powerline Adapter device will return to its factory default settings.
Pair/ Security	After plugging in your new PEA adapter, press the pair button for 3-10 seconds, then press the pair button on one of the other PEA adapters in your existing network for 3-10 seconds. Both buttons should be pressed within 2 minutes of each other.



## 200 Mbps\* Powerline Ethernet Adapter

Thank you for choosing Dish TV for your Powerline Ethernet Adapter.  
This guide will provide you with simple instructions for connecting and operating your Dish TV Powerline Ethernet Adapter

Further help can be found at [www.dishtv.co.nz](http://www.dishtv.co.nz)

### Before you start


Please check that your Dish TV Powerline Ethernet Adapter box contains all of the following components.



2x Powerline Ethernet Adapter (200Mbps\*)



CD-ROM (Advanced Configuration and User Manual)

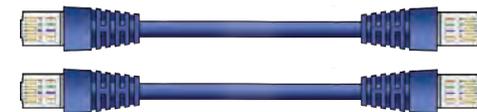

2x Ethernet Cables

\*Note: Access speed is a maximum theoretical achievable speed.



**Requirements**

**For advanced settings and User Manual use:**

- Computer
- Windows 98SE, 2000, ME, XP, Vista, Windows 7, Mac OS, Linux
- CD-ROM Drive
- Network Interface Card

**Power Supply:**


- 100~240VAC, 50-60HZ

**For Internet Access:**

- Cable or DSL Modem
- Subscription with an Internet Service Provider (ISP)


**Scenario One: General Installation**

After plugging in your new PEA adapters, press the pair button on one for 3-10 seconds, then press the pair button on the other PEA adapter in for 3-10 seconds. Both buttons need to be pressed within **2 minutes** of each other for pairing to happen.

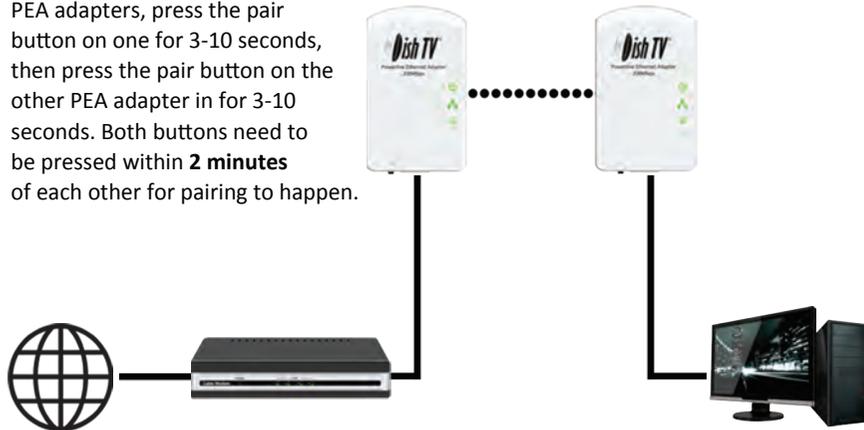

**Scenario Two: Extend Powerline Network**

After plugging in your new PEA adapters, press the pair button on one for 3-10 seconds, then press the pair button on the other PEA adapters for 3-10 seconds. All buttons need to be pressed within **2 minutes** of the first for pairing to happen.

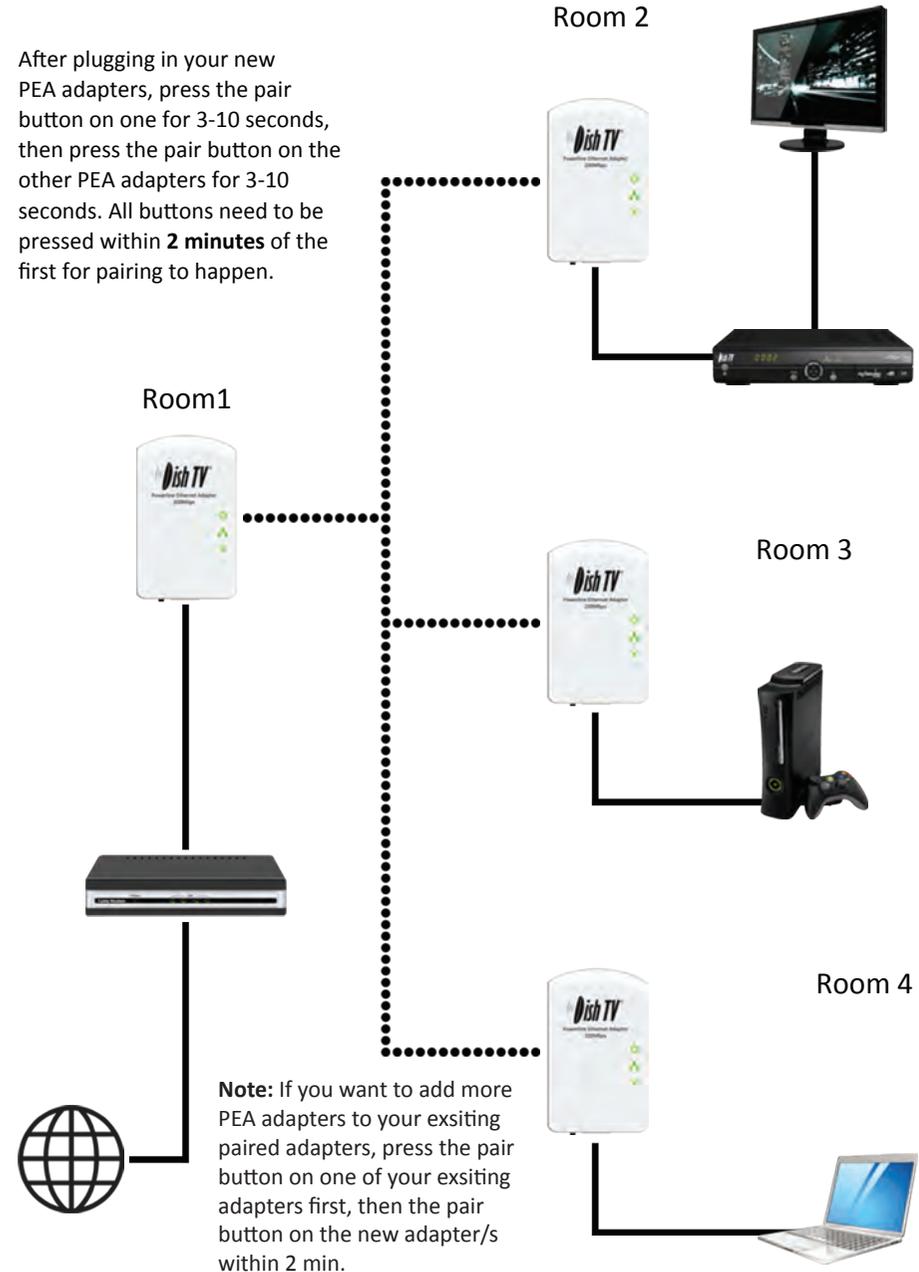

**Note:** If you want to add more PEA adapters to your existing paired adapters, press the pair button on one of your existing adapters first, then the pair button on the new adapter/s within 2 min.