



Wireless Adapter User Guide

please read these instructions carefully
and retain for future reference

Help line

For assistance during normal working hours (9am-5pm, Mon-Fri, New Zealand local time) call Oriental Pacific International Ltd.

NZ call: 0800 89 85 80

Email: service@orientalpacific.com

Package Contents:

Open the box carefully, check the following articles:

© one 54M Wireless USB Adapter

© one CD

© one user manual

Please contact with the franchiser timely if any damage on the product or any shortage of the accessories.

minimum configuration requirements

200MHz CPU or above

64M memory or above

5.0 internet Browser version or above

Windows 98 or above

Wireless Network Access point

Available USB Port

54M Wireless Adapter Quick Installation Guide

1. Hardware Installation

Hardware Installation for USB Adapter


Connect 54M USB Adapter to the USB interface on your computer.

2. Software Installation for Windows XP


When “Found New Hardware Wizard” is prompted, click Cancel,



2. then insert the Resource CD into your CD-ROM drive. Choose adapter driver, pitch on I accept the terms of the license agreement , then click Next to continue;

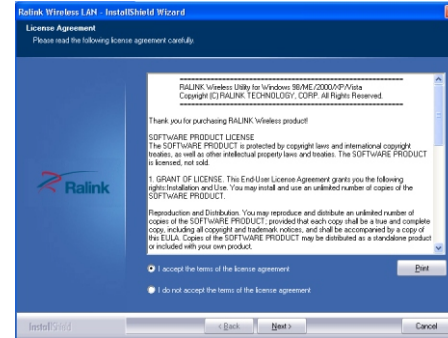

2. Follow the Install Shield Wizard steps, and click the Finish button when done to reboot the system, Just confirmed it like below:

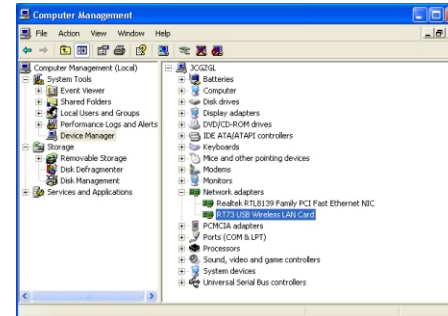


Note: If Windows XP warns about Windows Logo testing, click Continue Anyway to continue the installation.


3. Make infrastructure connection

Double click the icon in red circle

You will see:

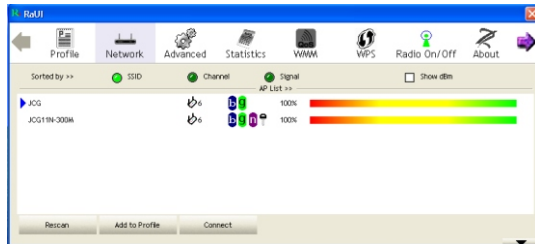


You can click the button Rescan to find which AP is in range, they will show on the window, choice one you want to connect, and click the button Add to Profile, and click ok, and click Activate to finish the connection operation, in this way an infrastructure connection is accomplished.

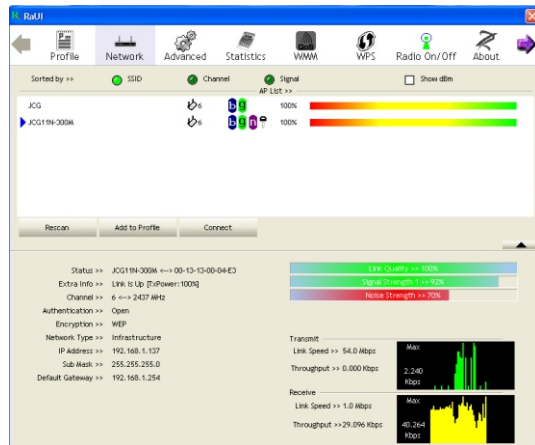

- 3 -


Note: please choose correct channel setting up to your law, for example, ch13 is permitted in your country, and you set your router at ch13, while you choose ch1-ch11 (default setting), you will never find the AP, and you will have to choose ch1-ch13 setting in Advanced page as below

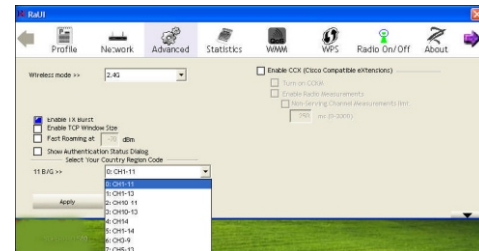


4. Make Ad-Hoc mode connection

4.1 Make an Ad-Hoc SSID

Click Profile button, then click Add to new profile

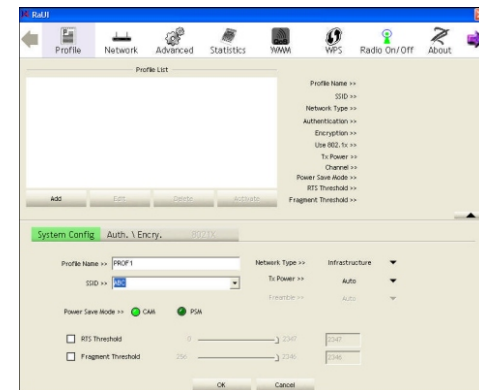


- 4 -

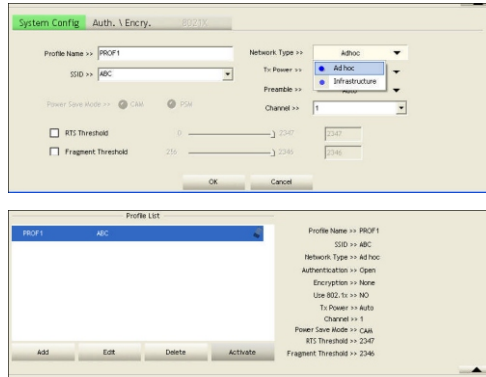


Click the Activate button to connect to network.

4.2 Setup static IP address for the Ad-Hoc link, Click start>settings>control Panel>network connections,

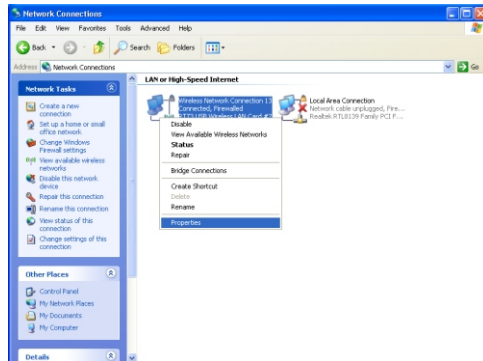

At its property page, double click item Internet Protocol(TCP/IP)

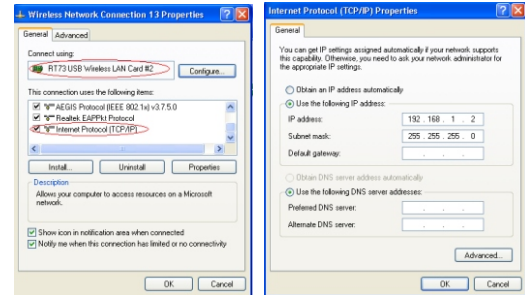

4.3 Ad-Hoc setup for one point accomplished

4.4 Setup another Ad-Hoc point as step 4.1,4.2

4.5 Ad-Hoc mode link accomplished. And you can visit each other.

Note: To make an Ad-Hoc modelink, Do remember to choose the same channel, its static IP address should be in the same subnet, and the SSID should be the same too

5. Some help information in Rlink Wireless Utility :

If you need detailed help, please click the Help button



Warranty Card

This product is guaranteed against faulty materials and workmanship for a period of one year from the date of purchase with proof of purchase. The obligation to the purchaser under this warranty is limited to servicing the unit and replacing defective parts or refund when the product is returned freight prepaid to the retailer with proof of purchase. This warranty becomes void if the product has been tampered with, damaged by accident, damaged in any other way by improper use or has been purchased second hand. All production orders have quality inspections. In the unlikely event of a deficiency, please contact the retailer from which this product was purchased.

WARRANTY FOR APPLIANCES USED COMMERCIALY LIMITED TO 90 DAYS

Type of Appliance: _____

Model No.: _____ Purchase Date: _____

Product Purchased From: _____

Your Name: _____

Address: _____

_____ Phone Number: _____

IMPORTANT!

Please retain this warranty card along with your purchase receipt. Please do not post to the retailer. If service or a warranty claim is required, both of these documents are to be returned with the appliance to your retailer, otherwise a fee may be charged or warranty declined. For technical help contact the helpline.