

iPad

Set Up Instructions




Installation of iPad IW Player


1. Power on iPad & go to App Store.




2. Search for Industry Weapon.

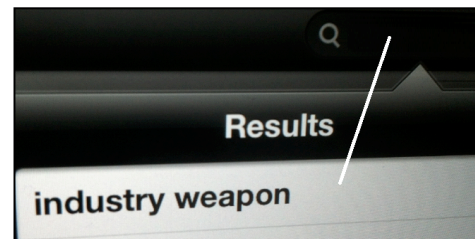

3. Install App.

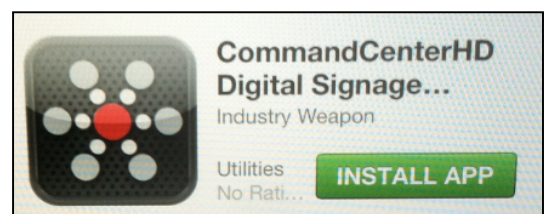

4. Open app & go to bottom of page to check version of player in **About This App**

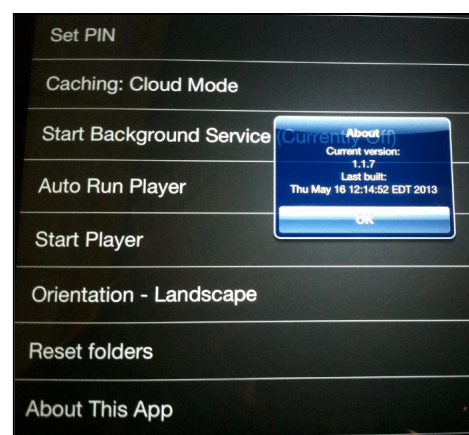


Requirements:

- IW Player Version 1.1.7 or later
- iOS 4.3 or later

Please Note: If you have an earlier version than 1.1.7, then go to App Store & select update IW Player.

iPad IW Player Device Settings
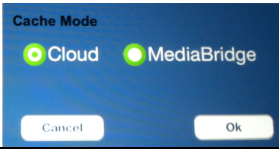
| | |
|---|---|
| | |
| Set Device # | CCHD Device # Assigned to iPad Player |
| Set Account | CCHD Account Name (http://____.channelshd.com) |
| Set Pin | CCHD Account Pin assigned in Configuration |
| Caching (Cloud or MediaBridge) | MediaBridge will require IP Address from CCHD  |
| Start Background Service | Check option ON once Device ID, Account & Pin Set |
| Auto Run Player | Check option ON to have player auto run on startup |
| Start Player | Select this option to start player immediately |
| Orientation (Landscape/Portrait) | Select either Landscape or Portrait Mode |
| Clear Cache | Select this option to clear cache on player |
| Reset Folders | Select this option to clear or reset folders |

CommandCenterHD Configuration

| | |
|-------------------------------|---|
| | |
| Set Account | Account Name listed under Account Pin section |
| Set Pin | Unique Pin listed under Account Pin section |
| MediaBridge IP Address | IP Address listed under MediaBridge Zones |

ACCOUNT PIN

Your Account Name is and unique pin is . These will be used when making a connection between CCHD and MediaBridge servers.

MEDIABRIDGE ZONES

Zones connect MediaBridge servers with their assigned Devices. Add new zones below. Apply zones to Devices in the Device manager.

| Zone Name | Zone ID | IP Address | Device Count | Edit | Delete |
|----------------------|----------------------|----------------------|--------------|---|---|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | 15 |  |  |

Add MediaBridge Zone

CCHD Device Settings

| | CCHD iPad (iOS) Settings |
|---|---|
| Player Name | Player Name (ex. - iPad Player) |
| Device ID | # Automatically Assigned after adding new Device |
| Connect Mode (MediaBridge or CCHD) | MediaBridge is the default. Select a Zone if available. CCHD (Cloud) does not require a Zone. |
| Player Model | Select iOS from Drop Down |
| *MediaBridge IP Override | Not required for iOS |
| *Player Rate Limit | Not required for iOS |
| *Set Synchronization Window | Not required for iOS |
| *Enable MediaBridge for 4600 | Not required for iOS |
| *MAC Address | Not required for iOS |
| *Location ID | Not required for iOS |
| Format (Horizontal or Portrait) | Horizontal is the default. If using portrait mode, you must also adjust device settings. |
| Video Quality (High, Medium or Low) | Not required for iOS. High is the default |
| Player Channel | Select Channel from Drop Down |
| Player Status (Active or Inactive) | Inactive is the default |
| *Highlight Touch | Not required for iOS |

| | |
|---|--|
| Admin Touch Position (Top Left, Top Right, Bottom Left, Bottom Right, No Admin Hotspot) | Top Left is the default |
| Zip Code | Enter 5-Digit Zip (ex. - 15220) |
| Scale (Fahrenheit or Celsius) | Fahrenheit is the default |
| Time Zone | Select Drop Down (ex. - Eastern Standard Time) |
| *Device Contact Email / Notes | Not required for iOS |
| Password | Standard password is default |

DATA CENTER EQUIPPED WITH:

- UPS power with battery and generator backup
- Secure location with 24-hour card access
- Climate controlled environment with redundant cooling systems
- Chemical fire suppression
- Closed circuit video surveillance
- Dual/redundant power across separate breakers for all server and storage devices



Web Browser CCHD Application

HTTPS/Port 443

Connection to CCHD for media distribution, device and data synchronization packages. (TCP)

HTTP/Port 80

External web requests, weather, news feeds, other external sources. (TCP)

