

FREEIP

User Manual

For Android

Version V 5.1.30

Introduction:.....	- 2 -
1、 Installation and registration.....	- 3 -
1.1、 Install APP to Android phone.....	- 3 -
1.2、 Registered account.....	- 3 -
2.Add Device.....	- 5 -
2.1、 Use SN code add IPC/NVR/DVR.....	- 5 -
2.2、 Manage Device.....	- 6 -
2.2.1、 How to add multiple devices;	- 6 -
2.2.2、 Delete Device;.....	- 6 -
2.2.3、 Device name modification.....	- 7 -
2.3、 Use RTSP port add IPC/NVR/DVR.....	- 7 -
2.4 user 【LAN Search】 to add IPC/NVR/DVR.....	- 8 -
3.Functions Introduction.....	- 10 -
4.Playback.....	- 11 -
5.FAQ.....	- 11 -

Introduction:

Welcome to use FREEIP App. FREEIP is an IPC/DVR/NVR real-time online watch and management app for free. Simple and quick operation to allow customers to more easily experience.


1、 Installation and registration

1.1、 Install APP to Android phone

Use your Android phone to visit :

<http://www.freeip.com/index.php?r=site/androidqrcode> download FREEIP application and Installation. So your Android phone interface







will be displayed this application icon  after successful installation.

1.2、 Registered account

When using the FREEIP for the first time , please register for free accounts. Successful registered account just need to fill in the valid email address and initial password . Using the successful registered account to login the FREEIP. As it

show in the following pictures.

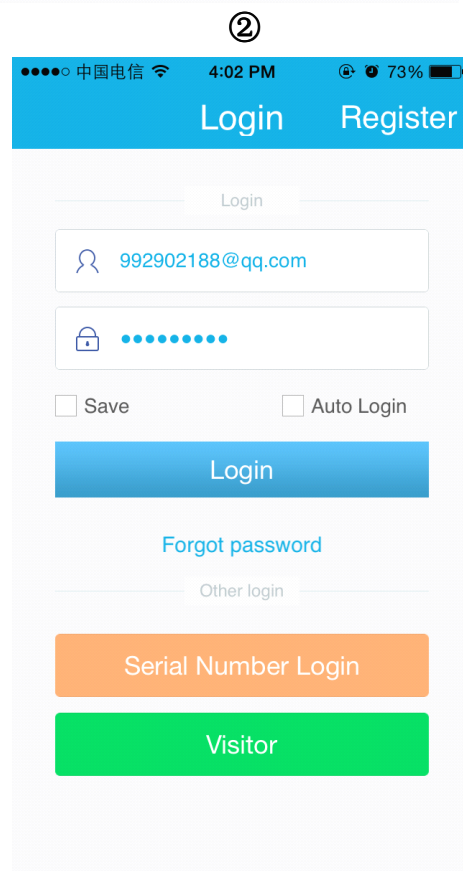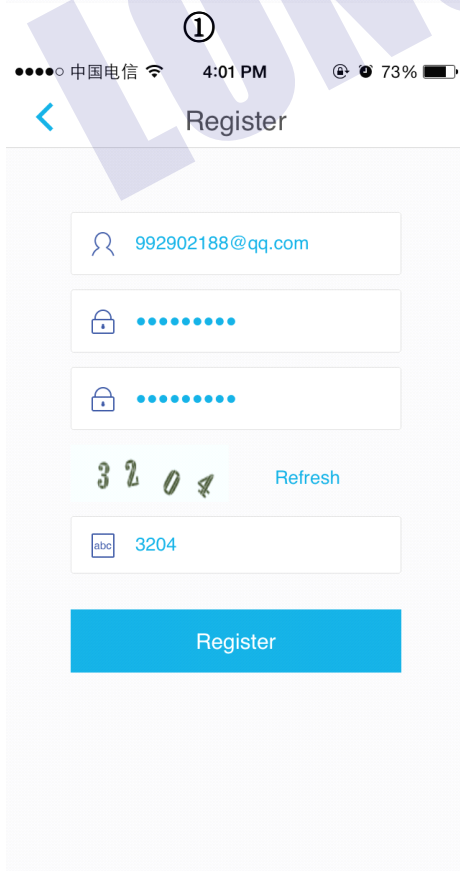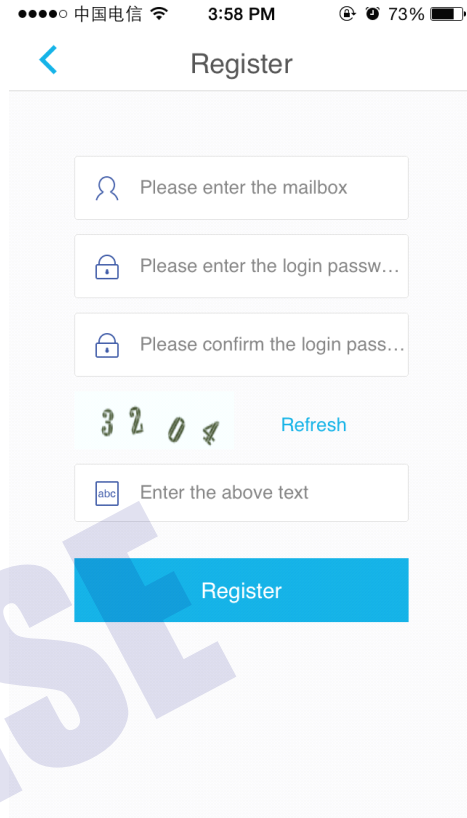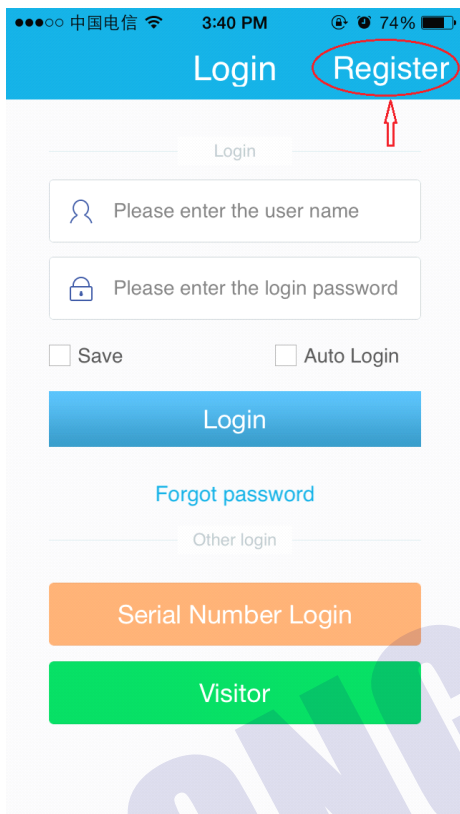


③

④

2.Add Device

2.1、 Use SN code add IPC/NVR/DVR.

After the first successful login FREEIP , the system will be prompted to add device , click “ add device” directly,system will automatic startup QR code scanning state. At this time only need to place the QR code icon in the scanning area, the system will automatically identify. As shown below:

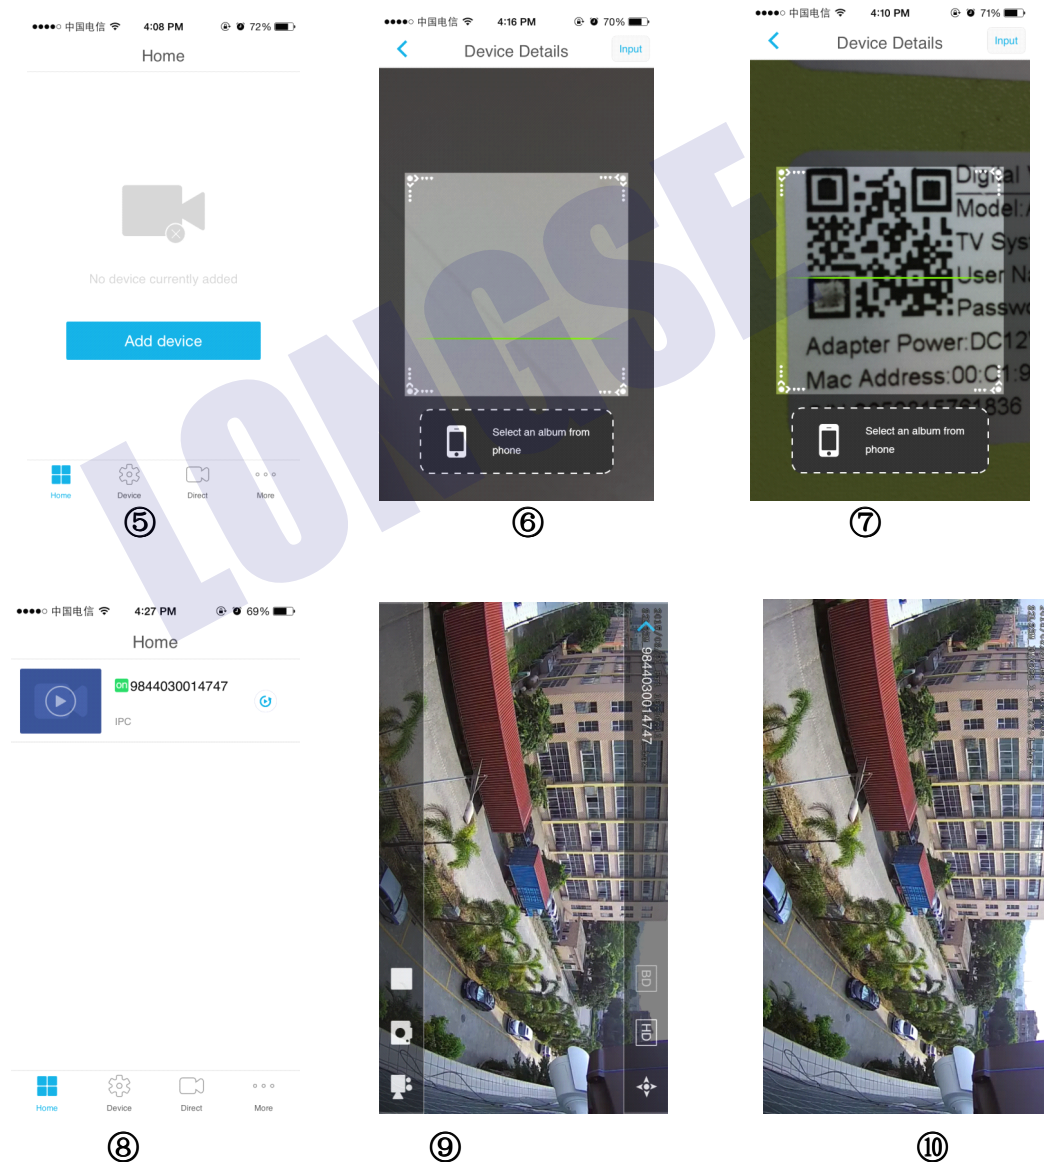

2.2、Manage Device




Click **Devices**, and enter into the device management menu. Executed to add multiple devices,, delete and modify device name. As shown below:


2.2.1、 How to add multiple devices;



Pic 1

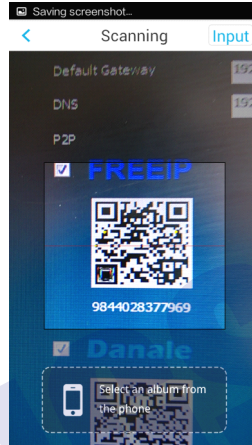


Pic 2

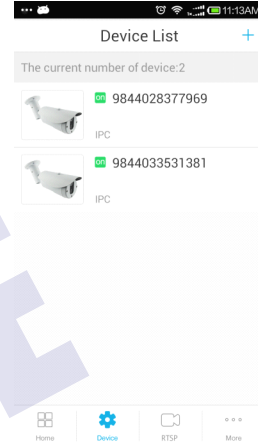


Pic 3

2.2.2、 Delete Device;


Click on the selected device you need to delete, and click **【delete】** on the jump page

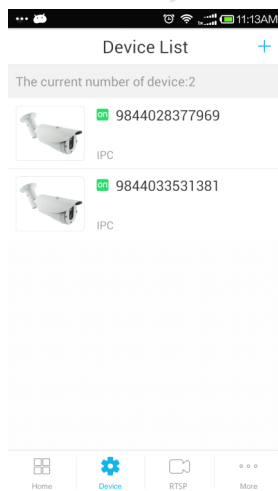

Pic 4

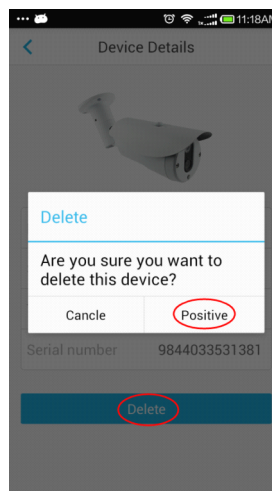

Pic 5

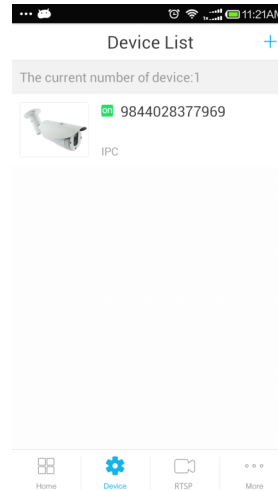


Pic 6

2.2.3、 Device name modification


Click on the selected device you need to modify, edit on the “device name” 。



Pic 7

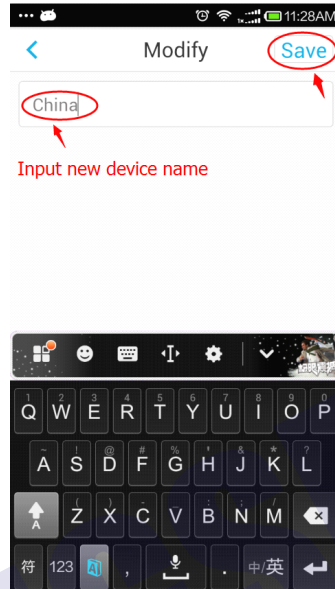

Pic 8

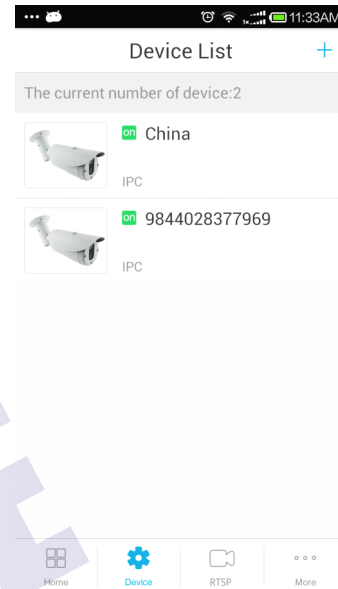


Pic 9


2.3、 Use RTSP port add IPC/NVR/DVR.




Click **Direct** to enter into operation interface, And click “Add device”, first select “Device type” of your current device, input “Device name”, fill in the device IP address in address bar , and fill in the RTSP port value of the current device in the port bar, and fill in account and password of the current device in the userName and Password. Click the “Save” button after fill in the correct information. (**Note: you must ensure that the Android phone and devices in the same local area network (LAN)**)

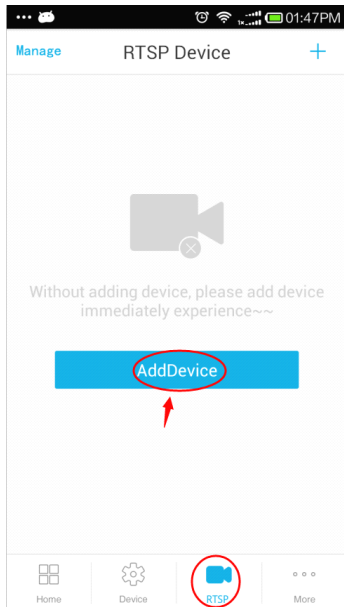

Pic 10

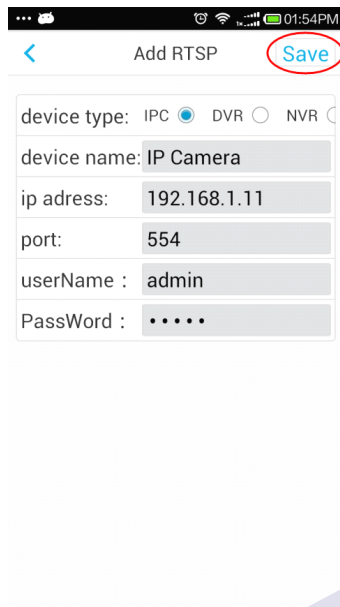

Pic 11

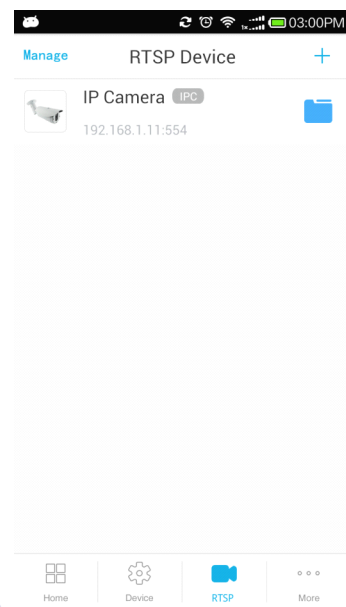

Pic 12

2.4 user 【LAN Search】 to add IPC/NVR/DVR

Click **Direct** to enter into operation interface, And click **【Add device】**

next click **【LAN Search】** finally click  to add direct. As shown below: (Note: you must ensure that the iPhone and devices in the same local area network (LAN))



No device currently added

Add device

Pic 13

LAN Search

Manually add



Make sure the wifi connection is normal

LAN Search

LAN Search Manually add


- NVR 192.168.1.111:554
- NVR 192.168.1.88:554
- NVR 192.168.1.89:554
- S400 192.168.1.129:80
- IPC 192.168.1.11:80












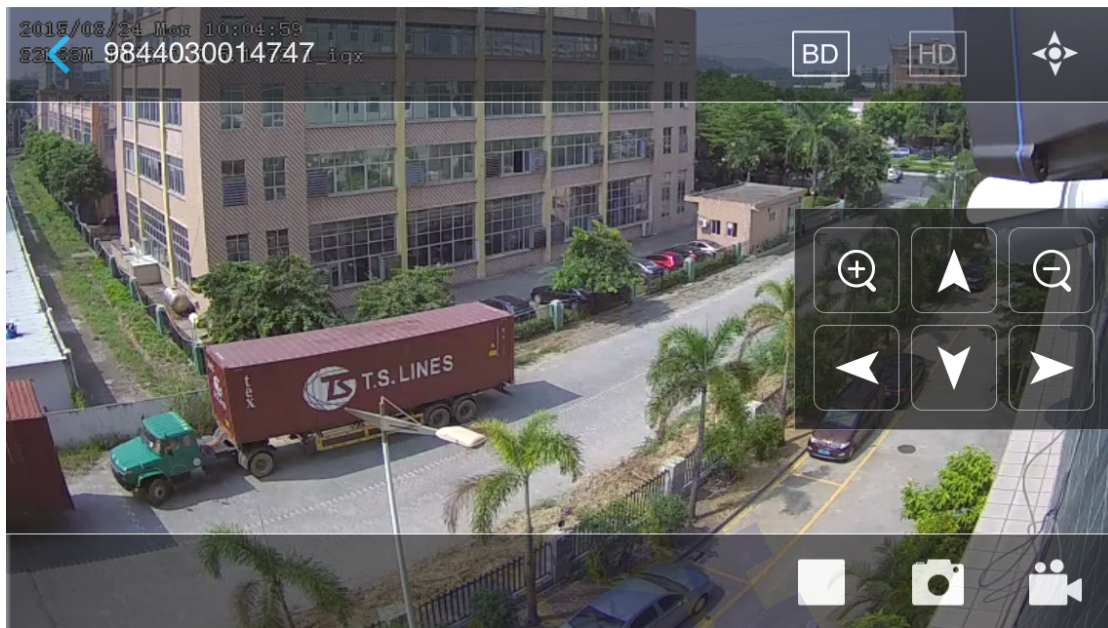



Pic15

- S400 192.168.1.129:80
- IPC 192.168.1.11:80
- IPC 192.168.1.92:80
- NVR 192.168.1.111:554
- NVR 192.168.1.88:554

Pic16

3.Functions Introduction




button	function
	Return to the higher level menu
	Blu-ray Disc
	High Definition
	PTZ control
	 : zoom in  : zoom out  : up  : left  : down  : right
	Stop
	Capture
	Record
	Play


4.Playback

Step 1:Click **【More】** to enter into operation interface

Step 2: Click **【Pictures】** into choice the Record video which you want to playback.

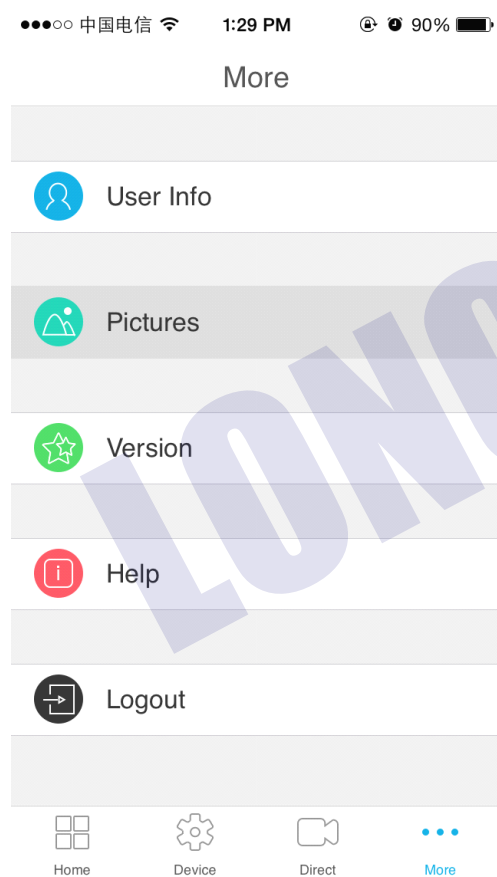

Pic17

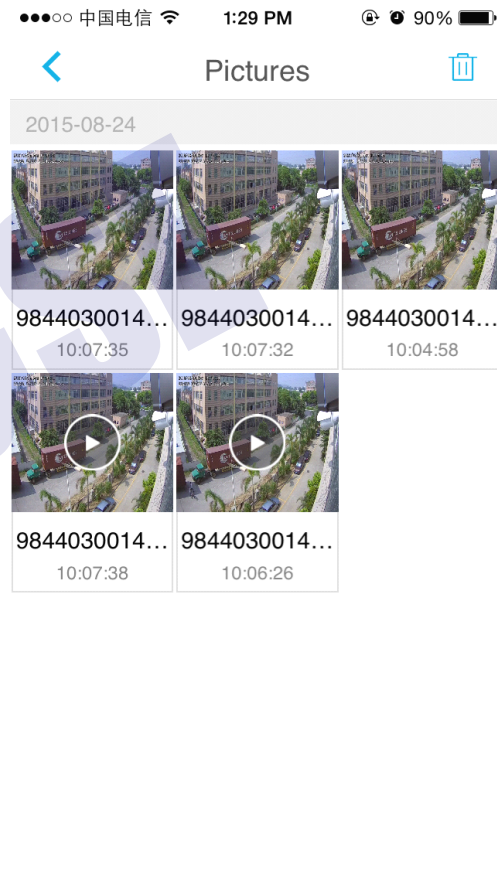

Pic18

5.FAQ

1、 FREEIP installation requirements on the mobile operating system?

Answer: Android smart phone operating system Android 2. 3. 3 versions and above all can install.

2、 Which mailbox support to register account?

Answer: To meet the demand of customers support, FREEIP server support the application registration of multiple valid mailboxes on the internet.

3、 The registered account can be log in on different mobile phone at the same time?

Answer: A same registered account can realize to log in and preview at different mobile phones at the same time.

4、 When scan the QR code to add device, it shows “ the device has been binding” . What happened?

Answer: FREEIP system stipulated one device can only added by one account, can not added by multiple registered accounts at the same time.

5、 Why the added device appears to disconnect during previewing?

Answer: Please check the network status of the device and mobile phone, ensure smooth network status. Try to preview at the BD status. And we suggest to use WIFI when preview at the HD status.

6、 My mobile language is foreign language, why can not open FREEIP?

Answer: FREEIP system only support Chinese and English language at present.