

A decorative graphic on the left side of the page, consisting of a large dashed circle, a solid blue circle, and several overlapping curved lines in blue and grey.

Product Manual

## **DB35.2 Serial ATA**

**ST3500841SCE**

**ST3400833SCE**

**ST3300822SCE**

**ST3250824SCE**

**ST3200827SCE**

**ST3160212SCE**

**ST3120213SCE**

**ST3802110SCE**

100390003  
Rev. C  
August 2007

Copyright © 2005-2007 Seagate Technology LLC. All rights reserved. Printed in U.S.A.

Publication number: 100390003, Rev. C

August 2007

Seagate, Seagate Technology and the Wave logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. DB35 Series, SeaTools and SeaTDD are either trademarks or registered trademarks of Seagate Technology LLC or one of its affiliated companies in the United States and/or other countries. All other trademarks or registered trademarks are the property of their respective owners.

One gigabyte, or GB, equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting. Seagate reserves the right to change, without notice, product offerings or specifications.

# Contents

<b>1.0</b>	<b>Introduction</b>	<b>1</b>
1.1	About the Serial ATA interface	2
<b>2.0</b>	<b>Drive specifications</b>	<b>3</b>
2.1	Specification summaries	3
2.2	Formatted capacity	10
2.2.1	LBA mode	10
2.3	Default logical geometry	10
2.4	Recording and interface technology	10
2.5	Physical characteristics	12
2.6	Seek time	12
2.7	Start/stop times	13
2.8	Power specifications	13
2.8.1	Power consumption	13
2.8.2	Conducted noise	15
2.8.3	Voltage tolerance	15
2.8.4	Power-management modes	15
2.9	Environmental specifications	16
2.9.1	Ambient temperature	16
2.9.2	Temperature gradient	16
2.9.3	Humidity	16
2.9.4	Altitude	16
2.9.5	Shock	16
2.9.6	Vibration	17
2.10	Acoustics	17
2.11	Electromagnetic immunity	18
2.12	Reliability	18
2.13	Agency certification	19
2.13.1	Safety certification	19
2.13.2	Electromagnetic compatibility	19
2.13.3	FCC verification	20
2.14	Environmental protection	20
2.14.1	European Union Restriction of Hazardous Substances (RoHS)	20
2.15	Corrosive environment	21
<b>3.0</b>	<b>Configuring and mounting the drive</b>	<b>23</b>
3.1	Handling and static-discharge precautions	23
3.2	Breather filter hole precautions	24
3.3	Configuring the drive	25
3.4	Serial ATA cables and connectors	25
3.5	Drive mounting	26
<b>4.0</b>	<b>Serial ATA (SATA) interface</b>	<b>27</b>
4.1	Hot-Plug compatibility	27
4.2	Serial ATA device plug connector pin definitions	28
4.3	Supported ATA commands	29
4.3.1	Identify Device command	31
4.3.2	Set Features command	34
4.3.3	S.M.A.R.T. commands	35
<b>5.0</b>	<b>Seagate Technology support services</b>	<b>37</b>



## List of Figures

Figure 1.	Typical 5V startup and operation current profile . . . . .	14
Figure 2.	Typical 12V startup and operation current profile . . . . .	14
Figure 3.	Breather filter hole location . . . . .	24
Figure 4.	Serial ATA jumper block and connectors . . . . .	25
Figure 5.	Attaching SATA cabling . . . . .	25
Figure 6.	Mounting dimensions—top, side and end view . . . . .	26



## 1.0 Introduction

---

This manual describes the functional, mechanical and interface specifications for the following Seagate DB35.2 Serial ATA (SATA) model drives:

- ST3500841SCE
- ST3400833SCE
- ST3300822SCE
- ST3250824SCE
- ST3200827SCE
- ST3160212SCE
- ST3120213SCE
- ST3802110SCE

These drives provide the following key features:

- Minimal acoustics for consumer storage usage profile.
- Bedroom quiet performance.
- Optimized power for consumer storage devices.
- Spinup current limited to a maximum of 2 amps.
- 7,200 RPM spindle speed.
- 8 Mbyte buffer: ST3500841SCE, ST3400833SCE, ST3300822SCE, ST3250824SCE, and ST3200827SCE.
- 2 Mbyte buffer: ST3160212SCE, ST3120213SCE, and ST3802110SCE.
- High instantaneous (burst) data-transfer rates (up to 300 Mbytes per second).
- Tunneling Magnetoresistive (TMR) recording heads.
- Native Command Queuing with command ordering to increase performance in demanding applications.
- State-of-the-art cache and on-the-fly error-correction algorithms.
- Full-track multiple-sector transfer capability without local processor intervention.
- 350 Gs nonoperating shock.
- Support for S.M.A.R.T. drive monitoring and reporting.
- SeaTools diagnostic software performs a drive self-test that eliminates unnecessary drive returns.
- Supports latching SATA cables and connectors.

## 1.1 About the Serial ATA interface

The Serial ATA interface provides several advantages over the traditional (parallel) ATA interface. The primary advantages include:

- Easy installation and configuration with true plug-and-play connectivity. It is not necessary to set any jumpers or other configuration options.
- Thinner and more flexible cabling for improved enclosure airflow and ease of installation.
- Scalability to higher performance levels.

In addition, Serial ATA makes the transition from parallel ATA easy by providing legacy software support. Serial ATA was designed to allow you to install a Serial ATA host adapter and Serial ATA disc drive in your current system and expect all of your existing applications to work as normal.

The Serial ATA interface connects each disc drive in a point-to-point configuration with the Serial ATA host adapter. There is no master/slave relationship with Serial ATA devices like there is with parallel ATA. If two drives are attached on one Serial ATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. This essentially means both drives behave as if they are Device 0 (master) devices.

**Note.** The host adapter may, optionally, emulate a master/slave environment to host software where two devices on separate Serial ATA ports are represented to host software as a Device 0 (master) and Device 1 (slave) accessed at the same set of host bus addresses. A host adapter that emulates a master/slave environment manages two sets of shadow registers. This is not a typical Serial ATA environment.

The Serial ATA host adapter and drive share the function of emulating parallel ATA device behavior to provide backward compatibility with existing host systems and software. The Command and Control Block registers, PIO and DMA data transfers, resets, and interrupts are all emulated.

The Serial ATA host adapter contains a set of registers that shadow the contents of the traditional device registers, referred to as the Shadow Register Block. All Serial ATA devices behave like Device 0 devices. For additional information about how Serial ATA emulates parallel ATA, refer to the “Serial ATA: High Speed Serialized AT Attachment” specification. The specification can be downloaded from [www.serialata.org](http://www.serialata.org).



## 2.0 Drive specifications

---

Unless otherwise noted, all specifications are measured under ambient conditions, at 25°C, and nominal power. For convenience, the phrases *the drive* and *this drive* are used throughout this manual to indicate the following models:

ST3500841SCE	ST3250824SCE	ST3120213SCE
ST3400833SCE	ST3200827SCE	ST3802110SCE
ST3300822SCE	ST3160212SCE	

### 2.1 Specification summaries

The specifications listed in tables 1 and 2 are for quick reference. For details on specification measurement or definition, see the appropriate section of this manual.

**Table 1: Drive specifications for 500 and 400 Gbyte models**

Drive specification	ST3500841SCE	ST3400833SCE
Formatted Gbytes (512 bytes/sector)*	500	400
Guaranteed sectors	976,773,168	781,422,768
Bytes per sector	512	
Default sectors per track	63	
Default read/write heads	16	
Default cylinders	16,383	
Recording density in BPI (kbits/inch max)	790.1	
Track density TPI (ktracks/inch avg)	124.5	
Areal density (Gbits/inch <sup>2</sup> avg)	97.96	
Spindle speed (RPM)	7,200	
Internal data transfer rate (Mbits/sec max)	815.2	
Sustained transfer rate (Mbytes/sec max)	65	
I/O data transfer rate (Mbytes/sec max)	300	
ATA data-transfer modes supported	PIO modes 0–4 Multiword DMA modes 0–2 Ultra DMA modes 0–6	
SATA data-transfer modes supported	3.0 Gbits/sec 1.5 Gbits/sec	
Cache buffer	8 Mbytes	
Height (max)	26.1 mm (1.028 inches)	
Width (max)	101.6 mm (4.000 inches) +/-0.010 inches	
Length (max)	146.99 mm (5.787 inches)	
Weight (max) grams	710 grams	
Average latency (msec)	4.16	
Power-on to ready (typical)	16 sec	
Standby to ready (typical)	16 sec	
Track-to-track seek time (msec typical)	<0.8 (read), <1.0 (write)	
Average seek (msec typical)	18 (read), 20 (write)	
Startup current (typical) 12V (peak)	2.0 amps	
Seek power (typical)	12.60 watts	
Operating (Consumer Storage Profile)	9.20 watts	
Operating (PVR Storage Profile)	4.88 watts	
Idle mode (typical)	8.00 watts	
Standby mode (typical)	0.800 watts	
Sleep mode (typical)	0.800 watts	
Voltage tolerance (including noise)	5V ± 5% 12V ± 10%	
Ambient temperature	0° to 60°C (operating) –40° to 70°C (nonoperating)	
Temperature gradient (°C per hour max)	20°C (operating) 30°C (nonoperating)	
Relative humidity	5% to 90% (operating) 5% to 95% (nonoperating)	
Relative humidity gradient	30% per hour max	
Wet bulb temperature (°C max)	37.7 (operating) 40.0 (nonoperating)	
Altitude, operating	–60.96 m to 3,048 m (–200 ft to 10,000+ ft)	

**Table 1: Drive specifications for 500 and 400 Gbyte models**

Drive specification	ST3500841SCE	ST3400833SCE
Altitude, nonoperating (meters below mean sea level, max)	-60.96 m to 12,192 m (-200 ft to 40,000+ ft)	
Shock, operating (max at 2 msec)	63 Gs	
Shock, nonoperating (max at 2 msec)	300 Gs	
Vibration, operating	5-22 Hz: +/-0.25", Displacement limited 22-350 Hz: 0.5 Gs 350-500 Hz: 0.25 Gs	
Vibration, nonoperating	5-22 Hz: +/-0.25", Displacement limited 23-350 Hz: 5.0 Gs 351-500 Hz: 1.0 Gs	
Drive acoustics, sound power		
Idle** (bels)	2.79 (typical) 2.96 (max)	2.59 (typical) 2.75 (max)
Operational, CE seeks (bels)	2.82 (typical) 2.97 (max)	2.75 (typical) 2.90 (max)
Operational, PVR seeks (bels)	2.71 (typical) 2.88 (max)	2.61 (typical) 2.75 (max)
Nonrecoverable read errors	1 per 10 <sup>14</sup> bits read	
Annualized Failure Rate (AFR)	0.70%	
Warranty	5 years on distribution units. To determine the warranty for a specific drive, use a web browser to access the following web page: <a href="http://www.seagate.com/support/service/">www.seagate.com/support/service/</a> From this page, click on the "Verify Your Warranty" link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.	
Contact start-stop cycles (25°C, 50% relative humidity)	50,000	
Supports hotplug operation per Serial ATA Revision 2.5 specification	Yes	

\*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

\*\*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels..

**Table 2: Drive specifications for 300, 250 and 200 Gbyte models**

Drive specification	ST3300822SCE	ST3250824SCE	ST3200827SCE
Formatted Gbytes (512 bytes/sector)*	300	250	200
Guaranteed sectors	586,072,368	488,397,168	390,721,968
Bytes per sector	512		
Default sectors per track	63		
Default read/write heads	16		
Default cylinders	16,383		
Recording density in BPI (kbits/inch max)	790.1		
Track density TPI (ktracks/inch avg)	124.5		
Areal density (Gbits/inch <sup>2</sup> avg)	97.69		
Spindle speed (RPM)	7,200		
Internal data transfer rate (Mbits/sec max)	867.2		
Sustained transfer rate (Mbytes/sec max)	76.6		
I/O data transfer rate (Mbytes/sec max)	300		
ATA data-transfer modes supported	PIO modes 0–4 Multiword DMA modes 0–2 Ultra DMA modes 0–6		
SATA data-transfer modes supported	3.0 Gbits/sec 1.5 Gbits/sec		
Cache buffer	8 Mbytes		
Height (max)	26.1 mm (1.028 inches)		
Width (max)	101.6 mm (4.000 inches) +/-0.010 inches		
Length (max)	146.99 mm (5.787 inches)		
Weight (max) grams	655 grams (1.44 lb.)	580 grams (1.28 lb.)	
Average latency (msec)	4.16		
Power-on to ready (typical)	16 sec		
Standby to ready (typical)	16 sec		
Track-to-track seek time (msec typical)	<0.8 (read), <1.0 (write)		
Average seek (msec typical)	18 (read), 20 (write)		
Startup current (typical) 12V (peak)	2.0 amps		
Seek power (typical)	12.60 watts		
Operating (Consumer Storage Profile)	9.20 watts		
Operating (PVR Storage Profile)	4.88 watts		
Idle mode (typical)	8.00 watts		
Standby mode (typical)	0.800 watts		
Sleep mode (typical)	0.800 watts		
Voltage tolerance (including noise)	5V ± 5% 12V ± 10%		
Ambient temperature	0° to 60°C (operating) –40° to 70°C (nonoperating)		
Temperature gradient (°C per hour max)	20°C (operating) 30°C (nonoperating)		
Relative humidity	5% to 90% (operating) 5% to 95% (nonoperating)		
Relative humidity gradient	30% per hour max		
Wet bulb temperature (°C max)	37.7 (operating) 40 (nonoperating)		
Altitude, operating	–60.96 m to 3,048 m (–200 ft to 10,000+ ft)		

**Table 2: Drive specifications for 300, 250 and 200 Gbyte models**

<b>Drive specification</b>	<b>ST3300822SCE</b>	<b>ST3250824SCE</b>	<b>ST3200827SCE</b>
Altitude, nonoperating (meters below mean sea level, max)	-60.96 m to 12,192 m (-200 ft to 40,000+ ft)		
Shock, operating (max at 2 msec)	63 Gs		
Shock, nonoperating (max at 2 msec)	350 Gs		
Vibration, operating	5-22 Hz: +/-0.25", Displacement limited 22-350 Hz: 0.5 Gs 350-500 Hz: 0.25 Gs		
Vibration, nonoperating	5-22 Hz: +/-0.25", Displacement limited 22-350 Hz: 5.0 Gs 350-500 Hz: 1.0 Gs		
Drive acoustics, sound power (bels)			
Idle** (bels)	2.67 (typical) 2.82 (max)		
Operational, CE seeks (bels)	2.80 (typical) 2.90 (max)		
Operational, PVR seeks (bels)	2.68 (typical) 2.80 (max)		
Nonrecoverable read errors	1 per 10 <sup>14</sup> bits read		
Annualized Failure Rate (AFR)	0.70%		
Warranty	5 years on distribution units. To determine the warranty for a specific drive, use a web browser to access the following web page: <a href="http://www.seagate.com/support/service/">www.seagate.com/support/service/</a> From this page, click on the "Verify Your Warranty" link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.		
Contact start-stop cycles (25°C, 50% relative humidity)	50,000		
Supports hotplug operation per Serial ATA Revision 2.5 specification	Yes		

\*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

\*\*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

**Table 3: Drive specifications for 160, 120, and 80 Gbyte models**

Drive specification	ST3160212SCE	ST3120213SCE	ST3802110SCE
Formatted Gbytes (512 bytes/sector)*	160	120	80
Guaranteed sectors	312,581,808	234,441,648	156,301,488
Bytes per sector	512		
Default sectors per track	63		
Default read/write heads	16		
Default cylinders	16,383		
Recording density in BPI (kbits/inch max)	840.0		
Track density TPI (ktracks/inch avg)	141.5		
Areal density (Gbits/inch <sup>2</sup> avg)	119.0		
Spindle speed (RPM)	7,200		
Internal data transfer rate (Mbits/sec max)	867.2		
Sustained transfer rate (Mbytes/sec max)	83.0		
I/O data transfer rate (Mbytes/sec max)	300		
ATA data-transfer modes supported	PIO modes 0–4 Multiword DMA modes 0–2 Ultra DMA modes 0–6		
SATA data-transfer modes supported	3.0 Gbits/sec 1.5 Gbits/sec		
Cache buffer	2 Mbytes		
Height (max)	26.1 mm (1.028 inches)		
Width (max)	101.6 mm (4.000 inches) +/-0.010 inches		
Length (max)	146.99 mm (5.787 inches)		
Weight (typical)	580 grams (1.28 lb.)		
Average latency (msec)	4.16		
Power-on to ready (typical)	16 secs		
Standby to ready (typical)	16 secs		
Track-to-track seek time (msec typical)	<0.8 (read), <1.0 (write)		
Average seek (msec typical)	18 (read), 20 (write)		
Startup current (typical) 12V (peak)	2.0 amps		
Seek power (typical)	12.40 watts		
Operating (Consumer Storage Profile)	9.25 watts		
Operating (PVR Profile)	4.91 watts		5.25 watts
Idle mode (typical)	8.00 watts		
Standby mode (typical)	0.800 watts		
Sleep mode (typical)	0.800 watts		
Voltage tolerance (including noise)	5V ± 5% 12V ± 10%		
Ambient temperature	0° to 60°C (operating) –40° to 70°C (nonoperating)		
Temperature gradient (°C per hour max)	20°C (operating) 30°C (nonoperating)		
Relative humidity	5% to 90% (operating) 5% to 95% (nonoperating)		
Relative humidity gradient	30% per hour max		
Wet bulb temperature (°C max)	37.7 (operating) 40 (nonoperating)		
Altitude, operating	–60.96 m to 3,048 m (–200 ft to 10,000+ ft)		

**Table 3: Drive specifications for 160, 120, and 80 Gbyte models**

Drive specification	ST3160212SCE	ST3120213SCE	ST3802110SCE
Altitude, nonoperating (meters below mean sea level, max)	-60.96 m to 12,192 m (-200 ft to 40,000+ ft)		
Shock, operating (max at 2 msec)	63 Gs		
Shock, nonoperating (max at 2 msec)	350 Gs		
Vibration, operating	5-22 Hz: 0.25 Gs, Limited displacement 22-350 Hz: 0.5 Gs 350-500 Hz: 0.25 Gs		
Vibration, nonoperating	5-22 Hz: 0.25 Gs, Limited displacement 23-350 Hz: 5.0 Gs 351-500 Hz: 1.0 Gs		
Drive acoustics, sound power (bels)			
Idle** (bels)	2.48 (typical) 2.64 (max)	2.46 (typical) 2.65 (max)	2.43 (typical) 2.51 (max)
Operational, CE seeks (bels)	2.65 (typical) 2.95 (max)	2.57 (typical) 2.64 (max)	2.61 (typical) 2.63 (max)
Operational, PVR seeks (bels)	2.53 (typical) 2.62 (max)	2.50 (typical) 2.57 (max)	2.45 (typical) 2.51 (max)
Nonrecoverable read errors	1 per 10 <sup>14</sup> bits read		
Annualized Failure Rate (AFR)	0.70%		
Warranty	5 years on distribution units. To determine the warranty for a specific drive, use a web browser to access the following web page: <a href="http://www.seagate.com/support/service/">www.seagate.com/support/service/</a> From this page, click on the "Verify Your Warranty" link. You will be asked to provide the drive serial number, model number (or part number) and country of purchase. The system will display the warranty information for your drive.		
Contact start-stop cycles (25°C, 50% relative humidity)	50,000		
Supports hotplug operation per Serial ATA Revision 2.5 specification	Yes		

\*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

\*\*During periods of drive idle, some offline activity may occur according to the S.M.A.R.T. specification, which may increase acoustic and power to operational levels.

## 2.2 Formatted capacity

Model	Formatted capacity*	Guaranteed sectors	Bytes per sector
ST3500841SCE	500 Gbytes	976,773,168	512
ST3400833SCE	400 Gbytes	781,422,768	512
ST3300822SCE	300 Gbytes	586,072,368	512
ST3250824SCE	250 Gbytes	488,397,168	512
ST3200827SCE	200 Gbytes	390,721,968	512
ST3160212SCE	160 Gbytes	312,581,808	512
ST3120213SCE	120 Gbytes	234,441,648	512
ST3802110SCE	80 Gbytes	156,301,488	512

\*One Gbyte equals one billion bytes when referring to hard drive capacity. Accessible capacity may vary depending on operating environment and formatting.

### 2.2.1 LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to  $n-1$ , where  $n$  is the number of guaranteed sectors as defined above.

See Section 4.3.1, "Identify Device command" (words 60-61 and 100-103) for additional information about 48-bit addressing support of drives with capacities over 137 Gbytes.

## 2.3 Default logical geometry

Cylinders	Read/write heads	Sectors per track
16,383	16	63

### LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to  $n-1$ , where  $n$  is the number of guaranteed sectors as defined above.

## 2.4 Recording and interface technology

Interface	ATA
Recording method	16/17 EPRML
Recording density KBPI (kbits/inch max)	
ST3500841SCE, ST3400833SCE, ST3300822SCE, ST3250824SCE, ST3200827SCE	790.1
ST3160212SCE, ST3120213SCE, ST3802110SCE	840.0
Track density KTPI (ktracks/inch max)	
ST3500841SCE, ST3400833SCE, ST3300822SCE, ST3250824SCE, ST3200827SCE	124.5
ST3160212SCE, ST3120213SCE, ST3802110SCE	141.5
Areal density (Gbits/inch <sup>2</sup> max)	
ST3500841SCE, ST3400833SCE, ST3300822SCE, ST3250824SCE, ST3200827SCE	97.69



ST3160212SCE, ST3120213SCE, ST3802110SCE	119.0
Spindle speed (RPM) ( $\pm$ 0.2%)	7,200
Internal data-transfer rate (Mbits/sec max)	
ST3500841SCE, ST3400833SCE	815.2
ST3300822SCE, ST3250824SCE, ST3200827SCE, ST3160212SCE, ST3120213SCE, ST3802110SCE	867.2
Sustained data transfer rate (Mbytes/sec max)	
ST3500841SCE, ST3400833SCE	65.0
ST3300822SCE, ST3250824SCE, ST3200827SCE	76.6
ST3160212SCE, ST3120213SCE, ST3802110SCE	83.0
I/O data-transfer rate (Mbytes/sec max)	300
Cache buffer	
ST3500841SCE, ST3400833SCE, ST3300822SCE, ST3250824SCE, ST3200827SCE	8 Mbytes (8,192 kbytes)
ST3160212SCE, ST3120213SCE, ST3802110SCE	2 Mbytes (2,048 kbytes)

## 2.5 Physical characteristics

<b>Drive specification</b>	
Maximum height (mm) (inches)	26.1 1.028
Maximum width (mm) (inches)	101.6 4.000 +/- 0.010
Maximum length (mm) (inches)	146.99 5.787
Maximum weight ST3500841SCE ST3400833SCE	710 grams (1.57 lbs)
ST3300822SCE	655 grams (1.44 lbs)
ST3250824SCE ST3200827SCE ST3160212SCE ST3120213SCE ST3802110SCE	580 grams (1.28 lbs)

## 2.6 Seek time

Seek measurements are taken with nominal power at 25°C ambient temperature. All times are measured using drive diagnostics. The specifications in the table below are defined as follows:

- Track-to-track seek time is an average of all possible single-track seeks in both directions.
- Average seek time is a true statistical random average of at least 5,000 measurements of seeks between random tracks, less overhead.

Typical seek times (msec)	Read	Write
Track-to-track	0.8	1.0
Average	18	20
Average latency:	4.16	4.16

**Note.** These drives are designed to consistently meet the seek times represented in this manual. Physical seeks, regardless of mode (such as track-to-track and average), are expected to meet or exceed the noted values. However, due to the manner in which these drives are formatted, benchmark tests that include command overhead or measure logical seeks may produce results that vary from these specifications.

## 2.7 Start/stop times

Power-on to Ready (sec)	16
Standby to Ready (sec)	16 (max)
Ready to spindle stop (sec)	10 (max)

## 2.8 Power specifications

The drive receives DC power (+5V and +12V) through a native SATA power connector. See Figure 5 on page 25.

### 2.8.1 Power consumption

Power requirements for the drives are listed in the table on page 9. Typical power measurements are based on an average of drives tested, under nominal conditions, using 5.0V and 12.0V input voltage at 25°C ambient temperature.

- **Spinup power**

Spinup power is measured from the time of power-on to the time that the drive spindle reaches operating speed.

- **Seek mode**

During seek mode, the read/write actuator arm moves toward a specific position on the disc surface and does not execute a read or write operation. Servo electronics are active. Seek mode power represents the worst-case power consumption, using only random seeks with read or write latency time. This mode is not typical and is provided for worst-case information.

- **Operating power and current**

Operating power is measured using a standard Consumer Storage Profile.

- **Idle mode power**

Idle mode power is measured with the drive up to speed, with servo electronics active and with the heads in a random track location.


- **Standby mode**

During Standby mode, the drive accepts commands, but the drive is not spinning, and the servo and read/write electronics are in power-down mode.


**Table 4: DC power requirements**

Power dissipation (typical) Example: ST3500841SCE	Average (watts, 25° C)	5V typ amps	12V typ amps
Spinup	—	—	2.0 (peak)
Idle	8.00	0.353	0.519
Operating (Consumer Storage Profile)	9.20	0.587	0.520
Operating (PVR Storage Profile)	4.88	0.39	0.41
Seeking	12.60	0.613	0.795
Standby	0.80	0.106	0.023
Sleep	0.80	0.106	0.023

**2.8.1.1 Typical current profiles**

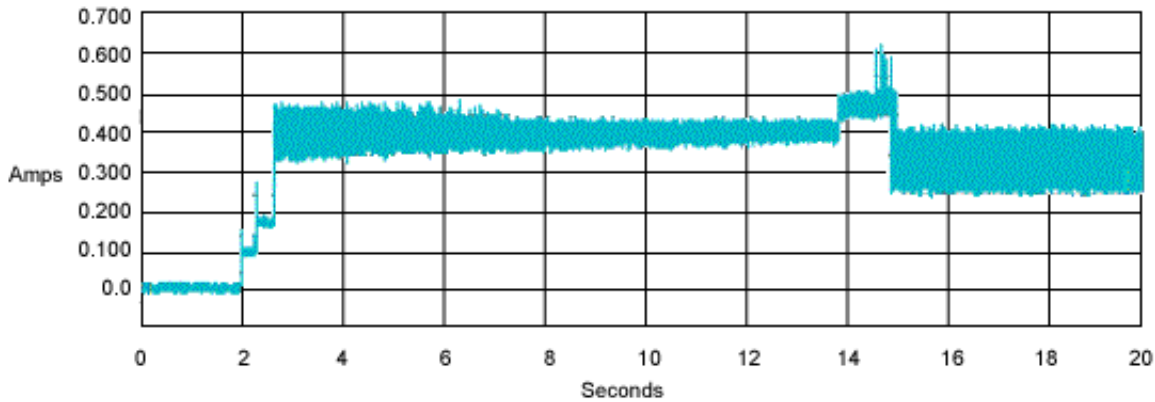

**Figure 1. Typical 5V startup and operation current profile**

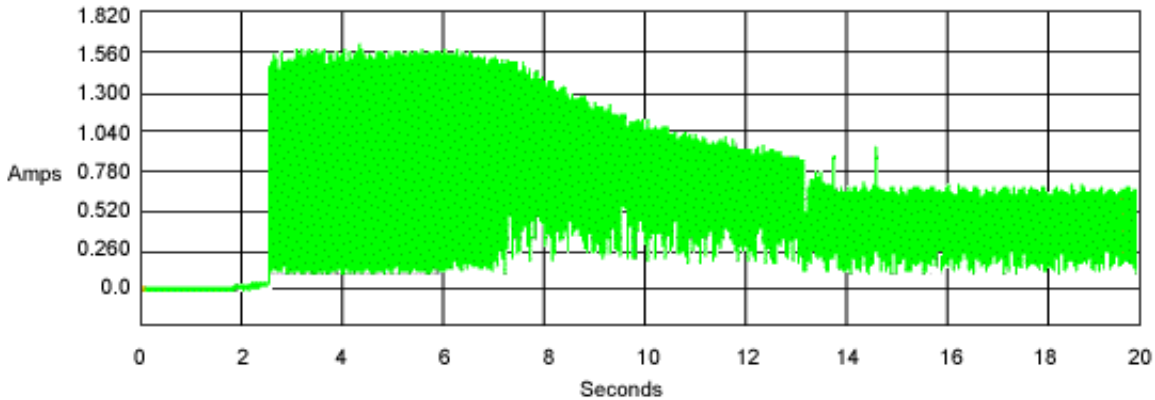

**Figure 2. Typical 12V startup and operation current profile**

## 2.8.2 Conducted noise

Input noise ripple is measured at the host system power supply across an equivalent 80-ohm resistive load on the +12 volt line or an equivalent 15-ohm resistive load on the +5 volt line.

- Using 12-volt power, the drive is expected to operate with a maximum of 120 mV peak-to-peak square-wave injected noise at up to 10 MHz.
- Using 5-volt power, the drive is expected to operate with a maximum of 100 mV peak-to-peak square-wave injected noise at up to 10 MHz.

**Note.** Equivalent resistance is calculated by dividing the nominal voltage by the typical RMS read/write current.

## 2.8.3 Voltage tolerance

Voltage tolerance (including noise):

5V  $\pm$  5%

12V  $\pm$  10%

## 2.8.4 Power-management modes

The drive provides programmable power management to provide greater energy efficiency. In most systems, you can control power management through the system setup program. The drive features the following power-management modes:

Power modes	Heads	Spindle	Buffer
Active	Tracking	Rotating	Enabled
Idle	Tracking	Rotating	Enabled
Standby	Parked	Stopped	Enabled
Sleep	Parked	Stopped	Disabled

- **Active mode**

The drive is in Active mode during the read/write and seek operations.

- **Idle mode**

The buffer remains enabled, and the drive accepts all commands and returns to Active mode any time disc access is necessary.

- **Standby mode**

The drive enters Standby mode when the host sends a Standby Immediate command. If the host has set the standby timer, the drive can also enter Standby mode automatically after the drive has been inactive for a specifiable length of time. The standby timer delay is established using a Standby or Idle command. In Standby mode, the drive buffer is enabled, the heads are parked and the spindle is at rest. The drive accepts all commands and returns to Active mode any time disc access is necessary.

- **Sleep mode**

The drive enters Sleep mode after receiving a Sleep command from the host. In Sleep mode, the drive buffer is disabled, the heads are parked and the spindle is at rest. The drive leaves Sleep mode after it receives a Hard Reset or Soft Reset from the host. After receiving a reset, the drive exits Sleep mode and enters Standby mode with all current translation parameters intact.

- **Idle and Standby timers**

Each time the drive performs an Active function (read, write or seek), the standby timer is reinitialized and begins counting down from its specified delay times to zero. If the standby timer reaches zero before any

drive activity is required, the drive makes a transition to Standby mode. In both Idle and Standby mode, the drive accepts all commands and returns to Active mode when disc access is necessary.

## 2.9 Environmental specifications

### 2.9.1 Ambient temperature

Ambient temperature is defined as the temperature of the environment immediately surrounding the drive. Actual drive case temperature should not exceed 69°C (156°F) within the operating ambient conditions for standard models. Recommended measurement locations are shown in Figure 6.

Above 1,000 feet (305 meters), the maximum temperature is derated linearly to 44°C (112°F) at 10,000 feet (3,048 meters).

Operating:	0° to 60°C (32° to 140°F)
Nonoperating:	-40° to 70°C (-40° to 158°F)

### 2.9.2 Temperature gradient

Operating:	20°C per hour (68°F per hour max), without condensation
Nonoperating:	30°C per hour (86°F per hour max)

### 2.9.3 Humidity

#### 2.9.3.1 Relative humidity

Operating:	5% to 90% noncondensing (30% per hour max)
Nonoperating:	5% to 95% noncondensing (30% per hour max)

#### 2.9.3.2 Wet bulb temperature

Operating:	37.7°C (99.9°F max)
Nonoperating:	40°C (104°F max)

### 2.9.4 Altitude

Operating:	-60.96 m to 3,048 m (-200 ft. to 10,000+ ft.)
Nonoperating:	-60.96 m to 12,192 m (-200 ft. to 40,000+ ft.)

### 2.9.5 Shock

All shock specifications assume that the drive is mounted securely with the input shock applied at the drive mounting screws. Shock may be applied in the X, Y or Z axis.

#### 2.9.5.1 Operating shock

These drives comply with the performance levels specified in this document when subjected to a maximum operating shock of 63 Gs based on half-sine shock pulses of 2 msec. Shocks should not be repeated more than two times per second.

### 2.9.5.2 Nonoperating shock

The nonoperating shock level that the drive can experience without incurring physical damage or degradation in performance when subsequently put into operation is 300 Gs for 500, 400, and 300 GB drives and 350 Gs for 250, 200, 160, and 80 GB drives, based on a nonrepetitive half-sine shock pulse of 2 msec duration.

### 2.9.6 Vibration

All vibration specifications assume that the drive is mounted securely with the input vibration applied at the drive mounting screws. Vibration may be applied in the X, Y or Z axis.

#### 2.9.6.1 Operating vibration

The maximum vibration levels that the drive may experience while meeting the performance standards specified in this document are specified below.

5–22 Hz	+/-0.25", Displacement limited
22–350 Hz	0.50 Gs
350–500 Hz	0.25 Gs

#### 2.9.6.2 Nonoperating vibration

The following table lists the maximum nonoperating vibration that the drive may experience without incurring physical damage or degradation in performance when subsequently put into operation.

5–22 Hz	0.25 G (Limited displacement)
22–350 Hz	5.0 Gs
350–500 Hz	1.0 Gs

## 2.10 Acoustics

Drive acoustics are measured as overall A-weighted acoustic sound power levels (no pure tones). All measurements are consistent with ISO document 7779. Sound power measurements are taken under essentially free-field conditions over a reflecting plane. For all tests, the drive is oriented with the cover facing upward.

**Note.** For seek mode tests, the drive is placed in seek mode only. The number of seeks per second is defined by the following equation:

$$(\text{Number of seeks per second} = 0.4 / (\text{average latency} + \text{average access time}))$$

Drive acoustics, sound power		
Idle	Operational, CE seeks	Operational, PVR (Personal Video Recorder) seeks
2.46 bels (typ) 2.65 bels (max)	2.57 bels (typ) 2.64 bels (max)	2.50 bels (typ) 2.57 bels (max)

## 2.11 Electromagnetic immunity

When properly installed in a representative host system, the drive operates without errors or degradation in performance when subjected to the radio frequency (RF) environments defined in the following table:

**Table 5: Radio frequency environments**

Test	Description	Performance level	Reference standard
Electrostatic discharge	Contact, HCP, VCP: $\pm 4$ kV; Air: $\pm 8$ kV	B	EN 61000-4-2: 95
Radiated RF immunity	80 to 1,000 MHz, 3 V/m, 80% AM with 1 kHz sine 900 MHz, 3 V/m, 50% pulse modulation @ 200 Hz	A	EN 61000-4-3: 96 ENV 50204: 95
Electrical fast transient	$\pm 1$ kV on AC mains, $\pm 0.5$ kV on external I/O	B	EN 61000-4-4: 95
Surge immunity	$\pm 1$ kV differential, $\pm 2$ kV common, AC mains	B	EN 61000-4-5: 95
Conducted RF immunity	150 kHz to 80 MHz, 3 Vrms, 80% AM with 1 kHz sine	A	EN 61000-4-6: 97
Voltage dips, interrupts	0% open, 5 seconds 0% short, 5 seconds 40%, 0.10 seconds 70%, 0.01 seconds	C C C B	EN 61000-4-11: 94

## 2.12 Reliability

Nonrecoverable read errors	1 per $10^{14}$ bits read, max
Annualized Failure Rate (AFR)	0.70% (nominal power, 25°C ambient temperature)
Contact start-stop cycles	50,000 cycles (at nominal voltage and temperature, with 60 cycles per hour and a 50% duty cycle)
Preventive maintenance	None required



## 2.13 Agency certification

### 2.13.1 Safety certification

The drives are recognized in accordance with UL 1950 and CSA C22.2 (950) and meet all applicable sections of IEC950 and EN 60950 as tested by TUV North America.

### 2.13.2 Electromagnetic compatibility

Hard drives that display the CE mark comply with the European Union (EU) requirements specified in the Electromagnetic Compatibility Directive (89/336/EEC). Testing is performed to the levels specified by the product standards for Information Technology Equipment (ITE). Emission levels are defined by EN 55022, Class B and the immunity levels are defined by EN 55024.

Seagate uses an independent laboratory to confirm compliance with the EC directives specified in the previous paragraph. Drives are tested in representative end-user systems. Although CE-marked Seagate drives comply with the directives when used in the test systems, we cannot guarantee that all systems will comply with the directives. The drive is designed for operation inside a properly designed enclosure, with properly shielded I/O cable (if necessary) and terminators on all unused I/O ports. Computer manufacturers and system integrators should confirm EMC compliance and provide CE marking for their products.

#### Korean RRL

If these drives have the Korea Ministry of Information and Communication (MIC) logo, they comply with paragraph 1 of Article 11 of the Electromagnetic Compatibility control Regulation and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Radio Research Laboratory (RRL) Ministry of Information and Communication Republic of Korea.

These drives have been tested and comply with the Electromagnetic Interference/Electromagnetic Susceptibility (EMI/EMS) for Class B products. Drives are tested in a representative, end-user system by a Korean-recognized lab.

- EUT name (model numbers): See table below.
- Certificate numbers:

Model	Certificate Number
ST3500841SCE	E-H011-05-3453 (B)
ST3400833SCE	E-H011-05-3453 (B)
ST3300822SCE	E-H011-05-3453 (B)
ST3250824SCE	E-H011-05-3453 (B)
ST3200827SCE	E-H011-05-3453 (B)
ST3160212SCE	E-H011-05-3453 (B)
ST3120213SCE	E-H011-05-3453 (B)
ST3802110SCE	E-H011-05-3453 (B)

- Trade name or applicant: Seagate Technology
- Manufacturing date: January 2006
- Manufacturer/nationality: Singapore and China

## Australian C-Tick (N176)

If these models have the C-Tick marking, they comply with the Australia/New Zealand Standard AS/NZS3548 1995 and meet the Electromagnetic Compatibility (EMC) Framework requirements of the Australian Communication Authority (ACA).

### 2.13.3 FCC verification

These drives are intended to be contained solely within a personal computer or similar enclosure (not attached as an external device). As such, each drive is considered to be a subassembly even when it is individually marketed to the customer. As a subassembly, no Federal Communications Commission verification or certification of the device is required.

Seagate Technology LLC has tested this device in enclosures as described above to ensure that the total assembly (enclosure, disc drive, motherboard, power supply, etc.) does comply with the limits for a Class B computing device, pursuant to Subpart J, Part 15 of the FCC rules. Operation with noncertified assemblies is likely to result in interference to radio and television reception.

**Radio and television interference.** This equipment generates and uses radio frequency energy and if not installed and used in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception.

This equipment is designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television, which can be determined by turning the equipment on and off, you are encouraged to try one or more of the following corrective measures:

- Reorient the receiving antenna.
- Move the device to one side or the other of the radio or TV.
- Move the device farther away from the radio or TV.
- Plug the computer into a different outlet so that the receiver and computer are on different branch outlets.

If necessary, you should consult your dealer or an experienced radio/television technician for additional suggestions. You may find helpful the following booklet prepared by the Federal Communications Commission: *How to Identify and Resolve Radio-Television Interference Problems*. This booklet is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Refer to publication number 004-000-00345-4.

## 2.14 Environmental protection

Seagate designs its products to meet environmental protection requirements worldwide, including regulations restricting certain chemical substances.

### 2.14.1 European Union Restriction of Hazardous Substances (RoHS)

The European Union Restriction of Hazardous Substances (RoHS) Directive restricts the presence of chemical substances, including Lead (Pb), in electronic products effective July 2006.

A number of parts and materials in Seagate products are procured from external suppliers. We rely on the representations of our suppliers regarding the presence of RoHS substances in these parts and materials. Our supplier contracts require compliance with our chemical substance restrictions, and our suppliers document their compliance with our requirements by providing material content declarations for all parts and materials for the disc drives documented in this publication. Current supplier declarations include disclosure of the inclusion of any RoHS-regulated substance in such parts or materials.

Seagate also has internal systems in place to ensure ongoing compliance with the RoHS Directive and all laws and regulations which restrict chemical content in electronic products. These systems include standard operating procedures that ensure that restricted substances are not utilized in our manufacturing operations, laboratory analytical validation testing, and an internal auditing process to ensure that all standard operating procedures are complied with.

## **2.15 Corrosive environment**

Seagate electronic drive components pass accelerated corrosion testing equivalent to 10 years exposure to light industrial environments containing sulfurous gases, chlorine and nitric oxide, classes G and H per ASTM B845. However, this accelerated testing cannot duplicate every potential application environment.

Users should use caution exposing any electronic components to uncontrolled chemical pollutants and corrosive chemicals as electronic drive component reliability can be affected by the installation environment. The silver, copper, nickel and gold films used in Seagate products are especially sensitive to the presence of sulfide, chloride, and nitrate contaminants. Sulfur is found to be the most damaging. In addition, electronic components should never be exposed to condensing water on the surface of the printed circuit board assembly (PCBA) or exposed to an ambient relative humidity greater than 95%. Materials used in cabinet fabrication, such as vulcanized rubber, that can outgas corrosive compounds should be minimized or eliminated. The useful life of any electronic equipment may be extended by replacing materials near circuitry with sulfide-free alternatives.



## 3.0 Configuring and mounting the drive

---

This section contains the specifications and instructions for configuring and mounting the drive.

### 3.1 Handling and static-discharge precautions


After unpacking, and before installation, the drive may be exposed to potential handling and electrostatic discharge (ESD) hazards. Observe the following standard handling and static-discharge precautions:

**Caution:**

- Keep the drive in the electrostatic discharge (ESG) bag until you are ready for installation.
- Before handling the drive, put on a grounded wrist strap, or ground yourself frequently by touching the metal chassis of a computer that is plugged into a grounded outlet. Wear a grounded wrist strap throughout the entire installation procedure.
- Handle the drive by its edges or frame *only*.
- The drive is extremely fragile—handle it with care. Do not press down on the drive top cover.
- Always rest the drive on a padded, antistatic surface until you mount it in the computer.
- Do not touch the connector pins or the printed circuit board.
- Do not remove the factory-installed labels from the drive or cover them with additional labels. Removal voids the warranty. Some factory-installed labels contain information needed to service the drive. Other labels are used to seal out dirt and contamination.

### 3.2 Breather filter hole precautions

This section contains information regarding the precautions to take with the breather filter hole in Seagate hard disc drives. Take the proper precautions to ensure full functionality and to prevent possible damage to the drive.

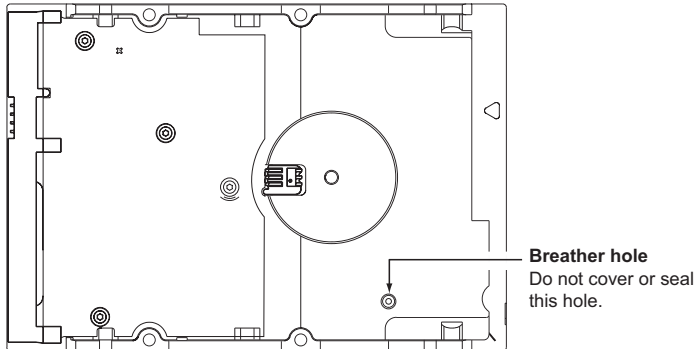

**Figure 3. Breather filter hole location**

**Caution: Do not cover, seal, or insert any object into this hole.**

This hole has two purposes:

- To allow condensation inside the hard disc to escape
- To allow air pressure inside the hard disc to equalize with ambient pressure

**Note.** If this hole is covered, sealed, or penetrated by any object, drive reliability may be compromised and could lead to permanent damage--doing so voids the warranty.

### 3.3 Configuring the drive

Each drive on the Serial ATA interface connects in a point-to-point configuration with the Serial ATA host adapter. There is no master/slave relationship because each drive is considered a master in a point-to-point relationships. If two drives are attached on one Serial ATA host adapter, the host operating system views the two devices as if they were both “masters” on two separate ports. This means both drives behave as if they are Device 0 (master) devices.

Serial ATA drives are designed for easy installation. It is usually not necessary to set any jumpers on the drive for proper operation; however, if you connect the drive and receive a “drive not detected” error, your SATA-equipped motherboard or host adapter may use a chipset that does not support SATA speed autonegotiation. If you have a motherboard or host adapter that does not support autonegotiation:

- Install a jumper as shown in Figure 4 below to limit the data transfer rate to 1.5 Gbits per second (and leave the drive connected to the SATA-equipped motherboard or host adapter that doesn't support autonegotiation) or
- Install a SATA host adapter that supports autonegotiation, leave the drive jumper block set to “Normal operation” (see Figure 4 below), and connect the drive to that adapter. This option has the benefit of not limiting the drive to a 1.5 Gbits/sec transfer rate.

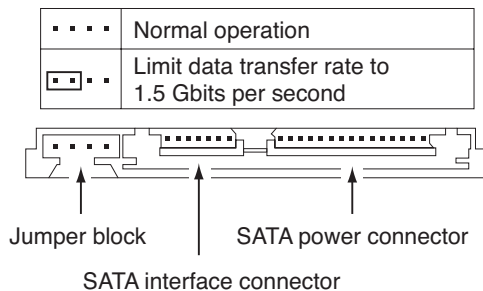


Figure 4. Serial ATA jumper block and connectors

### 3.4 Serial ATA cables and connectors

The Serial ATA interface cable consists of four conductors in two differential pairs, plus three ground connections. The cable size may be 30 to 26 AWG with a maximum length of one meter (39.37 inches). See Table 6 for connector pin definitions. Either end of the SATA signal cable can be attached to the drive or host.

For direct backplane connection, the drive connectors are inserted directly into the host receptacle. The drive and the host receptacle incorporate features that enable the direct connection to be hot pluggable and blind mateable.

For installations which require cables, you can connect the drive as illustrated in Figure 5.

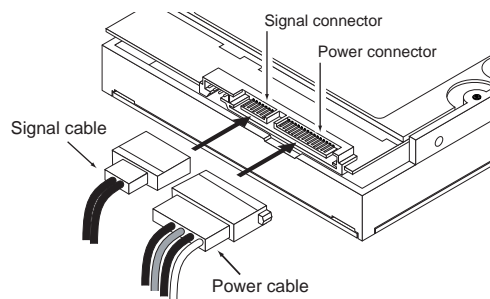


Figure 5. Attaching SATA cabling

Each cable is keyed to ensure correct orientation. DB35.2 Serial ATA drives support latching SATA connectors.

### 3.5 Drive mounting

You can mount the drive in any orientation using four screws in the side-mounting holes or four screws in the bottom-mounting holes. See Figure 6 on page 26 for drive mounting dimensions. Follow these important mounting precautions when mounting the drive:

- Allow a minimum clearance of 0.030 inches (0.76 mm) around the entire perimeter of the drive for cooling.
- Use only 6-32 UNC mounting screws.
- The screws should be inserted no more than 0.150 inch (3.81 mm) into the bottom or side mounting holes.
- Do not overtighten the mounting screws (maximum torque: 6 inch-lb).

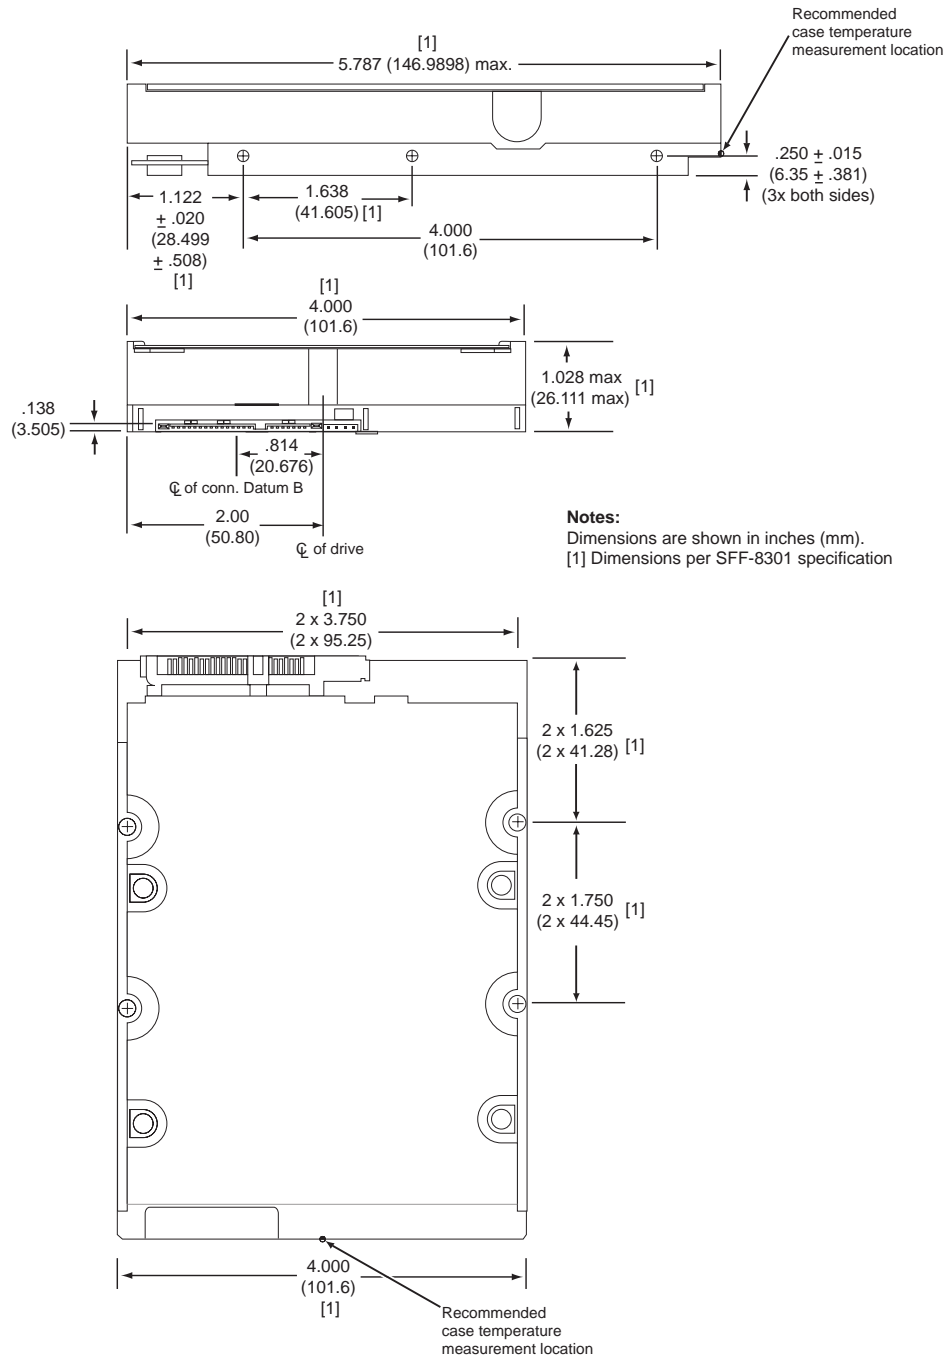


Figure 6. Mounting dimensions—top, side and end view



## **4.0 Serial ATA (SATA) interface**

---

These drives use the industry-standard Serial ATA interface that supports FIS data transfers. It supports ATA programmed input/output (PIO) modes 0–4; multiword DMA modes 0–2, and Ultra DMA modes 0–6.

For detailed information about the Serial ATA interface, refer to the “Serial ATA: High Speed Serialized AT Attachment” specification.

### **4.1 Hot-Plug compatibility**

DB35.2 Serial ATA drives incorporate connectors which enable you to hot plug these drives in accordance with the Serial ATA II: Extension to Serial ATA 1.0a specification. This specification can be downloaded from [www.serialata.org](http://www.serialata.org).

## 4.2 Serial ATA device plug connector pin definitions

Table 6 summarizes the signals on the Serial ATA interface and power connectors..

**Table 6: Serial ATA connector pin definitions**

Segment	Pin	Function	Definition
<b>Signal</b>	S1	Ground	2nd mate
	S2	A+	Differential signal pair A from Phy
	S3	A-	
	S4	Ground	2nd mate
	S5	B-	Differential signal pair B from Phy
	S6	B+	
	S7	Ground	2nd mate

Key and spacing separate signal and power segments

<b>Power</b>	P1	V <sub>33</sub>	3.3V power
	P2	V <sub>33</sub>	3.3V power
	P3	V <sub>33</sub>	3.3V power, pre-charge, 2nd mate
	P4	Ground	1st mate
	P5	Ground	2nd mate
	P6	Ground	2nd mate
	P7	V <sub>5</sub>	5V power, pre-charge, 2nd mate
	P8	V <sub>5</sub>	5V power
	P9	V <sub>5</sub>	5V power
	P10	Ground	2nd mate
	P11	Ground or LED signal	If grounded, drive does not use deferred spin
	P12	Ground	1st mate.
	P13	V <sub>12</sub>	12V power, pre-charge, 2nd mate
	P14	V <sub>12</sub>	12V power
	P15	V <sub>12</sub>	12V power

### Notes:

- All pins are in a single row, with a 1.27 mm (0.050") pitch.
- The comments on the mating sequence apply to the case of backplane blindmate connector only. In this case, the mating sequences are:
  - the ground pins P4 and P12.
  - the pre-charge power pins and the other ground pins.
  - the signal pins and the rest of the power pins.
- There are three power pins for each voltage. One pin from each voltage is used for pre-charge when installed in a blind-mate backplane configuration.
- All used voltage pins (V<sub>x</sub>) must be terminated.

### 4.3 Supported ATA commands

The following table lists Serial ATA standard commands that the drive supports. For a detailed description of the ATA commands, refer to the Serial ATA: High Speed Serialized AT Attachment specification. See “S.M.A.R.T. commands” on page 35 for details and subcommands used in the S.M.A.R.T. implementation.

**Table 7: Supported ATA commands**

Command name	Command code (in hex)
Check Power Mode	98 <sub>H</sub> or E5 <sub>H</sub>
Device Configuration Freeze Lock	B1 <sub>H</sub> / C1 <sub>H</sub>
Device Configuration Identify	B1 <sub>H</sub> / C2 <sub>H</sub>
Device Configuration Restore	B1 <sub>H</sub> / C0 <sub>H</sub>
Device Configuration Set	B1 <sub>H</sub> / C3 <sub>H</sub>
Device Reset	08 <sub>H</sub>
Download Microcode	92 <sub>H</sub>
Execute Device Diagnostics	90 <sub>H</sub>
Flush Cache	E7 <sub>H</sub>
Flush Cache Extended	EA <sub>H</sub>
Format Track	50 <sub>H</sub>
Identify Device	EC <sub>H</sub>
Idle	97 <sub>H</sub> or E3 <sub>H</sub>
Idle Immediate	95 <sub>H</sub> or E1 <sub>H</sub>
Initialize Device Parameters	91 <sub>H</sub>
Read Buffer	E4 <sub>H</sub>
Read DMA	C8 <sub>H</sub>
Read DMA Extended	25 <sub>H</sub>
Read DMA Without Retries	C9 <sub>H</sub>
Read Log Ext	2F <sub>H</sub>
Read Multiple	C4 <sub>H</sub>
Read Multiple Extended	29 <sub>H</sub>
Read Native Max Address	F8 <sub>H</sub>
Read Native Max Address Extended	27 <sub>H</sub>
Read Sectors	20 <sub>H</sub>
Read Sectors Extended	24 <sub>H</sub>
Read Sectors Without Retries	21 <sub>H</sub>
Read Verify Sectors	40 <sub>H</sub>
Read Verify Sectors Extended	42 <sub>H</sub>
Read Verify Sectors Without Retries	41 <sub>H</sub>
Recalibrate	10 <sub>H</sub>
Security Disable Password	F6 <sub>H</sub>
Security Erase Prepare	F3 <sub>H</sub>

Command name	Command code (in hex)
Security Erase Unit	F4 <sub>H</sub>
Security Freeze	F5 <sub>H</sub>
Security Set Password	F1 <sub>H</sub>
Security Unlock	F2 <sub>H</sub>
Seek	70 <sub>H</sub>
Set Features	EF <sub>H</sub>
Set Max Address Note: Individual Set Max Address commands are identified by the value placed in the Set Max Features register as defined to the right.	F9 <sub>H</sub> Address: 00 <sub>H</sub> Password: 01 <sub>H</sub> Lock: 02 <sub>H</sub> Unlock: 03 <sub>H</sub> Freeze Lock: 04 <sub>H</sub>
Set Max Address Extended	37 <sub>H</sub>
Set Multiple Mode	C6 <sub>H</sub>
Sleep	99 <sub>H</sub> or E6 <sub>H</sub>
S.M.A.R.T. Disable Operations	B0 <sub>H</sub> / D9 <sub>H</sub>
S.M.A.R.T. Enable/Disable Autosave	B0 <sub>H</sub> / D2 <sub>H</sub>
S.M.A.R.T. Enable Operations	B0 <sub>H</sub> / D8 <sub>H</sub>
S.M.A.R.T. Execute Offline	B0 <sub>H</sub> / D4 <sub>H</sub>
S.M.A.R.T. Read Attribute Thresholds	B0 <sub>H</sub> / D1 <sub>H</sub>
S.M.A.R.T. Read Data	B0 <sub>H</sub> / D0 <sub>H</sub>
S.M.A.R.T. Read Log Sector	B0 <sub>H</sub> / D5 <sub>H</sub>
S.M.A.R.T. Return Status	B0 <sub>H</sub> / DA <sub>H</sub>
S.M.A.R.T. Save Attribute Values	B0 <sub>H</sub> / D3 <sub>H</sub>
S.M.A.R.T. Write Log Sector	B0 <sub>H</sub> / D6 <sub>H</sub>
Standby	96 <sub>H</sub> or E2 <sub>H</sub>
Standby Immediate	94 <sub>H</sub> or E0 <sub>H</sub>
Write Buffer	E8 <sub>H</sub>
Write DMA	CA <sub>H</sub>
Write DMA Extended	35 <sub>H</sub>
Write DMA FUA Extended	CD <sub>H</sub>
Write DMA Without Retries	CB <sub>H</sub>
Write Log Extended	3F <sub>H</sub>
Write Multiple	C5 <sub>H</sub>
Write Multiple Extended	39 <sub>H</sub>
Write Multiple FUA Extended	CE <sub>H</sub>
Write Sectors	30 <sub>H</sub>
Write Sectors Without Retries	31 <sub>H</sub>
Write Sectors Extended	34 <sub>H</sub>

### 4.3.1 Identify Device command

The Identify Device command (command code EC<sub>H</sub>) transfers information about the drive to the host following power up. The data is organized as a single 512-byte block of data, whose contents are shown in Table 7 on page 29. All reserved bits or words should be set to zero. Parameters listed with an “x” are drive-specific or vary with the state of the drive. See Section 2.0 on page 3 for default parameter settings.

The following commands contain drive-specific features that may not be included in the Serial ATA specification.

Word	Description	Value
0	Configuration information: • Bit 15: 0 = ATA; 1 = ATAPI • Bit 7: removable media • Bit 6: removable controller • Bit 0: reserved	0C5A <sub>H</sub>
1	Number of logical cylinders	16,383
2	ATA-reserved	0000 <sub>H</sub>
3	Number of logical heads	16
4	Retired	0000 <sub>H</sub>
5	Retired	0000 <sub>H</sub>
6	Number of logical sectors per logical track: 63	003F <sub>H</sub>
7–9	Retired	0000 <sub>H</sub>
10–19	Serial number: (20 ASCII characters, 0000 <sub>H</sub> = none)	ASCII
20	Retired	0000 <sub>H</sub>
21	Retired	0400 <sub>H</sub>
22	Obsolete	0000 <sub>H</sub>
23–26	Firmware revision (8 ASCII character string, padded with blanks to end of string)	x.xx
27–46	Drive model number: (40 ASCII characters, padded with blanks to end of string)	ST3500841SCE ST3400833SCE ST3300822SCE ST3250824SCE ST3200827SCE ST3160212SCE ST3120213SCE ST3802110SCE
47	(Bits 7–0) Maximum sectors per interrupt on Read multiple and Write multiple (16)	8010 <sub>H</sub>
48	Reserved	0000 <sub>H</sub>
49	Standard Standby timer, IORDY supported and may be disabled	2F00 <sub>H</sub>
50	ATA-reserved	0000 <sub>H</sub>
51	PIO data-transfer cycle timing mode	0200 <sub>H</sub>
52	Retired	0200 <sub>H</sub>
53	Words 54–58, 64–70 and 88 are valid	0007 <sub>H</sub>
54	Number of current logical cylinders	xxxx <sub>H</sub>
55	Number of current logical heads	xxxx <sub>H</sub>
56	Number of current logical sectors per logical track	xxxx <sub>H</sub>

Word	Description	Value
57–58	Current capacity in sectors	xxxx <sub>H</sub>
59	Number of sectors transferred during a Read Multiple or Write Multiple command	xxxx <sub>H</sub>
60–61	Total number of user-addressable LBA sectors available (see Section 2.2 for related information) *Note: The maximum value allowed in this field is: 0FFFFFFFh (268,435,455 sectors, 137 Gbytes). Drives with capacities over 137 Gbytes will have 0FFFFFFFh in this field and the actual number of user-addressable LBAs specified in words 100-103. This is required for drives that support the 48-bit addressing feature.	ST3500841SCE = 0FFFFFFFh* ST3400833SCE = 0FFFFFFFh* ST3300822SCE = 0FFFFFFFh* ST3250824SCE = 0FFFFFFFh* ST3200827SCE = 0FFFFFFFh* ST3160212SCE = 0FFFFFFFh* ST3120213SCE = DF94BB0h ST3802110SCE = 950F8B0h
62	Retired	0000 <sub>H</sub>
63	Multiword DMA active and modes supported (see note following this table)	xx07 <sub>H</sub>
64	Advanced PIO modes supported (modes 3 and 4 supported)	0003 <sub>H</sub>
65	Minimum multiword DMA transfer cycle time per word (120 nsec)	0078 <sub>H</sub>
66	Recommended multiword DMA transfer cycle time per word (120 nsec)	0078 <sub>H</sub>
67	Minimum PIO cycle time without IORDY flow control (240 nsec)	00F0 <sub>H</sub>
68	Minimum PIO cycle time with IORDY flow control (120 nsec)	0078 <sub>H</sub>
69–74	ATA-reserved	0000 <sub>H</sub>
75	Queue depth	0000 <sub>H</sub>
76	Serial ATA capabilities	xxxx <sub>H</sub>
77	Reserved for future Serial ATA definition	xxxx <sub>H</sub>
78	Serial ATA features supported	xxxx <sub>H</sub>
79	Serial ATA features enabled	xxxx <sub>H</sub>
80	Major version number	003E <sub>H</sub>
81	Minor version number	0000 <sub>H</sub>
82	Command sets supported	364B <sub>H</sub>
83	Command sets supported	7C03 <sub>H</sub>
84	Command sets support extension	4003 <sub>H</sub>
85	Command sets enabled	30xx <sub>H</sub>
86	Command sets enabled	0001 <sub>H</sub>
87	Command sets enable extension	4000 <sub>H</sub>
88	Ultra DMA support and current mode (see note following this table)	xx3F <sub>H</sub>
89	Security erase time	0000 <sub>H</sub>
90	Enhanced security erase time	0000 <sub>H</sub>
92	Master password revision code	FFFE <sub>H</sub>
93	Hardware reset value (see description following this table)	xxxx <sub>H</sub>
95–99	ATA-reserved	0000 <sub>H</sub>

Word	Description	Value
100–103	Total number of user-addressable LBA sectors available (see Section 2.2 for related information). These words are required for drives that support the 48-bit addressing feature. Maximum value: 0000FFFFFFFFFh.	ST3500841SCE = 976,773,168 ST3400833SCE = 781,422,768 ST3300822SCE = 586,072,368 ST3250824SCE = 488,397,168 ST3200827SCE = 390,721,968 ST3160212SCE = 312,581,808 ST3120213SCE = 234,441,648 ST3802110SCE = 156,301,488
104–127	ATA-reserved	0000 <sub>H</sub>
128	Security status	0001 <sub>H</sub>
129–159	Seagate-reserved	xxxx <sub>H</sub>
160–254	ATA-reserved	0000 <sub>H</sub>
255	Integrity word	xxA5 <sub>H</sub>

**Note.** Advanced Power Management (APM) and Automatic Acoustic Management (AAM) features are not supported

**Note.** See the bit descriptions below for words 63, 88, and 93 of the Identify Drive data.

Description (if bit is set to 1)	
Bit	Word 63
0	Multiword DMA mode 0 is supported.
1	Multiword DMA mode 1 is supported.
2	Multiword DMA mode 2 is supported.
8	Multiword DMA mode 0 is currently active.
9	Multiword DMA mode 1 is currently active.
10	Multiword DMA mode 2 is currently active.
Bit	Word 88
0	Ultra DMA mode 0 is supported.
1	Ultra DMA mode 1 is supported.
2	Ultra DMA mode 2 is supported.
3	Ultra DMA mode 3 is supported.
4	Ultra DMA mode 4 is supported.
5	Ultra DMA mode 5 is supported.
6	Ultra DMA mode 6 is supported.
8	Ultra DMA mode 0 is currently active.
9	Ultra DMA mode 1 is currently active.
10	Ultra DMA mode 2 is currently active.
11	Ultra DMA mode 3 is currently active.
12	Ultra DMA mode 4 is currently active.
13	Ultra DMA mode 5 is currently active.
14	Ultra DMA mode 6 is currently active.

### 4.3.2 Set Features command

This command controls the implementation of various features that the drive supports. When the drive receives this command, it sets BSY, checks the contents of the Features register, clears BSY and generates an interrupt. If the value in the register does not represent a feature that the drive supports, the command is aborted. Power-on default has the read look-ahead and write caching features enabled. The acceptable values for the Features register are defined as follows:

**Table 8: Set Features command values**

02 <sub>H</sub>	Enable write cache ( <i>default</i> ).
03 <sub>H</sub>	Set transfer mode (based on value in Sector Count register). Sector Count register values:
00 <sub>H</sub>	Set PIO mode to default (PIO mode 2).
01 <sub>H</sub>	Set PIO mode to default and disable IORDY (PIO mode 2).
08 <sub>H</sub>	PIO mode 0
09 <sub>H</sub>	PIO mode 1
0A <sub>H</sub>	PIO mode 2
0B <sub>H</sub>	PIO mode 3
0C <sub>H</sub>	PIO mode 4 ( <i>default</i> )
20 <sub>H</sub>	Multiword DMA mode 0
21 <sub>H</sub>	Multiword DMA mode 1
22 <sub>H</sub>	Multiword DMA mode 2
40 <sub>H</sub>	Ultra DMA mode 0
41 <sub>H</sub>	Ultra DMA mode 1
42 <sub>H</sub>	Ultra DMA mode 2
43 <sub>H</sub>	Ultra DMA mode 3
44 <sub>H</sub>	Ultra DMA mode 4
45 <sub>H</sub>	Ultra DMA mode 5
46 <sub>H</sub>	Ultra DMA mode 6
10 <sub>H</sub>	Enable use of SATA features
55 <sub>H</sub>	Disable read look-ahead (read cache) feature.
82 <sub>H</sub>	Disable write cache
90 <sub>H</sub>	Disable use of SATA features
AA <sub>H</sub>	Enable read look-ahead (read cache) feature ( <i>default</i> ).
F1 <sub>H</sub>	Report full capacity available

**Note.** At power-on, or after a hardware or software reset, the default values of the features are as indicated above.



### 4.3.3 S.M.A.R.T. commands

S.M.A.R.T. provides near-term failure prediction for disc drives. When S.M.A.R.T. is enabled, the drive monitors predetermined drive attributes that are susceptible to degradation over time. If self-monitoring determines that a failure is likely, S.M.A.R.T. makes a status report available to the host. Not all failures are predictable. S.M.A.R.T. predictability is limited to the attributes the drive can monitor. For more information on S.M.A.R.T. commands and implementation, see the *Draft ATA-5 Standard*.

SeaTools diagnostic software activates a built-in drive self-test (DST S.M.A.R.T. command for D4<sub>H</sub>) that eliminates unnecessary drive returns. The diagnostic software ships with all new drives and is also available at: <http://seatools.seagate.com>.

This drive is shipped with S.M.A.R.T. features disabled. You must have a recent BIOS or software package that supports S.M.A.R.T. to enable this feature. The table below shows the S.M.A.R.T. command codes that the drive uses.

**Table 9: S.M.A.R.T. commands**

Code in features register	S.M.A.R.T. command
D0 <sub>H</sub>	S.M.A.R.T. Read Data
D2 <sub>H</sub>	S.M.A.R.T. Enable/Disable Attribute Autosave
D3 <sub>H</sub>	S.M.A.R.T. Save Attribute Values
D4 <sub>H</sub>	S.M.A.R.T. Execute Off-line Immediate (runs DST)
D5 <sub>H</sub>	S.M.A.R.T. Read Log Sector
D6 <sub>H</sub>	S.M.A.R.T. Write Log Sector
D8 <sub>H</sub>	S.M.A.R.T. Enable Operations
D9 <sub>H</sub>	S.M.A.R.T. Disable Operations
DA <sub>H</sub>	S.M.A.R.T. Return Status

**Note.** If an appropriate code is not written to the Features Register, the command is aborted and 0x04 (abort) is written to the Error register.



## 5.0 Seagate Technology support services

---

### Internet

For information regarding Seagate products and services, visit [www.seagate.com](http://www.seagate.com). Worldwide support is available 24 hours daily by email for your questions.

### Presales Support:

Presales@Seagate.com

### Technical Support:

DiscSupport@Seagate.com

### Warranty Support:

<http://www.seagate.com/support/service/index.html>

### mySeagate

my.seagate.com is the industry's first Web portal designed specifically for OEMs and distributors. It provides self-service access to critical applications, personalized content and the tools that allow our partners to manage their Seagate account functions. Submit pricing requests, orders and returns through a single, password-protected Web interface-anytime, anywhere in the world.

### spp.seagate.com

spp.seagate.com supports Seagate resellers with product information, program benefits and sales tools. You may register for customized communications that are not available on the web. These communications contain product launch, EOL, pricing, promotions and other channel-related information. To learn more about the benefits or to register, go to spp.seagate.com, any time, from anywhere in the world.

## Seagate Service Centers

### Presales Support

Our Presales Support staff can help you determine which Seagate products are best suited for your specific application or computer system, as well as product availability and compatibility.

### Technical Support

Seagate technical support is available to assist you online at [support.seagate.com](http://support.seagate.com) or through one of our call centers. Have your system configuration information and your "ST" model number available.

**SeaTDD™ (+1-405-324-3655)** is a telecommunications device for the deaf (TDD). You can send questions or comments 24 hours daily and exchange messages with a technical support specialist during normal business hours for the call center in your region.

## Customer Service Operations

### Warranty Service

Seagate offers worldwide customer support for Seagate products. Seagate distributors, OEMs and other direct customers should contact their Seagate Customer Service Operations (CSO) representative for warranty-related issues. Resellers or end users of drive products should contact their place of purchase or Seagate warranty service for assistance. Have your serial number and model or part number available.

### Data Recovery Services

Seagate offers data recovery services for all formats and all brands of storage media. Our data recovery services labs are currently located throughout the world. . Additional information, including an online request form and data loss prevention resources, is available at <http://services.seagate.com/index.aspx>

### Authorized Service Centers

Seagate Service Centers are available on a global basis for the return of defective products. Contact your customer support representative for the location nearest you.

### USA/Canada/Latin America support services

For an extensive list of telephone numbers to technical support, presales and warranty service in USA/Canada/Latin America, including business hours, go to the "Contact Us" page on [www.seagate.com](http://www.seagate.com).

## Global Customer Support

### Presales, Technical, and Warranty Support

Call Center	Toll-free	Direct dial
USA, Canada, and Mexico	1-800-SEAGATE	+1-405-324-4700

### Data Recovery Services

Call Center	Toll-free	Direct dial	FAX
USA, Canada, and Mexico	1-800-475-01435	+1-905-474-2162	1-800-475-0158 +1-905-474-2459

## Europe, the Middle East and Africa Support Services

For an extensive list of telephone numbers to technical support, presales and warranty service in Europe, the Middle East and Africa, go to the "Contact Us" page on [www.seagate.com](http://www.seagate.com).

## Asia/Pacific Support Services

For an extensive list of telephone numbers to technical support, presales and warranty service in Asia/Pacific, go to the "Contact Us" page on [www.seagate.com](http://www.seagate.com).

# Index

## A

ACA 20  
acceleration 17  
acoustics 7, 9, 17  
Active 15  
Active mode 15  
actuator arm 13  
AFR 18  
Agency certification 19  
altitude 16  
Altitude, nonoperating 5, 7, 9  
Altitude, operating 4, 6, 8  
Ambient temperature 4, 6, 8, 16  
ambient temperature 12, 13  
Annualized Failure Rate (AFR) 5, 7, 9, 18  
Areal density 4, 6, 8  
areal density 10  
ATA commands 29  
ATA data-transfer modes supported 4, 6, 8  
Australia/New Zealand Standard AS/NZS3548 1995  
20  
Australian Communication Authority (ACA) 20  
Australian C-Tick 20  
Average latency 12  
Average seek time 12  
Average seek, read 4, 6, 8

## B

bels 7, 9  
BPI 4, 6, 8, 10  
buffer 4, 6, 8, 11  
Bytes per sector 4, 6, 8, 10

## C

cables and connectors 25  
Cache 4, 6, 8  
cache 11  
capacity 10  
case temperature 16  
CE mark 19  
certification 19  
Check Power Mode 29  
chemical pollutants 21  
chemical substances 20  
Class B computing device 20  
compatibility 19  
Conducted noise 15  
Conducted RF immunity 18  
Configuring the drive 23  
connectors 25  
corrosive chemicals 21

Corrosive environment 21  
CSA C22.2 (950) 19  
current 4, 6, 8  
cycles 18  
Cylinders 10  
cylinders 4, 6, 8

## D

data-transfer rates 1  
DC power 13  
Default logical geometry 10  
Default sectors per track 4, 6, 8  
density 4, 6, 8, 10  
Device Configuration Freeze Lock 29  
Device Configuration Identify 29  
Device Configuration Restore 29  
Device Configuration Set 29  
Device Reset 29  
dimensions 26  
disc surface 13  
displacement 17  
Download Microcode 29

## E

ead/write heads 4, 6, 8  
Electrical fast transient 18  
Electromagnetic compatibility 19  
Electromagnetic Compatibility (EMC) 19  
Electromagnetic Compatibility control Regulation 19  
Electromagnetic Compatibility Directive (89/336/EEC)  
19  
Electromagnetic immunity 18  
Electrostatic discharge 18  
electrostatic discharge (ESD) 23  
EN 55022, Class B 19  
EN 55024 19  
EN 60950 19  
Environmental protection 20  
Environmental specifications 16  
EPRML 10  
error-correction algorithms 1  
errors 5, 7, 9, 18  
ESD 23  
EU 19  
European Union (EU) requirements 19  
European Union Restriction of Hazardous Substances 20  
Execute Device Diagnostics 29

## F

FCC verification 20  
features 1  
Federal Communications Commission 20  
Flush Cache 29

Flush Cache Extended 29

Format Track 29

Formatted capacity 10

Formatted Gbytes 4, 6, 8

## G

Gbytes 10

geometry 10

gradient 4, 6, 8

Gs 17

Guaranteed sectors 4, 6, 8, 10

guaranteed sectors 10

## H

Handling precautions 23

heads 4, 6, 8, 10

Height 4, 6, 8

height 12

humidity 4, 6, 8, 16

## I

I/O data-transfer rate 4, 6, 8, 11

Identify Device 29

Identify Device command 31

Idle 14, 15, 29

Idle Immediate 29

Idle mode 4, 6, 8, 13, 15

IEC950 19

Information Technology Equipment (ITE) 19

Initialize Device Parameters 29

Input noise ripple 15

input voltage 13

interface 10, 27

Internal data transfer rate 4, 6, 8

internal data-transfer rate OD 11

is 12

ISO document 7779 17

ITE 19

## K

Korea Ministry of Information and Communication  
(MIC) 19

Korean RRL 19

## L

latency 4, 6, 8, 12

latency time 13

LBA mode 10

Length 4, 6, 8

logical geometry 10

## M

maintenance 18

master/slave 2

maximum temperature 16

MIC 19

mounting 26

mounting screws 16

mounting the drive 23

## N

noise 15

nominal power 12

Nonoperating shock 17

Nonoperating vibration 17

Nonrecoverable read errors 5, 7, 9, 18

## O

Operating 14

Operating power 4, 6, 8, 13

Operating shock 16

Operating vibration 17

## P

PCBA 21

Physical characteristics 12

point-to-point 2, 25

Power consumption 13

power consumption 13

Power dissipation 14

Power modes 15

Power specifications 13

Power-management modes 15

Power-on to Ready 13

Power-on to ready 4, 6, 8

precautions 23

printed circuit board 23

programmable power management 15

## Q

quick reference 3

## R

Radiated RF immunity 18

Radio and television interference 20

radio frequency (RF) 18

random seeks 13

Read Buffer 29

Read DMA 29

Read DMA Extended 29

Read DMA without Retries 29

read errors 5, 7, 9, 18

Read Log Ext 29

- Read Multiple 29
- Read Multiple Extended 29
- Read Native Max Address 29
- Read Native Max Address Extended 29
- Read Sectors 29
- Read Sectors Extended 29
- Read Sectors Without Retries 29
- Read Verify Sectors 29
- Read Verify Sectors Extended 29
- Read Verify Sectors Without Retries 29
- read/write actuator arm 13
- Read/write heads 10
- Ready to spindle stop 13
- Recalibrate 29
- Recording density 4, 6, 8
- recording density 10
- recording method 10
- Recording technology 10
- Relative humidity 4, 6, 8
- relative humidity 16
- Reliability 18
- RF 18
- RMS read/write current 15
- RoHS 20
- RPM 4, 6, 8
- RRL 19

## S

- S.M.A.R.T. Disable Operations 30
- S.M.A.R.T. Enable/Disable Autosave 30
- S.M.A.R.T. Enable Operations 30
- S.M.A.R.T. Execute Offline 30
- S.M.A.R.T. implementation 29
- S.M.A.R.T. Read Attribute Thresholds 30
- S.M.A.R.T. Read Data 30
- S.M.A.R.T. Read Log Sector 30
- S.M.A.R.T. Return Status 30
- S.M.A.R.T. Save Attribute Values 30
- S.M.A.R.T. Write Log sector 30
- Safety certification 19
- SATA 27
- SATA data-transfer modes supported 4, 6, 8
- screws 16
- sector 10
- sectors 10
- Sectors per track 10
- sectors per track 4, 6, 8
- Security Disable Password 29
- Security Erase Prepare 29
- Security Erase Unit 30
- Security Freeze 30
- Security Set Password 30
- Security Unlock 30
- Seek 30
- seek mode 13

- Seek mode power 13
- Seek power 4, 6, 8
- Seek time 12
- seek time 4, 6, 8
- Seeking 14
- Serial ATA (SATA) interface 27
- serial ATA ports 2
- Servo electronics 13
- servo electronics 13
- Set Features 30
- Set Max Address 30
- Set Max Address Extended 30
- Set Multiple Mode 30
- Shock 16
- Shock, nonoperating 5, 7, 9
- Shock, operating 5, 7, 9
- single-track seeks 12
- Sleep 14, 15, 30
- Sleep mode 4, 6, 8, 15
- sound power 7, 9
- Specification summary table 3
- Spindle speed 4, 6, 8
- spindle speed 11
- spindle stop 13
- Spinup 14
- Spinup power 13
- Standby 14, 15, 30
- Standby Immediate 30
- Standby mode 4, 6, 8, 13, 15
- standby timer 15
- Standby to Ready 13
- Standby to ready 4, 6, 8
- Start/stop times 13
- start-stop cycles 5, 7, 9, 18
- Startup current 4, 6, 8
- static-discharge 23
- sulfide-free alternatives 21
- support services 37
- Surge immunity 18

## T

- technical support services 37
- temperature 4, 6, 8, 12, 16
- Temperature gradient 4, 6, 8
- temperature gradient 16
- timer 15
- timers 15
- TPI 4, 6, 8
- Track density 4, 6, 8
- track density 10
- Track-to-track 12
- Track-to-track seek time 4, 6, 8, 12
- tunneling magnetoresistive (TMR) heads 1
- TUV North America 19

## U

UL 1950 19

## V

Vibration 17

Vibration, nonoperating 5, 7, 9

Vibration, operating 5, 7, 9

voltage 13

Voltage dips, interrupts 18

Voltage tolerance 4, 6, 8, 15

## W

Weight 4, 6, 8

Wet bulb temperature 4, 6, 8

wet bulb temperature 16

Width 4, 6, 8

Write Buffer 30

Write DMA 30

Write DMA Extended 30

Write DMA FUA Extended 30

Write DMA Without Retries 30

Write Log Extended 30

Write Multiple 30

Write Multiple Extended 30

Write Multiple FUA Extended 30

Write Sectors 30

Write Sectors Extended 30

Write Sectors Without Retries 30







**Seagate Technology LLC**  
**920 Disc Drive, Scotts Valley, California 95066-4544, USA**  
*Publication Number: 100390003, Rev. C, Printed in USA*