




**2.5" SATA Hard Drive Enclosure
Kit**


**Boîtier pour disque dur SATA de
2,5 po (6,35 cm)**

**Caja para disco duro SATA de
2.5"**



RF-AHD25

User Guide Guide de l'utilisateur Guía del Usuario



Rocketfish RF-AHD25 2.5" Hard Drive Enclosure Kit

Contents

Introduction	2
Safety information	3
Features	3
Using the hard drive enclosure	6
Troubleshooting	26
Specifications.....	27
Legal notices	28
Français.....	30
Español	64

Introduction

Congratulations on your purchase of the Rocketfish RF-AHD25 SATA Hard Drive Enclosure Kit. You can install a high-speed SATA hard drive into this enclosure and connect it to a computer using either a USB 2.0 or eSATA port. This kit offers a backup function, allowing you to backup, restore, and synchronize your data.



Safety information

- Always read these safety instructions and this *User Guide* carefully. Keep this *User Guide* for future reference.
- Take precautions to avoid static electricity discharge or short circuits when connecting this enclosure to your computer.
- Do not use this enclosure close to water, rain, or high humidity.
- Do not use or store this enclosure in damp locations. Liquid entering this enclosure may cause damage or lead to fire or electric shock.
- Do not leave any metal objects inside the enclosure when installing the hard drive.
- Do not place anything heavy on top of this enclosure.
- Do not drop or subject this enclosure to shock.
- Do not place this enclosure close to a source of strong magnetic fields (such as a computer monitor, television, radio, or speaker). Strong magnetic fields can affect the reliability of data transfer to and from the enclosure's hard drive.

Features

- Supports up to 500 GB 2.5" SATA interface hard drive.
- Connects to a computer using either an eSATA or USB 2.0 host port.
- Supports Serial ATA II transfer rate of 3.0 Gb/s.
- One-button backup to easily backup, restore, and synchronize data between your Windows PC and the enclosure in USB mode.
- Has one *power on with backup active* indicator.
- Rapid heat dissipation.
- Supports Plug-and-Play and is hot swappable.

RF-AHD25 3

Package contents

- 2.5" SATA hard drive enclosure
- Five-pin mini USB cable
- eSATA cable
- Two Utility CDs
- *User Guide*
- 5 Volt/1 amp AC adapter
- An extra swappable cover plate
- Carrying bag
- Accessories:
 - Screwdriver
 - 4 screws


System requirements

- PC or Macintosh with an available USB 2.0 port or eSATA port
- Microsoft Windows 2000, Windows XP, or Windows Vista operating system or Mac OS X version 10.3.x or higher operating system
- 2.5" SATA hard drive



Identifying components

Front

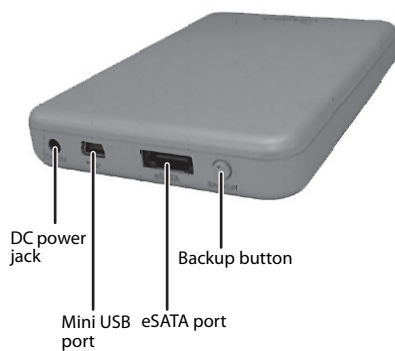

Back



Status indicators

Operation mode	LED	Description
Starting mode	Solid	The hard drive is turned on.
Active mode	Flashing	Data is being transmitted between your computer and the hard drive.
Disconnect mode	Off	The hard drive is turned off.

Using the hard drive enclosure

Installing your hard drive in the enclosure


Read these safety precautions before you install your hard drive in the enclosure:

- Use only the accessories provided in the accessory package.
- Always unplug the AC adapter before installing the hard drive.
- Do not use a power supply with a different voltage rating.
- Make sure that you first touch an unpainted, grounded metal object to discharge any static electricity stored on your clothing or body before touching any electronic components.
- Handle the printed circuit board (PCB) edges only. Avoid touching the onboard electronic components.




To install your 2.5" SATA hard drive in the enclosure:


- 1 Move the switch lock from the locked to the unlocked position, then open the case.

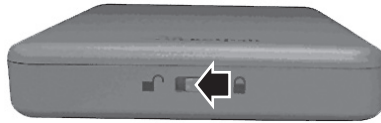


- 2 Remove the four screws from the printed circuit board and remove the circuit board from the enclosure.

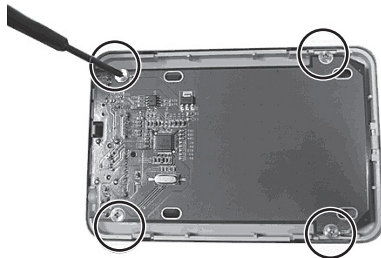

- 3 Connect the drive to the SATA connector.

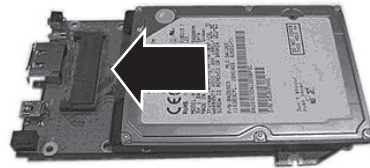

- 4** Secure the drive to the printed circuit board with four screws.



- 5** Return the printed circuit board to the enclosure, then secure it with the four screws you previously removed.



- 6** Replace the top of the enclosure, then slide the switch lock from the unlocked to the locked position.