

### Overview

Hewlett Packard's MSA P2000 Family of storage arrays features P2000 G3 arrays with the latest 8 Gb Fibre Channel, 6 Gb SAS, 10GbE iSCSI connected models, and an iSCSI model with four 1 Gb iSCSI ports per controller. The arrays are designed for entry-level customers and feature the latest in functionality and host-connect technology while offering excellent price/performance. They are ideal for companies with small budgets or limited IT expertise, and also larger companies with departmental or remote requirements. Each solution is designed to be easy to deploy, to be secure, along with low management costs, while driving rapid return on investment through efficient storage consolidation.

The MSA P2000 G3 arrays are 2U storage area network (SAN) or direct connect solutions (OS and protocol dependent) offering a choice of five controllers - two FC, one SAS, one 10GbE iSCSI and the newest model features a four port 1 Gb iSCSI. The first Fibre Channel controller is a high-performance, 8 Gb dual port model. The second offering is a unique dual-purpose Combo controller with two 8 Gb Fibre Channel ports with the addition of two 1GbE iSCSI ports. The third controller choice is 6Gb SAS with four ports per controller. There is also the addition of a two port 10 Gb iSCSI, while the latest controller introduction features four 1 Gb iSCSI ports per controller. Whatever the situation calls for, the P2000 G3 line-up has the right solution.

The dual-protocol MSA P2000 G3 MSA FC/iSCSI Combo Controller gives exceptional flexibility. The 8 Gb FC ports support a full FC SAN while the two 1GbE iSCSI ports can serve two purposes. With this combination you can economically share the array storage resource with a smaller department accessing it over iSCSI or enable the new optional Remote Snap functionality over iSCSI protocol (also available over FC).

The MSA P2000 G3 SAS is the follow-on product to the MSA2000sa G2, adding the latest 6 Gb SAS technology to the four host ports per controller. The P2000 G3 SAS array is designed for directly attaching up to four dual-path or eight single path rack servers. SAS array support for BladeSystems utilizes the HP 6 Gb SAS BL Switch.

The MSA P2000 G3 10GbE iSCSI brings the very latest in high-performance host connection with technology generally found only in higher priced arrays. The bandwidth it provides in conjunction with server consolidation is highly advantageous in shared storage configurations. Array connection to 10GbE switches that are in turn connected to 1GbE NICs is commonplace. Directly attached server support requires the server units to have 10GbE NICs.

Rounding out the controller choices is the MSA P2000 G3 iSCSI controller featuring four 1Gb iSCSI Ethernet ports, double the number of the G2 model. This allows an array that keeps the price of the components, particularly the interconnects, low while markedly increasing the performance capabilities.

All MSA P2000 G3 models can be equipped with single or dual controllers, feature the same scalability, and offer 6 Gb SAS back-end transmission speed to drives and JBODs. Significant data protection advances are delivered by the all P2000 G3 arrays. All G3 units come STANDARD with sixty-four snapshot capability at no extra cost and there is an option for the G3 series of five hundred and twelve snapshots. Volume Copy (clone) also comes standard. In a further move to protect the user's data, optional Remote Snap (replication) capability is offered on the FC, FC/iSCSI, and both iSCSI versions.

All MSA P2000 G3 models support hot plug replacement of redundant controllers, fans, power supplies, and I/O modules. Hot add of expansion enclosures is also supported.

The controller-less MSA P2000 chassis is offered in two models - one comes standard with twelve Large Form Factor (LFF) 3.5-inch drive bays, the other can accommodate twenty-four Small Form Factor (SFF) 2.5-inch drives. Both are able to simultaneously support enterprise-class SAS drives, SAS Midline, and archival-class SATA Midline drives. Either chassis can have one or two matching P2000 G3 controllers (same protocol) and are available with AC or DC power Supplies.


The HP modular approach to entry level SAN solutions enables incremental customer purchases, allowing the array to grow as needs grow, thus allowing a maximum return on investment. Choose a single controller unit for low initial cost with the ability to upgrade later; or decide on a model with dual controllers for the most demanding entry-level situations. There are no unexpected additional charges, licenses or fees as you add enclosures or hosts and users.

### Overview


Capacity can easily be added as the need develops by attaching additional drive enclosures. Maximum capacity ranges with LFF drives up to 57.6 TB SAS, 384 TB SAS Midline or 192 TB SATA Midline with the addition of the maximum number of drive enclosures. Configurations utilizing the SFF drive chassis and the maximum number of drive enclosures can grow to 134 TB of SAS, 149 TB of SAS Midline or 74.5 TB SATA Midline with a total of 96 LFF or 149 SFF drives. The P2000 G3 Arrays do not support SSDs.

### What's New in the P2000 G3 array family


- Adding support for the new HP P2000 4TB Large Form Factor SAS MDL HDD
  - HP MSA 4 TB 6G SAS 7.2K 3.5 in MDL HDD
- Microsoft Windows Server 2012 support
- Support with HP StoreEasy 3830 Gateway Storage or StoreEasy 3830 Gateway Storage Blades

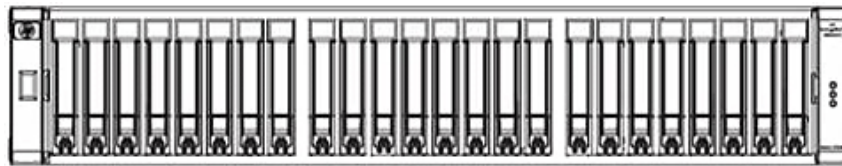

**HP P2000 G3 SFF Modular Smart Array**

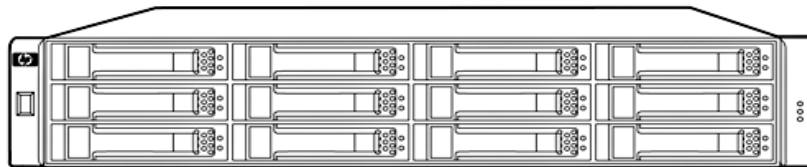


**HP P2000 G3 LFF Modular Smart Array**

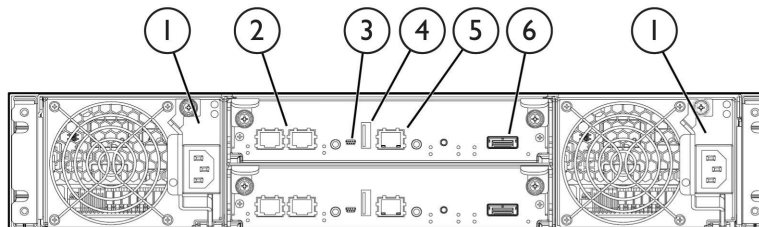

#### **P2000 G3 FC Controllers, 2 installed**


- |                             |                             |
|-----------------------------|-----------------------------|
| 1. Power supplies           | 4. Reserved for future use  |
| 2. 8 Gb Fibre Channel ports | 5. Management Ethernet port |
| 3. CLI port (mini-USB)      | 6. Expansion port           |

### Overview

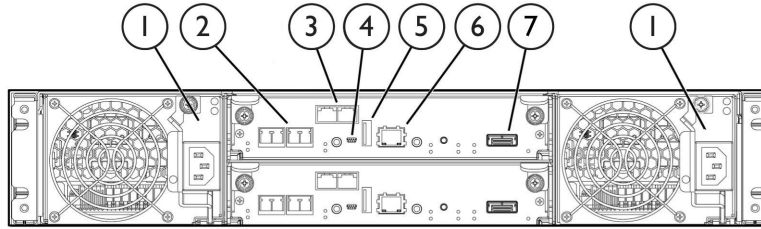


#### **P2000 G3 FC/iSCSI Combo Controllers, 2 installed**

- |                             |                             |
|-----------------------------|-----------------------------|
| 1. Power supplies           | 5. Reserved for future use  |
| 2. 8 Gb Fibre Channel ports | 6. Management Ethernet port |
| 3. 1GbE iSCSI ports         | 7. Expansion port           |
| 4. CLI port (mini-USB)      |                             |

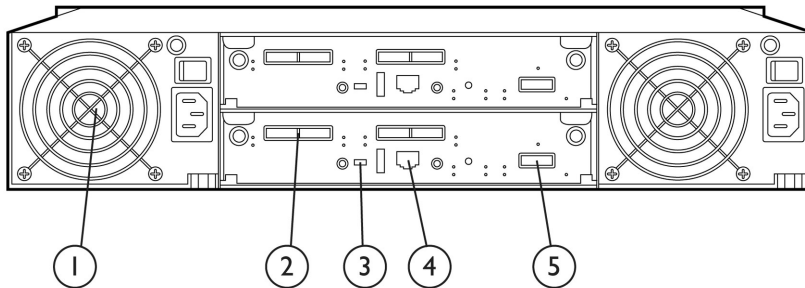

#### **P2000 G3 SAS controllers, 2 installed**


- |  |                             |
|--|-----------------------------|
| 1. Power supplies                      | 4. Management Ethernet port |
| 2. 6Gb SAS ports (four per controller) | 5. Expansion port           |
| 3. CLI port (mini-USB)                 |                             |

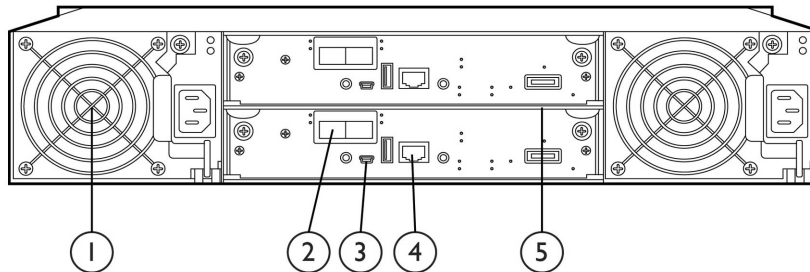

#### **P2000 G3 10GbE iSCSI controllers, 2 installed**

- |                        |                             |
|------------------------|-----------------------------|
| 1. Power supplies      | 4. Management Ethernet port |
| 2. 10GbE iSCSI ports   | 5. Expansion port           |
| 3. CLI port (mini-USB) |                             |

### Overview

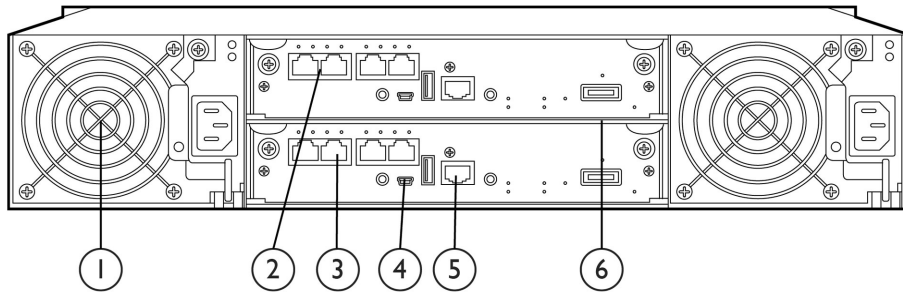

#### **P2000 G3 iSCSI dual controller**

- |                          |                             |
|--------------------------|-----------------------------|
| 1. Power supplies        | 4. CLI port (mini-USB)      |
| 2. 1 GbE iSCSI ports (4) | 5. Management Ethernet port |
| 3. 1 GbE iSCSI ports (4) | 6. Expansion port           |

### Models

#### P2000 G3 Modular Smart Array

#### P2000 G3 Controllers

##### P2000 G3 Fibre Channel Controllers

HP P2000 G3 MSA Fibre Channel Controller AP836B

**NOTE:** two 8Gb FC ports per controller

HP P2000 G3 MSA FC/iSCSI Combo Modular Smart Array Controller AP837B

**NOTE:** two 8Gb FC ports and two 1GbE iSCSI ports per controller

##### P2000 G3 SAS Controller

HP P2000 G3 SAS MSA Array System Controller AW592B

**NOTE:** four 6Gb SAS ports per controller

##### P2000 G3 10GbE iSCSI controller

HP P2000 G3 10GbE iSCSI MSA Array System Controller AW595B

**NOTE:** two 10GbE iSCSI ports per controller

##### P2000 G3 iSCSI controller (1Gb Ethernet)

HP P2000 G3 iSCSI MSA Array System Controller BK829B

**NOTE:** four 1Gb iSCSI ports per controller

#### P2000 Chassis

##### P2000 Controller-less Chassis (AC-powered)

HP P2000 LFF Modular Smart Array Chassis AP838B

**NOTE:** Will accept one or two controllers or Disk Enclosure I/O modules

HP P2000 SFF Modular Smart Array Chassis AP839B

**NOTE:** Will accept one or two controllers, not I/O modules

#### P2000 G3 Configured Array Systems

##### Configured Units, 8 Gb Fibre Channel Systems

HP P2000 G3 MSA FC Dual Controller LFF Modular Smart Array System AP845B

HP P2000 G3 MSA FC Dual Controller SFF Modular Smart Array System AP846B

HP P2000 G3 MSA FC/iSCSI Dual Combo Controller LFF Array AW567B

HP P2000 G3 MSA FC/iSCSI Dual Combo Controller SFF Array AW568B

##### Configured Units, 6 Gb SAS Systems

HP P2000 G3 SAS MSA Dual Controller LFF Array System AW593B

HP P2000 G3 SAS MSA Dual Controller SFF Array System AW594B

##### Configured Units, 10GbE iSCSI Systems

HP P2000 G3 10GbE iSCSI MSA Dual Controller LFF Array System AW596B

HP P2000 G3 10GbE iSCSI MSA Dual Controller SFF Array System AW597B

##### Configured Units, 1Gb iSCSI Systems

HP P2000 G3 iSCSI MSA Dual Controller LFF Array System BK830B

HP P2000 G3 iSCSI MSA Dual Controller SFF Array System BK831B

#### P2000 G3 FC SAN Starter Kits

HP P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit AP847B

HP P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit AP848B

(includes dual 8 Gb controllers, 24-drive bay SFF chassis, two 16-port 8 Gb switches, six 8 Gb single-port HBAs, SFPs and cables)

### Models

#### Disk Enclosures

HP P2000 Dual I/O LFF Drive Enclosure	AP843B
HP P2000 LFF Drive Enclosure I/O Module	AP844B
HP D2700 Disk Enclosure	AJ941A

#### Controller-less Chassis (DC-powered)

HP P2000 DC-power LFF Chassis (can add one or two P2000 G3 controllers or P2000 JBOD I/O modules)	AP840B
HP P2000 DC-power SFF Chassis	AP841B

### P2000 G3 Array Bundles

In some areas HP is offering P2000 G3 Array bundles with ProLiant SFF SAS drives. These bundles can simplify the process of ordering. HP offers these bundles with different type of P2000 G3 Array controllers for different storage capacity needs.

**NOTE:** These bundles are not offered worldwide so please check the availability for your region

Protocol	Raw Capacity	Regions Availability	Bundle Description	SKUs
<b>Fully Populated Bundles:</b>				
FC Bundles	3.5 TB	AMS APJ	HP P2000 G3 FC DC w/24 146GB SAS 15K SFF HDD 3.5TB Bundle	BV901B
	7.2 TB	AMS APJ	HP P2000 G3 FC DC w/24 300GB SAS 10K SFF HDD 7.2TB Bundle	BV902B
	14.4 TB	AMS APJ	HP P2000 G3 FC DC w/24 600GB SAS 10K SFF HDD 14.4TB Bundle	BV903B
	21.6 TB	AMS APJ	HP P2000 G3 FC 24x900GB SAS SFF Bundle	QR517B
	24 TB	AMS APJ	HP P2000 G3 FC 24x1TB SAS SFF Bundle	QR521B
	7.2 TB AMS	AMS APJ	HP P2000 G3 FC DC w/24 300GB SAS 15K SFF HDD 7.2TB Bundle	QW945B
FC/iSCSI Combo Bundles	21.6 TB	AMS APJ	HP P2000 G3 FC/iSCSI MSA DC w/24 900GB SAS 10K SFF HDD 21.6TB Bundle	QR518B
	24 TB	AMS APJ	HP P2000 G3 FC/iSCSI MSA DC w/24 1TB SAS 7.2K SFF MDL HDD 24TB Bundle	QR522B
SAS Bundles	7.2 TB	AMS APJ	HP P2000 SAS DC w/24 300GB SAS 10K SFF HDD 7.2TB Bundle	BV908B
	14.4 TB	AMS APJ	HP P2000 SAS DC w/24 600GB SAS 10K SFF HDD 14.4TB Bundle	BV909B
	21.6 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/24 900GB SAS 10K SFF HDD 21.6TB Bundle	QR519B

### Models

	24 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/24 1TB SAS 7.2K SFF MDL HDD 24TB Bundle	QR523A
1G iSCSI Bundles	7.2 TB	AMS APJ	HP P2000 G3 iSCSI DC w/24 300GB SAS 10K SFF HDD 7.2TB Bundle	BV911B
	21.6 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/24 900GB SAS 10K SFF HDD 21.6TB Bundle	QR520B
	24 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/24 1TB SAS 7.2K SFF MDL HDD 24TB Bundle	QR524B
<b>Half Populated Bundles:</b>				
FC Bundles	3.6 TB	AMS APJ	HP P2000 G3 FC DC w/12 300GB SAS 10K SFF HDD 3.6TB Bundle	BV913B
	7.2 TB	AMS APJ EMEA	HP P2000 G3 FC DC w/12 600GB SAS 10K SFF HDD 7.2TB Bundle	BV914B
	10.8 TB	AMS APJ	HP P2000 G3 FC MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR525B
	12 TB	AMS APJ	HP P2000 G3 FC MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR529B
	3.6 TB	AMS APJ	HP P2000 G3 FC DC w/12 300GB SAS 15K SFF HDD 3.6TB Bundle	QW949B
FC/iSCSI Combo Bundles	10.8 TB	AMS APJ	HP P2000 G3 FC/iSCSI MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR526B
	12 TB	AMS APJ	HP P2000 G3 FC/iSCSI MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR530B
SAS Bundles	3.6 TB	AMS APJ	HP P2000 G3 SAS DC w/12 300GB SAS 10K SFF HDD 3.6TB Bundle	BV917B
	7.2 TB	AMS APJ	HP P2000 G3 SAS DC w/12 600GB SAS 10K SFF HDD 7.2TB Bundle	BV918B
	10.8 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR527B
	12 TB	AMS APJ	HP P2000 G3 SAS MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR531B
	3.6 TB	AMS APJ	HP P2000 G3 SAS DC w/12 300GB SAS 15K SFF HDD 3.6TB Bundle	QW951B
1G iSCSI G3 Bundles	3.6 TB	AMS APJ	HP P2000 G3 iSCSI DC w/12 300GB SAS 10K SFF HDD 3.6TB Bundle	BV919B

### Models

7.2 TB	AMS APJ	HP P2000 G3 iSCSI DC w/12 600GB SAS 10K SFF HDD 7.2TB Bundle	BV920B
10.8 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/12 900GB SAS 10K SFF HDD 10.8TB Bundle	QR528B
12 TB	AMS APJ	HP P2000 G3 iSCSI MSA DC w/12 1TB SAS 7.2K SFF MDL HDD 12TB Bundle	QR532B
3.6 TB	AMS APJ EMEA	HP P2000 G3 iSCSI DC w/12 300GB SAS 15K SFF HDD 3.6TB Bundle	QW952B



### Features

#### Key Features

The HP P2000 G3 Modular Smart Array family encompasses five controllers, each featuring different protocols or combination of protocols to match the exact needs of the user.

- P2000 G3 FC/iSCSI Combo MSA controller: this unique controller offers both 8 Gb Fibre Channel and 1 GbE iSCSI functionalities built into a single array controller. This allows customers to enable storage needing high performance thru the FC ports while leveraging their SAN investment by sharing the array resources with smaller departments through low-cost iSCSI. It also enables optional Remote Snap (replication) for data protection.
- P2000 G3 FC MSA controller: Dual 8 Gb Fibre Channel host ports per controller give high performance with a mature topology and is compatible with the largest installed base of SAN users.
- P2000 G3 10GbE iSCSI MSA controller: HP was the first of the major modular array manufacturers that brought a high performance dual-ported 10GbE iSCSI solution to the entry level segment. Ideal for those who want to utilize cost-effective Ethernet as their infrastructure without sacrificing access time to their data. Now supports Remote Snap (replication).
- P2000 G3 SAS MSA controller: the P2000 G3 SAS model gives fast 6 Gb transmission rates with low cost SAS connections. Four host ports per controller support a highly efficient direct connect configuration.
- P2000 G3 iSCSI MSA controller offers four 1 Gb iSCSI ports utilizes the popular Ethernet infrastructure with its low cost and ease of management, while the additional ports assure increased performance over the previous generation. Now supports Remote Snap (replication).

---

#### All P2000 G3 models offer a common set of valuable features:

- Ease of management featuring browser-based out-of-band access. This allows a department or small company to effectively handle growing storage requirements, with the aid of an intuitive GUI to administer the unit with a minimum of complexity. Ideal for local or remote installations.
- All G3 models come standard with 64 controller-based snapshots and clone capability. The G3 arrays also support an optional 512 snaps.
- Choose either a low-cost single controller array or start with a configured dual controller array model to fit the budget, high availability, and performance needs.
- All models feature a wide variety of drives: enterprise-class SAS, SAS Midline, and archival-class SATA Midline in either P2000 LFF 3.5-inch or HP ProLiant SFF 2.5-inch drives.
- P2000 G3 models can have a maximum number of P2000 LFF drive enclosures (7), a maximum number of D2700 SFF enclosures (5), or mix both sizes. The array can grow incrementally from a few drives to 134 TB SAS, 384 TB of SAS MDL or 192 TB SATA MDL.
- 2 GB transportable read/write cache per controller. Battery-free cache backup with super capacitors and compact flash
- Vdisks can be spanned across multiple enclosures  
RAID levels 0, 1, 3, 5, 6, 10, 50
- Maximums vary by RAID levels: 2 drive max for RAID level 1; max of 16 drives for RAID levels 0, 3, 5, 6, and 10; max of 32 drives for RAID level 50
- 512 LUNs with LUN sizes greater than 40TB depending on the RAID configuration chosen. The maximum LUN size is 64TB
- Non-disruptive on-line controller code upgrade (requires dual controllers w/ multi-pathing software)
- Upgradable by design. Owners of an original MSA2000 G1 or G2 array are able to do data-in-place controller upgrades to the P2000 G3 FC, Combo FC/iSCSI, 1 Gb or 10GbE iSCSI, or P2000 G3 SAS. Cross protocol upgrades are also supported between the protocols. This unique ability protects the earlier investments in chassis, drives, and JBODs

Follow us on twitter and be a part of the conversation, and get the latest P2000 G3/MSA related news and information at:

<http://www.twitter.com/MSAstorage>

---

#### HP P2000 G3 FC MSA SAN Starter Kits



### Features

The new P2000 G3 FC MSA SAN Starter kits are offered to simplify ordering and implementation of your SAN. HP includes all the necessary hardware components to build your own SAN solution in one package, just add the drives of your choice. These kits are offered at very affordable prices which reflect a savings over purchasing each SAN component separately.

**Virtualization SAN Starter Kit** HP P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit. The HP P2000 G3 FC MSA Dual Controller Virtualization SAN Starter Kit addresses the growing need for server and storage administrators to deliver end-to-end storage, virtualization, and management capabilities across their network infrastructure. The hardware bundle consists of six Host Bus Adapters (HBAs), two FC switches, a P2000 G3 FC MSA Dual Controller Array (SFF Chassis) as well as two licenses per switch enabling Server Application Optimization (SAO) and Adaptive Networking (AN). SAO is an adapter technology that offers Quality of Service (QoS) capabilities that can be used in conjunction with fabric wide QoS and to enable a high performing, virtualized infrastructure. With SAO deployed, administrators can protect a VM and its application by assigning its IO flow to a specific priority level. The QoS priorities are enforced at the hardware level, thereby providing adequate bandwidth during periods of high congestion. Applications such as email and databases achieve better performance when deployed in specific SAO and MSA configurations. AP848B

**Small Business SAN Starter Kit** HP P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit AP847B  
The HP P2000 G3 FC MSA Dual Controller Small Business SAN Starter Kit is a unique end-to-end 8 Gbps SAN Solution, just add disks and power. This kit includes one 8 Gbps P2000 G3 FC MSA Dual Controller Array (LFF Chassis), four 8 Gbps FC HBAs, two HP SN6000 Stackable 8 Gbps 8-port FC switches and HP unique Simple SAN Connection Manager (SSCM) SAN management software, cables, rails and optics. SSCM is the only SAN management software that can manage the FC switch, HBA and provision HP storage from a single pane of glass.

---

### Application Solutions

The HP P2000 SAN is the ideal solution for customers running Oracle, Microsoft, SAP environments and those customers who are deploying virtual server technologies like VMware, Hyper-V, and Oracle Virtual Machine. The HP P2000 SAN delivers enterprise functionality that enhances virtual environments, simplifies management, and reduces costs. Easy to deploy, scale and maintain, HP P2000 SANs ensure that crucial business data remains available.

HP has developed best-in-class expertise in Oracle, Microsoft, SAP, and Virtualization Hypervisor technology through extensive testing with the HP P2000 SAN, HP servers, and management software; high availability and disaster recovery solutions; and backup and recovery on the Oracle, Microsoft, and SAP application platforms. As a result, our customers can expect a wide range of operational and business benefits where they can:

- Deploy IT assets across multiple locations.
- Incrementally grow storage without interruption.
- Enable high availability and disaster recovery capabilities for critical applications.
- Deploy a remote disaster recovery site.

### Learn more

To learn more about specific HP Storage Solutions that are built with Oracle, Microsoft, SAP and Virtualization environments in mind, visit the solution sites supporting each of these applications.

HP Storage for Oracle hyperlink to: <http://www.hp.com/storage/oracle>

HP Storage for Microsoft hyperlink to: <http://www.hp.com/storage/microsoft>

HP Storage for SAP hyperlink to: <http://www.hp.com/storage/sap>

HP Storage for VMware hyperlink to: <http://www.hp.com/go/vmware/storage>

### Family Information

	<b>P2000 G3 FC</b>	<b>P2000 G3 SAS</b>	<b>P2000 G3 10GbE iSCSI</b>	<b>P2000 G3 iSCSI (1GbE)</b>
<b>Capacity</b> Minimum / with maximum additional drive enclosures	<b>LFF:</b> 7.2 TB SAS or 36 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 384 TB SAS MDL or 192 TB SATA <b>SFF:</b> 21.6 TB SAS or 24 TB SS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 134 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL	<b>LFF:</b> 7.2 TB SAS or 36 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 384 TB SAS MDL or 192 TB SATA <b>SFF:</b> 21.6 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 134 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL	<b>LFF:</b> 7.2 TB SAS or 36 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 384 TB SAS MDL or 192 TB SATA <b>SFF:</b> 21.6 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 134 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL	<b>LFF:</b> 7.2 TB SAS or 36 TB SAS MDL or 24 TB SATA MDL w/ 7 LFF enclosures: 57.6 TB SAS, 384 TB SAS MDL or 192 TB SATA <b>SFF:</b> 21.6 TB SAS or 24 TB SAS MDL or 12 TB SATA MDL w/ 5 D2700 JBODs: 134 TB SAS or 149 TB SAS MDL or 74.5 TB SATA MDL
<b>Controller Cache</b>	2 GB per controller	2 GB per controller	2 GB per controller	2 GB per controller
<b>Total LUNs</b> LUN sizes greater than 40TB depending on the RAID configuration chosen	512 maximum LUN size: 64TB	512 maximum LUN size: 64TB	512 maximum LUN size: 64TB	512 maximum LUN size: 64TB
<b>Host connect</b> P2000 & MSA2000 have 1 or 2 controllers, EVA has 2 controllers standard	Two 8 Gb Fibre Channel ports or Two 8Gb FC and two 1GbE iSCSI ports per controller	Four 6 Gb (x4) SAS ports per controller	Two 10 GbE iSCSI ports per controller	Four 1 Gb iSCSI ports per controller
<b>Maximum Drives</b> w/ expansion	96 LFF/149 SFF	96 LFF/149 SFF	96 LFF/149 SFF	96 LFF/149 SFF
<b>Maximum host supported</b> (dual controller)	64	64 w/ SAS switch: 32 single blade servers (2x c7000), or 16 dual density blade servers	64	64
<b>Optional software: Snapshot, clone, Remote Snap</b>	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap (optional)	Snapshot, 64 standard (max 512) Clone (standard)	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap (optional)	Snapshot, 64 standard (max 512) Clone (standard) Remote Snap (optional)
<b>Use for Storage</b>	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA	Primary Storage with SAS drives. Secondary with SATA

**NOTE:** maximum available storage capacity depends on the RAID level being implemented

### Product Technology

### Family Information

**8Gb Fibre Channel controller** Two host ports per FC controller shipped with SFPs. The P2000 G3 FC controller can run in either point-to-point or FCAL (loop). The default is FCAL which is used in Direct Connect, particularly with two controllers. The PtP (fabric) mode is used with almost all switches.

**Combo controller with FC and iSCSI ports** This ingenious dual-protocol "combo" controller supports a full FC SAN through the 8Gb FC ports, while designating the two 1 GbE iSCSI ports to enable remote replication over iSCSI protocol and perform as an iSCSI target. This allows economical sharing of the storage resource (the P2000 G3 array) with one department needing the performance afforded by the 8 Gb FC ports while simultaneously supporting another department with lesser performance needs and a budget only allowing a 1GbE iSCSI network.

**6Gb SAS controller** Four 4x host ports per 6Gb SAS controller.

**10GbE iSCSI controller** Two 10GbE ports per G3 10GbE iSCSI controller. Ports are ready for the choice of SFP (none included) Supports the ProCurve and ISS versions of the following 10GbE parts for use in the controllers:

#### HP 10Gb Cables

- HP SFP+ 10GbE Copper Cable
- HP ProCurve 10-GbE SFP+-SFP+ Direct Attach Cable

#### HP SFP+ Transceivers

- HP BladeSystem 10Gb SR SFP+ and HP BladeSystem 10Gb LRM SFP+
- HP ProCurve 10-GbE SFP+ SR Transceiver and HP ProCurve 10-GbE SFP+ LRM Transceiver
- No SFP+ LR Transceiver support

**1 Gb iSCSI controller** Four 1 Gb Ethernet iSCSI ports per G3 iSCSI controller

**Modular Chassis** 2U rack height. 12 Large Form Factor or 24 Small Form Factor drive bays, accommodating SAS and SATA. Comes with space for one or two controllers, or P2000 3.5-inch disk Enclosure I/O modules (LFF chassis only)

**Drives available** The P2000 G3 controllers support both the P2000 3.5-inch Large Form Factor (LFF) drives, and the HP ProLiant 2.5-inch Small Form Factor (SFF) drives.

- Serial Attached SCSI (SAS) enterprise-class drives are designed for high demand, 24x7 usage.
- SAS Midline and SATA Midline are usually reserved for archival of data as they are both relatively inexpensive and are available in very large capacities.

The HP entry-level family of arrays can accommodate both SAS and SATA drives within the same enclosure making it ideal to have both business-critical, high activity files on SAS drives while using Snapshot, clone, or Remote Snap capability to keep back-up or archival data on the less expensive drives.

For investment protection, the controllers will support single and dual port SAS & SATA drives in a legacy single - or dual - domain MSA70. This support allows current owners of MSA70s to migrate their single port drives (in their MSA70 only, not into the array head) to be attached to a P2000 G3 FC or SAS. They can only cascade to another single I/O MSA70. This is not a data-in-place transition, and overall performance could be impacted.

SAS drive performance can be approximately 30% greater than SATA performance on sequential host I/O. SAS performance excels in sequential lower latency response time and random I/O per second transaction performance due to higher rpm disk speeds yielding lower seek times. SAS drive random performance is generally twice that of SATA drives.

**NOTE:** P2000 and MSA2 3.5-inch Large Form Factor (LFF) drives are for use only in the P2000 G3 or

### Family Information

MSA2000 models. The 2.5-inch Small Form Factor (SFF) drives are supported only with the P2000 G3 or the MSA2300 G2 controllers and are common with and are the same part numbers as the ProLiant hot-plug 2.5-inch drives.

**Optional Disk enclosures** Just as the user has a choice of chassis for the array head (LFF and SFF drive bays, AC or DC powered), so also do they have a choice of expansion disk enclosures accommodating either drive size. Both the P2000 and the D2700 disk enclosures can be hot-added to an operating array.

(**NOTE:** these are not supported as part of a NEBS-certified configuration with the MSA Carrier Grade Chassis. There is a certified JBOD listed in the Carrier-grade section)

**P2000 3.5-inch drive enclosure.** This 2U unit has twelve LFF (3.5-inch) drive bays and accepts for P2000 dual-ported SAS and SATA drives. The pre-configured HP P2000 Dual I/O LFF Drive Enclosure (AP843B) has two I/O modules and supports both single and dual controller arrays. If a single I/O disk enclosure model is desired, the appropriate chassis should be purchased along with a single I/O module (AP844B).

- This 3.5-inch drive enclosure can be attached to either the P2000 G3 FC or SAS LFF or SFF array head.
- Each configured model ships standard with two .5m mini-SAS to mini-SAS cables for cascading to other P2000 drive enclosures
- Up to seven P2000 3.5-inch enclosures can be attached to a P2000 G3 FC, FC/iSCSI Combo, or SAS controller in the array head.

**D2700 2.5-inch drive enclosure.** This 2U storage enclosure (AJ941A) is designed to support twenty five ProLiant 2.5-inch Universal form factor (SFF) 6Gb SAS or SATA hard drives. It ships standard with dual I/O modules installed.

- This 2.5-inch drive enclosure can be attached to a P2000 G3 controller (SFF or LFF) array head
- The D2700 enclosure ships with a two .5m miniSAS to miniSAS cable.
- Up to five D2700 may be attached to the P2000 G3 array head, given total support for 149 SFF drives.

### Scalability

The P2000 G3 FC, Combo FC/iSCSI, SAS, 1 Gb or 10GbE iSCSI controllers are designed to allow an installation to begin with smaller capacity and be able to grow gradually as needed. The flexibility of SAS or SATA drive technology, form factors, sizes, speeds, and costs per GB allows a system to easily fit in almost any budget.

- Large Form Factor configurations can scale up to 7.2 TB SAS, 36TB SAS MDL or 24 TB SATA, expandable to 57.6 TB SAS, 384 TB SAS MDL or 192 TB SATA with the addition of a maximum of seven P2000 3.5-inch Drive Enclosures
- Small Form Factor configurations can scale from 21.6 TB SAS, 24 TB SAS MDL or 12 TB SATA MDL. With the addition of five D2700 JBODs, the P2000 G3 can support 134 TB SAS, 149 TB SAS MDL or 74.5 TB SATA MDL.
- Users may configure a 24-drive P2000 G3 SFF array head with 12-drive LFF P2000 3.5-inch disk enclosures. This is an excellent method for a configuration that supports fast SFF enterprise-class SAS drives in the array head, combined with economical LFF drives staged for archival purposes, all in the same array.
- Qualification of larger capacity drives is ongoing.

### Vdisks

Vdisks can span across multiple enclosures, where drives used in the Vdisk can be contained in different enclosures. The maximum number of drives that can be used in RAID 1 Vdisk is 2; RAID 0, 3, 5, 6, and 10 is 16; and for RAID 50 Vdisk is 32.

### LUNs

The HP 2000 family of arrays supports 512 LUNs (total volumes in a dual controller system) and LUN sizes up to 64 TB depending on the RAID configuration chosen. The array supports expansion and deletion of any LUN.

### RAID 0, 1, 3, 5, 6, 10, 50

In addition to the usual RAID levels, the P2000 G3 features several important additional levels. RAID 6 is the highest level of RAID protection. It allocates two sets of parity data across drives and allows simultaneous write operations. It can withstand two simultaneous drive failures without downtime or data loss. RAID 10 is mirroring and striping without parity. It is the most popular of the multiple RAID levels, allowing large arrays

### Family Information

with high performance in most cases and superior fault tolerance. RAID 50 combines the block striping and parity of RAID 5 with the straight block striping of RAID 0, yielding higher performance than RAID 5 through the addition of RAID 0, particularly during writes.

#### Performance

Performance numbers are a guideline as established by tests using RAW I/O in an Operating System Agnostic test lab environment. 144 GB 15K SAS drives were used in a dual controller configuration of 12 vdisks consisting of twelve disks per vdisk, 1.6 TB volumes, and 3 volumes per host. 4 hosts directly attached to the P2000 G3 array were used in this test configuration (results cannot be expected with a single host). Results were achieved in Sequential Writes with 256K blocks; all random tests were based on 8K block sizes.

**NOTE:** Number and type of applications, drive type and number of drives, operating system used, and the number of hosts will affect overall performance. This table is provided strictly as a test-lab comparison. Note: These numbers reflect a full array configuration with the maximum number of front-end ports, disks, and controllers. The test results shown for the P2000 G3 are designed to give a conservative reference point for comparisons.

2000 Array Performance	P2000 G3 FC	P2000 G3 SAS	P2000 G3 10GbE iSCSI	P2000 G3 1GbE iSCSI
Protocol (host connect)	8 Gb Fibre Channel	6 Gb SAS	10Gb Ethernet	1 Gb Ethernet
<b>2000 RAID 10 Performance Results</b>				
Sequential Reads MB/s	1,650	1,650	1,600	550
Sequential Writes MB/s	850	850	800	525
Random Mix IOPs 60/40 read/write	20,500	23,500	18,500	17,200
<b>2000 RAID 5 Performance Results</b>				
Sequential Reads MB/s	1,650	1,650	1,600	550
Sequential Writes MB/s	1,300	1,350	1,000	525
Random Mix IOPs 60/40 read/write	14,000	16,000	12,500	9,400
<b>2000 RAID 6 Performance Results</b>				
Sequential Reads MB/s	1,650	1,650	1,600	550
Sequential Writes MB/s	1,300	1,100	1,000	525
Random Mix IOPs 60/40 read/write	8,300	9,800	7,500	5,600
Refer to the paper titled "Upgrading the HP MSA2000 (G1 or G2) to the P2000 G3 MSA ", available in the Resource Library at: <a href="http://www.hp.com/go/p2000">www.hp.com/go/p2000</a> .				

#### DC-power chassis

HP is making the two models of controller-less chassis available with direct current (DC) power supplies. They each have the two empty bays where users can insert one or two P2000 G3 controller(s). In addition, the P2000 chassis with LFF drive bay can have P2000 3.5-inch I/O modules inserted to create a LFF DC-power JBOD.

The 500 watt power supply is designed to operate over the input range of -40VDC to -75VDC.

SKU

### Family Information

HP P2000 DC-power LFF twelve 3.5-in Drive Bays (supports up to 2 controllers or I/O modules) AP840B

HP P2000 DC-power SFF Chassis AP841B

#### Configuration and Management Tools

HP Storage Management Utility (SMU). Management access, out-of-band: WEB GUI, CLI. Interface Types: USB, 10/100 Ethernet. Protocols Supported SNMP, SMI-S, SSL, SSH, SMTP, FTP, HTTP, Telnet

#### P2000 Software and Documents Support CD

- All product documentation (CD can be used on ALL supported server Operating Systems.)
- MSA Device Discovery Tool (Win and Linux) - reports P2000/MSA HW devices, and supported storage software
- Host Software Bundles (Win and Linux for both ProLiant x86, ProLiant x64 and Integrity IA64 servers)
- CD updated quarterly on HP.com with sustaining firmware updates
- The P2000 G3 contains an embedded SMI-S provider for use by SMI-S client applications. The embedded provider is designed to support P2000 configurations with up to 24 hard drives, and up to 250 mapping paths. A mapping path is defined as a P2000 volume presented through a P2000 target port to a Host initiator.

#### Hot Plug Expansion and Replacement Support

All P2000 G3 models support hot plug expansion and replacement of redundant controllers, enclosures, fans, power supplies, and I/O modules for simple, fast installation and maintenance. Hot add expansion of disk enclosures is also supported.

#### Snapshot and Clone

All G3 arrays come standard with 64 snaps, 512 snaps available. Controller based functionality. Offers higher levels of data protection, enabling an almost instant recovery from data failure or corruption. Offers alternative development testing of 'offline' production data and the ability to backup snapped/cloned data.

<b>Overview</b>	<p>The P2000 G3 arrays come integrated with web browser and CLI based software for storage and RAID management, setup, configuration, and troubleshooting. This reduces the cost of ownership by reducing the training and technical expertise necessary to install and maintain your HP storage solution.</p> <p>The SPOCK database provides interoperability information for thousands of components and millions of component combinations. It is available to all users at <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a>.</p>
<b>Server Compatibility</b> <b>NOTE:</b> depends on protocol	<p>Supports most HP ProLiant, BladeSystems and Integrity servers including</p> <ul style="list-style-type: none"> <li>• HP ProLiant DL, ML</li> <li>• HP c-Class Blade Servers</li> <li>• Integrity servers, IA64 (FC and FC/iSCSI support only)</li> <li>• Compatibility must be confirmed at: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></li> </ul>
<b>Industry Standard servers support</b>	<ul style="list-style-type: none"> <li>• Supports most multi-vendor industry standard 32-bit Intel and AMD based (x86) servers. HP requires the Third-Party Server to be logo'd and listed on the Microsoft Windows Server Catalog.</li> <li>• Refer to the Microsoft website: <a href="http://www.microsoft.com/windows/catalog/server/">http://www.microsoft.com/windows/catalog/server/</a></li> <li>• HP Division recommends that the Third-Party Server Vendor is an active member of TSANet. Refer to the TSANet website for details: <a href="http://www.tsanet.com">www.tsanet.com</a></li> <li>• Non-HP servers will generally be supported if the HP storage stack is used. This includes supported HP branded HBAs and drivers, and supported FC switches.</li> </ul>
<b>OS Support</b> <b>Fibre Channel ports</b>	<p>Refer to the HP support statements for complete current OS version support: <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></p> <ul style="list-style-type: none"> <li>• Microsoft Windows Server 2012</li> <li>• Microsoft Windows Server 2008 IA32, x64, IA64 (Standard, Enterprise, Datacenter)</li> <li>• Microsoft Windows Server 2008 R2 x64</li> <li>• Microsoft Windows 2003 SP1, SP2, and R2 and 2003 R2 IA32, x64</li> <li>• HP-UX</li> <li>• Red Hat Linux (32/64)</li> </ul>

### Family Information

	<ul style="list-style-type: none"> <li>• SuSE SLES (32/64)</li> <li>• Microsoft Windows Server 2008 x64 Hyper-V</li> <li>• VMware</li> <li>• OpenVMS</li> <li>• Apple Mac OS X (requires ATTO Celerity 8Gb FC HBA)</li> <li>• Solaris 10 (x86)</li> </ul>
<b>OS Support Fibre Channel Ports (Integrity)</b>	<ul style="list-style-type: none"> <li>• HP-UX</li> <li>• Windows</li> <li>• OpenVMS</li> <li>• Linux</li> </ul>
<b>OS Support 1GbE iSCSI ports on the G3 Combo FC/iSCSI Controller</b>	<ul style="list-style-type: none"> <li>• Microsoft Windows Server 2012</li> <li>• Microsoft Windows Server 2008 and 2008 R2 (x64, IA64)</li> <li>• Microsoft Windows Server 2008 x64 Hyper-V</li> <li>• Microsoft Windows 2003 (SP1, SP2, and R2) and 2003 R2 (IA32, x64)</li> <li>• Red Hat Enterprise Linux (32/64)</li> <li>• SuSE Linux IA32, x64</li> <li>• VMware ESX</li> </ul>
<b>OS Support G3 SAS Controller</b>	<p>Refer to the HP support statements for complete current OS version support:  <a href="http://www.hp.com/storage/spock">http://www.hp.com/storage/spock</a></p> <ul style="list-style-type: none"> <li>• Microsoft Windows Server 2012</li> <li>• Microsoft Windows Server 2008 IA32, x64</li> <li>• Microsoft Windows Server 2008 R2</li> <li>• Microsoft Windows 2003 and 2003 R2 IA32, x64</li> <li>• Red Hat Linux (32/64)</li> <li>• SuSE SLES (32/64)</li> <li>• Microsoft Windows Server 2008 x64 Hyper-V</li> <li>• VMware</li> <li>• Solaris 10 (x86)</li> </ul>
<b>OS Support G3 1Gb iSCSI Controller</b>	<ul style="list-style-type: none"> <li>• Microsoft Windows Server 2012</li> <li>• Microsoft Windows Server 2008 SP1, SP2, R2</li> <li>• Microsoft Hyper-V (x64 only)</li> <li>• Microsoft Windows Server 2003 and 2003 R2, SP2</li> <li>• VMware</li> <li>• Red Hat Linux (32/64)</li> <li>• SuSE SLES (32/64)</li> </ul>
<b>OS Support G3 10GbE iSCSI Controller</b>	<ul style="list-style-type: none"> <li>• Microsoft Windows Server 2012</li> <li>• Microsoft Windows Server 2008 SP1, SP2, R2</li> <li>• Microsoft Hyper-V (x64 only)</li> <li>• Microsoft Windows Server 2003 and 2003 R2, SP2</li> <li>• Red Hat Linux (32/64)</li> <li>• SuSE SLES (32/64)</li> <li>• VMware</li> </ul> <p><b>NOTE:</b> the G3 10GbE array must connect to a 10GbE switch; direct connect to the G3 10GbE array must be to a 10GbE NIC and supported by the OS.</p>



### Family Information

<b>Web Browser support</b>	<ul style="list-style-type: none"><li>• The P2000 G3 and the older MSA2000 support target based management, and include a Web interface and a telnet interface, and require a web browser for management.</li><li>• The P2000 G3 FC requires Microsoft Internet Explorer V7.x or V8.x</li><li>• The original MSA2000 and the MSA2000 G2 arrays require Microsoft Internet Explorer V6.X and V7.X (strongly encouraged)</li><li>• Mozilla Firefox 1.0.7 or later is supported</li></ul>
----------------------------	--

### Optional Software

#### **VMware Site Recovery Manager (SRM)**

#### **VMware Site Recovery Manager (SRM)**

VMware vCenter Site Recovery Manager (SRM) is an extension to VMware vCenter that delivers business-continuity and disaster-recovery solution that helps you plan, test, and execute the recovery of vCenter virtual machines. SRM can discover and manage replicated datastores, and automate migration of inventory from one vCenter to another. Site Recovery Manager integrates with the underlying replication product through a Storage Replication Adapter (SRA).

#### **HP P2000 Site Recovery Adapter (SRA)**

The HP P2000 SRA, a free-to-use plugin, is the program that integrates the VMware vCenter SRM with HP P2000 G3 arrays. It enables full-featured use of the VMware SRM. It is a host-software component installed on a Microsoft Windows Server that enables disaster recovery management (DRM) software on the host to communicate and control certain aspects of the replication feature in storage systems connected to the server. It allows the VMware SRM software to automatically coordinate virtual machine failover and failback between a protected data center and a disaster recovery site by employing a disaster recovery solution called Remote Snap. A perfect combination of the Remote Snap replication and VMware SRM provides an unfailing automated solution for implementing and testing the disaster recovery between sites located across geographies. It enables communication between the HP P2000 Remote Snap replication functionality that is embedded in HP P2000 Fibre Channel, iSCSI, and Combo Fibre Channel systems. Users are required to acquire Remote Snap license for their local and remote HP P2000 G3 arrays to use the HP P2000 SRA.

#### Site Recovery Manager Requirements/Dependencies:

- Requires vSphere 5.0/SRM 5.0
  - Not compatible with SRM 4.x
- Requires HP's P2000 SRA 2.0 Plug-in (downloadable from Hp.com)
- SRM works with Remote Snap functionality
  - Requires purchase of P2000 G3 Remote Snap licenses (one for each site)
- Customers must upgrade to T240 or the latest firmware
- SRM works with FC, iSCSI or Combo controllers only

#### **HP Insight Control Storage Module for vCenter**

#### **HP Insight Control Storage Module for vCenter**

HP Insight Control Storage Module for vCenter is a component within the HP Insight Control plug-in for vCenter. It provides VMware administrators that are using VMware's vSphere management console (vCenter) with the ability to see how virtual machines are mapped to datastores and individual P2000 volumes. By providing these clear relationships between VM's, datastores and storage, the VMware administrator's productivity increases, as does the ability to ensure quality of service. Roles for administrators can be defined on an individual basis, providing the ability to apply specific permissions for both view and control functions.

The HP Insight Control Storage Module for vCenter supports mixed array environments including EVA, P4000, P2000 (MSA), and the XP array series including the P9500.

When deployed with the P2000 array, provides the following:

- Active Management functionality for the P2000 array:
  - Create/Expand/Delete a Datastore

### Optional Software

- Create a Virtual Machine from a template
- Monitors the health and status of the P2000
- Displays LUN / volume connections from VMs and ESX servers to the arrays and provides the location and attributes of the P2000 within the SAN
- Identifies what storage features are available to allow administrators to match the features available on the P2000 to their requirements
- Provide a cluster-level view of the storage

HP Insight Control Storage Module for vCenter is downloadable from Software Depot:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=HPVPR>

For more information on HP Insight Control Storage Module for vCenter visit: [www.hp.com/go/vmware](http://www.hp.com/go/vmware)

### **vStorage API for Array Integration (VAAI)**

The vStorage API for Array Integration (VAAI) is one of the storage application programming interface (API) sets in vSphere 4.1. VAAI is an API storage partners can leverage to enhance performance of virtual machine (VM) management operations by delegating these operations to the storage array. With hardware offload, ESX/ESXi hosts perform certain operations faster and consume less server CPU and memory resources, and also storage port and storage fabric bandwidth. VAAI includes high performance and scalable VM data path primitives. HP introduced VAAI support for HP MSA P2000 Storage array products starting with the T230 firmware release.

#### Storage Hardware Primitives for VAAI

In the VMware vSphere 4.1 release, the HP StorageWorks P2000 G3 MSA Array Systems offload capabilities support the following three primitives:

- Full Copy or Hardware Assisted Move
- Block Zeroing or Hardware Assisted Zeroing
- Hardware Assisted Locking or Atomic Test and Set (ATS)

### **HP Storage Management Pack for Microsoft System Center**

The HP Management Pack for Systems Center Operations Manager provides seamless integration with Microsoft Systems Center Operations Manager and now System Center Essentials by integrating predefined discovery and state monitoring policies, event processing rules and tasks, and diagram and topology views for the storage system.

For more information:

[http://h18000.www1.hp.com/products/quickspecs/14249\\_div/14249\\_div.html](http://h18000.www1.hp.com/products/quickspecs/14249_div/14249_div.html)

HP Storage Management Pack can be downloaded free from the following website:

<https://h20392.www2.hp.com/portal/swdepot/displayProductInfo.do?productNumber=SCOM>

### **Snapshot and Volume Copy Software for the P2000 G3**

#### **Product Features**

#### **Data Protection**

- Snapshots create up to 512 point-in-time pictures of data (512 snaps are exclusive to the P2000 G3)
- Volume Copies create up to 128 point-in-time copies of data
- Recovery is instant - revert data from any previous Snapshot or Volume Copy
- Backup 'snapped' data to disk, virtual tape, or physical tape without a backup window
- A 64 snapshot license and Volume Copy are included with all P2000 G3 models.

### Optional Software

- Support and updates are desired for bundled software functionalities (such as 64 LTU Snap and/or Volume Copy etc in the P2000 G3 products) a combination HW + SW support care pack must be purchased.
- HP does not provide warranty assistance for software products included with our base hardware products. This would either be SupportPlus or SupportPlus24. The hardware warranty component of these services is accounted for in the pricing of the SP and SP24 care packs.

#### Data Testing

- Snap or clone data to test the performance of a software application on 'offline' production data
- Snap or clone data to test how a software patch or enhancement will function on 'offline; production dat0061

#### P2000 G3 Snapshot and Clone:

G3 controllers/models come STANDARD with 64 snapshots and Volume Copy software  
512 Snapshot option is ONLY available and supported with the G3, not the prior generation MSA2000 models

HP P2000 Snapshot 512 Software LTU TA806A

HP P2000 Snapshot 512 Software E-LTU TA806AAE

#### MSA2000 and MSA2000 G2 Snapshot and Volume Copy (clone) software:

Snapshot and Volume Copy software is optional on models other than the P2000 G3.

The following skus are designated for use by the MSA2000 G2 models. They are neither necessary nor available for the P2000 G3 FC.

HP 2000 Modular Smart Array Snapshot 255 Software LTU<sup>1</sup> T5539A

HP 2000 Modular Smart Array Snapshot 64 Software LTU T5512A

HP 2000 Modular Smart Array Snapshot 8 Software LTU T5513A

HP 2000 Modular Smart Array Snapshot 8 to 255 Upgrade Software LTU T5540A

HP 2000 Modular Smart Array Snapshot 64 to 255 Upgrade Software LTU T5541A

HP 2000 Modular Smart Array Snapshot 8 to 64 Upgrade Software LTU T5515A

HP 2000 Modular Smart Array Volume Copy Software LTU T5514A

<sup>1</sup> The snapshot software is supported on G2 and G3 models only. 512 snaps only applies to G3 controllers.

### Service and Support, HP Care Pack, and Warranty Information

#### Warranty

Three-year limited warranty, parts exchange Next Business day delivery

Enclosures, Hard drives, and Options for the P2000 G3 FC carry their own warranty. Refer to HP's Limited Warranty Statement for more information.

The P2000 G3 FC has been designed with customer self repairable parts to minimize repair time and provide greater flexibility in performing defective parts replacement. Please refer to HP's limited warranty Statement and parts replacement instructions for further details.

<http://h18006.www1.hp.com/products/storageworks/warranty.html>

Products included in various kits carry their own individual warranties.

**NOTE:** The warranty of the hard drive options purchased with the P2000 G3 FC, SAS, and 10GbE iSCSI products is different for SAS hard drives versus SAS MDL and SATA hard drives. SAS hard drive options have a three year warranty and SAS MDL and SATA hard drives options have a one year warranty.

---

#### Technology Services

Technology Services for increased uptime, productivity and ROI

TRUST HP storage technology experts for every level of service and support. Our integrated portfolio of Services for storage help customers reduce costs, optimize data, streamline storage management, and improve backup and recovery. Capitalizing on HP Storage Systems' capabilities requires a service partner who understands your increasingly complex environment. Team with the people who know HP infrastructure hardware and software best-the experienced professionals at HP Services.

Protect your business beyond warranty

Warranty protects against manufacturer defects, however warranty uplifts, such as HP Care Pack Services protect the business-by reducing downtime risks and providing operational consistency for mission-critical and standard business computing.

What HP Storage Technology Services can do for you

HP Storage Technology Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. HP storage lifecycle support services offers a full spectrum of customer care-from technology support to complex migrations to complete managed services.

#### Support:

**Choose from three levels of care for your HP MSA Storage environment.** HP Technology Services are personalized. You decide how, when, and where you receive support for your HP MSA Array Systems. Our approach is proactive, leveraging products, tools, and technology to avoid problems and optimize performance. And our portfolio is simplified-with straightforward choices to reduce complexity and risk, plus a single point of contact you can count on throughout the support lifecycle.

**Optimized care -Maintain optimum levels of storage performance and availability:** HP Proactive Care 24x7 with 40 HP Proactive Select service credits per year -Specifically designed for complex environments, this end-to-end environment support solution covers servers, operating systems, hypervisors, storage, and storage area networks (SANs). We provide rapid response to incidents, addressed 24x7x365 through HP advanced solution center support plus proactive reports for problem prevention. Choose from an extensive menu of HP Proactive Select event and technical services, such as onsite firmware upgrades, health checks, assessments, and education.

**Standard care -Maintain high levels of storage availability:** HP Proactive Care 24x7 with 30 Proactive Select service credits per year - Specifically designed for complex environments, this end-to-end

### Service and Support, HP Care Pack, and Warranty Information

environment support solution covers servers, operating systems, hypervisors, storage, and SANs. We provide rapid response to incidents, addressed 24x7x365 through HP's advanced solution center support plus proactive reports for problem prevention. Choose from an extensive menu of HP Proactive Select event and technical services, such as onsite firmware upgrades, health checks, assessments, and education.

**Basic care-Maintain storage with basic recommended support levels:** HP Support Plus 24 with 10 Proactive Select service credits per year - This support service is designed for environments where proactive help from HP is not required. HP provides 24x7 hardware and software support onsite, including third-party support with a maximum 4-hour onsite response. We also provide cost-saving software updates and monitor ongoing operations through the latest remote tools. Choose from an extensive menu of HP Proactive Select event and technical services, such as onsite firmware upgrades, health checks, assessments, and education.

---

#### Installation

**Implement right from the start: Support that's included whatever levels of care you select-**HP MSA Storage Installation and Startup Service - HP installs, tests, and configures your tape hardware and software onsite. We deliver a tailored storage deployment, properly integrated into your environment.

---

#### Additional services to meet your needs

**HP Data Migration Services** -HP expertise and tools help you migrate data across your data center or around the globe. Take the burden of migration off your shoulders and put it in the capable hands of expert HP storage migration consultants. Our proven approach helps orchestrate the complete data migration and consolidation process while maintaining consistent data availability during the transfer process.

**HP Proactive Select** -HP Proactive Select is a flexible way to purchase services to fit your particular environment or situation. Working with an HP Account Support Manager, you select a package of services in the form of services credits that include proactive services spanning many technologies and processes, such as onsite firmware upgrades, health checks, assessments, and education. You tailor the service delivery to improve time to production, optimize performance, or build in continuous improvements.

---

#### For more information

Only HP brings together deep expertise, proactive and business critical support and a strong partner network-plus, a full set of infrastructure services designed to power a Converged Infrastructure.

To learn more on HP Storage Services, please contact your HP sales representative or HP Authorized Channel Partner

- HP Care Pack Services are sold by HP and HP Authorized Service Partners:
  - Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
  - Customers purchasing from a commercial reseller can find HP Care Pack Services at [www.hp.com/go/lookuptool](http://www.hp.com/go/lookuptool)

### Configuration Information

#### Configure to Order Program Information

HP has a very successful Configure to Order program for the P2000 G3 family. The P2000 G3 models and options may or may not be factory installed in a rack with add-on controllers, switches, P2000 disk enclosures and hard drives. The P2000 G3 arrays may be integrated with ProLiant servers or as standalone storage.


Orders to be shipped through the CTO process must have a minimum of two drives of the same type (SAS, SAS MDL, or SATA) ordered per controller. SAN Starter Kits are not eligible for CTO.

Description	Product #
<b>P2000 G3 Controllers &amp; Controller-less Chassis</b>	
HP P2000 G3 FC Modular Smart Array Controller <b>NOTE:</b> two 8Gb FC ports	AP836B#0D1
HP P2000 G3 FC/iSCSI Combo Modular Smart Array Controller <b>NOTE:</b> two 8Gb FC ports and two 1GbE iSCSI ports	AP837B#0D1
HP P2000 G3 SAS Modular Smart Array Controller <b>NOTE:</b> four 6Gb 4x SAS ports	AW592B#0D1
HP P2000 G3 10GbE iSCSI Modular Smart Array Controller <b>NOTE:</b> two 10GbE iSCSI ports	AW595B#0D1
HP P2000 G3 iSCSI MSA Array System Controller <b>NOTE:</b> four 1Gb Ethernet iSCSI ports	BK829B#0D1
HP P2000 Modular Smart Array 3.5-in Drive Bay Chassis (LFF) <b>NOTE:</b> Will accept one or two controllers or Disk Enclosure I/O modules	AP838B#0D1
HP P2000 Modular Smart Array 2.5-in Drive Bay Chassis (SFF) <b>NOTE:</b> Will accept one or two controllers, not I/O modules	AP839B#0D1
<b>Disk Enclosures</b>	
HP P2000 Dual I/O LFF Drive Enclosure, <b>NOTE:</b> twelve 3.5" drive bays Used with single or dual controller LFF or SFF array head	AP843B#0D1
HP P2000 LFF Drive Enclosure I/O Module <b>NOTE:</b> no cable included. Designed for use with blank LFF chassis AP838A	AP844B#0D1
<b>Configured Units</b>	
HP P2000 G3 FC MSA Dual Controller LFF Modular Smart Array System	AP845B#0D1
HP P2000 G3 FC MSA Dual Controller SFF Modular Smart Array System	AP846B#0D1
HP P2000 G3 FC/iSCSI MSA Dual Combo Controller LFF Array	AW567B#0D1
HP P2000 G3 FC/iSCSI MSA Dual Combo Controller SFF Array	AW568B#0D1
HP P2000 G3 SAS MSA Dual Controller LFF Modular Smart Array System	AW593B#0D1
HP P2000 G3 SAS MSA Dual Controller SFF Modular Smart Array System	AW594B#0D1
HP P2000 G3 10GbE iSCSI MSA Dual Controller LFF Array System	AW596B#0D1
HP P2000 G3 10GbE iSCSI MSA Dual Controller SFF Array System	AW597B#0D1

### Configuration Information

HP P2000 G3 iSCSI MSA Dual Controller LFF Array System  
 HP P2000 G3 iSCSI MSA Dual Controller SFF Array System

BK830B#0D1  
 BK831B#0D1

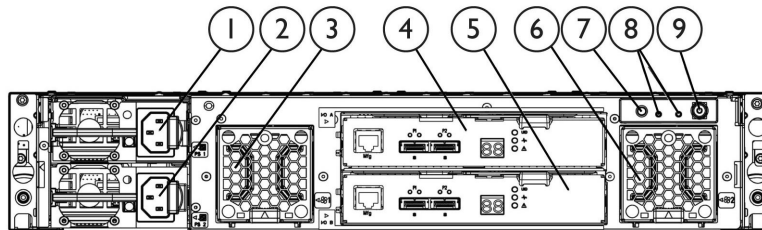

#### HP D2700 Disk Enclosure Rear Panel components

- |                   |                 |                            |
|-------------------|-----------------|----------------------------|
| 1. Power Supply 1 | 4. I/O Module A | 7. Rear UID push button    |
| 2. Power Supply 2 | 5. I/O Module B | 8. Enclosure LEDs          |
| 3. Fan 1          | 6. Fan 2        | 9. Power on/standby button |

<b>D2700</b>	HP D2700 Disk Enclosure	AJ941A#0D1
	<b>NOTE:</b> 25 Small Form Factor (SFF) drive bays	
<b>SAS &amp; SATA Drives (SFF 2.5-inch)</b>	HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
	HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
	HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
	HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
	HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
	HP P2000 300GB 6G SAS 15K rpm LFF Dual Port Enterprise Hard Drive	AP858A
	HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21
	HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507610-B21
	HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21
	<b>NOTE:</b> Go to the <a href="http://www.hp.com/products/harddiskdrives">HP Hard Drive Compatibility table</a> for complete drive compatibility information ( <a href="http://www.hp.com/products/harddiskdrives">http://www.hp.com/products/harddiskdrives</a> ). Using hard drives in unsupported configurations will result in voiding the warranty and could result in damage to the drive and/or loss of data.	



### Configuration Information

#### Step 1 - P2000 G3 - Base Configuration

Select one:

Model Name	SKU
HP P2000 Modular Smart Array 3.5-inch Drive Bay Chassis	AP838B
<ul style="list-style-type: none"> <li>Controller-less chassis with twelve Large Form Factor (LFF) drive bays. Space for two controllers.</li> </ul>	
HP P2000 Modular Smart Array 2.5-inch Drive Bay Chassis	AP839B
<ul style="list-style-type: none"> <li>Controller-less chassis with twenty-four Small Form Factor (SFF) ProLiant drives bays. Space for two controllers.</li> </ul>	

There are two array-head chassis - one with twelve 3.5-inch large form factor bays, the other with twenty-four 2.5-inch small form factor drive bays. For an additional twelve drive bays purchase a P2000 3.5-inch Disk Enclosure. You may attach a total of seven P2000 Drive Enclosures for a total of ninety-six LFF drive bays. For 25 additional SFF drive bays purchase D2700 JBOD. You may attach a total of five D2700 JBODs for a total of one hundred and forty nine SFF drive bays. Dual I/O modules JBODS support both single and dual controller arrays.

#### Step 2 - Options

Select each option with quantities specified.

##### Step 2a - Options

Quantity	Description with Parts Shipped:	SKU
1 or 2	HP P2000 G3 MSA Fibre Channel Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AP836B
1 or 2	HP P2000 G3 MSA FC/iSCSI Combo Modular Smart Array Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AP837B
1 or 2	HP P2000 G3 SAS MSA Array System Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AW592B
1 or 2	HP P2000 G3 10GbE iSCSI MSA Array System Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	AW595B
1 or 2	HP P2000 G3 iSCSI MSA Array System Controller <b>NOTE:</b> for either the LFF or SFF P2000 or the two DC-powered chassis	BK829B

### Configuration Information

#### Step 2b - SAS and SATA Drive Options

**NOTE:** SATA drives are designed for archival or reference data. They should not be used in a heavy or intense I/O environment. Those situations require the use of enterprise-class SAS drives. P2000 3.5-inch drives are for use only with P2000 products.

##### **P2000 Large Form Factor (LFF) SAS drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure**

HP P2000 300GB 6G SAS 15K rpm LFF Dual Port Enterprise Hard Drive	AP858A
HP P2000 450GB 6G SAS 15K rpm LFF Dual Port Enterprise Hard Drive	AP859A
HP P2000 600GB 6G SAS 15K rpm LFF Dual Port Enterprise Hard Drive	AP860A

##### **P2000 Large Form Factor (LFF) SAS MDL DP drives for P2000 G3 FC and P2000 3.5-inch Disk Enclosure**

HP P2000 1TB 6G SAS 7.2K LFF (3.5-inch) Dual Port MDL Hard Drive	AP861A
HP P2000 2TB 6G SAS 7.2K LFF (3.5-inch) Dual Port MDL Hard Drive	AW555A
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	QK703A
HP MSA 4TB 6G SAS 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	C8R26A

**NOTE:** Before installing 3TB HDDs and higher in an P2000 G3 Array please update P2000 array controller firmware to version TS230Rxxx or later

##### **MSA2 Large Form Factor (LFF) SATA drives for P2000 array head an P2000 disk enclosure**

HP MSA2 1TB 7.2K rpm LFF (3.5 inch) Dual-port SATA Hard Disk Drive	AJ740B
HP P2000 2TB 3G SATA 7.2K rpm LFF MDL Hard Drive	AW556B

##### **ProLiant Small Form Factor (SFF) SAS drives for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3 yr Warranty Hard Drive	627117-B21

##### **ProLiant Small Form Factor (SFF) SAS MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**


HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507610-B21
HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21

##### **ProLiant Small Form Factor (SFF) SATA MidLine drive for P2000 G3 Array (24 drive bay) and the D2700 JBOD (25 drive bay)**

<b>(NOTE: SFF SATA drives are single ported and therefore do not have a fail-over path intrinsic to their design)</b>	
HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21

#### Step 2c - Drive Enclosure Options

### Configuration Information

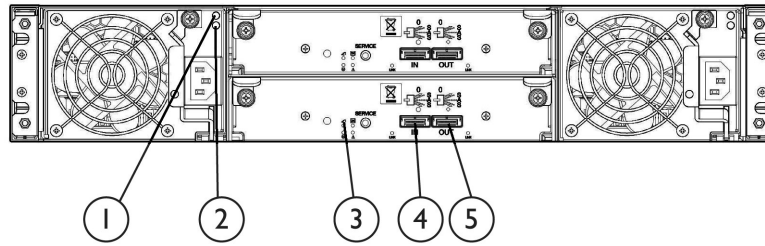

#### P2000 Dual I/O 3.5-inch 12 Drive Enclosure

##### Rear Panel components

- |                    |                 |                 |
|--------------------|-----------------|-----------------|
| 1. Power Indicator | 3. Unit Locator | 5. SAS Out Port |
| 2. Fault Indicator | 4. SAS In Port  |                 |

Use either disk enclosure with Large or Small Form Factor, single or dual controller array heads. Each ship with two .5m mini-SAS to mini-SAS cables.

HP P2000 Dual I/O LFF Drive Enclosure

AP843B

HP D2700 Disk Enclosure

AJ941A

HP P2000 LFF Drive Enclosure I/O Module

**NOTE:** Only used in conjunction with the P2000 blank chassis (AP838A) if a single I/O disk enclosure is desired. No cable included)

AP844B

### Step 2c - SAS Cable Options

#### miniSAS to miniSAS Cables:

Connecting P2000 G3 FC or SAS controller to a JBOD if a longer cable is desired. Also used for attaching the P2000 G3 SAS host ports to servers

HP External Mini SAS 2m Cable

407339-B21

### Configuration Information

#### Step 3 - Other P2000 G3 Options

##### Choose optional AC Power Cords (2 required)

**NOTE:** Two PDU cables: one 142263-008 (Black) and one 1422633-013 (Grey), ship standard with all AC-powered enclosures.

Power Cord, (Australia/China/New Zealand)	227098-001
Power Cord, (Central Europe)	157215-001
Power Cord, (United Kingdom/Hong Kong)	157216-001
Power Cord, (Switzerland)	157219-001
Power Cord, (Italy)	157217-001
Power Cord, (Denmark)	157218-001
Power Cord, (Japan)	139867-001
Power Cord, (South East Asia/India)	157220-001

#### Step 4a - Choose Supported Options For Fibre Channel Infrastructure

Fibre Channel	Model	Description	SKU	
<b>Host Bus Adapters - X86 servers</b>	<b>BladeSystem c-Class Fibre Channel Mezzanine HBAs</b>			
		QLogic QMH2562 8Gb FC HBA for HP c-Class BladeSystem	451871-B21	
		HP BLc Emulex LPe1205- 8Gb FC HBA for HP c-Class BladeSystem	456972-B21	
		Lpe1105-HP 4Gb FC HBA for HP c-Class BladeSystem	403621-B21	
		QMH2462 4Gb FC HBA for HP c-Class BladeSystem Windows and Linux	403619-B21	
		Brocade 804 8Gb FC HBA for HP BladeSystem c-Class, Windows, VMware, Linux	590647-B21	
	<b>Fibre Channel HBAs</b>			
	<b>NOTE:</b> Please visit <a href="http://www.hp.com/go/fchba">www.hp.com/go/fchba</a> for product details and <a href="http://www.hp.com/storage/spock">www.hp.com/storage/spock</a> for compatibility details.			
	<b>Brocade Fibre Channel HBAs</b>			
		HP 81B PCI-e FC HBA Single Port	AP769B	
	HP 82B PCI-e FC HBA Dual Port	AP770B		
	HP 41B 4Gb PCI-e FC HBA	AP767B		
	HP 42B 4Gb Dual-Port PCI-e FC HBA	AP768B		
<b>Emulex Fibre Channel HBAs</b>				
	HP 81E PCI-e FC HBA Single Port	AJ762B		
	HP 82E PCI-e FC HBA Dual Port	AJ763B		
	HP FC2142 4Gb PCI-e HBA	A8002B		
	HP FC2242 Dual Channel 4Gb PCI-e HBA	A8003B		
<b>QLogic Fibre Channel HBAs</b>				
	HP 81Q PCI-e FC HBA Single Port	AK344A		
	HP 82Q PCI-e FC HBA Dual Port	AJ764A		
	HP FC1142 4Gb PCI-e HBA	AE311A		
	HP FC1242 Dual Channel 4Gb PCI-e HBA	AE312A		

### Configuration Information

<b>Fibre Channel Host Bus Adapters - Integrity servers</b>	<b>Integrity</b>	HP 4Gb 1-port PCI-X 2.0 Fibre Channel Host Bus Adapter	AB378B	
		HP 4Gb 2-port PCI-X 2.0 Fibre Channel Host Bus Adapter	AB379B	
		HP 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AD300A	
		HP 4Gb 1-port PCIe Fibre Channel Host Bus Adapter	AD299A	
		HP 4Gb 2-port PCIe Fibre Channel Host Bus Adapter	AD355A	
		HP PCIe 1-port 4Gb and 1-port 1000BT Adapter	AD221A	
		HP PCIe 2-port 4Gb and 2-port 1000BT Adapter	AD222A	
		HP PCIe 2-port 4Gb and 2-port 1000BSX Adapter	AD393A	
		HP PCI-X 1-port 4Gb FC and 1-port 1000BT Adapter	AD193A	
		HP PCI-X 2-port 4Gb FC and 2-port 1000BT Adapter	AD194A	
		HP PCI Express 1-port 8Gb Fibre Channel SR (QLogic) Adapter	AH400A	
		HP PCI Express 2-port 8Gb Fibre Channel SR (QLogic) Adapter	AH401A	
		HP 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AH402A	
		HP 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AH403A	
		<b>Integrity server blades</b>	Emulex LPe1105 4Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	403621-B21
			QLogic QMH2462 4Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	403619-B21
			QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	451871-B21
Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	456972-B21			
<b>Fibre Channel Switches</b>	HP 8/8 Base SAN Switch	AM866B		
	HP 8/8 SAN Switch	AM867B		
	HP 8/24 Base SAN Switch	AM868B		
	HP 8/40 Base SAN Switch	AM869B		
	HP 8/40 Power Pack+ SAN Switch	AM870B		
	HP 8/80 Power Pack+ SAN Switch	AM872B		
	HP 8/80 Base SAN Switch	AM871B		
	HP 1606 Power Pack+ Extension SAN Switch	AP864B		
	HP 1606 Full Extension SAN Switch	AP863B		
	HP 1606 Base Extension SAN Switch	AP862B		
	HP 2408 FCoE Base Converged Network Switch	AP801B		
	HP 2408 FCoE Power Pack+ Converged Network Switch	AP802B		
	Brocade 8/12c SAN Switch for HP BladeSystem c-Class	AJ820B		
	Brocade 8/24c SAN Switch for HP BladeSystem c-Class	AJ821B		
	Brocade 8/24c SAN Switch for HP BladeSystem c-Class Power Pack+	AJ822B		
	<b>SKU</b>			
	HP 8/20q Fibre Channel Switch	AQ233A		
	<b>NOTE:</b> 8 device ports active, upgradeable to 20 device ports active			

### Configuration Information

	HP 8Gb Simple SAN Connection Kit <b>NOTE:</b> 8 device ports active, upgradeable to 20 device ports active	AK241A
	HP 8/20q Fibre Channel Switch <b>NOTE:</b> 16 switch ports active	AK242A
	HP SN6000 Stackable 8Gb 24-port single power supply FC Switch <b>NOTE:</b> 20 device ports active/4 stacking (ISL) ports active	AW575B
	HP SN6000 Stackable 8Gb 24-port dual power supply FC Switch <b>NOTE:</b> 20 device ports active/4 stacking (ISL) ports active	AW576B
	HP SN6000 Stackable 8 Gb 12-port Single Power Fibre Channel Switch <b>NOTE:</b> 8 device ports/4 stacking (ISL) ports active, upgradeable to 20 device ports active	BK780B
	Cisco MDS 9124 8-ports Active Fabric Switch	AG646A
	Cisco MDS 9124 16-ports Active Fabric Switch	AG647A
	Cisco MDS 9124 24-ports Active Fabric Switch	AG648A
	Cisco MDS 8Gb 12-port Fabric Switch for HP BladeSystem c-Class	AW563A
	Cisco MDS 8Gb 24-port Fabric Switch for HP BladeSystem c-Class	AW564A
	Cisco MDS 9124e 12-port Fabric Switch for HP c-Class BladeSystem	AG641A
	Cisco MDS 9124e 24-port Fabric Switch for HP c-Class BladeSystem	AG642A
	Cisco MDS 9134 24-ports Active Fabric Switch	AG874A
	Cisco MDS 9134 32-ports Active Fabric Switch	AG875A
	Cisco MDS 9222i Fabric Switch	AG851B
	HP SN6000C 16-ports Active Fabric Switch	AW585A
	HP SN6000C 32-ports Active Fabric Switch	AW586A
	HP Nexus 5010 Converged Network Switch	AP775A
	HP Nexus 5020 Converged Network Switch	AP776A
<b>PremierFlexOM4+ type cable P2000 G2</b>	1m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK732A
	2m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK733A
	5m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK734A
	15m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK735A
	30m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK736A
	50m HP PremierFlex OM4 LC/LC Multi-mode Optical Cable	QK737A
<b>OM3 FC LC-LC cables options for the P2000 G3</b>	LC-LC Multi-Mode OM3 Fibre Channel Cable 0.5m	AJ833A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 1m	AJ834A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 2m	AJ835A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 5m	AJ836A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 15m	AJ837A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 30m	AJ838A
	LC-LC Multi-Mode OM3 Fibre Channel Cable 50m	AJ839A

### Step 4b - Choose Supported Options For 10GbE Infrastructure

- verify that the cable/transceiver is supported with the connecting device (i.e. switch or NIC/iSCSI HBA)

### Configuration Information

<b>Copper Cable</b>	HP 0.5m SFP+ 10GbE Copper Cable	487649-B21
	HP 1m SFP+ 10GbE Copper Cable	487652-B21
	HP 3m SFP+ 10GbE Copper Cable	487655-B21
	HP 5m SFP+ 10GbE Copper Cable	537963-B21
	HP 7m SFP+ 10GbE Copper Cable	487658-B21
<b>SFP</b>	HP BladeSystem 10Gb SR SFP+	455883-B21
	HP BladeSystem 10Gb LRM SFP+	455889-B21
	HP ProCurve 10-GbE SFP+ 1m Direct Attach Cable	J9281B
	HP ProCurve 10-GbE SFP+ 3m Direct Attach Cable	J9283B
	HP ProCurve 10-GbE SFP+ 7m Direct Attach Cable	J9285B
	HP ProCurve 10-GbE SFP+ SR Transceiver	J9150A
	HP ProCurve 10-GbE SFP+ LRM Transceiver	J9152A
<b>NIC</b>	HP NC522SFP Dual Port 10GbE Server Adapter	468332-B21
	HP NC524SFP Dual Port 10GbE Module	489892-B21
	HP NC550SFP Dual Port 10GbE Server Adapter	581201-B21
	HP NC522m Dual Port Flex -10 10GbE Multifunction BL-c Adapter	467801-B21
	HP NC532m 10GbE Dual Port Flex-10 10GbE Multifunction BL-c Adapter	467799-B21
	HP NC550m 10Gb 2-port PCIe x8 Flex-10 Ethernet Adapter	581204-B21
<b>iSCSI HBA - standup</b>	Qlogic QLe4062c	Reference sell
<b>iSCSI HBA - mezz</b>	HP BLc QLogic iSCSI Dual Port Adapter with Virtual Connect Kit	488074-B22
<b>NIC - mezz</b>	HP NC522m Dual Port 10GbE Multifunction BL-c Adapter	467801-B21

### Step 4c - Choose Supported Options For SAS connection

HP SC08e 6Gb SAS HBA for G6 and G7 rack servers	614988-B21
HP H221 Host Bus Adapter for Gen8 servers	650931-B21
HP Smart Array P712m Controller/256 for Server Blades	488348-B21
HP Smart Array P711m Controller/1 for Server Blades	513778-B21
HP 6Gb/s SAS BL Switch - Single Pack for BladeSystems	BK763A
HP 6Gb/s SAS BL Switch - Dual Pack for BladeSystems	BK764A
HP Ext Mini SAS 2M cable	407339-B21
HP Ext Mini SAS 4m cable - (only be used when connecting a SAS HBA or 6Gb SAS switch to a SAS controller. Connecting it to disk enclosures is not supported.)	432238-B21

### Step 5 - Choose Rack Options

Please refer to the HP Infrastructure products page for more information on HP racks and rack options or the HP 10000 G2 Series Rack QuickSpec.

<http://h18004.www1.hp.com/products/servers/platforms/rackandpower.html>

[http://h18000.www1.hp.com/products/quickspecs/12402\\_div/12402\\_div.HTML](http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.HTML)

### Technical Specifications

<b>P2000 G3 FC</b> <b>P2000 G3 FC/iSCSI</b> <b>P2000 G3 SAS</b> <b>P2000 G3 10GbE iSCSI</b> <b>P2000 G3 iSCSI (1Gb)</b>	<b>POWER REQUIREMENTS</b>	
	Input Power Requirements (typical-running I/O) SFF/LFF arrays	<ul style="list-style-type: none"> <li>• 8G FC (2 Port - 8G FC) 110VAC 3.32A, 344-390 W; 220VAC 1.61A, 374-432W</li> <li>• FC/iSCSI Combo (2 Port - 8G FC + 2 Port -1G iSCSI) 110VAC; 3.64A, 357-418W, 220VAC 1.77 A, 365-424W</li> <li>• 6G SAS (4 Port - 6G SAS) 110VAC 3.49A, 344-390W, 220VAC 1.7A 374-432W</li> <li>• 10GbE iSCSI (2 Port - 10 GbE iSCSI) 110VAC 3.67A, 395W, 220VAC, 1.95A 388.2W</li> <li>• 1G iSCSI (4 Port - 1GbE iSCSI) 110VAC 3.3A 363W, 220VAC, 1.63A 360W</li> </ul>
	Max Input Power	100-240 VAC, 50/60 Hz., 4.5-1.9A; 48-60 VDC 10.4A/8.3A
	Heat Dissipation	1622 BTU/hr
	<b>TEMPERATURE AND HUMIDITY RANGES</b>	
	Operating Temperature	41°F to 104°F (5°C to 40°C)
	Shipping Temperature	-40°F to 158°F (-40°C to 70°C)
	Operating Humidity	10% to 90% RH @ 104°F (40°C) non-condensing
	Non-Operating Humidity	Up to 93% RH @ 104°F (40°C)
	<b>DECLARED ACOUSTIC NOISE LEVELS</b>	
	Sound Power	A weighted sound power LWAd=6,75 B
	Sound Pressure	A weighted sound pressure LpAm - 55dB
	<b>SHOCK AND VIBRATION</b>	
	Shock, Operational	10G's for 10 milliseconds
	Shock, Non-Operational	15G 11ms half sine
	Vibration, Operational	5-500Hz, 0.21 Grms flat
	Vibration, Non-Operational	3-365-3Hz, 1.22 Grms, z-axis, 0.85 Grms, X&Y axis shaped spectrum
	<b>PHYSICAL</b>	
	Height	3.5 in/ 8.9 cm
	Depth (excluding cables) (back of ear to back of controller handle)	P2000 G3 SFF 24-bay array: 20.28 in / 51.510 cm P2000 G3 LFF 12-bay array: 21.3 in. / 55.1 cm
	Width (body only)	17.6 in / 44.7 cm (w/ ears 19 in / 48.26 cm)
	Chassis Weight (no controllers)	P2000 LFF chassis: 34.1 lbs. (DC-pwr model: 37.9 lbs) P2000 SFF chassis: 32.3 lbs (DC-pwr model: 36.1 lbs)



### Technical Specifications

<b>P2000 G3 FC Controller</b>	<b>User Interface</b>	Status and activity provided via management interfaces. Status Indicators on front of Controller
	<b>FC/iSCSI Combo Controller</b>	
<b>P2000 G3 SAS Controller</b>	<b>RAID Support</b>	0, 1, 3, 5, 6, 10, 50
	<b>Cache Memory</b>	2GB Read/Write. ECC protection with backup to Flash memory (indefinite backup)
<b>P2000 G3 10GbE iSCSI Controller</b>	<b>Cache Backup</b>	ECC protection with back up to flash memory (indefinite backup)
	<b>Upgradeable Firmware</b>	yes
<b>P2000 G3 iSCSI Controller (1Gb)</b>	<b>Disk Drive and Enclosure Protocol Support</b>	6 Gb SAS - Serial Attached SCSI
	<b>Host Ports</b>	FC: 2 x 8Gb Fibre Channel SFP+ SAS: 4 -4x lane 6 Gb SAS Host Connections 10GbE iSCSI: 2 x 10GbE SFP+ 1GbE iSCSI: 4 x 1GbE RJ45
	<b>Expansion Port</b>	SAS (SFF8088) 4x lane 6 Gb SAS
	<b>Weight, controller</b>	P2000 G3 Fibre Channel, FC/iSCSI, SAS, and 10GbE iSCSI MSA Controllers 4.5lbs. 1GbE iSCSI is 4.89 lbs

<b>P2000 G3 Regulatory Info</b>	<b>Safety</b>	UL 60950-1 (USA)
		CAN/CSA-C22.2 No.60950-1-03 (Canada)
		EN 60950-1 (European Union)
		GS mark (Germany)
		IEC 60950-1 (International)
		CCC Mark (power supply only, China PRC)
	<b>Electromagnetic Compatibility</b>	VCCI:2008-04 Class A (Japan)
		FCC 15:109(g) Class A (USA)
		ICES-003:2004 Class A (Canada)
		EN55022 : (European Union Class A); CISPR 22 (International Class A)
		EN61000-3-2 : (Harmonics) (European Union)
		EN61000-3-3 : (Flicker) (European Union)
		EN 55024 (European Union, Immunity, Class A);CISPR 24 (International Immunity, Class A)
		AS/NZS CISPR 22, Class A (Australia, New Zealand)
		CNS 13438 Taiwan, Class A (Taiwan)
KN22 Class A (Emissions Class A); KN24 (Immunity) (S Korea)		
<b>RoHS and WEEE</b>	RoHS-6/6 Compliance, China RoHS, WEEE	
<b>Country Approvals</b>	United States ,Australia/New Zealand, Canada, China (PRC), European Union, Germany (GS Mark), Japan, South Korea, Taiwan	

### Technical Specifications

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.