
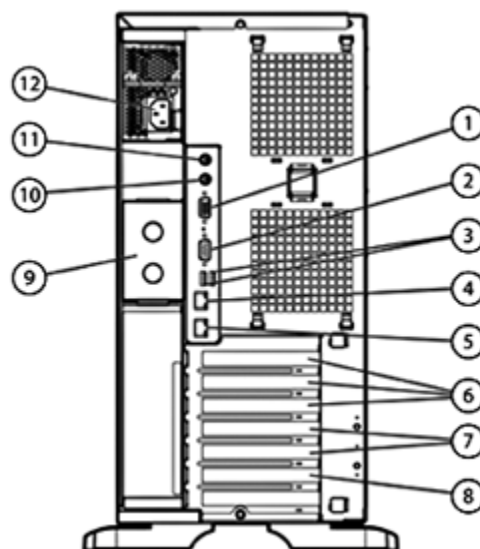


Overview

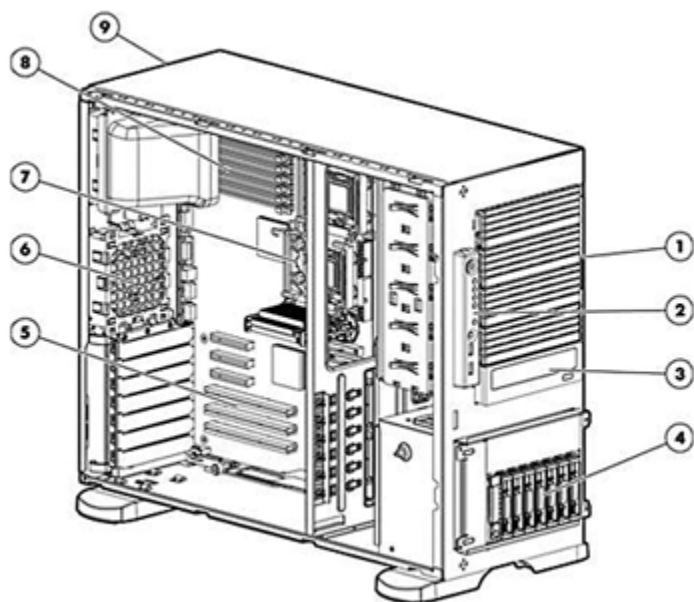

Front View:

1. Five removable media bays
2. Front display panel; includes power button, UID, two USB 2.0 ports, and system status LED's
3. CD-ROM Drive (Dual-Core models), DVD-ROM Drive (Quad-Core models)
4. Eight SFF (2.5") (shown) or six LFF (3.5") SAS or SATA Hot Plug drive bays
5. Six expansion slots (three PCI Express, three PCI-X)
6. Two system fans standard with support for optional redundant system fans
7. Support for two Intel Dual-Core or Quad-Core Xeon 5000 sequence processors
8. Eight PC2-5300 FB-DIMM (DDR2 667) memory sockets
9. Single Hot-Plug power supply standard, optional second redundant supply for availability

Rear View:

1. Monitor port
2. Serial port
3. USB ports
4. Integrated Lights-Out 2 (iLO2) port
5. Network port
6. PCI Express x4
7. PCI-X 64/100
8. PCI-X 64/133
9. Access to add 2nd redundant power supply
10. Mouse port
11. Keyboard port
12. Power

What's New

- New Intel's latest Quad-Core Xeon 5400 series processors with 12MB (2x6MB) L2 cache
- Base models with Quad-Core Xeon 5400 series processors come standard with 2GB system memory

At A Glance

Building on a tradition of excellence, the HP ProLiant family introduces the fifth generation HP ProLiant ML350 server. The HP ProLiant ML350 G5 server provides Multi-Core performance, enterprise level management, and highly available redundant options in a modular server form factor. New for this generation is a smaller and quieter chassis, embedded Smart Array E200i Controller and 5 media bays.

Processors:

- Quad-Core and Dual-Core Intel® Xeon™ processors for blazing performance; systems support up to 2 processors
- 1333/1066/667 MHz front side bus (FSB)
- Intel® 5000Z chipset

Memory:



Overview

- Eight PC2-5300 Fully Buffered DIMMs (DDR2 667) sockets with online-spare support for cost-effective memory configuration and expansion and 2:1 interleaving
- Up to 16 GB of memory supported on Dual-Core Models (5000 and 5100 series)
- Up to 32 GB of memory supported on Quad-Core Models (5300 and 5400 series)
- **Storage Controllers:**
 - Entry Models: HP Smart Array E200i/64MB Controller (integrated SAS/SATA Hot-Plug Controller with RAID 0/1/1+0 support)
 - 128MB BBWC optional upgrade kit for RAID 5 support also available
 - Base Models: HP Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)
- **Internal Drive Support:**
 - Up to eight SFF (2.5") or six LFF (3.5") Hot Plug Serial Attached SCSI (SAS) or Serial-ATA (SATA) hard drives
 - Maximum of 4.50TB of internal storage capacity (using Hot-Plug SATA drives)
- **Network Controller:**
 - Embedded NC373i Multifunction Gigabit Network Adapter with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit
- **Expansion Slots:**
 - Six total expansion slots
 - One 64-bit/133-MHz PCI-X; two 64-bit/100-MHz PCI-X; three x8 PCI Express (x4 speed)
 - Optional PCI-X Expander provides additional two 64-bit/100-MHz PCI-X slots by converting a single PCI Express slot
 - A single x8 PCI Express slot with x8 bus speed can be achieved by attaching the x4/x8 PCIE Bus Expander option kit. (Please see the chart and notes in the Expansion Slots under Standard Features below for more details)
- **USB Ports:**
 - Six USB 2.0 ports: (2) front; (2) rear; (2) internal
- **Redundancy:**
 - Optional Hot plug redundant power supplies
 - Support for optional redundant system fans
- **Management:**
 - HP Insight Control Environment server management software
 - Integrated Lights-Out 2 featuring Integrated Remote Console with KVM over IP performance over shared network access
 - Support for ROM-Based Setup Utility (RBSU) and redundant ROM
 - Systems Insight Manager, SmartStart, and Automatic Server Recovery 2 (ASR-2)
 - HP Power Meter and Power Regulator for ProLiant, delivering integrated power consumption monitoring and server level, policy based power management for industry leading energy efficiency and savings on system power and cooling costs
- **Deployment/Serviceability:**
 - Optional parallel and second serial port available without using a PCI slot
 - Tool-free chassis entry and component access
 - Tool-free motherboard removal
 - Universal rail solution supporting both square and round hole rack environments
- **Warranty:**
 - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. SATA hard drives have a one-year warranty.
NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA0-6362ENW.pdf>.

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor One of the following depending on Model	Quad-Core Intel Xeon Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Quad-Core Intel Xeon Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Quad-Core Intel Xeon Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 80 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB) NOTE: Available via Configuration To Order only.
	Dual-Core Intel Xeon Processor 5110 (1.60 GHz, 65 Watts, 1066 FSB) NOTE: Available via Configuration To Order only.
	Quad-Core Intel Xeon Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)
	Quad-Core Intel Xeon Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)
	Quad-Core Intel Xeon Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)
	Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)
	Quad-Core Intel Xeon Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB)
	Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)
	Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 65 Watts, 1333 FSB)
	Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)
	Dual-Core Intel Xeon Processor 5080 (3.73 GHz, 130 Watts, 1066 FSB)
	Dual-Core Intel Xeon Processor 5060 (3.2 GHz, 130 Watts, 1066 FSB)
	Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 95 Watts, 667 FSB)

Cache Memory One of the following depending on Model	12MB (2 x 6MB) Level 2 cache (5400 series)
	8MB (2 x 4MB) Level 2 cache (5300 series)
	4MB (1 x 4MB) Level 2 cache (5100 series)
	4MB (2 x 2MB) Level 2 cache (5000 series)

Upgradeability	Upgradeable to dual processing (8 or 4 cores) (Please contact your regional sales support to determine quad core upgradeability. Some of the earlier shipping models may not support this upgrade)
-----------------------	---

Chipset	Intel 5000Z Chipset NOTE: For more information regarding Intel chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/ .
----------------	---

Standard Features

Storage	Diskette Drives	None included standard
	Optical Drive <i>One of the following depending on model</i>	Quad-Core 5400 series: 16x SATA DVD-ROM drive Quad-Core 5300 series: 16x PATA DVD-ROM drive Dual-Core: 48x IDE CD-ROM drive NOTE: Quad-Core 5400 series BTO Models are configured with SATA optical drive.
	Hard Drives	None included standard

Maximum Internal Storage <i>One of the following depending on model</i>	Hot Plug LFF (3.5") Serial ATA (SATA)	4.50TB	6 x 750GB
	Hot Plug LFF (3.5") Serial Attached SCSI (SAS)	1.80TB	6 x 300GB
	Hot Plug SFF (2.5") SATA	960GB	8 x 120GB
	Hot Plug SFF (2.5") SAS	1.168TB	8 x 146GB

Interfaces	Parallel	Optional parallel port available
	Serial	1 (optional 2nd serial port available)
	Pointing Device (Mouse)	1
	Graphics	1
	Keyboard	1
	Network RJ-45	2 (1 dedicated for iLO 2)
	USB 2.0 Ports	6 (2 front, 2 rear, 2 internal) NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html .

Graphics	Integrated ATI ES1000, 32MB video standard <ul style="list-style-type: none"> 16 bit color: maximum resolution of 1600 x 1200 32 bit color: maximum resolution of 1280 x 1024 NOTE: Maximum resolution available via iLO 2 remote console is 1280x1024.
-----------------	--

Form Factor	Tower or Rack (5U) NOTE: Rack models (and rack conversion kit) support: <ul style="list-style-type: none"> Square or round hole racks 24"- 36" deep, including HP Rack System /E and HP Systems Telco racks with 3rd part option kit from Rack Solutions http://www.racksolutions.com/hp
--------------------	--

ProLiant Essentials Foundation Pack Software	HP Systems Insight Manager	HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms. Through a single management view, HP SIM provides core management services that include device discovery and identification,
---	----------------------------	---

Standard Features

event views, health monitoring, inventory data collection, software version control and reporting. HP SIM is built on industry standards and is extensible with value-added ProLiant Essentials, Integrity Essentials and Storage Essentials software to meet individual management needs. For more details on HP SIM visit <http://www.hp.com/go/hpsim>.

HP SIM provides organizations with the following benefits:

- Simplifies and consolidates infrastructure lifecycle management using task and query based functionality
- Provides the foundation for infrastructure automation and virtualization
- Enables IT management based on business processes not hardware platforms
- Lowers infrastructure maintenance cost and frees resources for innovation
- Maximizes resource utilization with virtualization technologies
- Provides a central point of integration between infrastructure and Enterprise management tools such as HP OpenView

Insight Management Agents

Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at:

<http://www.hp.com/servers/manage>

SmartStart

SmartStart simplifies server setup by providing a quick, easy way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at

<http://www.hp.com/servers/manage>.

Minimum SmartStart version supported: 7.60

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up at <http://www.hp.com/go/subscriberschoice> and customize your profile to receive alerts on updates as they become available.

ROMPaq, support software, and configuration utilities

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options

Available in SmartStart or downloadable from the Software and Drivers download pages at <http://www.hp.com/go/support>.

Insight Diagnostics Online Edition

The most advanced configuration analysis, reporting and troubleshooting utilities used by HP at your fingertips
Available in SmartStart.

Optional ProLiant Essentials Value Packs

Optional software offerings that extend the functionality of an Adaptive Infrastructure to address specific business problems and needs:

- **Accelerated iSCSI Pack** - enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA

Standard Features

providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.

- **HP Insight Control Environment** - is based on HP Systems Insight Manager and ProLiant Essentials software, and brings the value of Insight Control to ProLiant customers by delivering comprehensive health and performance monitoring, remote control, vulnerability scanning and patch management as well as flexible deployment and power management through an integrated installation package and streamlined licensing. For more information, visit: <http://www.hp.com/go/ice>
- **Rapid Deployment Pack (RDP)** is an automated deployment and provisioning solution for all ProLiant servers. RDP includes the ProLiant Integration Module featuring ProLiant server pre-configured events for OS installation, and optimized software drivers, firmware and management agents. Every RDP disc includes 7-day, 10-node trial licenses for evaluation purposes. RDP requires a license for each server deployed and is available for purchase with HP servers. For more information, visit: <http://www.hp.com/servers/rdp>.
- **Server Migration Pack - Universal Edition** - Upgrading, replacing, or virtualizing your existing server? Effortlessly transition to new virtual or physical HP ProLiant servers or BladeSystem with automated, accurate and affordable migration of OS, application and data. SMP Universal automates the manual processes required for migrating servers between physical or virtual platforms, whether migrating to VMware or Microsoft virtual machines. SMP Universal allows all of the following:
 - Physical to ProLiant
 - Physical to virtual
 - Virtual to virtual
 - Virtual to ProLiant
- **Performance Management Pack** (offered exclusively through the Insight Control suites) - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.
- **Integrated Lights-Out Advanced Pack** - upgrades the iLO 2 processor with comprehensive remote control including Virtual KVM remote graphical console, enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication).
- **Integrated Lights-Out Select Pack** - upgrades the iLO 2 processor with enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication) for servers managed using remote consoles available in iLO 2 Standard and iLO 2 Standard Blade Edition.
- **Insight Power Manager (IPM)** - upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager. IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.

Optional Remote
Management Packs

Standard Features

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

Industry Standard Compliance

ACPI V2.0 Compliant
PCI 2.2 Compliant
PXE Support
WOL Support
PCI-X 1.0a Compliant
Novell Certified
Microsoft® Logo certifications
USB 2.0

Availability

Optional Hot-Plug, Redundant Power supply
Online-Spare Memory
Optional Dual Redundant System Fans

Remote Management

Integrated Lights-Out (iLO 2) Management 2

- Virtual Text Remote Console (pre-OS only)
- Remote Serial Console
- Virtual Power Button Control
- Virtual Unit ID control
- Integrated Remote Console (ActiveX Control client)
- Dedicated & full function shared network connectivity with VLAN
- Embedded system health
- Present power consumption
- Browser, command line and scripted access
- Automatic IP Configuration via DHCP/DNS/WINS
- Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)
- Advanced Encryption Standard (AES)/Triple Data Encryption Standard (3DES)
- OS independent hardware health status
- IML and iLO Event Logging
- Support for 12 user accounts with customizable access privilege

System Management

HP Systems Insight Manager
SmartStart
Redundant ROM
System Firmware Update
ROMPaq
ProLiant RBSU (ROM-Based Setup Utility)
Automatic Server Recovery-2 (ASR-2)
Dynamic Sector Repairing (with Smart Array Controller)
Drive Parameter Tracking (with Smart Array Controller)
Pre-Failure Warranty (covers processors, memory, and SAS hard drives)

Standard Features

Security	Power-on password Setup password Diskette boot control Parallel and serial interface control Disk configuration lock Power switch security
Server Power Cords	ProLiant ML servers in a rack-mount configuration no longer ship standard with NEMA power cords that allow connection to 110V US wall outlets in a home or office. These servers are primarily connected to PDU's in data center racks so they now ship standard with only a PDU power cord (416151-B21). If a user wishes to power a ProLiant ML rack-mount server using a 110V receptacle (NEMA-15), the NEMA power cord must be ordered separately. The 12' cord (AF556A) or 6' cord (187335-001) can be purchased online at HP.COM. In a tower configuration, the servers ship standard with a 6' country specific NEMA power cord. If customers require a local power cord, they can check the power cord matrix for the appropriate country specific sku. Please see the following power cord matrix: http://www.hp.com/go/powercordmatrix .
UPS and PDU Power Cord Matrix	Please see the UPS and PDU cable matrix that lists cable descriptions, requirements, and specifications for UPS and PDU units: http://h18004.www1.hp.com/products/servers/proliantstorage/power-protection/index.html
Power Supply	800 Watt-CE Mark Compliant Hot Plug Power Supply (1000 Watt high line) Optional second Power Supply provides redundant capability NOTE: Please see the "Power Specifications" section later in this document for low line and high line requirements.
System Fans	2 fans ship standard, dual redundant fans are optional, 4 fans total supported (does not include power supply or processor heat sink fans)
Required Cabling	For required cabling information, refer to the HP ProLiant ML350 G5 cabling matrix at http://www.hp.com/servers/proliantML350 . NOTE: Please see the "Storage" section of this QuickSpecs for important information on controllers and cables required to support SAS or SATA hard drives as well as storage management software available for SATA hard drives.

Standard Features

OS Support

Microsoft Windows Server 2003/R2 (Standard, Web, and Enterprise Editions)
Microsoft Windows Small Business Server 2003
Microsoft Windows 2000 Server and Advanced Server
Novell NetWare 6.5/Open Enterprise Server
Red Hat Enterprise Linux
SUSE Linux Enterprise Server
SCO OpenServer 5.0.7/6.0
SCO UnixWare 7.1.3/7.1.4

NOTE: For a complete and up-to-date listing of supported operating systems please visit our OS Support Matrix at: <http://www.hp.com/go/supportos>.

NOTE: For more Linux OS support & certification information, please visit the ProLiant & BladeSystem Server Linux matrix

<http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html>

NOTE: Optional hardware may be required to support some operating systems.

NOTE: For information on how to buy server operating systems from HP please visit the OS product site at: <http://h18004.www1.hp.com/products/servers/software/OEM.html>

NOTE: For an up-to-date listing of the latest drivers available for the HP ProLiant ML350 G5, please see: <http://www.compaq.com/support/files/server/us/index.html>.

NOTE: For more information on VMware support, please visit the VMware Server Support Matrix at: <http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html>.

Installation of Server into Telco Racks

Support for all 2-post Telco racks requires the use of the HP ProLiant ML350 G5 rack kit and an additional option kit from Rack Solutions. <http://www.racksolutions.com/hp>.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

Standard Features

Service and Support HP Care Pack services provide total care and support expertise with committed response designed to meet your IT and business needs.

HP Care Pack services include coverage for the HP branded hardware options qualified for the server and purchased at the same time or afterward that are internal to the enclosure. This also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions, provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Recommended Service - simplify ProLiant solution implementation, maintenance, and management.

- **Support** - 3-Year 4-Hour response 24x7 Same Business Day Coverage only
- **Deployment Service** - Installation and Start up only

Enhanced Service - optimize service level to increase IT performance and availability.

- **Support** - -3-Year Support Plus 24 only

Refer to the information on "Installation & Start-Up" for service on ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

NOTE: For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

<p>HP ML350 G5 Entry Models</p> <p>Tower</p> <p>Quad-Core Models</p> <p>HP ML350T05 E5420 LFF</p> <p>458239-xx1</p> <p>HP ML350T05 E5410 LFF</p> <p>458244-xx1</p> <p>HP ML350T05 E5310 LFF</p> <p>440188-xx1</p> <p>Dual-Core Models</p> <p>HP ML350T05 5130 LFF</p> <p>416893-xx1</p> <p>HP ML350T05 5120 LFF</p> <p>416892-xx1</p> <p>Rack</p> <p>Quad-Core Models</p> <p>HP ML350R05 E5420 LFF</p> <p>458240-xx1</p> <p>Dual-Core Models</p> <p>HP ML350R05 5130 LFF</p> <p>416894-xx1</p>	<p>Processor(s)</p> <p>One of the following depending on Model</p> <p>Cache Memory</p> <p>Memory</p> <p>One of the following depending on Model</p> <p>Network Controller</p> <p>Storage Controller</p> <p>Hard Drive</p> <p>Internal Storage</p> <p>Optical Drive</p> <p>One of the following depending on Mode</p> <p>PCI-Express Slots</p> <p>Power Supplies</p> <p>Fans</p> <p>Form Factor</p> <p>One of the following depending on Model</p>	<p>(1) Quad-Core Intel Xeon E5420 Processor (2.50 GHz, 80 Watts, 1333 FSB)</p> <p>(1) Quad-Core Intel Xeon E5410 Processor (2.33 GHz, 80 Watts, 1333 FSB)</p> <p>(1) Quad-Core Intel Xeon E5310 Processor (1.6 GHz, 80 Watts, 1066 FSB)</p> <p>(1) Dual-Core Intel Xeon 5130 Processor (2.0GHz, 65 Watts, 1333 FSB)</p> <p>(1) Dual-Core Intel Xeon 5120 Processor (1.86 GHz, 65 Watts, 1066 FSB)</p> <p>12MB (2x6MB) Level 2 cache - 5400 Series</p> <p>8MB (2 x 4MB) Level 2 cache - 5300 Series</p> <p>4MB (1 x 4MB) Level 2 cache - 5100 Series</p> <p>Quad-Core 5400 Series: 1GB (2 x 512MB)</p> <p>Quad-Core 5300 Series: 1GB (2x512MB)</p> <p>Dual-Core: 512 MB (1 x 512 MB)</p> <p>Embedded NC373i Multifunction Gigabit Server Adapter</p> <p>Smart Array E200i/64 Controller (RAID 0/1/1+0)</p> <p>None Ship Standard; (0/6 LFF)</p> <p>1.80TB LFF SAS; 4.50TB LFF SATA</p> <p>Quad-Core: 16x DVD-ROM standard</p> <p>Dual-Core: 48x CD-ROM standard</p> <p>Six expansion slots (three PCI Express, three PCI-X)</p> <p>800-Watt CE-mark compliant Hot-Plug power supply</p> <p>Optional second power supply provides redundant operation</p> <p>2 fans ship standard, 4 fans total supported (does not include power supply or processor heatsink fans)</p> <p>Tower</p> <p>Rack (5U), (8.75 in/22.25 cm)</p>
--	---	--

<p>HP ML350 G5 Base Models</p> <p>Tower</p> <p>Quad-Core Models</p> <p>HP ML350T05 E5430 SFF</p> <p>458238-xx1</p> <p>HP ML350T05 E5420 SFF</p> <p>458242-xx1</p> <p>HP ML350T05 E5410 SFF</p> <p>458246-xx1</p> <p>HP ML350T05 E5320 SFF</p> <p>438730-xx1</p> <p>HP ML350T05 E5310 SFF</p>	<p>Processor(s)</p> <p>One of the following depending on Model</p> <p>Cache Memory</p> <p>One of the following depending on Model</p>	<p>(1) Quad-Core Intel Xeon E5430 Processor (2.66 GHz, 80 Watts, 1333 FSB)</p> <p>(1) Quad-Core Intel Xeon E5420 Processor (2.50 GHz, 80 Watts, 1333 FSB)</p> <p>(1) Quad-Core Intel Xeon E5410 Processor (2.33 GHz, 80 Watts, 1333 FSB)</p> <p>(1) Quad-Core Intel Xeon E5320 Processor (1.86 GHz, 80 Watts, 1066 FSB)</p> <p>(1) Quad-Core Intel Xeon E5310 Processor (1.6 GHz, 80 Watts, 1066 FSB)</p> <p>(1) Dual-Core Intel Xeon 5140 Processor (2.33 GHz, 65 Watts, 1333 FSB)</p> <p>(1) Dual-Core Intel Xeon 5130 Processor (2.0 GHz, 65 Watts, 1333 FSB)</p> <p>12MB (2 x 6MB) Level 2 cache - 5400 Series</p> <p>8MB (2 x 4MB) Level 2 cache - 5300 Series</p> <p>4MB (1 x 4MB) Level 2 cache - 5100 Series</p>
--	---	--



Models

<p>434717-xx1</p> <p>Dual-Core Models HP ML350T05 5140 SFF 417605-xx1</p> <p>HP ML350T05 5130 SFF 417536-xx1</p> <p>Rack Quad-Core Models HP ML350R05 E5430 SFF 458237-xx1</p> <p>HP ML350R05 E5420 SFF 458243-xx1</p> <p>HP ML350R05 E5320 SFF 440189-xx1</p> <p>Dual-Core Models HP ML350R05 5140 SFF 417538-xx1</p> <p>HP ML350R05 5130 SFF 417537-xx1</p>	<p>Memory</p> <p>Network Controller</p> <p>Storage Controller</p> <p>Hard Drive</p> <p>Internal Storage</p> <p>Optical Drive <i>One of the following depending on Mode</i></p> <p>PCI-Express Slots</p> <p>Power Supplies</p> <p>Fans</p> <p>Form Factor <i>One of the following depending on Model</i></p>	<p>Quad-Core 5400 Series: 2 GB (2 x 1GB) standard Quad-Core 5300 Series: 1 GB (2 x 512MB) standard Dual-Core: 1 GB (2 x 512MB) standard</p> <p>Embedded NC373i Multifunction Gigabit Server Adapter</p> <p>Smart Array E200i/128 BBWC Controller (RAID 0/1/1+0/5)</p> <p>None Ship Standard; (0/8 SFF)</p> <p>1.168TB SFF SAS; 480GB SFF SATA</p> <p>Quad-Core: 16x DVD-ROM standard Dual-Core: 48x CD-ROM standard</p> <p>Six expansion slots (three PCI Express, three PCI-X)</p> <p>800-Watt CE-mark compliant Hot-Plug power supply Optional second power supply provides redundant operation</p> <p>2 fans ship standard, 4 fans total supported (does not include power supply or processor heatsink fans)</p> <p>Tower Rack (5U), (8.75 in/22.25 cm)</p>
---	---	--

Country Code Key

XX=00
 XX=01
 XX=03
 XX=04
 XX=05
 XX=20
 XX=29
 XX=37
 XX=42
 XX=AA

Tower Code Key

U.S. English
 Australia
 UK
 Germany
 France
 Brazil
 Japan
 APD
 Europe
 PRC

Rack Code Key

U.S. English
 N/A
 N/A
 N/A
 N/A
 N/A
 Japan
 APD
 Europe
 PRC

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

Models	<p>ML350 G5 Tower Models</p> <p>LFF - 3.5" Drives</p> <p>HP ProLiant ML350G5 LFF SAS/SATA Tower CTO Chassis 412645-B21</p> <p>Includes:</p> <ul style="list-style-type: none"> Embedded NC373i Multifunction Gigabit Server Adapter Integrated Smart Array E200i Controller Six Hot-Plug (LFF) SAS/SATA Drive Bays Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors) Six USB ports 800W Hot-Plug Power Supply Tower Form Factor Keyboard 2-button Mouse <p>SFF - 2.5" Drives</p> <p>HP ProLiant ML350G5 SFF SAS/SATA Tower CTO Chassis 395570-B21</p> <p>Includes:</p> <ul style="list-style-type: none"> Embedded NC373i Multifunction Gigabit Server Adapter Integrated Smart Array E200i Controller Eight Hot-Plug (SFF) SAS/SATA Drive Bays Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors) Six USB ports 800W Hot-Plug Power Supply Tower Form Factor Keyboard 2-button Mouse <p>ML350 G5 Rack Models</p> <p>LFF - 3.5" Drives</p> <p>HP ProLiant ML350G5 LFF SAS/SATA Rack CTO Chassis 412644-B21</p> <p>Includes:</p> <ul style="list-style-type: none"> Embedded NC373i Multifunction Gigabit Server Adapter Integrated Smart Array E200i Controller Six Hot-Plug (LFF) SAS/SATA Drive Bays Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors) Six USB ports
---------------	--

Configuration Information - Factory Integrated Models

800W Hot-Plug Power Supply
Rack (5U) Form Factor

SFF - 2.5" Drives

HP ProLiant ML350G5 SFF SAS/SATA Rack CTO Chassis 395569-B21

Includes:

Embedded NC373i Multifunction Gigabit Server Adapter
Integrated Smart Array E200i Controller
Eight Hot-Plug (SFF) SAS/SATA Drive Bays
Six expansion slots: one 64-bit/133-MHz PCI-X, two 64-bit/100-MHz PCI-X, and three x4 PCI Express (with x8 connectors)
Six USB ports
800W Hot-Plug Power Supply
Rack (5U) Form Factor

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	HP E5440 ML350G5 FIO Kit	458257-L21
	HP E5430 ML350G5 FIO Kit	458259-L21
	HP E5420 ML350G5 FIO Kit	458265-L21
	HP E5410 ML350G5 FIO Kit	458267-L21
	HP E5405 ML350G5 FIO Kit	458269-L21
	HP X5355 ML350G5 FIO Kit	436015-L21
	HP E5345 ML350G5 FIO Kit	436013-L21
	HP E5335 ML350G5 FIO Kit	437444-L21
	HP E5320 ML350G5 FIO Kit	435512-L21
	HP E5310 ML350G5 FIO Kit	435513-L21
	HP X5160 ML350G5 FIO Kit	416891-L21
	HP X5150 ML350G5 FIO Kit	416890-L21
	HP X5140 ML350G5 FIO Kit	416889-L21
	HP X5130 ML350G5 FIO Kit	416888-L21
	HP X5120 ML350G5 FIO Kit	416887-L21
	HP X5110 ML350G5 FIO Kit	416886-L21
Base Memory	512 MB FBD PC2-5300 1 x 512 MB Kit	413507-B21
	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
Smart Array E200i Controller Cache	HP SA E200 64MB Cache FIO Kit	405102-B21
	NOTE: Select this option for RAID 0/1/1+0 128-MB Battery-Backed Write Cache (BBWC) NOTE: Select this option for RAID 0/1/1+0/5.	351580-B21
Optical Drive	Floppy Drive ML350/370 G5 Kit	409582-B21
	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21

Configuration Information - Factory Integrated Models

HP 48X CD-ROM ALL (no screws)	384758-B21
HP DVD±R/RW 16X Half Height	383974-B21
16X DVD-ROM Drive Option Kit (Carbon)	217053-B21
HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
HP Half-Height SATA DVD RW Optical Drive	447328-B21

Step 3: Choose Additional Options for Factory Integration

Controllers	HP Smart Array P400/256MB Controller	405132-B21
	NOTE: SAS Controller supporting RAID 0/1/1+0/5.	
	HP Smart Array P600/256 BBWC Controller	337972-B21
	NOTE: SAS Controller supporting RAID 0/1/1+0/5/6.	
	Smart Array 642 Controller	291967-B21
	NOTE: U320 Controller.	
	Smart Array 6402/128 Controller	273915-B21
	NOTE: U320 Controller.	
Smart Array 6404/256 Controller	273914-B21	
NOTE: U320 Controller.		
64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21	
HP Smart Array 6404/512 FIO CNTRLR	452240-B21	

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Options" section below.

Options

NOTE: Some options may not be factory configurable. Please contact your local sales representative for additional information.

HP ProLiant ML350 G5 Unique Options	HP Redundant Fan ML350 G5 Kit	409579-B21
	HP PCI-X Expander Kit (2 x 64-bit 100MHz PCI-X slots) NOTE: The HP PCI-X Expander kit converts a single PCI Express slot (slot 6) into two full height, full length 64-bit 100MHz PCI-X slots NOTE: The HP PCI-X Expander kit can support a maximum of one (1) HP Smart array, HBA, or SCSI PCI-X adapter. Prioritize internal slots for use with PCI-X storage controllers. Please refer to the ML350G5 user guide for additional details.	435670-B21
	HP Tower to Rack Conversion Kit - ML350 G5 Kit NOTE: See "Redundant Options" section below for Hot Plug Redundant Power supplies.	412640-B21

HP Insight Control and ProLiant Essentials Offerings

ProLiant Essentials Value Pack

NOTE: Electronic licensing options are available for Insight Control suites and select ProLiant Essentials software products. Please see the appropriate Insight Control and ProLiant Essentials QuickSpecs for additional information.

Accelerated iSCSI Pack

ProLiant Essentials Accelerated iSCSI Pack, No Media, Single License 452679-B21
NOTE: For use with a single NIC port. Contains one license with a unique license activation key and documentation.
NOTE: For additional License Kits, please see the QuickSpecs at:
http://h18000.www1.hp.com/products/quickspecs/12466_div/12466_div.html

HP Insight Control Environment

HP Insight Control Environment, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates 452148-B21
NOTE: For additional License Kits, please see the QuickSpecs at:
http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html

ProLiant Essential RDMA Pack

HP ProLiant Essentials RDMA Pack for Embedded Multifunction Gigabit Server Adapters, No Media, 1-Server License 452681-B21
NOTE: For additional License Kits, please see the QuickSpecs at:
http://h18000.www1.hp.com/products/quickspecs/12573_div/12573_div.html

Rapid Deployment Pack

ProLiant Essentials Rapid Deployment Pack No Media 1-Server License including 1 year of 24x7 Technical Support and Updates 452151-B21
NOTE: This license allows 1 server to be deployed and managed via RDP.
NOTE: For additional License Kits, please see the QuickSpecs at:
http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.html

HP Server Migration Pack - Universal Edition

HP Server Migration Pack - Universal Edition, No Media, 1-Year Unlimited Migration License, including 1 year of 24x7 Technical Support and Updates 460756-B21
NOTE: This license allows unlimited migrations (physical to ProLiant, physical to virtual, virtual to virtual, and virtual to ProLiant) for one year. Contains one license with a unique license activation key and documentation.

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to ProLiant Single Migration License, including 1 year of 24x7 Technical Support and Updates 460750-B21
NOTE: This license allows 1 physical to ProLiant or virtual to ProLiant migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed

Options

<p>online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.</p>	
<p>HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to Virtual Single Migration License, including 1 year of 24x7 Technical Support and Updates</p> <p>NOTE: This license allows 1 physical to virtual or virtual to virtual migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.</p>	460753-B21
<p>Remote Management</p> <p>NOTE: Electronic licensing options are available for Insight Control suites and select ProLiant Essentials software products. Please see the appropriate Insight Control and ProLiant Essentials QuickSpecs for additional information.</p>	
<p>Integrated Lights-Out Advanced Pack</p>	
<p>Integrated Lights-Out Advanced Pack, No Media ,1 Server License, including 1 year of 24x7 Technical Support and Updates</p> <p>NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10861_div/10861_div.html</p>	452141-B21
<p>Integrated Lights-Out Select Pack</p>	
<p>Integrated Lights-Out Select Pack, No Media, 1 Server License, including 1 year of 24x7 Technical Support and Updates</p> <p>NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10861_div/10861_div.html</p>	452158-B21
<p>Integrated Lights-Out Power Management Pack</p>	
<p>HP iLO Power Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates</p> <p>NOTE: This option kit includes 1 license for iLO Advanced and Insight Power Manager.</p> <p>NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12632_div/12632_div.html</p>	452145-B21
<p>Insight Power Manager</p>	
<p>HP Insight Power Manager, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates</p> <p>NOTE: This option kit includes 1 license for Insight Power Manager.</p> <p>NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12623_div/12623_div.html</p> <p>NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information.</p> <p>NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: http://www.hp.com/servers/proliantessentials.</p>	452677-B21

Options

Processors	Quad-Core Intel Xeon Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)	458257-B21
	Quad-Core Intel Xeon Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)	458259-B21
	Quad-Core Intel Xeon Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)	458265-B21
	Quad-Core Intel Xeon Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)	458267-B21
	Quad-Core Intel Xeon Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)	458269-B21
	Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)	436015-B21
	Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)	436013-B21
	Quad-Core Intel Xeon Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)	437444-B21
	Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)	435512-B21
	Quad-Core Intel Xeon Processor E5310 (1.6 GHz, 80 Watts, 1066 FSB)	435513-B21
	Dual-Core Intel Xeon Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)	416891-B21
	Dual-Core Intel Xeon Processor 5150 (2.67 GHz, 65 Watts, 1333 FSB)	416890-B21
	Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)	416889-B21
	Dual-Core Intel Xeon Processor 5130 (2.0 GHz, 65 Watts, 1333 FSB)	416888-B21
	Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)	416887-B21
	Dual-Core Intel Xeon Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB)	416886-B21
	Dual-Core Intel Xeon Processor 5080 (3.73 GHz, 130 Watts, 1066 FSB)	409397-B21
	Dual-Core Intel Xeon Processor 5060 (3.2 GHz, 130 Watts, 1066 FSB)	409401-B21
	Dual-Core Intel Xeon Processor 5050 (3.0 GHz, 95 Watts, 667 FSB)	409400-B21
Memory (DIMMs)	512 MB FBD PC2-5300 1 x 512 MB Kit	413507-B21
	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
Optical Drives	Floppy Drive ML350/370 G5 Kit	409582-B21
	CD-RW/DVD-ROM Combo Drive Option Kit	331346-B21
	HP DVD±R/RW 16X Half Height	383974-B21
	16X DVD-ROM Drive Option Kit (Carbon)	217053-B21
	HP Half-Height SATA DVD-ROM Optical Drive	447326-B21
	HP Half-Height SATA DVD RW Optical Drive	447328-B21
Serial Port Kit	Parallel/Serial Port ML370/350 G5 Kit	401222-B21

Options

Hard Drives

Hot Plug SFF SAS 2.5" Drives

HP 36GB 3G SAS 10K SFF SP HDD	375859-B21
HP 36GB 3G SAS 15K SFF SP HDD	431933-B21
HP 36GB 3G SAS 15K SFF DP HDD	418369-B21
HP 72GB 3G SAS 10K SFF SP HDD	375861-B21
HP 72GB 3G SAS 10K SFF DP HDD	384842-B21
HP 72GB 3G SAS 15K SFF SP HDD	431935-B21
HP 72GB 3G SAS 15K SFF DP HDD	418371-B21
HP 146GB 3G SAS 10K SFF SP HDD	431958-B21
HP 146GB 3G SAS 10K SFF DP HDD	418367-B21

Hot Plug SAS 3.5" Drives

HP 300GB 3G SAS 15K 3.5" SP HDD	431944-B21
HP 300GB 3G SAS 15K 3.5" DP HDD	416127-B21
HP 146GB 3G SAS 15K 3.5" SP HDD	375872-B21
HP 146GB 3G SAS 15K 3.5" DP HDD	384854-B21
HP 72GB 3G SAS 15K 3.5" SP HDD	375870-B21
HP 72GB 3G SAS 15K 3.5" DP HDD	384852-B21
HP 36GB 3G SAS 15K 3.5" SP HDD	375868-B21

NOTE: Please see the [SAS Hard Drive QuickSpecs](#) for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html
(Worldwide)

SFF SATA Hot Plug Drives

HP 120GB 1.5G SATA 5.4K SFF HDD	431786-B21
HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21

NOTE: SATA hard drives have a 1-year warranty. Please see the [SATA Hard Drive QuickSpecs](#) for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.html
(Worldwide)

3.5" SATA Hot Plug Drives

HP 750GB 1.5G SATA 7.2K 3.5" HDD	432341-B21
HP 500GB 1.5G SATA 7.2K 3.5" HDD	395473-B21
HP 250GB 1.5G SATA 7.2K 3.5" HDD	349239-B21
HP 160GB 1.5G SATA 7.2K 3.5" HDD	349238-B21
HP 80GB 1.5G SATA 7.2K 3.5" HDD	349237-B21

NOTE: SATA hard drives have a 1-year warranty. Please see the [SATA Hard Drive QuickSpecs](#) for additional technical information on the hard drives Support details, please see the following:

http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.html
(Worldwide)

PCI Option

HP x4-x8 PCI-E Bus Expander Option Kit	403724-B21
--	------------

NOTE: The HP x4/x8 PCI Express Bus Expander kit converts 2 x4 PCI Express slots into a single x8 PCI Express slot for high performance x8 PCI Express cards

Options

Storage Controllers	SAS Controllers	
	Smart Array E200 Controller	
	HP Smart Array E200/128 BBWC Controller	411508-B21
	128-MB Battery-Backed Write Cache (BBWC)	351580-B21
	NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.	
	Smart Array E500 Controller	
	HP Smart Array E500/256MB Controller	435129-B21
	Smart Array P400 Controller	
	HP Smart Array P400/512MB BBWC Controller	411064-B21
	NOTE: Supports RAID 0/1/1+0/5/6.	
	HP Smart Array P400/256MB Controller	405132-B21
	NOTE: Supports RAID 0/1/1+0/5.	
	512MB Battery-backed cache (BBWC) upgrade	405148-B21
	NOTE: for Smart Array P400 Controller.	
	Battery-backed write cache (BBWC) upgrade	383280-B21
	NOTE: for Smart Array P400 Controller.	
	Smart Array P400 Battery Attach Kit	417836-B21
	NOTE: This option kit contains a 24" battery cable and adhesive material for installing a battery into the server if a Smart Array P400 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.	
	Smart Array P600 Controller	
	HP Smart Array P600/256 BBWC Controller	337972-B21
	NOTE: Supports external drive attach.	
	512MB Battery-backed write cache (BBWC) upgrade	372538-B21
	NOTE: For Smart Array P600 Controller.	
	Smart Array P800 Controller	
	HP Smart Array P800/512 BBWC Controller	381513-B21
	NOTE: Supports external drive attach.	
	NOTE: Please see the following QuickSpecs additional information:	
	http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html (Smart Array E200 Controller)	
	http://h18000.www1.hp.com/products/quickspecs/12700_div/12700_div.html (Smart Array E500 Controller)	
	http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.html (Smart Array P400 Controller)	
	http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.html (Smart Array P600 Controller)	
	http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html (Smart Array P800 Controller)	
	SAS HBA	
	HP SC44Ge Host Bus Adapter	416096-B21
	HP 8 Internal Port SAS HBA with RAID	347786-B21
	NOTE: Please see the HBA QuickSpecs for additional information:	
	http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html (SC44Ge HBA)	
	http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html (8 Internal Port SAS HBA)	
	SCSI Controllers for External Drive/Storage Support	
	Smart Array 6402/128 Controller	273915-B21
	NOTE: Ultra320 SCSI.	

Options

Smart Array 6404/256 Controller	273914-B21
NOTE: Ultra320 SCSI.	
Smart Array 642 Controller	291967-B21
NOTE: Ultra320 SCSI.	
128MB Battery-Backed Write Cache (BBWC)	351580-B21
NOTE: Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.	
64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
SCSI HBA	
HP SC11Xe Host Bus Adapter	412911-B21
NOTE: Supports external drive attach.	
NOTE: Please see the following Controller or SCSI Adapter QuickSpecs for Technical Specifications such as PCI Bus, PCI Peak Data Transfer Rate, SCSI Protocols supported, SCSI Peak Data Transfer Rate, Channels, SCSI Ports, Drives supported, Cache, RAID support, and additional information:	
http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.html (Single Channel Ultra320 SCSI HBA)	
http://h18000.www1.hp.com/products/quickspecs/11587_div/11587_div.html (Smart Array 6400 Series)	
http://h18000.www1.hp.com/products/quickspecs/12069_div/12069_div.html (Smart Array 642)	
http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA)	

Communications

HP NC110T PCI Express Gigabit Server Adapter	434905-B21
NOTE: Does not support Windows 2000.	
HP NC360T PCI Express Dual Port Gigabit Server Adapter	412648-B21
HP NC364T PCI Express Quad Port Gigabit Server Adapter	435508-B21
NOTE: Does not support Windows 2000.	
HP NC373F PCI Express Multifunction Gigabit Server Adapter	394793-B21
HP NC373T PCI Express Multifunction Gigabit Server Adapter	394791-B21
HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter	394795-B21
HP NC510F PCIe 10 Gigabit Server Adapter	414126-B21
NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter.	
HP NC510C PCIe 10 Gigabit Server Adapter	414129-B21
NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter.	
HP NC7170 PCI-X Dual Port 1000T Gigabit Server Adapter	313881-B21
HP NC7771 PCI-X 1000T Gigabit Server Adapter	290563-B21
Agere 06 PCI Hi-Speed 56K SftMd	440519-B21

Options

Redundant Options	Hot Plug Redundant Power Supply 350/370/380 G5 AU Kit	399771-011
	Hot Plug Redundant Power Supply 350/370/380 G5 EU Kit	399771-021
	Hot Plug Redundant Power Supply 350/370/380 G5 JP Kit	399771-291
	Hot Plug Redundant Power Supply 350/370/380 G5 Worldwide Kit	399771-B21
	Hot Plug Redundant Power Supply 350/370/380 G5 UK Kit	399771-031
	Hot Plug Redundant Power Supply 350/370/380 G5 US Kit	399771-001
	Redundant Fan ML350 G5 Kit	409579-B21

Tape Drives

NOTE: For the complete listing of Tape Drive offerings, please see:
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

USB Tape Drives

HP StorageWorks 1U USB Rack-Mount Kit with one DAT 160 USB drive AG703A

SAS Tape Drives

NOTE: For the ML350 G5, HP recommends purchasing the HP SC44Ge HBA (416096-B21) for a dedicated SAS HBA for tape.

HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive DW085A

HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive EH847A

NOTE: Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.

Ultrium Tape Drives

HP StorageWorks LTO-1 Ultrium 232 Internal Tape Drive (Carbonite) DW064A

HP StorageWorks LTO-2 Ultrium 460 Internal Tape Drive (Carbon) Q1518B

HP StorageWorks LTO-2 Ultrium 448 SCSI Internal Tape Drive (Carbonite) DW016A

HP StorageWorks LTO-3 Ultrium 920 SCSI Internal Tape Drive EH841A

HP StorageWorks LTO-3 Ultrium 960 Internal Tape Drive (Carbonite) Q1538A

HP StorageWorks LTO-4 Ultrium 1840 SCSI Internal Tape Drive EH853A

NOTE: Please see the HP StorageWorks LTO Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items:

http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html
(Worldwide)

http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html
(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>

Rack-Mount Tape Drive Enclosures

HP StorageWorks 1U SCSI Rack-Mount kit A7445B

NOTE: The 1U Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including the DAT 40, DAT 72, DAT 160, DLT VS160, LTO-1 Ultrium 232, LTO-2 Ultrium 448 and LTO-3 Ultrium 920 tape drives.

HP StorageWorks 1U USB Rack-Mount Kit A8007A

NOTE: The 1U USB Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the DAT 40 USB, DAT 72 USB and DAT 160 tape drives.

HP StorageWorks 1U SAS Rack-Mount Kit AE459A

NOTE: The 1U SAS Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the LTO-2 Ultrium 448 SAS and LTO-3 Ultrium 920 SAS tape drives.

Options

HP StorageWorks 3U Rack-mount kit 274338-B22

NOTE: The 3U Rack-mount Kit can support up to (2) full-height or (4) half-height tape drives and compatible with multiple LVD SCSI tape drives including DAT 40, DAT 72, DLT VS160, SDLT 600, LTO-1 Ultrium 232, LTO-2 Ultrium 460, LTO-2 Ultrium 448, LTO-3 Ultrium 920, LTO-3 Ultrium 960 and LTO-4 Ultrium 1840 tape drives.

NOTE: Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:
http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.html
 (Worldwide)

HP D2D Backup System

<p>HP StorageWorks D2D110 Backup System NOTE: 1TB of Disk Storage</p> <p>HP StorageWorks D2D110 Backup System with Data Protector Express Software Kit NOTE: 1TB of Disk Storage</p> <p>HP StorageWorks D2D120 Backup System NOTE: 2TB of Disk Storage</p> <p>HP StorageWorks D2D120 Backup System with Data Protector Express Software Kit NOTE: 2TB of Disk Storage NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12651_div/12651_div.html (Worldwide)</p>	<p>EH880A</p> <p>EH923A</p> <p>EH884A</p> <p>EH924A</p>
---	---

Tape Autoloaders

<p>HP StorageWorks DAT Autoloader</p> <p>HP StorageWorks DAT 72x10 tape autoloader</p> <p>HP StorageWorks 1/8 Tape Autoloader</p> <p>HP StorageWorks 1/8 LTO-3 Ultrium 920 G2 Tape Autoloader</p> <p>HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader</p> <p>HP StorageWorks 1/8 LTO-2 Ultrium 448 G2 Tape Autoloader</p> <p>HP StorageWorks 1/8 LTO-1 Ultrium 232 G2 Tape Autoloader</p> <p>HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit NOTE: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions NOTE: Please reference the Tape Autoloader QuickSpecs at http://www.hp.com/go/automation for additional information needed to create a complete solution; reference current compatibility information at http://www.hp.com/go/ebs</p>	<p>AE313B</p> <p>AH165A</p> <p>AH558A</p> <p>AH164A</p> <p>AH163A</p> <p>AH166A</p>
---	---

Options

Tape Libraries

HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ033A
HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 4GB FC Library	AJ034A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 SCSI Drive Library	AG115A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 4GB FC Library	AG326B
HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SAS Drive Library	AH559A
HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SCSI Drive Library	AH169A
HP StorageWorks MSL2024 1 LTO-2 Ultrium 448 SCSI Drive Library	AG116A

HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 1 LTO-2 Ultrium 448 SCSI Drive Library	AG320A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library	AH560A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SCSI Drive Library	AH171A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 SCSI Drive Library	AG322A
HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 4GB FC Library	AG324B
HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ035A
HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 4GB FC Library	AJ036A

HP StorageWorks MSL8096 Tape Library

HP StorageWorks MSL8096 2 LTO-3 Ultrium 920 SAS Drive Library	AH561A
HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 4GB FC Library	AH218A
HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 SCSI Drive Library	AH219A
HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ039A
HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 4GB FC Library	AJ040A

HP StorageWorks MSL6000 Tape Library

LTO-4 Ultrium 1840 technology

HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 SCSI Drive Library	AJ029A
HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 4GB FC Library	AJ030A
HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 SCSI Drive Library	AJ031A
HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 4GB FC Library	AJ032A

LTO-3 Ultrium 960 technology

HP StorageWorks MSL6030 1 LTO-3 Ultrium 960 Dr LVDS Library	AD606B
HP StorageWorks MSL6030 1 LTO-3 Ultrium 960 Dr FC Library	AD608B
HP StorageWorks MSL6030 2 LTO-3 Ultrium 960 Dr LVDS Library	AD607B
HP StorageWorks MSL6030 2 LTO-3 Ultrium 960 Dr FC Library	AD609B

HP StorageWorks Modular Smart Array 20 NOTE: Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies. NOTE: The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 3.5" Hot Plug Hard Drives.	335921-B21
--	------------

Options

HP StorageWorks Modular Smart Array 30	HP StorageWorks Modular Smart Array 30 SB NOTE: Rack-mountable 14 drive enclosure with single bus, redundant power supplies	302969-B21
	HP StorageWorks Modular Smart Array 30 DB NOTE: Rack-mountable 14 drive enclosure with dual bus, redundant power supplies NOTE: The Modular Smart Array Enclosure 30 Family supports the Wide Ultra3, Ultra320 Hot Plug Hard Drives.	302970-B21
HP StorageWorks Modular Smart Array 50	HP StorageWorks Modular Smart Array 50 Enclosure NOTE: Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.html (Worldwide)	364430-B21
HP StorageWorks Modular Smart Array 60	HP StorageWorks 60 Modular Smart Array Enclosure NOTE: Please see the Modular Smart Array 60 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html (Worldwide)	418408-B21
HP StorageWorks Modular Smart Array 70	HP StorageWorks 70 Modular Smart Array Enclosure NOTE: Please see the Modular Smart Array 70 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html (Worldwide)	418800-B21
HP StorageWorks Modular Smart Array 500	HP StorageWorks Modular Smart Array 500 Generation 2 NOTE: Please see the Modular Smart Array 500 Generation 2 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/11956_div/11956_div.html (Worldwide)	335880-B21
HP StorageWorks Modular Smart Array 1000	HP StorageWorks Modular Smart Array 1000 NOTE: Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.html (Worldwide)	201723-B22
HP StorageWorks Modular Smart Array 1500 cs	Modular Smart Array 1500 Controller Shelf NOTE: Please see the StorageWorks Modular SAN Array 1500 cs QuickSpecs for additional options and configuration information at: http://www.hp.com/go/MSA1500cs	AA986A

Options

Cluster Options	<p>ProLiant Cluster Starter Kit 364023-B22</p> <p>NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html (Worldwide)</p> <p>HP HA/F200 for Entry SAN Cluster 364026-B22</p> <p>NOTE: For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html (Worldwide)</p> <p>NOTE: For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: http://www.hp.com/solutions/highavailability/oracle</p> <p>HP Serviceguard for Linux ProLiant Cluster A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (2 node license cluster kit) 305199-B26</p> <p>HP Serviceguard for Linux ProLiant Cluster, A.11.18 (2 license version - Red Hat EL 4&5, SUSE SLES10) 305199-B27</p> <p>HP Serviceguard for Linux A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (single license version) 307754-B26</p> <p>HP Serviceguard for Linux, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES10) 307754-B27</p> <p>HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription T2798AA#001</p> <p>HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription T2798AA#003</p> <p>NOTE: For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html (Worldwide)</p> <p>NOTE: For configuration/certification options for HP Serviceguard for Linux please go to: http://www.hp.com/info/sglx</p>
------------------------	--

StorageWorks Options	<p>NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: http://h18006.www1.hp.com/storage/saninfrastructure/hba.html</p> <p>HP StorageWorks FC2142SR 4Gb PCI-e HBA A8002A</p> <p>HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA A8003A</p> <p>HP StorageWorks FC1142SR 4Gb PCI-e HBA AE311A</p> <p>HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA AE312A</p> <p>HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA AD167A</p> <p>HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA AD168A</p> <p>HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA AB429A</p> <p>HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA AE369A</p>
-----------------------------	---

Options

Uninterruptible Power Systems – Tower	HP, T1000 UPS NA	AF403A
	HP, T1000 UPS JPN	AF404A
	HP, T1000 UPS INTL	AF405A
	HP, T1500 UPS NA	AF406A
	HP, T1500 UPS JPN	AF407A
	HP, T1500 UPS INTL	AF408A
	HP, R/T 2200 UPS NA	AF409A
	HP, R/T 2200 UPS JPN	AF410A
	HP, R/T 2200 UPS INTL	AF411A

Uninterruptible Power Systems - Rack	HP, R1.5kVA UPS, 1U, NA	AF419A
	HP, R1.5kVA UPS, 1U, INTL	AF418A
	HP, R1.5kVA UPS, 1U, JPN/TW	AF421A
	HP R3000 VA UPS, 2U, DTC, INTL	AF414A
	HP R3000 VA UPS, 2U, L5-30, NA	AF422A
	HP R3000 VA UPS, 2U, L6-20, NA	AF423A
	HP R3000 VA UPS, 2U, L6-20, JPN	AF424A
	HP R3000 VA UPS, 2U, L5-30, JPN	AF425A
	HP R5500 VA UPS, INTL	AF416A
HP R5500 VA UPS, NA/JPN	AF426A	

HP Monitored Power Distribution Unit (PDU)	HP Monitored Power Distribution Unit: Full Rack Version	
	17.3 kVA Monitored PDU Model S2324	AF503A
	8.6 kVA Monitored PDU Model S1324	AF504A
	16.6 kVA Monitored PDU Model S2140	AF505A
	8.3 kVA Monitored PDU Model S1140	AF506A
	22 kVA Monitored PDU Model S2316	AF507A
	11 kVA Monitored PDU Model S1316	AF508A
	14.7 kVA Monitored PDU Model S2132	AF509A
	7.3 kVA Monitored PDU Model S1132	AF510A
	4.9kVA Monitored PDU model S124	AF914A
7.3kVA Monitored PDU model S132	AF915A	

Options

Modular PDUs 1U/0U (Up to 32 outlets) NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).	3.6kVA Model - mPDU, 16A, High (WW)	252663-B24
	2.8 kVA Model - mPDU, 24A, Low (NA/JPN)	252663-D71
	4.9kVA Model - mPDU, 24A, High (NA/JPN)	252663-D72
	7.3kVA Model - mPDU, 32A, High (INT'L)	252663-B31
	8.3kVA Model - mPDU, 40A, High (WW)	252663-B21
	8.3kVA Model - mPDU, 40A, High (power cord attached) (NA/JPN)	252663-D73
	9.2kVA Model - mPDU, 40A, High (power cord attached) (INTL)	252663-B32
	8.3kVA Model - mPDU 40A, High (core only) (NA/JPN)	252663-D75
	9.2kVA Model - mPDU 40 A, High (core only) (Int'l)	252663-B34
	8.3kVA Model - mPDU 32A, High (core only) (Int'l)	252663-B33
	4.9kVA Model - mPDU 24A, High (core only) (NA/JPN)	252663-D74
	NOTE: Please see the following Modular Power Distribution Unit (Zero-U/1U Modular PDUs) QuickSpecs for additional options including shorter jumper cables and country specific power cords: http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.html (Worldwide)	

USB Options	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	HP USB 04 Standard Keyboard	DT528A# ABA
	HP 1GB USB 2.0 Floppy Drive Key	442085-B21
	HP 256MB USB 2.0 Floppy Drive Key	442084-B21

Rack Conversion Kit	HP ML350 G5 Tower to Rack Conversion Kit	412640-B21
	ProLiant DL380 G4, ML370 G4, ML350 G4 Shipping Bracket for Round Hole Racks	371482-B21
	NOTE: This kit is required if the server will be configured and shipped within a round hole rack.	

HP Rack 5000 Series (Graphite Metallic)	HP 5642 Rack-Unassembled	358254-B21
	NOTE: Please see the HP Rack 5642 QuickSpecs for additional part numbers and Technical Specifications such as height, width, depth, weight, and color: http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html (Worldwide)	
	NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower .	

Options

HP Rack 10000 G2 Series (Carbon/Graphite Metallic)	10642 G2 (42U) Rack Cabinet - Pallet	AF001A
	10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
	10642 G2 (42U) Rack Cabinet - Crated	AF003A
	10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet	AF004A
	10636 G2 (36U) Rack Cabinet - Pallet	AF011A
	10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
	10636 G2 (36U) Rack Cabinet - Crated	AF013A
	10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A
	10622 G2 (22U) Rack Cabinet - Pallet	AF021A
	10622 G2 (22U) Rack Cabinet - Shock Pallet	AF022A
	10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet	AF041A
	10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet	AF042A
	10647 G2 (47U) Rack Cabinet - Pallet	AF031A

NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.

NOTE: Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

HP Rack 10000 Series (Graphite Metallic)	HP S10614 (14U) Rack Cabinet - Shock Pallet	292302-B22
--	---	------------

NOTE: xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).

NOTE: It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all equipment is qualified to be shipped in the Rack 10000 series.

NOTE: Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.html
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>

Options

Keyboards and Monitors

TFT7210R Rack Mounted 17" Monitor	348373-B21
TFT7600 Rackmount Keyboard Monitor US	AG052A
TFT7600 Rackmount Keyboard Monitor UK	AG053A
TFT7600 Rackmount Keyboard Monitor GR	AG054A
TFT7600 Rackmount Keyboard Monitor FR	AG055A
TFT7600 Rackmount Keyboard Monitor IT	AG056A
TFT7600 Rackmount Keyboard Monitor SP	AG057A
TFT7600 Rackmount Keyboard Monitor DEN	AG058A
TFT7600 Rackmount Keyboard Monitor NOR	AG059A
TFT7600 Rackmount Keyboard Monitor SE/FI	AG060A
TFT7600 Rackmount Keyboard Monitor SWI	AG061A
TFT7600 Rackmount Keyboard Monitor PORT	AG062A
TFT7600 Rackmount Keyboard Monitor BEL	AG063A
TFT7600 Rackmount Keyboard Monitor JPN2	AG064A
TFT7600 Rackmount Keyboard Monitor RUS	AG065A
TFT7600 Rackmount Keyboard Monitor INTL	AG066A
1U Rackmount Keyboard with USB, US	AG072A
1U Rackmount Keyboard with USB, UK	AG073A
1U Rackmount Keyboard with USB, GR	AG074A
1U Rackmount Keyboard with USB, FR	AG075A
1U Rackmount Keyboard with USB, ITL	AG076A
1U Rackmount Keyboard with USB, SP	AG077A
1U Rackmount Keyboard with USB, DEN	AG078A
1U Rackmount Keyboard with USB, NOR	AG079A
1U Rackmount Keyboard with USB, SE/FI	AG080A
1U Rackmount Keyboard with USB, SWI	AG081A
1U Rackmount Keyboard with USB, PORT	AG082A
1U Rackmount Keyboard with USB, BEL	AG083A
1U Rackmount Keyboard with USB, JPN2	AG084A
1U Rackmount Keyboard with USB, RUS	AG085A
1U Rackmount Keyboard with USB, INTL	AG086A

NOTE: For additional information regarding Rack Options, please see the following URL: <http://www.hp.com/go/rackandpower>.

Options

HP KVM Switch Options	2x1x16 IP Console Switch with Virtual Media	AF601A
	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
	NOTE: Requires PS/2 and one USB port on server.	
	Server Console Switch (KVM), 0 x 1 x 8 port	336044-B21
	Server Console Switch (KVM), 0 x 2 x 16 port	336045-B21
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	USB Interface Adapter, 1 pack	336047-B21
	Serial Interface adapter - 1 Pack with power supply	373035-B21
	NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL:	
	http://www.hp.com/go/kvm .	
	HP 1x4 Console Switch	AF611A
	PS2 Server Console Cable, 6 ft, 2 pack	AF612A
USB Server Console Cable, 6 ft, 2 pack	AF613A	
NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm.		

HP Serial Console Server Options	HP 16 Port Serial Console Server (worldwide)	AF101A
	HP 48 Port Serial Console Server (worldwide)	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
	NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm.	
NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm.		

Service and Support Offerings (HP Care Pack Services)	Hardware Services On-site Service	
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years (Electronic)	U4512E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4513E
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years (Electronic)	U4514E
	O/S and Hardware Installation	
	Hardware Installation (Electronic)	U4522E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays. (Electronic)	U4523E
	Support Plus	
	Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays. (Electronic)	U4524E

Options

Support Plus 24

Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support
offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays,
Electronic U4525E

Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support
offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays,
Electronic U6308E

Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support
offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays,
Electronic U8330E

NOTE: For more information, customer/resellers can contact
<http://www.hp.com/services/carepack>

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant ML350 G5 Memory Configuration

The HP ProLiant ML350 G5 requires memory interleaving when more than one DIMM is installed. For interleaving, DIMMs must be configured in identical pairs. The system will not boot properly if multiple DIMMs of varying density or type are installed in the system.

Standard Memory

All HP ProLiant ML350 G5 models ship with PC2-5300 Fully Buffered DIMMs (DDR2-667). Entry models include a single 512 MB DIMM (Dual-Core) or two 512MB DIMMs (Quad-Core). Base models include two 512 MB DIMMs (1 GB total memory). Factory Integrated Models include the memory capacity of your choice.

Common Memory Configuration

Valid DIMM pair combinations use slots 1/5, slots 2/6, slots 3/7, and slots 4/8. Maximum supported memory is 16 GB for Dual-Core and 32 GB on Quad-Core models.

NOTE: Charts does not represent all possible memory configurations.

Memory		Slot							
		1A	2B	3C	4D	5A	6B	7C	8D
Standard	1 GB	512 MB	Empty	Empty	Empty	512 MB	Empty	Empty	Empty
Optional	13 GB	512 MB	2 GB	2 GB	2 GB	512 MB	2 GB	2 GB	2 GB
Maximum	32 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB

Following are memory options available from HP:

- 512MB FBD PC2-5300 1 x 512 MB Kit 413507-B21
- 1 GB FBD PC2-5300 2 x 512 MB Kit 397409-B21
- 2 GB FBD PC2-5300 2 x 1 GB Kit 397411-B21
- 2 GB FBD PC2-5300 2 x 1 GB LP Kit 461826-B21
- 4 GB FBD PC2-5300 2 x 2 GB Kit 397413-B21
- 4 GB FBD PC2-5300 2 x 2 GB LP Kit 461828-B21
- 8 GB FBD PC2-5300 2 x 4 GB Kit 397415-B21

Online spare memory configuration

FBDIMMs can either be single-rank or dual-rank. Certain FBDIMM configuration requirements are based on these classifications. A dual-rank FBDIMM is similar to having two separate FBDIMMs, or ranks, on the same module. Although only a single FBDIMM module, a dual-rank FBDIMM acts as two separate FBDIMMs.

In online spare mode, a single rank of memory acts as the spare memory. For single-rank FBDIMMs, the entire FBDIMM acts as the spare memory. For a dual-rank FBDIMM, only half of the FBDIMM acts as the spare memory while the other half is available for operating system and application usage.

Online spare FBDIMM configuration requirements (in addition to general configuration requirements):

- When only bank A is being used, it must be fully populated with dual-rank FBDIMMs.
- For optimum memory usage, HP recommends all FBDIMMs be the same size with the same HP part number. If different sized FBDIMMs are used, a portion of the installed memory may not be utilized.

In online spare mode, FBDIMMs must be populated as specified in the following table:


- Configuration 1 (Bank A only) is only supported if using bank A, populated with dual-rank FBDIMMs.
- After installing FBDIMMs, use RBSU to configure the system for online spare memory support.

Bank A 1A and 5A	Bank B 2B and 6B	Bank C 3C and 7C	Bank D 4D and 8D
---------------------	---------------------	---------------------	---------------------

Memory

X	—	—	—
X	X	—	—
X	X	X	X

Storage

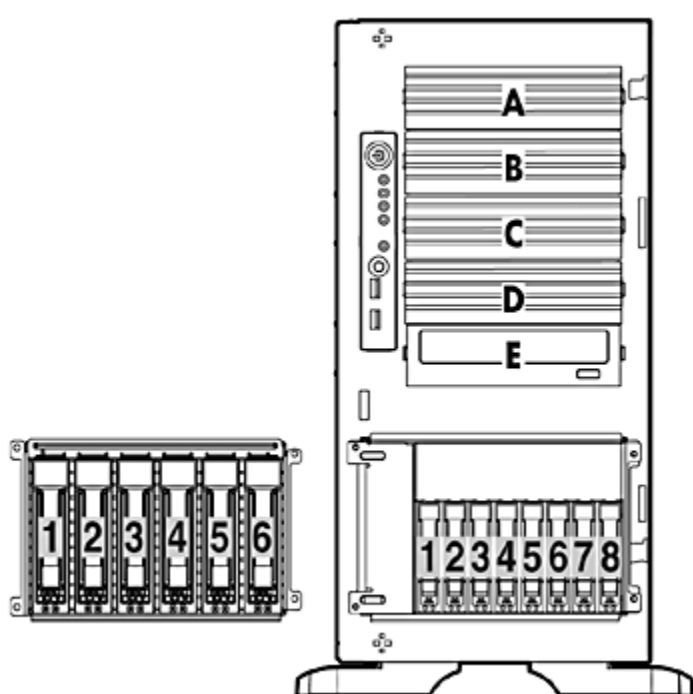

1 - 6 6 x 3.5" (LFF) Hot-Plug SAS/SATA hard drive bays

Or

1 - 8 8 x 2.5" (SFF) Hot-Plug SAS/SATA hard drive bays

A,B,C,D Available half height media bays

E Optical Drive

Drive Support

	Quantity Supported	Position Supported	Controller
Removable Media			
1.44-MB Diskette Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
IDE (ATAPI) CD-ROM Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP DVD±R/RW 16X Half Height	Up to 1	A, B, C, D, E	Integrated SATA Controller
DVD-ROM Drive Option Kit	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP Half-Height SATA DVD-ROM Optical Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller
HP Half-Height SATA DVD RW Optical Drive	Up to 1	A, B, C, D, E	Integrated SATA Controller

Storage

Hard Drives

3.5" SATA Hot Plug Drives

	Quantity Supported	Position Supported	Controller
750GB 1.5G SATA 7.2K	Up to 6	1-6	HP Smart Array E200i/64MB Controller
500GB 1.5G SATA 7.2K			HP Smart Array E200i/128 BBWC Controller
250GB 1.5G SATA 7.2K			HP Smart Array E500/256MB Controller
160GB 1.5G SATA 7.2K			HP Smart Array P400/256MB Controller
80GB 1.5G SATA 7.2K			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller
			HP 6-Port SATA RAID Controller

SFF SATA Hot Plug Drives

	Quantity Supported	Position Supported	Controller
120GB 1.5G SATA 5.4K	Up to 8	1-8	HP Smart Array E200i/64MB Controller
60GB 1.5G SATA 5.4K			HP Smart Array E200i/128 BBWC Controller
			HP Smart Array E500/256MB Controller
			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
			HP Smart Array P800/512 BBWC Controller
			HP 6-Port SATA RAID Controller

NOTE: HP Systems Insight Manager should not be used to view the status of SATA hard drives and SATA RAID configurations.

Hot Plug SFF SAS 2.5" Drives

	Quantity Supported	Position Supported	Controller
146GB 3G SAS 10K SP	Up to 8 SFF	1-8	HP Smart Array E200i/64MB Controller
146GB 3G SAS 10K DP			HP Smart Array E200i/128 BBWC Controller
72GB 3G SAS 10K SP			HP Smart Array E500/256MB Controller
72GB 3G SAS 10K DP			HP Smart Array P400/256MB Controller
72GB 3G SAS 15K SP			HP Smart Array P400/512MB BBWC Controller
72GB 3G SAS 15K DP			HP Smart Array P600/256 BBWC Controller
36GB 3G SAS 10K SP			HP Smart Array P800/512 BBWC Controller
36GB 3G SAS 15K SP			HP 6-Port SATA RAID Controller
36GB 3G SAS 15K DP			

Hot Plug SAS 3.5" Drives

	Quantity Supported	Position Supported	Controller
300GB 3G SAS 15K 3.5" SP	Up to 6 LFF	1-6	HP Smart Array E200i/64MB Controller
300GB 3G SAS 15K 3.5" DP			HP Smart Array E200i/128 BBWC Controller
146GB 3G SAS 15K 3.5" SP			HP Smart Array E500/256MB Controller
146GB 3G SAS 15K 3.5" DP			HP Smart Array P400/256MB Controller
72GB 3G SAS 15K 3.5" SP			HP Smart Array P400/512MB BBWC Controller
72GB 3G SAS 15K 3.5" DP			HP Smart Array P600/256 BBWC Controller
36GB 3G SAS 15K 3.5" SP			HP Smart Array P800/512 BBWC Controller
			HP 6-Port SATA RAID Controller



Storage

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
Modular Smart Array 20 Family	Up to 2	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller
Modular Smart Array 30 Family	Up to 2	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller
Modular Smart Array 50 Enclosure	Up to 2	External	HP Smart Array P600/256 BBWC Controller
Modular Smart Array 500 G2	1	External	Please see the Modular Smart Array 500 or 500 G2 QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/msa500 .
Modular Smart Array 1500 cs or 1000	Please see the Modular Smart Array 1500 cs or Modular Smart Array 1000 QuickSpecs links to determine configuration requirements		Please see the Modular Smart Array 1000 QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/MSA1000 Please see the Modular Smart Array 1500 cs QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/MSA1500cs

Tape Drives, Tape Autoloaders, Tape Libraries & D2D Backup

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/division/10233.html> (Worldwide)

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/division/10809.html> (Worldwide)

NOTE: For complete listing of tape drive offerings see

<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

NOTE: SAS Tape Drives: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

	Position Supported	Controller	Controller/HBA Option Kit Part Number
HP StorageWorks SCSI Tape Drives, Internal	Internal	64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
LTO-1 Ultrium 232			
LTO-2 Ultrium 448			
LTO-2 Ultrium 460			
LTO-3 Ultrium 920			
LTO-3 Ultrium 960			
LTO-4 Ultrium 1840			
DAT 40			
DAT 72			



Storage

DAT 160
DLT VS160
SDLT 600

HP StorageWorks SCSI Tape Drives, External External 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 374654-B21

LTO-1 Ultrium 232
LTO-2 Ultrium 448
LTO-2 Ultrium 460
LTO-3 Ultrium 920
LTO-3 Ultrium 960
LTO-4 Ultrium 1840
DAT 40
DAT 72
DAT 160
DLT VS160
SDLT 600
1U Rack-Mount Kit
3U Rack-Mount Kit

HP StorageWorks USB Tape Drives, Internal Internal USB 2.0 Port N/A

DAT 40 USB
DAT 72 USB
DAT 160 USB

HP StorageWorks USB Tape Drives, External External USB 2.0 Port N/A

DAT 40 USB
DAT 72 USB
DAT 160 USB
1U USB Rack-Mount Kit

HP StorageWorks SAS Tape Drives, Internal External HP SC44Ge Host Bus Adapter 416096-B21

NOTE: Recommended.

LTO-2 Ultrium 448 SAS HP Smart Array E500 Controller 435129-B21

LTO-3 Ultrium 920 SAS **NOTE: The following SAS Smart Array controllers require ROM Flash version 2.04 or higher for SAS tape support:**

HP Smart Array P400/256MB Controller 405132-B21

HP Smart Array P400/512MB Controller 411064-B21

HP StorageWorks SAS Tape Drives, External External HP SC44Ge Host Bus Adapter 416096-B21

NOTE: Recommended.

LTO-2 Ultrium 448 SAS HP Smart Array E500 Controller 435129-B21

LTO-3 Ultrium 920 SAS **NOTE: The following SAS Smart Array controllers require ROM Flash version 2.04 or higher for SAS tape support:**

HP Smart Array P400/256MB Controller 405132-B21

HP Smart Array P400/512MB Controller 411064-B21

HP StorageWorks SCSI Tape Automation, External External 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 374654-B21

DAT 72x10 Autoloader



Storage

1/8 G2 Tape Autoloader
MSL2024
MSL4048
MSL8096
MSL6000

HP StorageWorks SAS Tape Automation, External 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096	External	HP SC44Ge Host Bus Adapter NOTE: Please visit http://www.hp.com/go/connect for details about minimum SAS controller firmware version and SAS cabling requirements.	416096-B21
--	----------	---	------------

HP StorageWorks Fibre Tape Automation, External MSL2024 MSL4048 MSL6000	External	Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information.	N/A
---	----------	--	-----

HP StorageWorks D2D Backup Systems D2D110 D2D120	External	Embedded Network Controller	N/A
---	----------	-----------------------------	-----

Power Specifications

Part Number	380622-001
Spare Kit	403781-001
Operational Input Voltage Range (V rms)	90 - 264
Frequency Range (Nominal) (Hz)	47 - 63 (50 / 60)

Nominal Input Voltage (Vrms)	100	120	208	220	230	240
Max Rated Output Wattage Rating	800	950	1000	1000	1000	1000
Nominal Input Current (A rms)	10.0	8.8	5.85	5.5	5.2	4.97
Max Rated Input Wattage Rating (Watts)	980	1035	1193	1186	1172	1169
Max. Rated VA (Volt-Amp)	1000	1056	1217	1210	1196	1193
Efficiency (%)	81.5	82	84	84	85	85.5
Power Factor	0.98	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.44	0.52	0.91	0.96	1.00	1.04
Maximum Inrush Current (A peak)	30	30	30	30	30	30
Maximum Inrush Current duration (milliseconds)	3	3	3	3	3	3

NOTES:

ActiveAnswers Power Calculation

Power calculator is LIVE on ActiveAnswers Web site. This is an external link.

Follow this link: <http://h30099.www3.hp.com/configurator/powercalcs.asp>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: ML350 G5
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

Technical Specifications

System Unit	Tower Dimensions (H x W x D) (with feet/bezel)	18.39 x 8.59 x 23.46 in (46.7 x 21.8 x 59.6 cm)		
	Rack Dimensions (H x W x D) (with feet/bezel)	8.54 x 17.5 x 21.9 in. (21.7 x 44.5 x 55.7cm)		
	Tower Weight (approximate)	Maximum	67 lb (30.4 kg) (all hard drives, power supplies, and processors installed)	
		Minimum	50 lb (22.7 kg) (one hard drive, power supply, and processor installed)	
	Rack Weight (approximate)	Maximum	61 lb (27.7 kg) (all hard drives, power supplies, and processors installed)	
		Minimum	44 lb (20.0 kg) (one hard drive, power supply, and processor installed)	
	Max Input Requirements (per power supply)	Rated Line Voltage	100 VAC, 120 VAC 200 - 240 VAC	
		Rated Input Current	10A (at 100 VAC) 9A (at 120 VAC) 6.1A (at 200 VAC)	
		Rated Input Frequency	50 to 60 Hz	
		Rated Input Power	980W (at 100 VAC) 1035W (at 120 VAC) 1170W (at 240 VAC)	
BTU Rating	BTU/HR	3350 BTU/hr (at 100 VAC) 3530 BTU/hr (at 120 VAC) 3990 BTU/hr (at 240 VAC)		
Power Specifications	To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls			
	<ul style="list-style-type: none"> - Click on the system of interest. Example: ML350 G5 - Follow the instructions of the next screens. 			
Power Supply Output (per power supply)	Rated Steady-State Power	800 W (at 100 VAC) 850 W (at 120 VAC) 1000 W (at 200-240 VAC)		
	Maximum Peak Power	800 W (at 100 VAC) 850 W (at 120 VAC) 1000 W (at 200-240 VAC)		
System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be		

Technical Specifications

		limited by the type and number of options installed.
		System performance may be reduced if operating with a fan fault or above 30°C (86°F).
Relative Humidity (non-condensing)	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
Altitude	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
		Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
	Idle	
		L WAd 5.2 B
		L pAm 35 dBA
	Operating	
		L WAd 5.3 B
		L pAm 35 dBA

Smart Array E200i Controller	Disk Drive and Enclosure Interface	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
	SAS Connectors	2 internal (SFF8484) x4 wide port connectors
	Cache Memory Speed	DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth.
	Server Interface	x4 2.5G PCIe provides 2GB/s maximum bandwidth.
	SAS Speed	x8 3G SAS provides 2.4GB/s maximum bandwidth.
	Cache Memory	40-bit 64MB ECC read cache or 40-bit 128MB ECC battery backed, transportable read/write cache
	Logical Volumes Supported	Up to 32 logical volumes
	Maximum Volume Capacity	4.5TB (6 x 750GB SATA)
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space
	RAID Support	RAID 5 (Distributed Data Guarding) RAID 1, 1+0 (Striping & Mirroring) RAID 0 (Striping)
	Upgradeable Firmware	Upgradeable Firmware

Technical Specifications

Embedded NC373i Multifunction Gigabit Server Adapter	Network Interface	10Base-T/100Base-TX/1000Base-TX	
	Compatibility	IEEE 802.3 10Base-T	
		IEEE 802.3ab 1000Base-T	
		IEEE 802.3u 100Base-TX	
	Data Transfer Method	PCI Express, four lanes (x4)	
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
		10Base-T (Full-Duplex)	20 Mb/s
100Base-TX (Half-Duplex)		100 Mb/s	
100Base-TX (Full-Duplex)		200 Mb/s	
1000Base-TX (Half and Full-Duplex)		2000Mb/s	
Connector	RJ-45		
Cable Support	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)	
	10/100/1000Base-TX	Category 5 UTP; up to 328 ft (100 m)	

Environment-friendly Products and Approach	End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
---	---	---

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.