




5" Chipper/Shredder/Blower



Shown here is the 5" PTO Chipper/Shredder/Blower - Model SC5540B (73554)



Both models have five shredder settings (circled inset photo) which allows the operator to select consistency of mulch. An adjustable gate (back photo) regulates the shredder output.

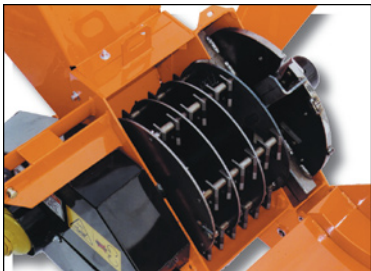

Easy access to rotor, blades and knives is provided by the large hinged cover with safety interlock.



Model SC5670B (75524)

Model	Engine*	Size (LxWxH)	Chipper Capacity	Feed System	Chipper Shredders	Weight (Lbs.)	3 Point Hitch	PTO	Tires
SC5670B (75524)	Honda 670cc	87"x52"x92"	5"	self feed	4 chipper blades 36 shredder knives	1130			5.30x12 pneumatic
SC5540B (73554)	PTO	54"x33"x92"	5"	self feed	4 chipper blades 36 shredder knives	720	Cat. 1	540 rpm	

* For Use On Tractors With Engine Horsepower Ratings From 13 hp diesel and 15 hp gas to 45 hp. Both Model 75524 and PTO Model 73554 have 36 free swinging shredder knives for more efficient shredding. Each model also has a large 18"x13" shredder feed hopper opening with fold down tray.



Find a dealer near you!

Call us at 800.247.7335 or
Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078
Email: sales@BearCatProducts.com
Fax: 701.282.9522



5" Chipper/Shredder/Blower

Unique product, self-feed chipper/shredder without a screen. This greatly reduces the chance of plugging, especially with damp material.

BLADES

Four reversible heat-treated chipper steel blades mounted to an 18" x .75" thick [45.7cm x 1.9cm thick] machined balanced disc. Chips up to 5" [12.7cm] limbs. Rotor assembly weighs 146 lbs. [66kg]

SHREDDER KNIVES

36 free-swinging shredder knives mounted in a staggered pattern for more efficient shredding.

Adjustable lip for desired consistency of mulch. Settings which you can select the desired consistency of mulch.

EASY ACCESS

The rotor assembly is accessible through the hinged cover, which exposes one half of the rotor assembly for easy access to the chipping blades, shredding knives and ease of clean out.

DISCHARGE CHUTE

360-degree rotating discharge chute with deflector. Put the chips where you want them the first time.

TRAILER

Heavy-duty trailer and fenders with 2" [5.08cm] ball coupler. .1875" [4.76mm] reinforced steel bed. Highway towable 1000 lb. [454kg] torsion axle suspension with 12" X 5.30 [30.5cm x 13.5cm] tires.

HEAVY-DUTY CONSTRUCTION WITH ENGINE COVER.

- SC5670B (75524) weighs 1,130 lbs. [513kg];
- SC5540B (73554) weighs 720 lbs. [327kg]

ADJUSTABLE STAND (75524 towable model) with safety chains.

EASE OF USE FOR SINGLE USER

One person can easily maneuver the chipper/shredder and hook up to a vehicle.

FLUID CAPACITY

- 6.6 gal [25 liter] gas tank.

90° FEED ANGLE

- Quicker chipping because you are cutting through less wood.

DOUBLE-BANDED BELT DRIVE FOR BETTER TRANSFER OF POWER

ENGINE

Honda 670cc engine on SC5670B (75524)

Dimensions:

- SC5670B (75524) – Length: 97", Width: 56", Height: 96"
- SC5540B (73554) – Length: 54", Width: 65", Height: 87"

SAFETY

- Meets all applicable ANSI safety standards.



Find a dealer near you!

Call us at 800.247.7335 or
Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078
Email: sales@BearCatProducts.com
Fax: 701.282.9522