



# CALYPSO

Boombox System for Clarion Plug and Play Receiver

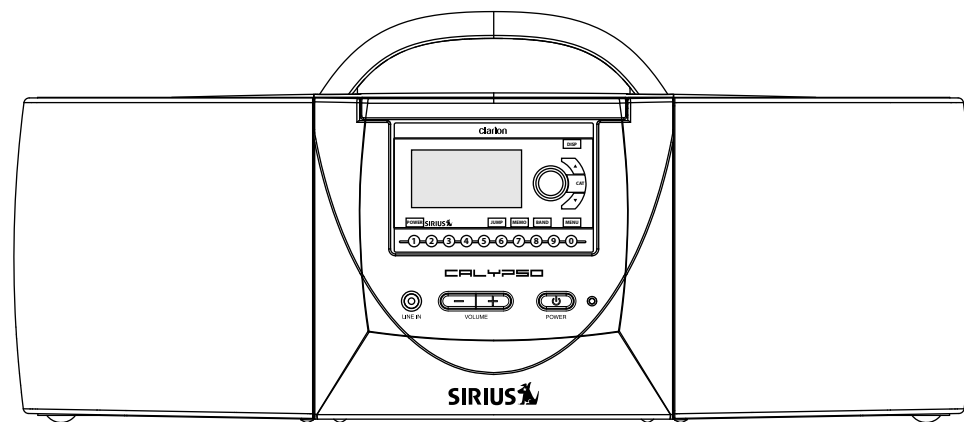


User's Guide

**SIRIUS**  
SATELLITE RADIO



1

## *Calypso Boombox*



### **Dear Customer**

Congratulations on your purchase of the world's finest brand in the electronic industry. At Clarion we are committed to high-quality sound reproduction, and are confident that you will be pleased with your purchase.

Clarion's Sirius Satellite Plug and Play Receiver and boombox provide entertainment with the flexibility of both home and portable use.

120 channels of original programming received in high-quality digital sound providing:

65 channels of commercial-free music  
55 channels of news, sports, and entertainment



Your boombox requires the use of Clarion's Sirius Plug and Play Receiver, Calypso(sold seperately). For further flexibility an optional home and car kit are available at an authorized dealer near you.

Home/Office Kit part number: CLHK  
Automobile Kit part number: CLCK




Clarion and Sirius Satellite Radio welcome you to an experience like no other.


To learn more about Clarion's complete line of audio products and dealer locations, please visit us at our Website:

[www.clarion.com](http://www.clarion.com)




© 2005 SIRIUS Satellite Radio Inc. "SIRIUS" and the SIRIUS dog logo are registered trademarks of SIRIUS Satellite Radio Inc.





## *User's Guide*

2



### **Precautions**

Follow these precautions to avoid serious accidents or personal injury.

Do not position the Calypso Boombox in an area that obstructs the viewing of any home component such as television or stereo system displays.

Do not expose the Calypso Boombox to direct sunlight for prolonged periods of time.

Do not expose the Calypso Boombox to moisture including rain and areas adjacent to bodies of water such as pools, hot tubes, etc.

Position the Calypso Boombox where there are no signal obstructions such as trees, overhangs, etc.

Unplug the AC Power Adapter from the wall outlet when the Calypso Boombox is not in use for an extended period of time.

It is recommended that the batteries be removed when the Boombox is not in use for an extended period of time to prevent battery leakage.

Do not position the Calypso Boombox on an inclined or unstable surface.




### **FCC Notice**

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

### **Copyright and Trademarks**



This document is copyrighted by Clarion. You may not copy any portion of it without permission.

SIRIUS is a registered trademark of SIRIUS Satellite Radio.



### Packaging Contents and Descriptions

In addition to this manual, this kit includes:

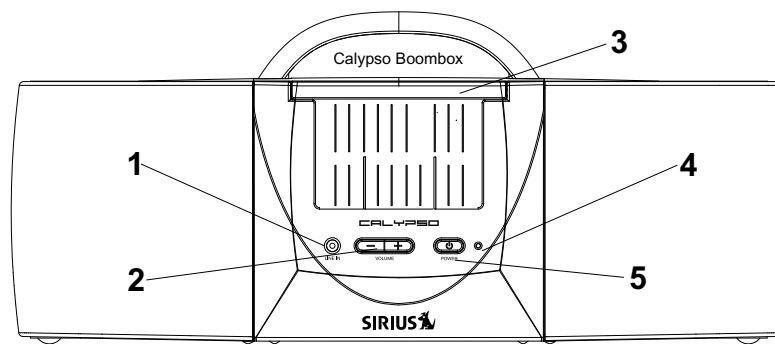


1. **Line Input:** Audio input from an external source. When Line Input is connected, the Boombox will automatically play the external source. It is recommended to turn the Calypso off while Line Input is in use to preserve battery power.
2. **Volume Control:** Press the [-] button to decrease the volume and the [+] button to increase the volume level.
3. **Protective Door:** Opens and closes to allow the Calypso to be mounted into place.
4. **Power Indicator:** The indicator glows GREEN when the unit is ON. The indicator will glow RED when the battery power is low.
5. **Power Button:** Applies power to the Calypso Boombox and turns on the Power Indicator


## Powering Up Your Boombox

Your Boombox can operate by connecting the AC Power Adapter to an outlet in your home or by installing 8 "D" batteries (sold separately). The batteries are bypassed automatically whenever the AC Power Adapter is plugged in.

1. Turn the Boombox upside down and push the battery cover latches forward to flip the cover to the open position.
2. Insert 8 "D" batteries as shown and then close the cover.

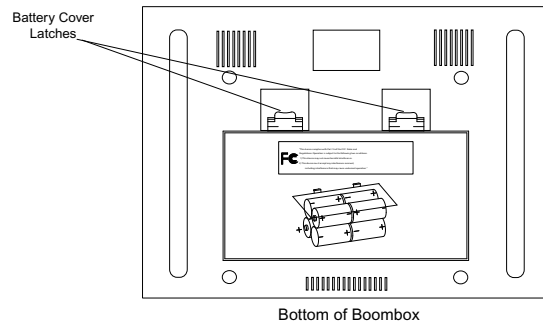

Connect the AC Power Adapter to your home outlet as shown in the diagram below.

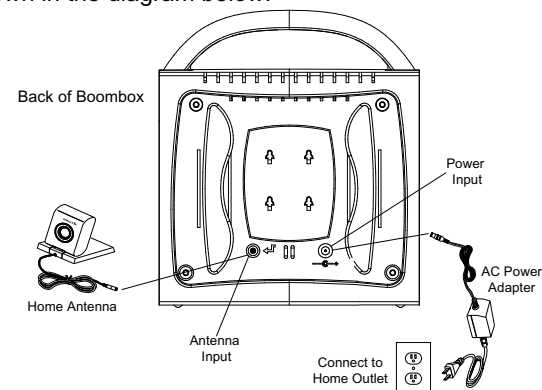


## Installing/Positioning the Antenna


Place your antenna near a window (if in a house) free from any obstructions. When outdoors in an open area, place the antenna as high as possible. You may have to reposition the antenna to achieve optimum results. For connections refer to the diagram above.

**Installing the Calypso Receiver in the Boombox**

Open the Protective Door and slide the Calypso Receiver into the Boombox by lining up the guides. Push the receiver until the connectors engage and then close the Protective Door. Turn the power ON by pressing the Power Button. The Power Indicator will glow GREEN. If the unit does not turn on, press the Power Button on the Calypso Receiver.

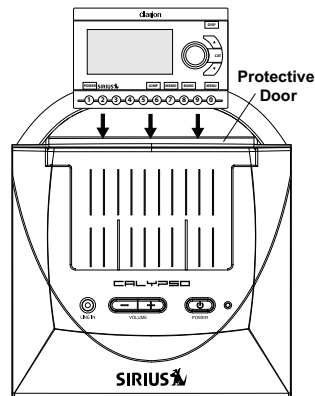**Removing the Calypso Receiver from the Boombox**

Open the Protective Door and slide the Calypso Receiver out of the Boombox by using your thumb and forefinger. Grasp the Receiver on the sides and pull up to disengage.

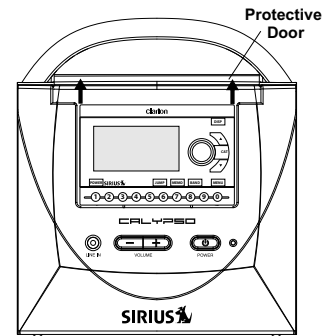


### Detaching Speakers

Lift the Boombox with the front facing you. Twist the Speaker Enclosure towards you and separate it from the main body. Repeat these steps for the opposite Speaker Enclosure.

### Connecting the Speakers

Remove the Speaker Connector and un-wind the Speaker Cable from the Main Unit. Insert the Speaker Connector into the Socket of the Speaker Enclosure. Repeat these steps for the opposite Speaker Enclosure.

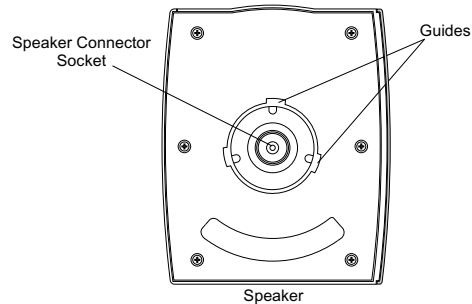


### Attaching Speakers

Disconnect the Speaker Connector from the Socket and wind the Speaker Cable. Place the Speaker Enclosure besides the Main Unit and line up the guides. Twist the Speaker Enclosure away from you to lock it in place. Repeat these steps for the opposite Speaker Enclosure.


**Troubleshooting**

Symptom	Probable Cause	Remedy
Boombox does not power up	No power to Boombox	Check AC Power Connector for proper connections or proper installation of batteries
No sound	Speaker connections, Calypso receiver not properly installed	Confirm speakers are properly connected and that the receiver is properly engaged to the Boombox connector
Intermittent Operation	Low battery level	Replace batteries
"Antenna Error"	Satellite antenna not connected	Check the antenna connection in the rear of the Boombox and verify that the receiver is properly engaged to the Boombox connector











*User's Guide*



8





9

## Calypso Boombox

### Specifications

Nominal Output Power per Channel.....5 Watts RMS

Total Harmonic Distortion (THD).....

Frequency Response.....

Signal-to-Noise Ratio.....

Line Input Impedance.....






Line Input Level.....

Line Input Connector Type.....3.5mm Stereo Jack (1/8")

Battery Type and Quantity....."D" Cell, 8 total

Overall Dimensions.....

Weight without Batteries.....



### 1. Limited Warranty Information

For USA and Canada only





This product is warranted against all defects in material workmanship for a period of one year from the date of original purchase. Clarion ProAudio products, except for speakers, are covered by a two year limited warranty when installed by an authorized Clarion dealer. The conditions of this limited warranty and the extent of responsibility of Clarion Corporation of America ("Clarion") under this limited warranty are as follows:

1. PROOF OF DATE OF PURCHASE WILL BE REQUIRED FOR WARRANTY SERVICE OF THIS PRODUCT. IN THE CASE OF THE TWO (2) YEAR LIMITED WARRANTY FOR CLARION PROAUDIO PRODUCT, PROOF OF INSTALLATION BY AN AUTHORIZED DEALER IS REQUIRED. INFORMATION ABOUT CLARION AUTHORIZED WARRANTY SERVICE CENTERS MAY BE OBTAINED BY CONTACTING CLARION AT THE ADDRESS BELOW.
2. This limited warranty will become void if service performed by anyone other than an approved Clarion Warranty Service Center results in damage to the product.
3. This limited warranty does not apply to any product which has been subject to misuse, neglect or accident, or which has had the serial number altered, defaced or removed, or which has been connected, installed, adjusted or repaired, other than in accordance with the instructions furnished by Clarion.
4. This limited warranty does not cover car static or other electrical interferences, tape head or laser pick-up cleaning or adjustments, or labor costs for the removal or reinstallation of the unit for repair.
5. The sole responsibility of Clarion under this limited warranty shall be limited to the repair of the product or replacement of the product, at the sole discretion of Clarion.

6. Product must be shipped in its original carton or equivalent carton, fully insured, with shipping charges prepaid. Clarion will not assume any responsibility for any loss or damage incurred in shipping.
7. ALL IMPLIED WARRANTIES EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW SHALL HAVE NO GREATER DURATION THAN THE WARRANTY PERIOD SET FORTH ABOVE. UNDER NO CIRCUMSTANCES SHALL CLARION BE LIABLE FOR ANY LOSS OR DAMAGE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OR INABILITY TO USE THE PRODUCT. BECAUSE SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR EXCLUSIONS OR LIMITATIONS OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.
8. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.
9. Should you have any difficulties with the performance of this product during the warranty period, please call or visit our web site ([www.clarion.com](http://www.clarion.com)) for a listing of Authorized Warranty Service Centers in your area. You may also contact Clarion at the address listed below.

In USA:  
Clarion Corporation of America  
Attn: Customer Service Manager  
661 W. Redondo Beach Blvd.  
Gardena, CA. 90247-4201  
1-800-GO-CLARION  
(310)327-9100

In Canada:  
Clarion Canada, Inc.  
Warranty Service Center  
2239 Winston Park Drive  
Oakville, Ontario L6H 5R1  
(905)829-4600



Clarion Corporation of America  
661 West Redondo Beach Blvd.  
[www.clarion.com](http://www.clarion.com)

200504-CLBB-10 Rev. 3

