
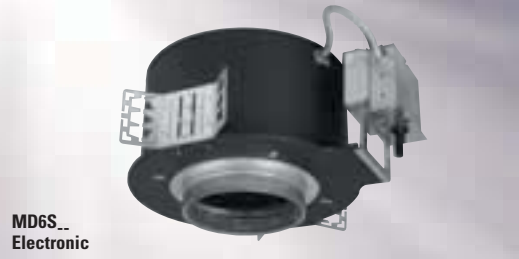


PORTFOLIO™

HOUSING

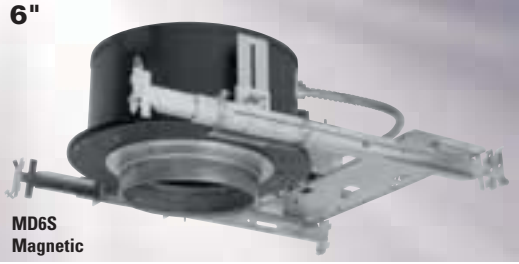

6" Shallow Downlight Metal Halide ED17

Wide beam downlight for general lighting from a single horizontally mounted ED17 metal halide lamp. Low profile allows use where vertical clearance is limited. Use with lamps suitable for enclosed fixtures. Magnetic ballast ordered separately installs rapidly to ballast bridge with electrical quick connects. Bar hangers provided with magnetic ballast housing.

Dimensions - Magnetic	Length	Width	Height	Cutout
Standard Housing	24-7/16"	15-1/2"	6-1/2"	6-3/8"

Dimensions - Electronic	Length	Width	Height	Cutout
Standard Housing	18-5/8"	18"	9-7/8"	6-3/8"

HOUSING [Magnetic Ballast]
MD6S=Metal Halide, Shallow

BALLAST
720=50W MH 120/277V Magnetic
728=50W MH 120/347V Magnetic
730=70W MH 120/277V Magnetic
738=70W MH 120/347V Magnetic

ACCESSORIES
HSA6=Slope Adapter for 6" Aperture Housings, Specify Slope
TRM6=Metal Trim Ring, Specify Finish*
TRR6=Trimless Trim Ring, White*
FK_=Field Installed Fuse Kit, Specify Amperage

*Not compatible with Self Flange

HOUSING [Electronic Ballast]
MD6S50=50W Electronic Metal Halide, Shallow
MD6S50CP=50W Electronic Metal Halide, Shallow, Chicago Plenum
MD6S70=70W Electronic Metal Halide, Shallow
MD6S70CP=70W Electronic Metal Halide, Shallow, Chicago Plenum

BALLAST
1E=120V 50/60 Hz Electronic
2E=277V 50/60 Hz Electronic

ACCESSORIES
HB26=C Channel Bar Hanger, 26" Long, Pair
HB50=C Channel Bar Hanger, 50" Long, Pair
RMB22=Wood Joist Bar Hanger, 22" Long, Pair
HSA6=Slope Adapter for 6" Aperture Housings, Specify Slope
TRM6= Metal Trim Ring, Specify Finish
TRR6=Trimless Trim Ring, White
FK=Field Installed Fuse Kit, Specify Amperage

TRIM


Downlight



TRIM
6141=Self Flanged
6140=Metal Trim Ring, White

FINISH
LI=Low Iridescent Clear
H=Haze
WMH=Warm Haze
G=Gold
WH=Wheat
W=Gloss White
GP=Graphite
GPH=Graphite Haze
K=Cognac
KH=Cognac Haze

OPTIONS
WF=White Painted Flange (Self Flanged only)



Ordering Example*

Housing, Ballast, Trim, Accessories and Lamps ordered as separate line items.

*Magnetic Ballast - separate line item
Electronic Ballast - ships with housing

Housing	Ballast	Trim	Accessories
MD6S702E		6141LI	TRM6