

INSTALLATION INSTRUCTIONS

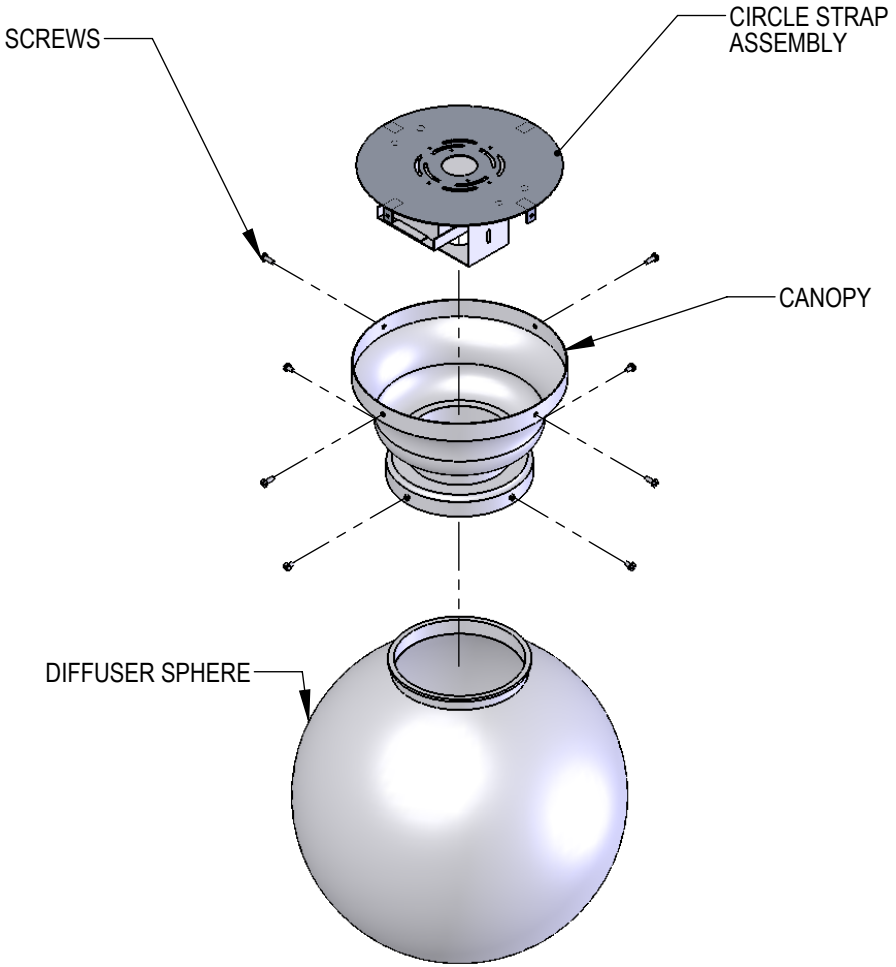

NOTICE:

- ☐ For proper installation, have a qualified electrician install this product.
- ☐ Before installation of any luminaire onto an electrical junction box, be sure to disconnect power.
- ☐ This luminaire must be wired and grounded in accordance with the National Electrical Code, local codes, and ordinances.
- ☐ Wire supply connections must be made with U.L. approved connectors.
- ☐ Check that luminaire voltage and building voltage are the same.



MODEL 233

CAUTION:

BEFORE INSTALLING AND SERVICING OF LUMINAIRE, EXERCISE SPECIAL CARE AND HANDLING OF PARTS. PLEASE USE GLOVES AND PADDED MATERIAL WHILE HANDLING PARTS TO AVOID SCRATCHING THE FINISH. CLEAN WITH SOFT CLOTHS AND WATER.

INSTRUCTIONS:

1. Unscrew top 4 screws and remove CIRCLE STRAP ASSEMBLY from CANOPY.
2. Attach CIRCLE STRAP ASSEMBLY to J-box (by others) using 8-32 screws.
3. Using U.L. approved wire connectors: connect the luminaire neutral (white) to the supply neutral, connect the luminaire line wire (black) to the supply line wire. Fasten green ground wires to ground screw.
4. Re-attach CANOPY with previously removed screws.
5. Attach DIFFUSER SPHERE to CANOPY using 4 screws.

COOPER Lighting Shaper™

1141 Marina Way South, Richmond, CA 94804 Phone: (510)234-2370 Fax:(510) 234-2371