


READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE PROCEEDING.
RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.







This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at electrical panel before proceeding.

DO NOT INSTALL THIS SYSTEM IN A WET OR DAMP LOCATION.
DO NOT ENERGIZE ANYTHING OTHER THAN THE FIXTURES IN THE SYSTEM.
DO NOT EXCEED MAXIMUM WEIGHT LOADING.

CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY REINFORCING WALL TO SUPPORT FIXTURE WEIGHT.

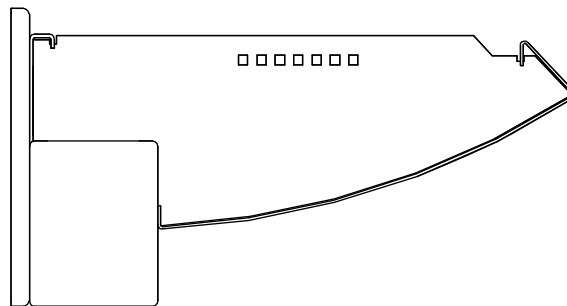

SAMPLE RUNS

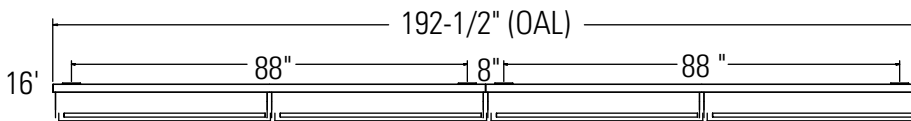

Step 1. Mark off Mounting Centers (Fig. 1)

- A. Mark required distance from single gang j-box rotated 90° to mounting center and drill two (2) holes (diameter to be determined by method of support) 45° from horizontal and 3 ½" apart. (Refer to page 1 for dimensions)




Figure 1

Step 2. Installing the First Fixture/Individual

- A. Securely fasten the wall mounting plates to the wall.
 B. Remove reflector. On the power fixture you will have to feed the wires through to the back of the fixture, on the side your j-box is on. (Fig. 2) Feed wires from junction box into the back of the fixture and connect wiring from the j-box to the fixture. (Fig. 2)
 C. Hang fixture on the wall mounting plates. (Fig. 3)
 D. Secure fixture to the wall mounting plates using ¼-20 screws provided. (Fig. 4)
 E. Replace reflector.




Figure 2

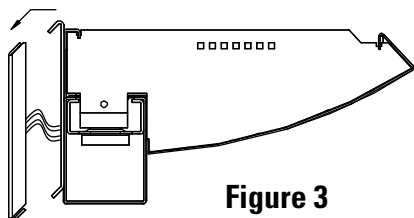


Figure 3

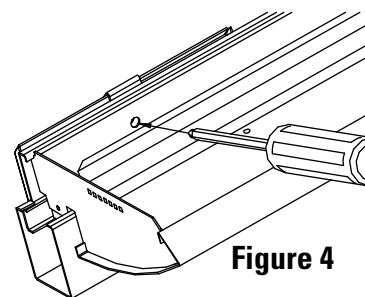


Figure 4

Step 3. Installing the Run

- A. Slide joiner bracket into the previously installed fixture. (Fig. 5)
- B. Hang the next fixture in the run on the wall canopies, but offset it to clear the joiner bracket. (Fig. 6) Connect the wiring between the two fixtures.
- C. Slide the fixture onto the joiner bracket and securely tighten down the set screws on both fixtures. (Fig. 7)
- D. Repeat for the rest of the run.




Figure 5

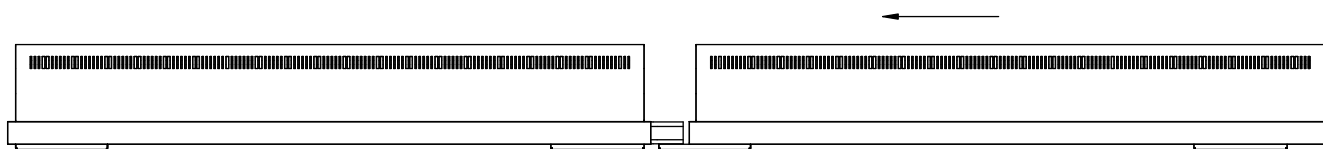


Figure 6

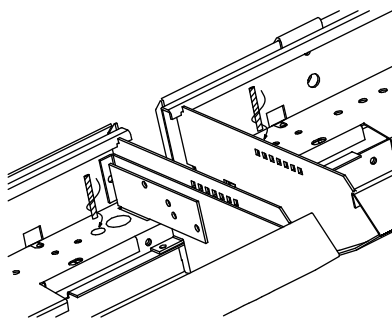


Figure 7

Step 4. End Cap Installation

- A. Slide the end cap assembly into each end of the run. (Fig. 8)
- B. Securely tighten the set screws on both ends of the run. (Fig. 9)




Figure 8




Figure 9