


BATTERY CHARGER CH01

Features:

- For charging the batteries of CB08-XA and all jumbo types, directly connected to the control box or via the handset HB40A (must not be used with BA18)
- Mains: 100 - 240 VAC / 50-60 Hz switch mode power supply
- Charging voltage: 27.6 VDC \pm 2%
- Charging current: Max. 500 mA
- Colour: Black
- Cable: 2000mm with straight or angled DC-plug (5.5 x 2.5)
- Switch mode principle
- Interchangeable with CH08
- Green LED for power on
- Yellow LED for charging function
- Medically approved according to IEC 60601-1 only when used with straight DC plug

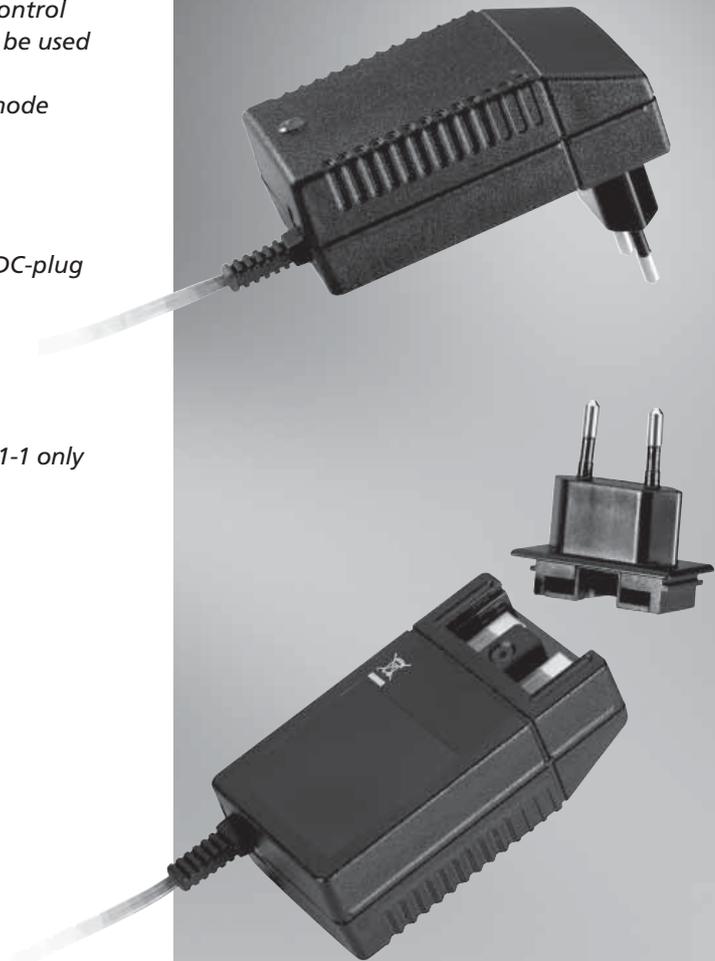

MEDLINE
IMPROVING EFFICIENCY
CARELINE
IMPROVING EFFICIENCY

The CH01 Battery Charger gives the possibility to interchange the plug type with a simple "slide on" operation.

This gives great versatility and a logistical advantage reducing stocks and costs.



Euro plug



English plug



Shaver plug



U.S. / Japan plug



Australian plug



Charging module

Charging module: Part number: 10CH01S-00 (Straight plug)
10CH01A-00 (Angled plug)

Plug Adaptor unit:	Part number:
English plug	00CH01UK-00
Australian plug	00CH01AUS-00
Euro plug	00CH01EU-00
U.S. / Japanese / UL plug	00CH01US-00
Shaver plug	00CH01IEC-00



Please order in multiples of 69 as there are 69 pieces in a box.

Specifications subject to change without prior notice.
It is the responsibility of the product user to determine the suitability of LINAK A/S products for a specific application. LINAK will at point of delivery replace/repair defective products covered by the warranty if promptly returned to the factory. No liability is assumed beyond such replacement/repair.