



DT412/DT422/DT432

Cordless Telephones for Aastra MX-ONE™
and Aastra MD110

Quick Reference Guide

This Quick Reference Guide includes short descriptions on how to use the basic features. More features, legal text and technical requirements are available in the User Guide.

Switching On/Off

Switch on: **[Power]** (Until display on) **Yes** (Within 2 seconds)

Switch off: **Press and hold Hot key Yes**

Free Seating¹

Note: Free seating is not supported by IP DECT.

Log on: *** 1 1 *** Authorization code *****
Own ext. No. **# [1-9]**

Log off: **# 1 1 # [1-9]**

Answer Calls

Answer: **[Answer]**

Handsfree: **Press middle soft key**

On another ext. **Call ringing ext. [1-9]**
(Call pick-up): **France: 4; Sweden: 6**

End call: **[End]**

Make Calls

On hook: **Ext. No. or External line code and No. [1-9]**

Off hook: **[Off]** Ext. No. or External line code and No

Handsfree: **Dial No. and press middle soft key**

Common Speed
Dialing number: **Dial Speed Dialing No. [1-9]**

Dial a number via **Press and hold preprogrammed Hot key**
Hot/Soft key: **or Press preprogrammed Soft key**

Make a call via the
phone book: **Find Enter first letter of name Ok**
[Find] or [Soft] (Until name is displayed) [1-9]

Dial number from
the call list: **[Call] (Until number is displayed) [1-9]**

Last External
Number Redial: *** * * [1-9]** Finland, Sweden: *** * 0**

The complete User Guide is available in electronic format on the
Enterprise Telephone Toolbox CD and on
<http://www.aastra.com>

Inquiry

Ongoing
conversation: **R (See display) Call 3rd party**

Refer back: **2**

Return and
finish Inquiry: **R (See display) [1-9]**

Transfer

Ongoing
conversation: **R (See display) Call 3rd party**
[Transfer] (Before or after answer)

Conference

Ongoing
conversation: **R (See display) Call 3rd party**
3 (After answer)
France: 4; Sweden: 6

Callback

Activate: **6 [1-9]**
Finland, France, Sweden: 5

Cancel single
Callback: **# 3 7 * Ext. No. # [1-9]**

Cancel all
Callbacks: **# 3 7 # [1-9]**

Call Waiting

Activate: **5 (At busy tone) Wait on line**
Finland and France: 6; Sweden: 4

Handsfree

Activate or
Deactivate: **Press middle soft key**

General Deactivation

Cancel all activated
features: **# 0 0 1 # [1-9]**

Menu structure

Messages **[Messages]** Messages list >

SMS **1** Send SMS >

Contacts **[Contacts]** Local phonebook >
Central phonebook
Call list >


Modes **[Modes]** Normal >
In charger >
Mode 2 >
Mode 3 >
Mode 4 >
Mode 5 >
Mode 6 >
Mode 7 >
Mode 8 >
Mode 9 >
Switch off

Volume >
Ring signals >
Vibrator (on/off)
Key beep (on/off)
Alarm settings* >
Absent (on/off)
Answer >
Soft key
Name: ...

Services **[Services]** Service 1 >
Service 2 >
Service 10 >

* Only available for the DT422 and
DT432 phone.
** Only available for the DT412 and
DT422 phone.

Settings

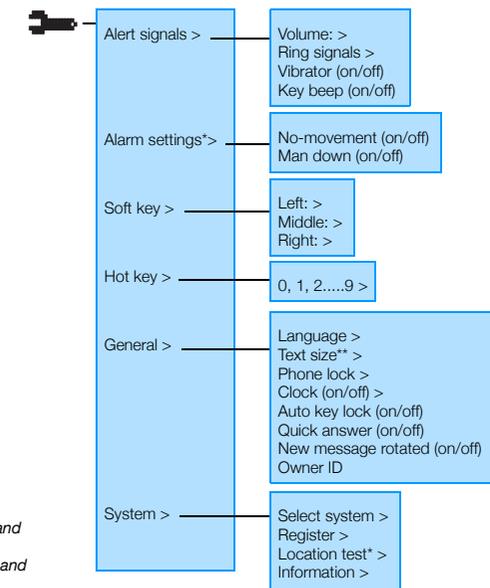

On hold

Put a call on hold: **R (See display) [1-9]**

Resume call: **[1-9] (Within 30 seconds)**

Resume on
another extension: **Call ext. where call was put on hold**
[1-9]
France: 4; Sweden: 6

Internal Follow-me

Order from your
own extension: *** 2 1 * New ext. No. # [1-9]**
U.K.: * 2 *

Cancel: **# 2 1 # [1-9]**
U.K.: # 2 #

External Follow-me

Order: *** 2 2 # External line code and No.**
[1-9]

Cancel: **# 2 2 # [1-9]**

Personal Number¹

Activate or
change profile from
own extension: *** 1 0 * (1-5) # [1-9]**

Cancel: **# 1 0 # [1-9]**

Voice Mail¹

Enter your mailbox: **Dial voice mail No. and follow recorded
instructions**

New message
received: **Listen Follow recorded instructions**

Program a Hot/Soft key with a number

Program: **[Menu] [Left] or [Right] (Settings)**
[Soft key or Hot key] [1-9]
[Left] or [Right] (Select key) [1-9] Edit
Enter name Save [Change]
[Phone call] Select Enter No. Save

Absence Information¹

Order: *** 2 3 * Absence code**

With return
date/time: *** Date/Time # [1-9]**
(Date sequence is system dependent)

Without return
date/time: **# [1-9]**

Cancel: **# 2 3 # [1-9]**

Abbreviations and Explanations

ext. No.	Extension Number	Yes, Find, Ok, Listen, Edit, Save, Change, Select Soft key
1	Feature may be optional	