Operator's Manual

THANK YOU FOR BUYING A SNAPPER PRODUCT!

We have designed and built this machine with utmost care, and it is intended to give you long and satisfactory service.

Any mechanical device can be potentially dangerous if not used properly. No accident prevention program can be successful without the wholehearted cooperation of the person who is directly responsible for the operation of the equipment. Study this operator's manual to learn the operation of the controls and observe all safety precautions. Only use this machine for the purpose it is intended. By following these instructions and safety precautions you should enjoy the long and trouble free operation you expect.

Snapper Comet Riding Mower

MODELS 2650 - 2650\$ - 2680 - 2680\$ 3080 - 3080\$

SNAPPER MOWER GUARANTEE

All Snapper Mowers are guaranteed for normal use to the original purchaser against defective workmanship and material. This guarantee extends for one year from purchase date on mowers not used commercially, and for one month on mowers that are used commercially.

We will replace or repair without charge any part or parts returned to us during the guarantee period, with transportation charges prepaid, that our inspection shows to have been defective in workmanship or material when shipped from the factory.

This guarantee is void if the parts in question have been altered or damaged by accident, abuse, neglect, improper adjustment, lack of lubrication or normal wear. This guarantee does not cover engines, tires, tubes, batteries and belts which are guaranteed separately by their manufacturers.

No other guarantee, expressed or implied, is made by the Company which retains the right to change specifications without notice or obligation.

WARNING: Use of replacement parts other than genuine Snapper parts may impair the safety of your mower and may void our warranty.

IMPORTANT: This guarantee is void unless the guarantee card attached is filled out completely and mailed to the Factory within 10 days of the date mower was purchased.


IT IS THE POLICY OF McDONOUGH POWER EQUIPMENT, INC. TO IMPROVE ITS PRODUCTS WHENEVER IT IS POSSIBLE AND PRACTICAL TO DO SO. WE RESERVE THE RIGHT TO MAKE CHANGES OR ADD IMPROVEMENTS AT ANY TIME WITHOUT INCURRING ANY OBLIGATION TO MAKE SUCH CHANGES ON PRODUCTS MANUFACTURED PREVIOUSLY.

McDONOUGH POWER EQUIPMENT, INC.

IZ/I FUGUA

McDONOUGH, GA., U. S. A., 30253

REV 1, 12/1/72 MANUAL #06062

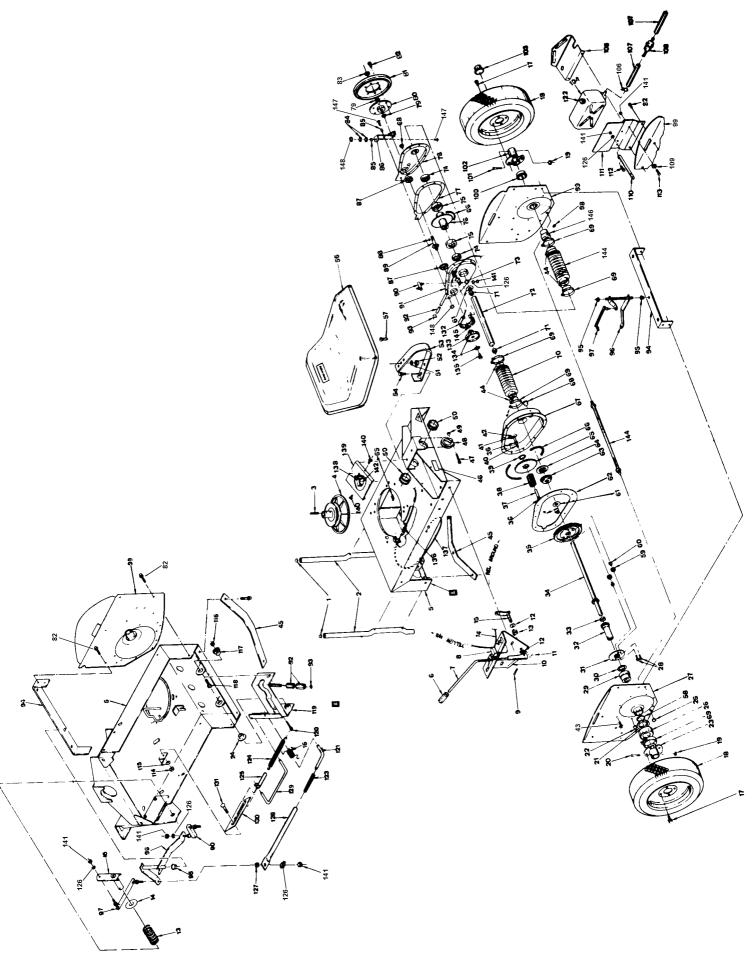


Rear Wheels, Transmission and Variable Speed Drive

ă	-	_	_	_	4	-	-	_	-	_	_	-		1	ი.			-	_	-	-	7						- د	۷ 4	o	_	-	-	7	_	7	7			-	š	-	-		-	7	_	•	_	- 1	7		-					
o. Description		7 5/16-24 x 5/8 Hex Head Cap Screw							7 3/16 x 3/4 Cotter Pin		'5 Gas Cap						Solution in the second			8 Auxiliary Brake Band			••		_	_				23 J/10:24 Tex NO!				21 Belleville Washer	8 Bearing, LH Fender (w/fitting)	-)3 1/4"-28 HN		¥	18 Ground Wire	Not Shown on 2650S and 26805 Tecumseh Engines	48 Ground Wire	54 Fuse Wire	Not Shown on 2680 and 3080 Briggs Engines			23 3/4 Street Ell	Not Shown on 26805 and 30805 Briggs Engines	50 Ground Wire					} }		_		51 Sattery Clamp
Part Xo	9.0238	9.0227	9-0130	9.0.0	9-019-6	1.1048	9-0369	4-7347	9.0357	3-1729	1-1775	1.1820	1-104	1090	9-0187	1-1968	2-1706	2007	0000	5.0628	3.1748	1.1121	9.0493	1.1867	1-1855	1.1853	1-1155	3-7344	9-0302	6770-6	0781.1	1-0992	1.1070	1.1121	50918	90101	90303	;	No.	1.1148	Items Not	1-1148	1-1864		1.1860	1.0267	2-1723	Heras Not	1.1860	1.1862	1-0267	2.1723	200	Items Not	1.1858	1.1859	2 2	3-7343
Fea	113	: E	717	5	2	117	1.8	118	120.	121	122.	123.	124.	125.	126.	127.	128	7.7.	<u>.</u>	132	133	134.	135.	136.	137.	138.	138	139.		= 5	7 7 7	143	144.	145.	146.	147.	148.		=		*			ltems				<u>.</u>			_			*				
Ory.								. ,	•	4	7	_	_		_	-	- (2 4) -		. –	_	7	7	_	-	-	7	 - ,	- ;	4 .	c	٠, ١	۰ -	۰ ۵	-		_	- (m ·		- ‹	٠, -	_	-	_	_	,	- 1	7 -		- 4	. 6	_	-	_		-
Description	4 / 2 / 1 / 1 / 1 / 1 / 1 / 1 / 1 / 1 / 1	// 10 LOCK Washer	10 to the man //	Seat Spring	S/8-10 X Hex need 51. Scient	Wosner (recomben crigina)	3607 7/14/14 × 1/2000 Bolt		12 Tooth, 12 Pitch Gear	Pinion Spacer	Flance Washer	Gasket	Sprocket	Washer	Sprocket	Chain	Case	Plastic Plug	Boot Camp	5001		Neber Worker	Needle Bearing	Nylon Thrust Washer	Hub and Sprocket Str.	Gasket	Cover, Left Hand	Belleville Washer	Hob	Driven Disc	5/16-18 × 5/8 HWSI	5/8-18 Hex Lock Nut	Washer	Spirit Spacer	Secrios	Woodruff Key	Sprocket and Shaft	Shift Link, Short	Cover, Right Hand	Roller	Retaining Ring	Cross Brace	Nylon Bedring	Shift Link Land	Grease Fitting	Fender, Left Hand	Seal Cap, Left Hand	Axle Bolt, Left Hand		Hub Cap	3-Guart lank	Front Bracket		Filter	Washer	Tank Brace, 2650, 2650S, 2680, 3080	Tank Brace, 2680S, 3080S	Bracket, Back
Part No.	,	9.0247	9-0449	3.0844	9-0324	3-108/	1.190	7-0248	2.1127	2.1126	1.1072	1.8060	1.0959	1.0988	2-1129	1.0941	3-7279	1.1024	1-1037	1.101.1	-0490	17011	1-0942	1.1086	4-0355	1.8059	3-7278	1-1121	2-0911	1-0765	9.0361	9.0356	2.0984	1.0916	1.0756	1.0614	1-0940	1.1018	4.7313	2.0908	1-0776	3-7291	1.1016	1.1017	1 0909	3-7285	1-0967	1.1035	4.0350	1.1052	1.9507	3.9553	3.1736	1177	3.0008	3.1138	3-1180	3-9552
1	٠;	ล่	22.	53	7	ė,	ġ Į		ė ę	\$ 8	<u> </u>	62	63	2	65	99	67.	%	69	දි (-	7 7	7	75.	76	77.	78.	79.	80.	.	82.	83	2	ć č	9 6	8	<u></u>	8	9.	45	દુ	7.	g 3	ė 6	. 6	8	8	101	102	. 63	104	5 5	<u>.</u> 5	8	60	100	10	Ξ.
Description Qty.		Cop	Sumper 2	Key	Drive Disc Assembly	Main Case	Grip	Shift Handle	Nectrol 08:105	Clevis Fin	2/22 - 2/4 Cattain Bin	There where	Carried Actions	Mount Clutch Wire	Shift Handle Arm	Corios	100 Bolt	Wheel and Tire Assembly, 2650,	2650S, 2680, 2680S	Ris			Wheel and Time Ass'v 3080, 30805 2		Tite	Volva Stem	Volve Cap	5/16-24 Lock Nut GR5 2	Wheel Bolt, R.H. Axle Bolt	Oil Seal	5/16 Flange Lock Nut	Right Hand Wheel Hub	Thrust Washer	5/16-24 Lock Nut	Seal Cap, R.H.	Fender, K.M.	3/ 10-24 x 1-3/8 nn tock cap strew at	disassembled)	Bearing	Thrust Washer	Differential Plate 1	Short Axle Assembly	Spacer	Long Axle Assembly	s/14 Belleville Worker	Concern victime victime 1	(3eor 111 10P	Retaining Ring	ldier Bolt	5/16 "O" Ring		1/4.20 x 5/8 Self Tapping Screw 11	Seal King	Name Plate	5/16.24 x 2.1/2 Hex Head Cap Screw 1	Tube Clamp	5/16-24 Flange Lock Nut	Grommet
Z to		1-0153	3.0798	1-0210	5.0169	4-9556	1-0838	4-0284	1-1854	1-1021	4-0332	7007	3-1030	1.1857	4.0341	1.1821	9-0367	5.0116		1.0533	1.0524	1.0525	1.018%	3-0294	1.1007	1.1153	1.0189	1.1201	1.1013	1.1817	1-0969	4-0351	1-0925	9-0222	3.1732	3-7280	y-0354		1-0966	3.1079	3.1104	5-0278	1.1026	5-0277	7.1138	2.11.28	1.0064	1-0965	1.1042	1-1156	9.0395	9.0362	1.1166	3 1003	9.0358	3-1100	9-0480	1.1033
1		- -	~	ન	v.	٠ń	ø	7	œ	o: ç	2:	=	<u>.</u> :	<u> </u>	<u> </u>	<u> </u>	2 2	8 0					2	<u>•</u>				2	20	21.	22	23	24.	25.	9	27.	8		39	3	3	35.	33	9 7	3 2	9 5	i æ	8	Q	=	42	€,	4	Ç :	ė t	. 4	49	S

Spindle, Cutter Unit and Lift, 26", 30" Snapper Comet

Item	Part No.	Description	Qty.	ltem	Part No.	Description	Qty.	Item	Part No.	Description	Qty
1.	3-7359	Spindle Cover, 26" Comet	1	33.	1-1925	Idler Spring	1	41.	4-7323	Deck, 30" Comet	1
1. 2.	1-7360 9-0302	Spindle Cover, 30" Comet 1/4-20 x 3/8 Self Tap-	1	34. 35.	9-0095 9-0053	1/4-28 Hex Nut	3	41.	4-7325	Deck, 26" Comet	i
••	7-0302	ping Screw	5	35.	7-0055	1/4 Internal Tooth Lock Washer	3	42. 43.	9-0041 9-0122	1/8 x 1 Cotter Pin	1
3.	1-0027	Jam Nut	ĭ	36.	9-0055	1/4 SAE Washer	3	44.	4-7318	3/8 Washer Front Lift Arm	2
4.	1-0935	Washer	14	37 .	4-0402	Deflector Str.	ĺ	45.	1-0739	Retaining Ring	3
5. 6.	1-0787	Spindle Pulley	1	38.	9-0101	1/4-28 x 3/4 HHCS	3	46.	4-7324	Rail Str. 30" Comet	1
7.	3-0817 9-0037	Brake Drum 3/32 x 3/4 Cotter Pin	1	39. 40.	1-1763 9-0292	Fender Washer 3/8-24 x 3/4 HHCS	1 9	46.	4-7317	Rail Str. 26" Comet	1
8.	9-0161	3/8-24 × 1-3/4 HHCS	;	40.	7-0272	3/0-24 x 3/4 nnc3	7	47. 48.	1-0737 1-1922	Roll Pin	2
9.	3-1184	Blade Holder	i					46. 49.	1-1922	Spring Mount Ground Spring	1
10.	1-1029	Idler Pulley, 3/8 Bore	1	1-		<u></u>		50.	1-0741	Tolerance Ring	'n
11. 12.	3-0982 9-0289	Restrictor 3/8-24 Lock Nut	1					51.	1-1857	Mower Clutch Wire	i
13.	1-0740	Retaining Ring	10 2	2-	<u> </u>	— —	-	52 .	9-0362	1/4-20 × 5/8 Self	_
14.	1-0696	Bearing	2		-	_ \	Q	53 .	9-0307	Tapping Screw 10-C x 1/2 Self Tap-	1
15.	1-0996	Ring, 26" Comet	3			32		50.	7-0007	ping Screw	1
15. 16.	1-0996	Ring, 30" Comet	4		3			54.	1-1051	Retaining Ring	2
17.	1-0684 4-0385	Grip Chain Arm, R.H.	1		4	──∜8	_ 58	55.	5-0627	Spindle Brake Assembly	1
17.	4-0386	Chain Arm, L.H. (not show)	ง่า		5_			56. 57.	1-2230	Wire Link	1
18.	1-1812	"O" Ring	, 2		6.		-	57. 58.	1-3885 1- 0749	Spring Belt	1
19.	3-1182	Spacer	1		- \	5	•	•••	6-0173	Height Indicator Kit	i
20. 21.	4-7295 9-0364	Lift Handle 5/32 x 1 Cotter Pin	1		7_	、 	6	59.	3-1193	Indicator Plate	1
21. 22.	4-7319	Rear Lift Arm	i	8-				60.	1-1758	Decal	1
23.	1-0735	Clevis	i			5	5	61.	5-0195 4-0273	Spindle Assembly	1
24.	1-0736	Clevis Pin	1	10		_ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		62.	1-0817	Housing Alemite Fitting	í
25.	9-0155	3/8-24 Hex Nut	1	10-	-6	3 6 Q	4	63.	1-0690	Washer	i
26. 26.	2-11 <i>57</i> 2-1135	Timing Rod, 30" Comet Timing Rod, 26" Comet]			, 5 0	.53	64.	3-1183	Washer	1
27.	1-1074	Spring, 30" Comet	i	11-		A 13	/	65.	9-0393	1/2-20 Hex Lock Nut	2
27.	1-1010	Spring, 26" Comet	j		•		_52	66.	9-0491	1/2-20 x 1-1/4 HHCS, Grade 5	2
28.	1-0996	Ring, 30" Comet	4	12-			/32	67.	9-0278	5/8 Jam Nut	1
28. 29.	1-0996 9-0037	Ring, 26" Comet	3			51		68.	1-8069	Cutter Bar, 30" Comet	i
29. 30.	9-0365	3/32 x 3/4 Cotter Pin 1/8 x 3/4 Cotter Pin	1	18 17 1	5 15 4	13	40	68.	1-8068	Cutter Bar, 26" Comet	1
31.	1-1920	Blade Handle	i			T -4+	49	69. 70.	4-7246 1-0681	Idler Arm Str.	1
32.	2-0882	Support Rod	1	I - I		25	48	70.	1-0001	Grip	1
					1 23	50					
					7 1	20					
				į Ų			47 4	6 4			
				22 12	0-11-			/ 4	5		
				Å √ 29			*	44	1		
								1-x-	·		
				1			43	للمر	İ		
	A				1 (3)	STAN Y SOK	_43 /	•	- !		
		59					3	70			
		1 7						<i>,</i> '			
	1					27 21 15 \	*		i		
		18/				• \ 30	31 🎢				
	1	60				33 28		3,2	!		
	٤			34				/	/		
		_				40	_ T	S			
	61					it the					
				/,	7		_ :/2				
				- 1	The						
				35	4.4.	42	3/				
	12		36-	_		36	•				
		62	1	× 40	No.						
	14	63		ELLIA -	1		_ \	\			
		64	1	18/-		1		41			
	T	→ 65	\	X	1 5		40				
	66		、レ	ـلا /							
	•		1	373	R. 1	i					
		66	>	`\	38						
		1967 66		`	~~ ~	38					
		~ ,			`.,						
						 					

Front Wheels, Front End and Steering

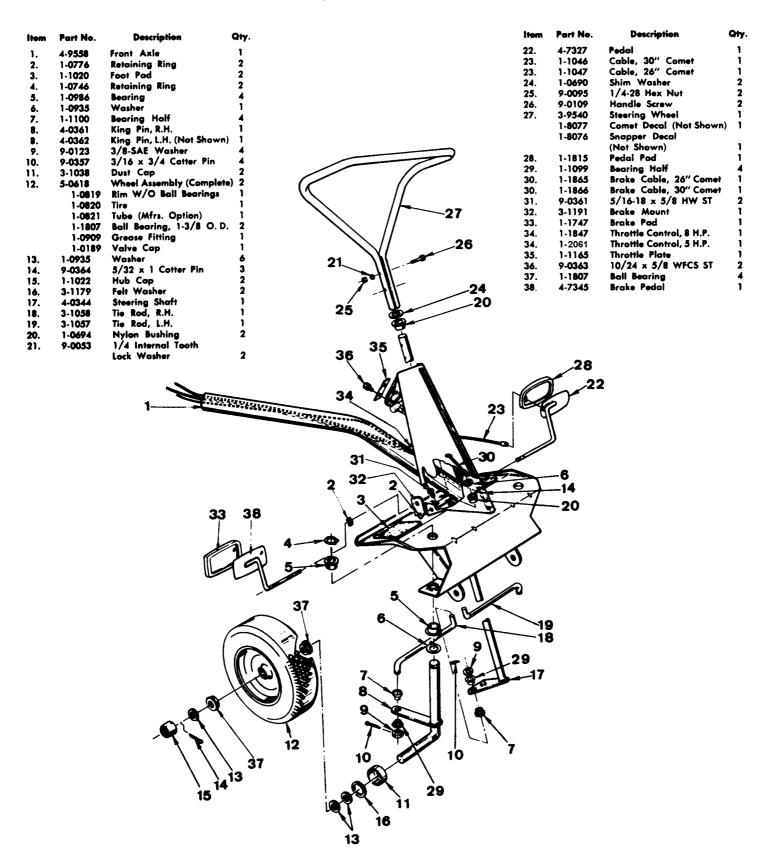

Assembly, Operation, Service Manual and Parts List SNAPPER COMET 26" & 30"

1. ASSEMBLY

- A. Install steering wheel. (Page 7, Item No. 27).
- B. Install grass deflector (Page 6, Item No. 37) or grass catcher kit.
- C. Connect right hand steering link (Page 7, Item No. 18).
- D. Install seat (Page 4, Item No. 56) to mower using one $7/16-14 \times 1$ carriage bolt, one 7/16 lock washer, and one 7/16-14 hex nut.
- E. Check engine manual for engine oil and gasoline recommendations.
- F. Check tire pressure—front 20 lbs.; rear 25 lbs.
- G. If electric start:
 - Service battery according to instructions supplied with the battery.
 - Place battery under seat with terminals nearest the front of the machine.
 - 3. Connect wires to battery terminals with negative side to ground.

2. OPERATIONS:

A. STARTING ENGINE:

- Read entire operator's manual, the engine manual, and become familiar with all controls before starting engine.
- 2. Shift transmission to "neutral-park" position.
- 3. Shift cutter to "out" position.
- 4. Turn key switch to "on" position.
- 5. Start engine per engine manual.

B. FORWARD MOTION:

- Depress clutch and brake pedals, move shift lever to speed No. 1 and slowly release clutch and brake pedals. Speed may now be varied without using the clutch.
- 2. Always use the clutch to shift out of neutral.
- 3. Always begin forward motion in speed No. 1.

C. REVERSE MOTION:

 Same as forward motion except shift lever must be held in reverse.

D. ROLL:

 Shift the transmission to roll when the machine is to be moved without the use of the engine.

E. STOPS:

- The machine may be stopped by depressing clutch pedal and then brake pedal in that order.
- Vary the speed of the machine with the shift lever, not with the brake.
- 3. The engine may be stopped by turning the key switch to the "off" position or moving the throttle control to the "stop"
- As a safety precaution, if stops must be made going up steep inclines, shift cutter to out position and back slowly down to level ground before restarting.

F. CUTTER UNIT:

- Cutting height is changed by moving the lift handle. (Page 6, Item No. 20). There are 8 different positions, ranging between 1 and 4 inches.
- 2. Cutting height may be changed at any time.
- 3. To engage cutter unit, slowly move the cutter handle from the "out" position to the "in" position.
- 4. Cutter can be engaged or disengaged at any time.

3. ADJUSTMENTS:

A. CLUTCH:

The clutch linkage has been designed so that with inital factory adjustment, the driven disc wear is accommodated throughout its useful life. Replace disc when worn to 1/32-1/16 inch rubber thickness. Do not tamper with linkage if mower does not pull at this point. Replace driven disc.

In the event someone tampers with the factory adjustment, the linkage can be checked as follows:

- Remove driven disc and install adjusting gauge, which can be made from a driven disc with the "as new" radius of 3 inches on half the circumference and a 2³/₄ inch radius ground on the other half.
- 2. Depress clutch pedal and shift to second speed.
- 3. Adjust clutch rod guide until the $2\frac{3}{4}$ inch radius clears driving disc .005/.010 inch.
- 4. Rotate gauge 180 deg. and fully depress clutch pedal until brakes are applied. Check to see that the 3 inch radius clears driven disc by 1/32 inch minimum with sliding chain case pushed lightly against yoke lift. This assures that driven disc will be pulled down from driving disc when clutch is disengaged.

B. CLUTCH AND BRAKE PEDALS:

Control cables should have slight amount of slack with clutch and brake pedals released and with shift handle in neutral. This can be checked by seeing that the clutch rod slides to the rear end of slot in the clutch rod guide. Adjust by shifting cable stops as required through keyhole in brake and clutch pedal.

C. CUTTER DRIVE BELT:

The spring loaded idler maintains proper belt tension throughout the effective belt life.

Adjust main tube when idler pulley causes the belt to rub together behind the spindle pulley. Main tube adjustment is accomplished as follows:

- Loosen clamp under seat spring and pull main tube forward until inside surface of cutter drive belt has approximately 1" running clearance measured at the idler pulley with cutter unit engaged.
- Check to see if control cable has a slight amount of slack with clutch and brake pedal released and with shift handle in neutral discussed in "D" above.

Belt replacement is accomplished as follows:

- 1. Remove spindle guard cover and remove belt from pulley.
- 2. Stand mower on end (refer to "Storage") with shift handle in neutral.
- Pull belt from behind drive disc. Reach behind slide and pull clutch rod for maximum disc clearance. Roll belt between drive and driven discs. Pull belt between driven disc and belt guide and remove from transmission case.
- 4. Reverse procedure to install new belt.

D. CUTTER SPINDLE REMOVAL.

If it is necessary to remove and re-assemble spindle housing, the housing must be plumbed to the cutter deck to obtain an equal distance between the blade tip and deck. This is accomplished by locating the housing flange correctly to the deck, using the clearance holes for the capscrews for alignment. Tighten securely using self-locking nuts.

E. DECK ADJUSTMENT:

The cutter blade has been factory adjusted for 1 inch minimum cutting height. After a period of time, wear in the linkage may require re-adjustment. Correct procedure is as follows — taking all measurements to the same blade tip:

- 1. Park mower on level and even floor or surface.
- 2. Move lift handle to lowest position to remove spindle cover.
- Adjust blade tip cutting edge to 1 % inch at rear by bending the swinging chain arms of the rear suspension up or down as required, maintaining a level blade side to side as this is adjusted.
- 4. Swing blade tip to front and adjust to 1 inch by adjusting timing link that connects the front and rear lift arms. Shortening this link $\frac{1}{2}$ turn of the rod end raises front end approximately 1/8 inch.
- 5. Turn blade to point to the front and rear of machine. The 26" and 30" blade should be at least $\frac{1}{2}$ " higher at rear than the front.

4. STORAGE:

The mower may be set on end for servicing or storage within the following limitations.

- A. For electric starter units, remove battery to prevent acid leakage and subsequent damage.
- B. Gas tank must be practically empty to eliminate fire hazard.
- C. For winter storage, always drain oil and gasoline. Refer to engine manual for proper procedure to follow.

5. OPTIONAL EQUIPMENT:

To increase the usefulness of your Snapper Comet Mower, the following kits may be obtained as Optional Equipment:

6-0049	Tire Chains, 16 x 4.80 — 8 Tires
6-0119	Tire Chains, 16 x 6.50 — 8 Tires
6-0111	Leaf Mulcher, 26"
6-0118	Leaf Mulcher, 30"
6-0185	Snow Plow Kit
6-0183	Grass Catcher Kit
6-0169	Steering Wheel Kit
6-0170	Wheel Brake Kit

SAFETY PRECAUTIONS

Remember, a careful operator is always the best insurance against an accident.

Study your Operator's Manual, become familiar with the controls and how the mower operates. Learn to stop the mower quickly.

Never attempt to start machine unless shift handle is in neutral and cutter is in the out position.

Always begin forward motion with shift handle in the No. 1 speed position.

Before operating mower clear area of debris.

Operate the engine at the slowest speed that will cut satisfactorily.

Stop and check for breakage and repair any damage after striking foreign objects.

Mount mower from left hand side, opposite the discharge chute.

Keep hands and feet clear of the cutter unit at all times.

Do not operate mower with guards removed.

Disengage cutter, shift to park-neutral and stop engine before dismounting.

Do not crank or operate engine where exhaust fumes can collect.

Never allow children to operate the Snapper Comet.

Instruct individuals to stay away from the mower while it is in operation.

Do not let others ride with you on the mower.

Do not operate the mower without either the grass deflector or the entire grass catcher attachment in place.

The grass bag, if used, should be frequently checked for wear and deterioration. Replace with Snapper brand bags only, when deterioration or wear requires.

When mowing, never discharge clippings toward windows and doorways.


Mow only in daylight or in good artificial light.


Be extra careful when working on hillsides or rough ground. Watch out for holes or ditches into which a wheel may drop and cause the mower to overturn. If it is necessary to stop when going up steep inclines, shift cutter to out position and back slowly down to level ground before restarting.


When going down inclines, keep in low speed with clutch pedal out to allow engine to control speed.

Fill gas tank outdodors, but never while engine is running or hot. Avoid spilling. Always use an approved gasoline can.

Wait for all movement to stop before servicing machine.




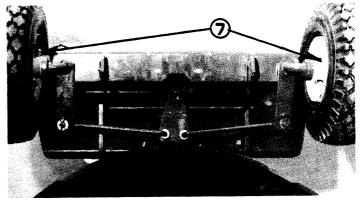

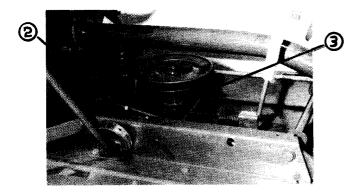


LUBRICATION INSTRUCTIONS

FOR SNAPPER COMET 26" & 30"





- The spindle is assembled with sealed precision ball bearings that require infrequent lubrication. More than two shots of grease a year from a pressure gun may damage bearing seals.
- Height adjusting cams are lubricated with medium cup grease after removing spindle cover. Twice a year is sufficient.
- Lubricate idler arm twice a year with a few drops of SAE 30 oil.
- 4. The differential is factory lubricated with 14 ounces of Snapper 00 grease. Once a year stand machine on end and remove plug "B". Add Snapper 00 grease, if necessary, to bring lubricant level to bottom of hole "B".
- 5. The sliding chain case is factory lubricated with 2 ounces of Snapper 00 grease. Remove plug and add 1 ounce of grease each year.
- 6. Lubricate shift lever with 2 shots of grease from a pressure gun twice a year.
- 7. The front wheel and axle bearings take 2 shots of grease from a pressure gun every 10 hours of operation.
- 8. The engine should be serviced according to the engine manual supplied with this machine.
- Remove excessive amounts of grease, oil, dirt and grass regularly for added machine life.


NOTE: Snapper 00 grease, Part No. 1-1050, is specially compounded for this application and is available from your Snapper dealer.



3080S WIRING DIAGRAM

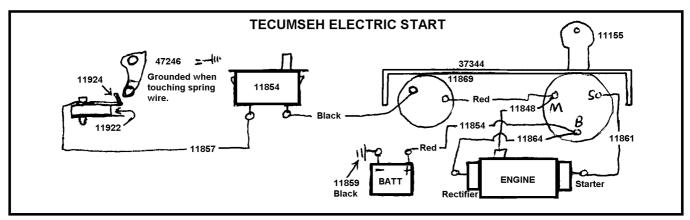

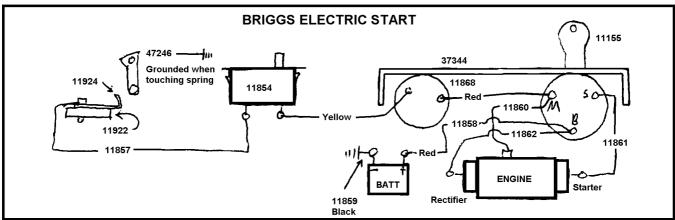

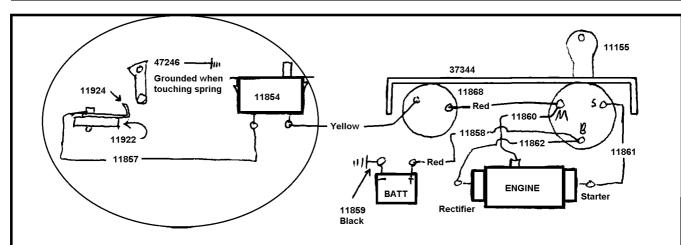

NOTE: Many parts are not available to repair this interlock system. Updating may require using modual kit #63064 for B&S engines, #63066 for Tecumseh engines, deck wiring harness #18912, deck switch #18524, switch shield #31859, detent switch #15707, and shift detent #40546. Changing the shift detent allows use of the newer button type switch. In the circled area above, modification may require replacing #11922 with the new type deck switch on the cross brace in a position that allows proper activation from contact with the switch shield (or a bent a nail welded to the idler arm if the shield isn't available) when the blade is disengaged.

SNAPPER POWER EQUIPMENT McDonough, GA • 30253