

# Portable CD Player

Operating Instructions  
Mode d'emploi  
Manual de instrucciones




"WALKMAN" is a trademark of Sony Corporation.  
"WALKMAN" est une marque commerciale de Sony Corporation.

D-E330/D-E331  
D-E350/D-E351


Sony Corporation ©2002 Printed in China

<http://www.sony.net/>

Locating the controls  
Emplacement des commandes  
Localización de los controles

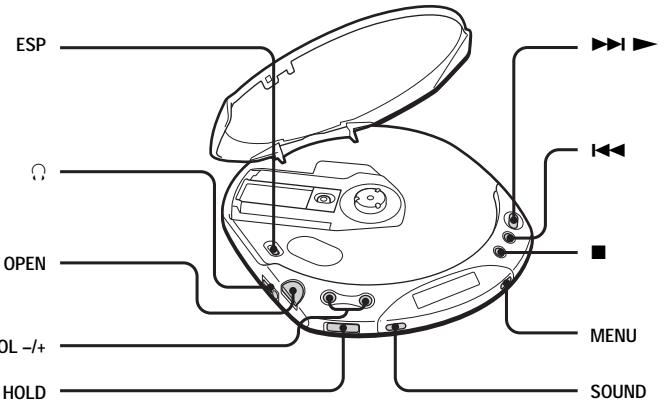

## Display/Affichage/Visor

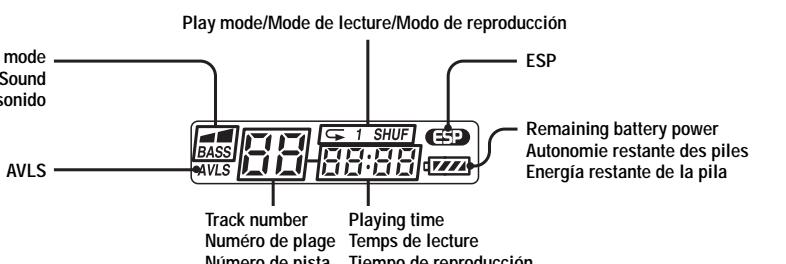



A



(rear)/(arrière)/(parte posterior)

Insert the  $\ominus$  end first (for both batteries).  
Insérez d'abord l'extrême marquée  $\ominus$  (pour les deux piles).  
Introduzca el extremo  $\ominus$  primero (para ambas pilas).

B

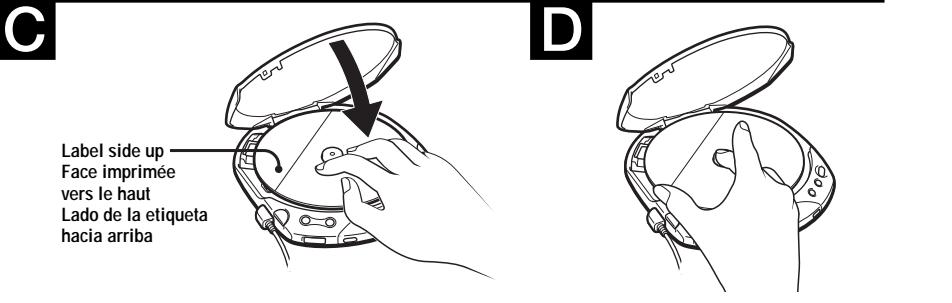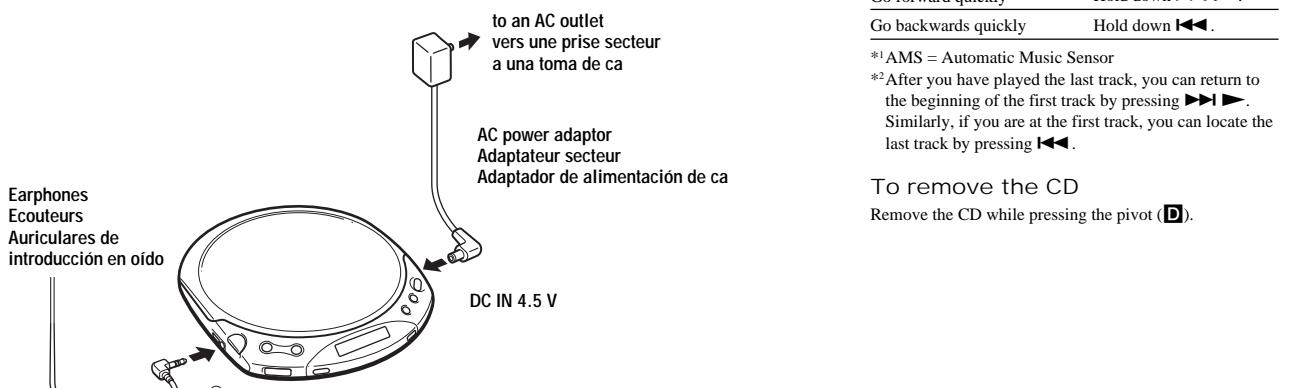

English

## WARNING

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

Do not install the appliance in a confined space, such as a bookcase or built-in cabinet.

To prevent fire, do not cover the ventilation of the apparatus with newspapers, table-cloths, curtains, etc. And don't place lighted candles on the apparatus.

To prevent fire or shock hazard, do not place objects filled with liquids, such as vases, on the apparatus.

## CAUTION

The use of optical instruments with this product will increase eye hazard.

Certain countries may regulate disposal of the battery used to power this product. Please consult with your local authority.

## CAUTION

• INVISIBLE LASER RADIATION WHEN OPEN  
• DO NOT STARE INTO BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENTS

## Playing a CD

You can use the following power sources only:

- LR6 (size AA) alkaline batteries
- AC power adaptor

## To use the dry batteries

1 Open the battery compartment lid (A-①).

2 Insert two LR6 (size AA) alkaline batteries by matching the  $\oplus$  to the diagram in the battery compartment (A-②).

## Note

If the sound is distorted when using the SOUND function, turn down the volume.

## To lock the buttons

1 Slide HOLD in the direction of the arrow. When you press any button, "Hold" appears in the display and the CD player is locked against any accidental operation.

## To unlock

Slide HOLD in the opposite direction of the arrow.

## To play a CD

1 Press OPEN to open the lid.

2 Fit the CD to the pivot, then close the lid (C).

3 Press  $\gg\gg$ .

## Note

This CD player can play CD-Rs/CD-RWs recorded in the Compact Disc Digital Audio (CD Audio) format, but playback capability may vary depending on the quality of the disc and the condition of the recording device.

## Other operations

To	Press
Stop play	■
Adjust the volume	VOL +/-
Play (from the point you stopped)	$\gg\gg$
Play (from the first track)	$\gg\gg$ for 2 seconds or more
Find the beginning of the current track (AMS*)	$\ll\ll$ once
Find the beginning of previous tracks (AMS)	$\ll\ll$ repeatedly*2
Find the beginning of the next track (AMS)	$\gg\gg$ once*2
Find the beginning of succeeding tracks (AMS)	$\gg\gg$ repeatedly*2
Go forward quickly	Hold down $\gg\gg$ .
Go backwards quickly	Hold down $\ll\ll$ .

\*1 AMS = Automatic Music Sensor  
\*2 After you have played the last track, you can return to the beginning of the first track by pressing  $\gg\gg$ . Similarly, if you are at the first track, you can locate the last track by pressing  $\ll\ll$ .

## To remove the CD

Remove the CD while pressing the pivot (D).

Earphones Ecouteurs Auriculares de introducción en oído

AC power adaptor Adaptateur secteur Adaptador de alimentación de ca

DC IN 4.5 V

Français

## AVERTISSEMENT

Pour prévenir tout risque d'incendie ou d'électrocution, ne pas exposer l'appareil à la pluie ou à l'humidité.

N'installez pas l'appareil dans un espace confiné comme dans une bibliothèque ou un meuble encadré.

Afin d'éviter tout risque d'incendie, ne pas couvrir les ailettes de ventilation de cet appareil avec des journaux, des nappes, des rideaux, etc. Ne pas poser de bougies allumées sur l'appareil.

## INFORMATION

A pleine puissance, l'écouté prolongé du baladeur peut endommager l'oreille de l'utilisateur.

## ATTENTION

L'utilisation d'instruments optiques avec ce produit augmente les risques pour les yeux.

1 Set ESP to "ON."  
The ESP indication appears.

\*ESP = Electronic Shock Protection

## To release the ESP MAX function

Set ESP to "OFF."

## Notes

• Playing may stop when the CD player gets a strong shock even with the ESP MAX function on.

• You may hear a noise or sound may skip:

— when listening to a dirty or scratched CD,

— when listening to an audio test CD,

— when the player receives continuous shock or

— when using poor-quality CD-Rs/CD-RWs or if there is a problem with the recording device or application software.

## PLAYING A CD

### To enjoy more powerful bass sound (Digital MEGA BASS)

1 Press SOUND to select "BASS ■■■" or "BASS ■■■■■".

"BASS ■■■■■" accentuates the bass sound more than "BASS ■■■".

## Note

If the sound is distorted when using the SOUND function,

turn down the volume.

## To use the dry batteries

1 Open the battery compartment lid (A-①).

2 Insert two LR6 (size AA) alkaline batteries by matching the  $\oplus$  to the diagram in the battery compartment (A-②).

## Note

If the sound is distorted when using the SOUND function,

despite the use of dry batteries.

## To lock the buttons

1 Slide HOLD in the direction of the arrow.

When you press any button, "Hold" appears in the display and the CD player is locked against any accidental operation.

## To unlock

Slide HOLD in the opposite direction of the arrow.

## To play a CD

1 Press OPEN to open the lid.

2 Fit the CD to the pivot, then close the lid (C).

3 Press  $\gg\gg$ .

## Note

This CD player can play CD-Rs/CD-RWs recorded in the Compact Disc Digital Audio (CD Audio) format, but playback capability may vary depending on the quality of the disc and the condition of the recording device.

## OTHER OPERATIONS

### To turn off the AVLS function

Hold down SOUND until "AVLS" disappears from the display.

## Note

If you use the sound function and the AVLS function at the same time, sound may be distorted. If this happens, turn down the volume.

## To turn off the operation beep sound

You can turn off the beep sound that is heard from your headphones/earphones when you operate your CD player.

1 Remove the power source (AC power adaptor or dry batteries) from the CD player.

2 Connect the power source while pressing ■.

## To turn on the beep sound

Remove the power source and then connect the power source without pressing ■.

## To turn off the beep sound

Remove the power source and then connect the power source without pressing ■.

## To remove the CD

Remove the CD while pressing the pivot (D).

## OTHER OPERATIONS

### To turn off the AVLS function

Maintenez ■ jusqu'à ce que l'indication "AVLS" disparaît de l'affichage.

## Note

Ce lecteur CD peut reproduire des CD-R/CD-RW enregistrés au format Compact Disc Digital Audio (CD Audio) mais la capacité de lecture peut varier en fonction de la qualité du disque et de l'état de l'appareil d'enregistrement.

## OTHER OPERATIONS

### To turn off the AVLS function

Maintenez ■ jusqu'à ce que l'indication "AVLS" disparaît de l'affichage.

## Note

Ce lecteur CD peut reproduire des CD-R/CD-RW enregistrés au format Compact Disc Digital Audio (CD Audio) mais la capacité de lecture peut varier en fonction de la qualité du disque et de l'état de l'appareil d'enregistrement.

## OTHER OPERATIONS

### To turn off the AVLS function

Maintenez ■ jusqu'à ce que l'indication "AVLS" disparaît de l'affichage.

## Note

Ce lecteur CD peut reproduire des CD-R/CD-RW enregistrés au format Compact Disc Digital Audio (CD Audio) mais la capacité de lecture peut varier en fonction de la qualité du disque et de l'état de l'appareil d'enregistrement.

## OTHER OPERATIONS

### To turn off the AVLS function

Maintenez ■ jusqu'à ce que l'indication "AVLS" disparaît de l'affichage.

## Note

Ce lecteur CD peut reproduire des CD-R/CD-RW enregistrés au format Compact Disc Digital Audio (CD Audio) mais la capacité de lecture peut varier en fonction de la qualité du disque et de l'état de l'appareil d'enregistrement.

## OTHER OPERATIONS

### To turn off the AVLS function

Maintenez ■ jusqu'à ce que l'indication "AVLS" disparaît de l'affichage.

## Note


Ce lecteur CD peut reproduire des CD-R/CD-RW enregistrés au format Compact Disc Digital Audio (CD Audio) mais la capacité de lecture peut varier en fonction de la qualité du disque et de l'état de l'appareil d'enregistrement.

## OTHER OPERATIONS

### To turn off the AVLS function

Maintenez ■ jusqu'à ce que l'indication "AVLS" disparaît de l'affichage.

# E



## English


### Using the dry batteries

#### To remove the batteries

Remove the batteries as illustrated (E).

#### When to replace the batteries

You can check the remaining power of the batteries in the display.



Battery power is full.  
Battery power is getting low.  
Battery power is low.  
Battery power is low.  
Lo batt\* Batteries are depleted.


\* Beep sounds.

When the batteries are depleted, replace both batteries with new ones.

- The indicator sections of roughly shows the remaining battery power. One section does not always indicate one-fourth of the battery power.
- Depending on operating conditions, the indicator sections of may increase or decrease.

#### To attach the battery compartment lid

If the battery compartment lid is detached by an accidental drop, excessive force, etc., attach it as illustrated.



### Battery life (approx. hours) (JEITA\*)

Battery life varies depending on how the player is used.

	ESP OFF	ESP ON
Two Sony alkaline batteries LR6 (SG) (produced in Japan)	23	33

\* Measured value by the standard of JEITA (Japan Electronics and Information Technology Industries Association). (When the CD player is used on a flat and stable place.)

### Precautions

#### On safety

- Should any solid objects or liquid fall into the unit, unplug it and have it checked by qualified personnel before operating it any further.
- Do not put any foreign objects in the DC IN 4.5 V (external power input) jack.

#### On power sources

- When you are not using the CD player for a long time, disconnect all power sources from the player.

#### On the AC power adaptor

- Use only the supplied AC power adaptor. If your player is not supplied with it, use AC-E45HG AC power adaptor. Do not use any other AC power adaptor.

#### Polarity of the plug



### On dry batteries

- Do not throw the batteries into fire.
- Do not carry the batteries with coins or other metallic objects. It can generate heat if the positive and negative terminals of the battery are accidentally contacted by a metallic object.
- Do not mix new batteries with old ones.
- Do not use different types of batteries together.
- When the batteries are not to be used for a long time, remove them.
- If battery leakage occurs, wipe off any deposit in the battery compartment, and install new batteries. In case the deposit adheres to you, wash it off thoroughly.

## Français

### Utilisation de piles sèches

#### Pour retirer les piles

Enlevez les piles comme illustré ci-dessous (E).

#### On the CD player

- Keep the lens of the CD player clean and do not touch it. If you do so, the lens may be damaged and the CD player will not operate properly.
- Do not put any heavy object on top of the player. The CD player and the CD may be damaged.
- Do not leave the CD player in a location near heat sources, in a place subject to direct sunlight, excessive dust or sand, moisture, rain, mechanical shock, unleveled surface, or in a car with its windows closed.
- If the CD player causes interference to radio or television reception, turn off the CD player or move it away from the radio or television.
- Discs with non-standard shapes (e.g., heart, square, star) cannot be played on this CD player. Attempting to do so may damage the CD player. Do not use such discs.

#### On headphones/earphones

##### Road safety

Do not use headphones/earphones while driving, cycling, or operating any motorized vehicle. It may create a traffic hazard and is illegal in some areas. It can also be potentially dangerous to play your headsets at high volume while walking, especially at pedestrian crossings. You should exercise extreme caution or discontinue use in potentially hazardous situations.

##### Preventing hearing damage

Avoid using headphones/earphones at high volume. Hearing experts advise against continuous, loud and extended play. If you experience a ringing in your ears, reduce volume or discontinue use.

##### Consideration for others

Keep the volume at a moderate level. This will allow you to hear outside sounds and to be considerate to the people around you.

### Maintenance

#### To clean the casing

Use a soft cloth slightly moistened in water or a mild detergent solution. Do not use alcohol, benzine or thinner.

#### To clean the plugs

If the plugs become dirty, there is no audio or noise is heard. Clean them with a dry soft cloth periodically.

### Specifications

#### System

Compact disc digital audio system

#### Laser diode properties

Material: GaAlAs

Wavelength: 1: 780 nm

Emission duration: Continuous

Laser output: Less than 44.6 μW (This output is the value measured at a distance of 200 mm from the objective lens surface on the optical pick-up block with 7 mm aperture.)

#### Power requirements

For the area code of the model you purchased, check the upper left side of the bar code on the package.

Two LR6 (SG) batteries (produced in Japan)

AC power adaptor (DC IN 4.5 V jack):

U/U2/CA2/E92/MX2/TW2/BR3 model: 120 V, 60 Hz

CED/CEX/CET/CEW/CE7/EE/E1/E13/G5/G6/G7/G8/B1 model: 220 - 230 V, 50/60 Hz

CEK/CE7 model: 230 - 240 V, 50 Hz

AU2 model: 240 V, 50 Hz

JE/W/E33/EA3/KR4 model: 100 - 240 V, 50/60 Hz

HK2 model: 220 V, 50/60 Hz

AR1/CNA model: 220 V, 50 Hz

Dimensions (w/h/d) (without projecting parts and controls)

Approx. 130.6 × 26.3 × 150.5 mm (5 1/4 × 1 1/16 × 6 in.)

#### Mass (excluding accessories)

Approx. 190 g (6.8 oz)

#### Operating temperature

5°C - 35°C (41°F - 95°F)

#### Supplied accessories

For the area code of the model you purchased, check the upper left side of the bar code on the package.

#### D-E330/D-E350

Headphones/earphones (1)

#### D-E331/D-E351

AC power adaptor (1)

Headphones/earphones (1)

Design and specifications are subject to change without notice.

#### A propos du lecteur CD

Veillez à ce que la lentille du lecteur CD reste propre et ne la touchez pas. La lentille et le lecteur risquent sinon de ne plus fonctionner correctement.

Ne posez pas d'objets lourds sur le lecteur. Vous risquez sinon d'endommager le lecteur CD et le CD.

Ne laissez pas le lecteur CD à proximité de sources de chaleur ou à un endroit exposé au rayonnement direct du soleil, à de la poussière en excès ou à du sable, à l'humidité, à la pluie, aux chocs mécaniques, sur une surface inclinée ou encore dans une voiture dont les fenêtres sont fermées.

- Si le lecteur CD provoque des interférences dans la réception radiophonique ou télévisée, mettez le lecteur CD hors tension ou éloignez-le de la radio ou du téléviseur.
- Les disques de formes spéciales (par exemple en forme de cœur, de carre ou d'étoile) ne sont pas utilisables sur ce lecteur de CD. En cas d'utilisation, cela peut endommager votre lecteur de CD. N'utilisez pas ce genre de disques.

#### A propos des écouteurs/casque d'écoute

##### Sécurité routière

Evitez d'utiliser les écouteurs/casque d'écoute pendant la conduite d'une voiture, d'une bicyclette ou de tout véhicule motorisé. L'utilisation d'un casque d'écoute peut être dangereuse dans la circulation et est illégale dans certaines régions géographiques. Il peut également être dangereux d'utiliser les écouteurs à volume élevé en marchant, et plus particulièrement lorsque vous franchissez un passage protégé. Redoublez de vigilance ou interrompez l'écoute dans des situations à risques.

##### Prévention des troubles de l'ouïe

Evitez d'utiliser les écouteurs/casque d'écoute à volume très élevé. Les médecins déconseillent l'écoute prolongée à volume élevé. Si vous percevez un bourdonnement dans les oreilles, réduisez le volume ou interrompez l'écoute.

##### Respectez votre entourage

Maintenez le volume à un niveau modéré. Cela vous permettra d'entendre les sons extérieurs et d'être attentif à votre entourage.


### Entretien

#### Pour nettoyer le boîtier

Utilisez un chiffon doux légèrement humide ou imprégné d'une solution détergente neutre. N'utilisez pas d'alcool, de benzine ou de diluant.

#### Pour nettoyer des fiches

Si le couvercle du compartiment à piles s'enlève accidentellement à la suite d'une chute, d'une pression excessive, etc., refitez-le comme illustré ci-dessous.



### Autonomie des piles (approx. en heures) (JEITA\*)

L'autonomie des piles varie suivant les conditions d'utilisation du lecteur.

	ESP OFF	ESP ON
Deux piles alcalines Sony LR6 (SG) (fabriqué au Japon)	23	33

### Spécifications

#### Système

Système audio numérique à disques compacts

#### Propriétés de la diode laser

Matériau : GaAlAs

Longueur d'onde : 1 = 780 nm

Durée d'émission : continue

Puissance de sortie laser : moins de 44,6 μW (Cette puissance est la valeur mesurée à une distance de 200 mm de la surface de la lentille de l'objectif du bloc optique avec une ouverture de 7 mm.)

#### Puissance de raccordement

Pour connaître le code zonal du modèle dont vous venez de faire l'acquisition, voyez en haut à gauche du code à barres apposé sur l'emballage.

Deux piles LR6 (AA) : 3 V CC

Adaptateur secteur (prise DC IN 4.5 V) :

Modèle U/U2/CA2/E92/MX2/TW2/BR3 : 120 V, 60 Hz

Modèle CED/CEX/CET/CEW/CE7/EE/E1/E13/G5/G6/G7/G8/B1 : 220 - 230 V, 50/60 Hz

Modèle CEK/CE7 : 230 - 240 V, 50 Hz

Modèle AU2 : 240 V, 50 Hz

Modèle JE/W/E33/EA3/KR4 : 100 - 240 V, 50/60 Hz

Modèle HK2 : 220 V, 50/60 Hz

Modèle AR1/CNA : 220 V, 50 Hz

Dimensions (l/h/p) (parties saillantes et commandes non comprises)

Approx. 130.6 × 26.3 × 150.5 mm (5 1/4 × 1 1/16 × 6 po.)

#### Masse (accessoires non compris)

Approx. 190 g (6.8 oz)

#### Température de d'utilisation

5 à 35 °C (41 à 95 °F)

#### Accessoires fournis

Pour connaître le code de la zone du modèle dont vous venez de faire l'acquisition, voyez en haut à gauche du code à barres apposé sur l'emballage.

#### D-E330/D-E350

Casque d'écoute/écouteurs (1)

#### D-E331/D-E351

Adaptateur secteur (1)

Casque d'écoute/écouteurs (1)

#### Pour les utilisateurs en France

En cas de rem