



GT5-A3011

OWNER'S MANUAL
BEDIENUNGSANLEITUNG
MODE D'EMPLOI
MANUAL DE USO
HANDLEIDING
MANUALE DEL
PROPRIETARIO
ANVÄNDARHANDBOK
BRUGSVEJLEDNING
OMISTAJAN KÄSIKIRJA

PODRĘCZNIK UŻYTKOWNIKA РУКОВОДСТВО ПОЛЬЗОВАТЕЛЯ

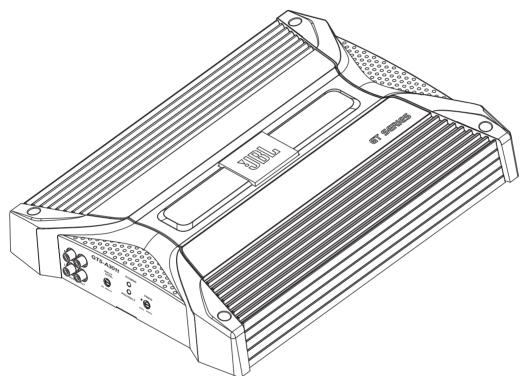

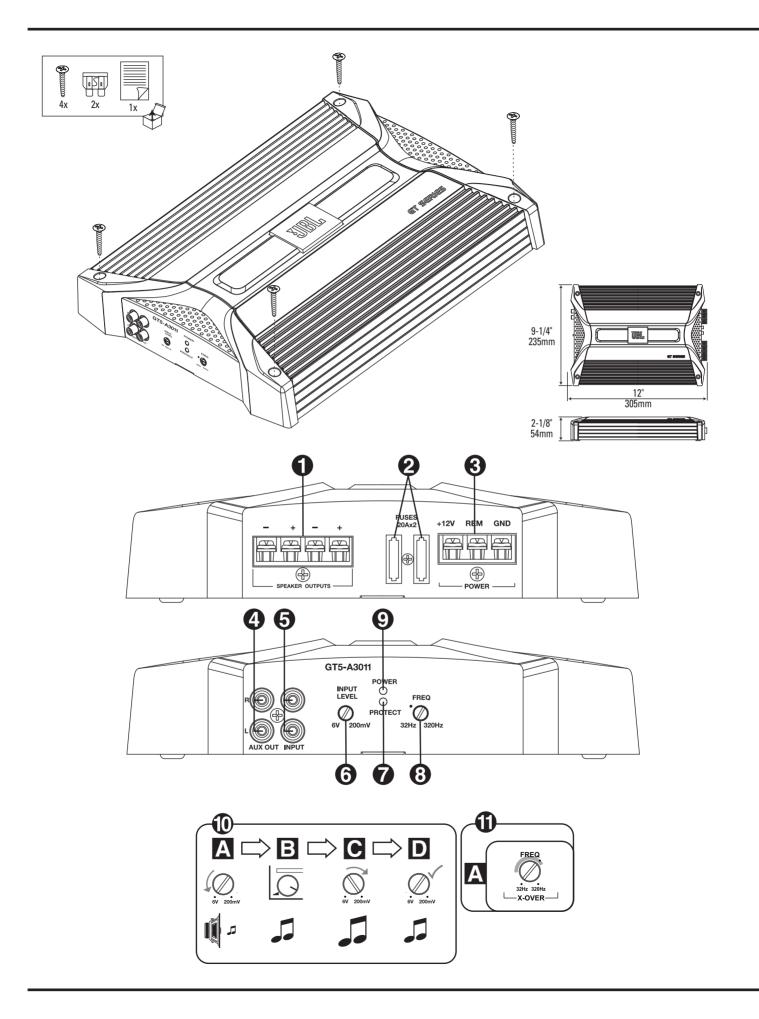

GT5-A3011 CAR AUDIO SUBWOOFER AMPLIFIER OWNER'S MANUAL

Installation Warnings and Tips

- Disconnect the negative (–) lead from your vehicle's battery.
- At the installation sites, locate and make a note of all fuel lines, hydraulic brake lines, vacuum lines and electrical wiring. Use extreme caution when cutting or drilling in and around these areas.
- Choose a safe mounting location away from moisture.
- Make sure there is sufficient air circulation at the mounting location for the amplifier to cool itself.
- Mount the amplifier, using the supplied hardware.

Specifications

- 200W RMS x 1 @ 4 ohms and ≤1% THD + N*
- 300W RMS x 1 @ 2 ohms, 14.4V supply and $\leq \! 1\%$ THD + N*
- Maximum input signal: 6V*
- Maximum sensitivity: 200mV*
- THD + N: 0.05%*
- Signal-to-noise ratio: 95dBA (reference 1W into 4 ohms)*
- Signal-to-noise ratio: 120dBA (reference rated power into 4 ohms)
- Frequency response: 10Hz 300Hz (-3dB)*
- Total peak power: 600 watts
- * CEA-2006A-compliant

Speaker Output Connectors

 Connect the subwoofer to these terminals, observing proper polarity. Either + or – terminal may be used. Minimum total impedance is 1 ohm.

2 Fuses

• Replace only with the same type and rating.

Power Input Connectors

- +12V: Connect to the positive terminal of the vehicle's battery. 8 AWG wire is recommended. Install an appropriate fuse holder and fuse (40A minimum) within 18 inches of the battery. Make sure the wire is not damaged or pinched during installation. Install protective grommets when routing wires through the firewall or other sheet metal.
- GND: Connect to the vehicle's chassis. Refer to the picture below.

Factory Bolt Ring Connector Ground Wire Note: Remove any paint Star Washer

below ring connector.

 REM: Connect to the "Remote Out" lead from the source unit or to a source of switched +12V (ACC).

Aux Output Connectors (RCA)

• Nonfiltered pass-through output. Connect to the input of an additional amplifier.

6 Input Connectors (RCA)

 Connect to the RCA outputs from the source unit or signal processor.

(3) Input-Level Control

- Used to match the input level of the amplifier to the output level of the source unit.
- See **(**) for the adjustment procedure.

Protect LED

 Illuminated under any of the following fault conditions: battery over/under voltage, short circuit in speaker wires, amplifier is too hot, amplifier's output circuit has failed (DC voltage is present in the amplifier's output).

13 Low-Pass Filter Frequency Control

- 12dB/octave low-pass filter, variable from 32Hz to 320Hz.
- See for the adjustment procedure.

Power On LED

• Illuminated when the amplifier is on.

Setting Input Level

- A Turn Input Level control counterclockwise to 6V (minimim).
- B With a dynamic music track playing, turn the head unit's volume control to the 3/4 position.
- Turn Input Level control clockwise until the bass output is proportionate to the output of the high-frequency speakers, according to your preference.
- Input level is now adjusted correctly.

1 Setting the Crossover

A Crossover setting for subwoofers.

Note: Acceptable frequency ranges are indicated in gray.



Harman Consumer Group, Inc. 250 Crossways Park Drive, Woodbury, NY 11797 www.jbl.com

© 2008 Harman International Industries, Incorporated. All rights reserved. JBL is a trademark of Harman International Industries, Incorporated, registered in the United States and/or other countries. GT Series is a trademark of Harman International Industries, Incorporated.

Part No. GT5A30110M 7/08

H A Harman International Company

Declaration of Conformity



We, Harman Consumer Group, Inc. 2, route de Tours 72500 Château du Loir France

declare in own responsibility that the product described in this owner's manual is in compliance with technical standards:

EN 55013:2001+A1:2003

EN 55020:2002+A1:2003

lh-yells Klaus Lebherz Harman Consumer Group, Inc. Château du Loir, France 7/08