
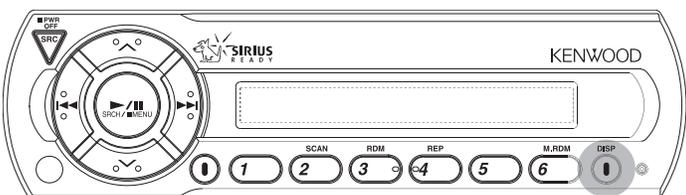
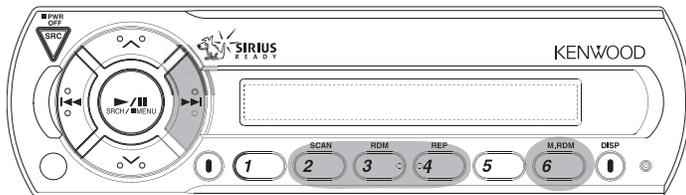


## KCA-R70FM Instruction Manual Addendum:

### Kenwood Music Keg features

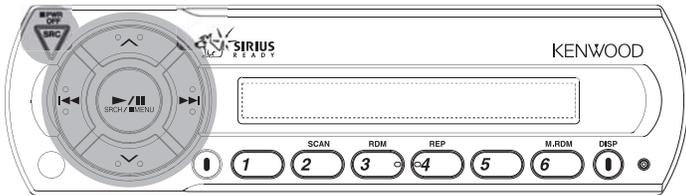

### Kenwood Music Keg connection note

If you are using the KCA-R70FM and a Kenwood Music Keg with a head unit that has an Aux (preamp) Input, you can connect the Music Keg's preamp outputs directly to the head unit's Aux Inputs and use the KCA-R70FM to control the Music Keg without using the FM modulator for the audio signal. Consult the instruction manuals for the Music Keg and the head unit for further information.

### Playing Songs

#### Select the Kenwood Music Keg

Press the [SRC] button repeatedly until the display reads "CHANGER"

#### Selecting playlists:

Press the [^] button to move to the next playlist

Press the [v] button to move to the previous playlist

#### Selecting songs:

Press the [>>I] button to skip to the next song

Press the [I<<] button to skip to the previous song

- The selected song plays automatically

#### Pausing a song:

Press the [>/II] button to pause the song; press the button again to resume playing the song

#### Scanning songs:

You can play the first part of each song in the selected playlist and select the song you want to listen to

Press the [SCAN] button to begin scanning songs

Press the [SCAN] button again when you hear the song you want to play

#### Random Play:

Play all the songs in a playlist or in the Music Keg in random order

Press the [RDM] button to play all of the songs in the currently-selected playlist randomly; press the button again to stop Random Play

Press the [M.RDM] button to play all of the songs in the Music Keg randomly; press the button again to stop Random Play

- Press the [>>I] button to skip to the next randomly selected song
- When Random Play is active, the "RDM" indicator illuminates. In [RDM] mode the track number flashes; in [M.RDM] mode the disc and track numbers flash.

#### Repeat Play:

You can repeat a single song, or all the songs in a playlist

Press the [REP] button to repeat the current song

Press the [REP] button again to repeat all the songs in the currently-selected playlist

Press the [REP] button again to stop Repeat Play

### Viewing Information on the Display

Press the [DISP] button repeatedly to cycle through the following information (up to 36 characters):





P.TIME (elapsed time of the current song)

D.TITLE (name of the current playlist)

T.TITLE (name of the current track)

## KCA-R70FM Instruction Manual Addendum:

### Sirius Satellite Radio tuner features

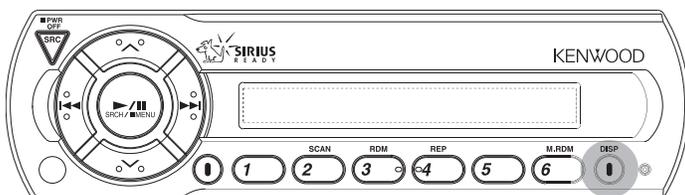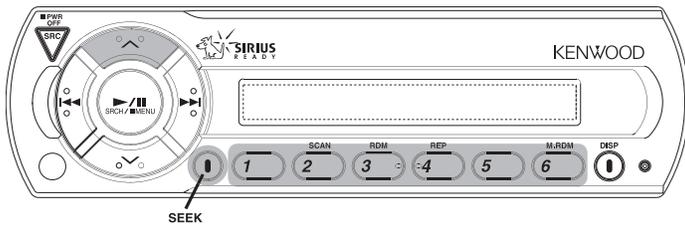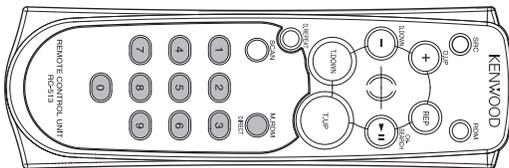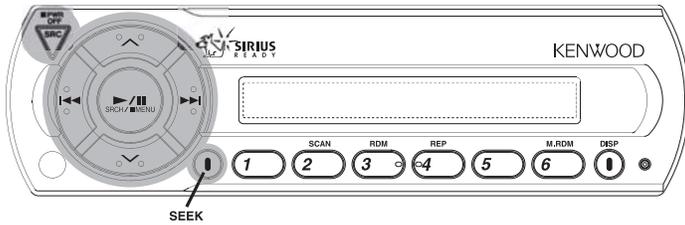

### Listening to Radio Stations

#### Select the Sirius mode:

Press the [SRC] button until the display reads "SIRIUS"

#### Selecting a Category:

Press the [SRCH (>/II)] button

Press the [^] button to move to the next category

Press the [v] button to move to the previous category

#### Selecting a Channel:

Press the [>>I] button to skip to the next channel

Press the [I<<] button to skip to the previous channel

#### Scanning Channels:

Press the [SEEK] button so the display shows "SEEK 1"

Press and hold the [SEEK] button for at least one second

Release the [SEEK] button when you hear the channel you want to listen to

#### Selecting a Channel Directly (using the remote):

You can use the remote to select a channel directly by number

Press the [DIRECT] button on the remote

Use the remote's number buttons to enter the channel number

Press the [I<<] or [>>I] button to receive the channel

- You can select up to Channel number 223
- If you don't press a button for 10 seconds, the Direct Access mode is automatically cancelled

### Using Station Presets with Sirius Satellite Radio

#### Select the Preset Band:

Press the [^] button. The Preset Band cycles between SR1/SR2/SR3/SR4 with each press of the button.

#### Entering a Channel in memory:

Press the [^] button to select the desired Preset Band

Select the Channel you want to put into memory (see above)

Press and hold a preset [#1] - [#6] button for at least 2 seconds to memorize the station in that position

- The preset number display will blink once

#### Selecting a Preset Channel:

Press the [^] button to select the desired Preset Band

Press the desired preset button [#1] - [#6]

#### Scanning Preset Channels

Press the [SEEK] button so the display shows "SEEK 2"

Press the [>>I] button to skip to the next preset

Press the [I<<] button to skip to the previous preset

### Viewing Information on the Display

Press the [DISP] button repeatedly to cycle through the following information:

CHANNEL (name of the current channel)

SONG (name of the currently-playing song)

ARTIST (name of the currently-playing artist)

CATEGORY (name of the current category)

ALBUM (name of the current album)