

OWNERS MANUAL



7.2" ROOF MOUNT TFT-LCD MONITOR
YOU'RE NOW READY FOR
MORE FUN ON
THE ROAD THAN EVER BEFORE



LEGACY[®]
7.2" ROOF MOUNT TFT LCD MONITOR

LSWR-7100

WWW.LEGACYCARAUDIO.COM

YOU'RE NOW READY FOR MORE FUN ON THE ROAD THAN EVER BEFORE

7.2" ROOF MOUNT TFT - LCD MONITOR OSD ADJUSTMENT

1. Press the POWER ON/OFF button on the monitor or remote unit to turn on the power.
 - a. Touch power switch on the monitor to select video/audio inputs.
 - b. Press power switch on the monitor 2 seconds to turn off the monitor
2. Press MENU button on the monitor or remote unit to active the OSD function show on the LCD screen and press again to select the adjustment item as below.
 - BRIGHTNESS
 - CONTRAST
 - COLOR
 - VOLUME
 - SATURATION
3. Press UP/DOWN button on the monitor or remote unit to increase or decrease the value of the adjustment functions for optimum viewing.
 - REMOTE CONTROL UNIT
 - POWER on/off

FEATURES ON SCREEN DISPLAY CONTROL
ON SCREEN DISPLAY CONTROL
WIDE SCREEN LCD PANEL
SUPER BRIGHT LCD PANEL
FM signal output for wireless headphone


4. WIRE CONNECTION

Red wire: +ve
Black wire: -ve
Violet wire: none
Yellow RCA Jack: Video1 In
White RCA Jack: Video2 In

5. ACCESSORIES

EXTENSION MINIDIN CABLE 1 PC
REMOTE CONTROL UNIT 1 PC
VIDEO CABLE 1 PC
MOUNTING PLATE 1 PC

6. LCD MONITOR REMOTE CONTROL

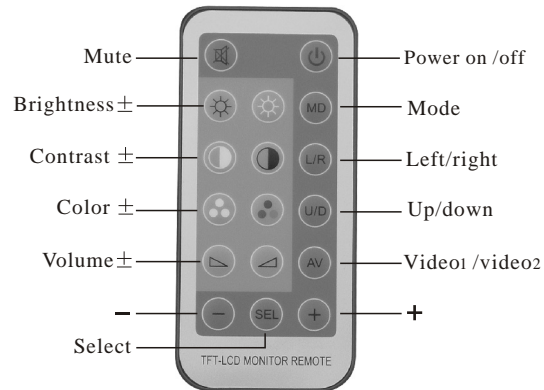

SPECIFICATIONS:

DISPLAY.....	7.2" WIDE SCREEN TFT-LCD
BACK LIGHT	BUILT IN CCFT
DOT FORMAT	1440 x 480
VIDEO INPUT LEVEL	COMPOSITE 1.0V P-P/75 OHMS
VIDEO INPUT SYSTEMS.....	NTSC AUTO SWITCHING
POWER SOURCE.....	DC 12V +/- 15%
POWER CONSUMPTION	700Ma (max) / 10w (max)
OPERATION TEMPERATURE	-20 Celcius to + 75 Celcius
STORAGE TEMPERATURE	-30 Celcius to + 85 Celcius
DIMENSIONS	210 (W) x182 (H) x38.5 (D) mm
NET WEIGHT	0.9 KGS