


bellfree BF Colour Apartment Station

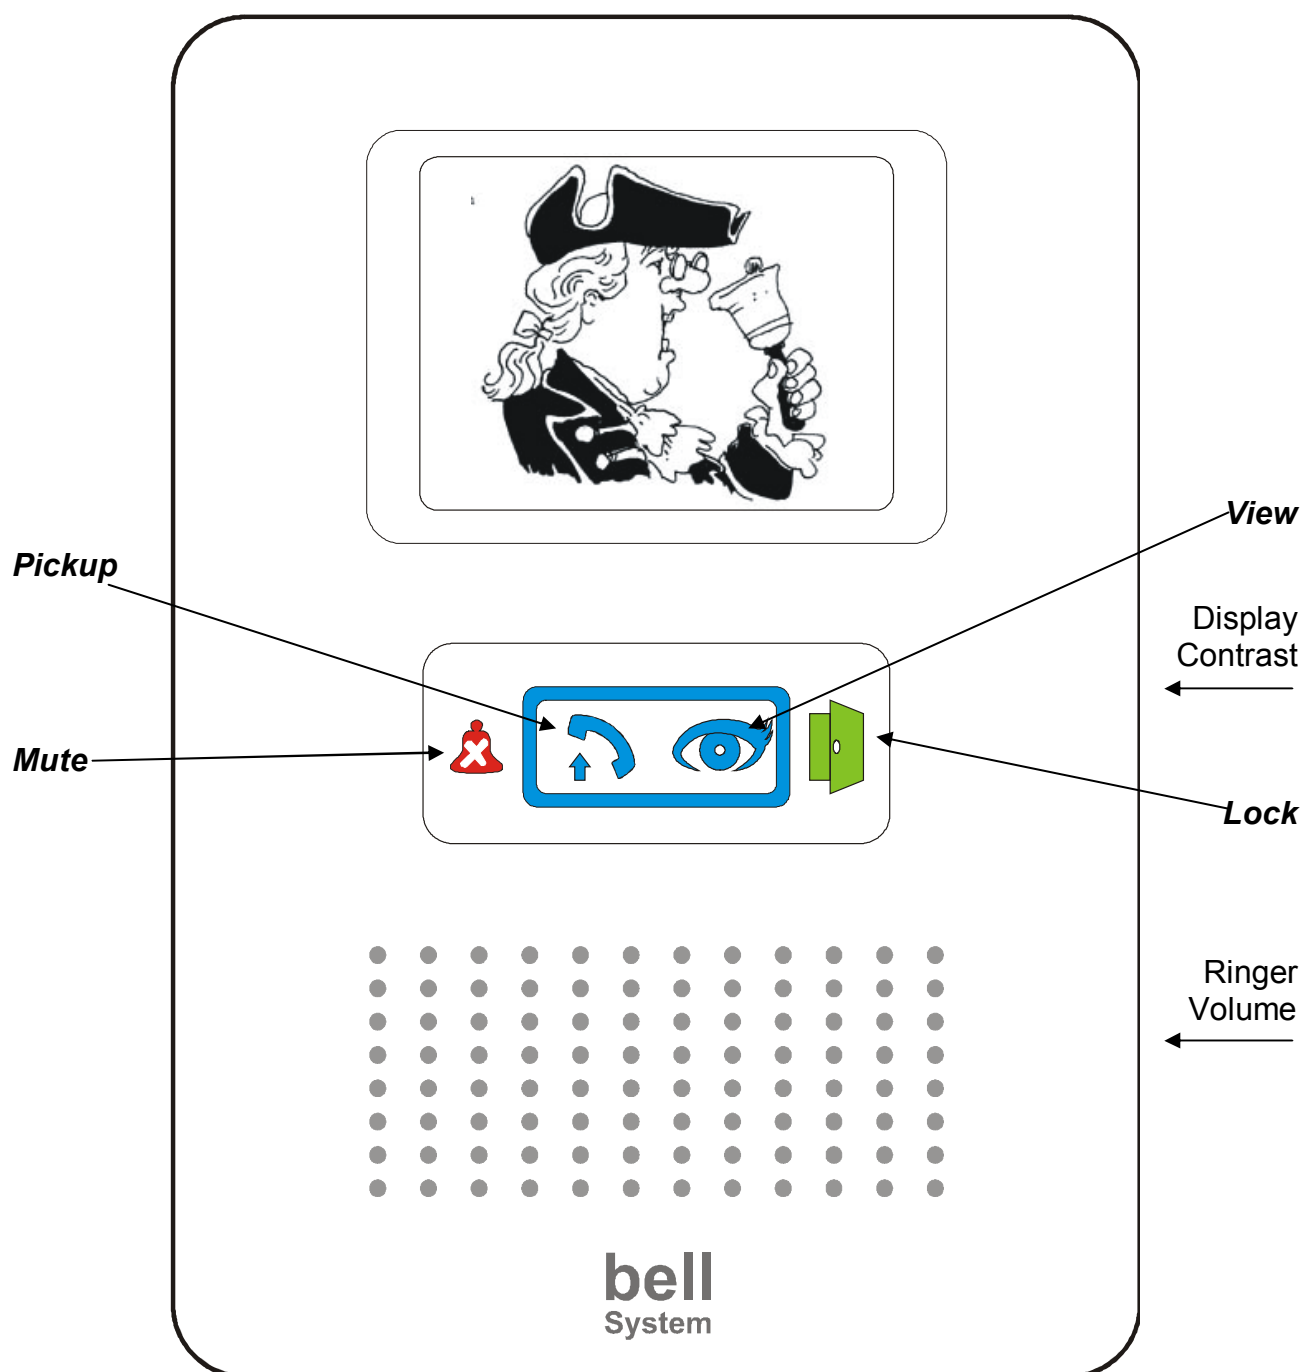

Symbol	Lamp	Steady	Flashing
Mute on/off	Red	Apartment station is muted	Door bell – All flash
Pickup / end	Blue	Call in progress	Ringing
View / camera select			
Lock	Green	Door is open	Touch to release lock

Call sequence

When the resident's address is entered followed by the **call** button the addressed apartment station will ring and its blue **pickup / view** lamp will flash highlighting the **pickup** and **view** symbols. The apartment station will continue to ring for typically up to 30 seconds or until the resident responds by touching the **view** symbol (see silent viewing below) or the **pickup** symbol. After using the **pickup** symbol the resident can freely converse with the visitor whose image is now displayed on the apartment station; at the same time the green **lock** symbol will flash to highlight the **lock** function.

The call may be terminated by touching the **pickup** symbol again or more usually by touching the **lock** symbol first to allow the visitor access through the entrance; the speech and picture will persist for a further 3 seconds while the door is being released.

Silent viewing

When the apartment station is ringing the resident can touch the **view** symbol to answer the call instead of the **pickup** symbol; this will stop the apartment station ringing and enable them to view the visitor for up to typically 60 seconds or until the **lock** symbol is touched to release the door. Silent viewing can be 'normalised' at any time by touching the **pickup** symbol and conversing with the visitor as described above.

Apartment Station Controls

The diagram in the introduction shows the apartment station and its controls. The default setting is ringer volume halfway (slide finger up and down) and contrast fully down.

Ringer Mute

The resident can mute the ringing sound in the apartment station when they do not wish to be disturbed. Ringer mute is activated by touching the **mute** symbol on the apartment station, which then illuminates in red as a reminder. Touching the **mute** symbol a second time will disengage the mute function. Ringer Mute only stops the audible ring, but the blue ring lamp will still flash and all other functions work normally. Ringer mute will continue for the pre-set time even if a call is answered.

During installation it is possible to set a time limit for the mute function in various values from 2 minutes up to 10 hours or indefinitely. When this time period has elapsed the mute function will automatically disengage. Default timeout is indefinite.

Door Status Indication (optional)

The green **lock** lamp on the apartment station will illuminate to warn the resident that a door has been left open following a call. This feature requires a door monitor contact to be fitted.

Door bell (optional)

Pressing the door bell outside the flat rings (different sound to a normal call) the apartment station for a short period, flashing all buttons at the same time.