


# ET 8 and 12 QUICK PROGRAMMING GUIDE

2900 Adams Street Suite A-25 Riverside, CA 92504 (877) 922-2782 www.aquaconserve.com

## ET 8 and 12 Keyboard Guide October 20th, 2005




Keys:

More: Increase Value or select ON. Less: Decease Value or select OFF. Next: Next item to change. Previous: Previous item to change.


**Dial:** Rotate the dial to select the item to view or modify.


#### Secondary functions of the keys:

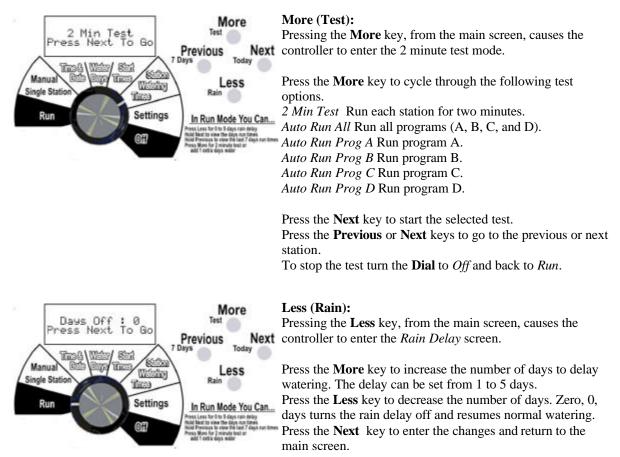

For more information please refer to your User's Guide.


## ET 8 and 12 Quick Programming Guide October 21, 2005

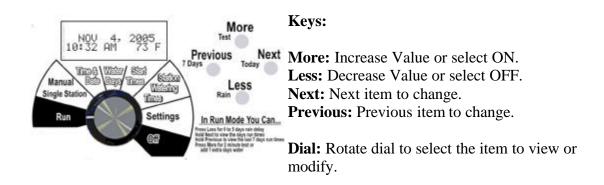



#### **Time and Date:**

Turn the Dial to the position labeled *Time & Date*.
Use the More or Less keys to select the correct month.
Press the Next key to select the date.
Use the More or Less keys to select the correct date.
Press the Next key to select the year.
Press the More or Less keys to select the correct year.
Press the Next key to select the hour.
Use the More or Less keys to select the correct hour.
Press the Next key to select the minutes.
Press the More or Less keys to select the correct hour.



#### Set Watering Days:

Turn the **Dial** to the position labeled *Days*.

Use the **More** or **Less** keys to select the Program to enter the watering days.

Press the **Next** key to select the watering days options.

Use the **More** or **Less** keys to select the option. Options are


OFF Program does not water.

*Odd Days* Program waters on odd days of the year. *Even Days* Program waters on even days of the year.

*Select Days* Select which days of the week to water.

Skip # Days

#### Set Watering Start Time:



Turn the **Dial** to the position labeled *Times*.

Use the **More** or **Less** keys to select the Program to enter the start times.

Press the **Next** key to select the first start time's hour.

Use the **More** or **Less** keys to select the start hour. Press the **Next** key to select the first start time's minutes.

Press the **More** or **Less** keys to select the start minutes.

Repeat the above steps for the 2nd through 4th start times. Repeat for the other Programs

Reg: 01 Lock:OFF Accum:ON WR%100

Manual

Single Static

Run

Ship


Stelle

Watchey

Settings

Time

ണ



#### **Set Station Run Times:**

Turn the **Dial** to the position labeled *Station Watering Times*:

Use the **More** or **Less** keys to select the station to program.

Press the **Next** key to set the station's *Program A* run time.

Use the **More** or **Less** keys to set the *Summer Run Time* in minutes.

Press the **Next** key to set the station's *Program B* run time.

Repeat the above steps for all of the run times and stations.

#### Settings:

More


Less

In Run Mode You Can

Test

Rain

Previous



Use the **More** or **Less** keys to select the correct *Reg*ion. Refer to the User Manual for the correct region number.

Press the **Next** key to select the *Lock*.

Press the **More** key to turn the *Lock* ON. Press the **Less** key to turn the *Lock* OFF.

Press the **Next** key to select *Accum*ulation.


Press the More key to turn Accumulation ON.

Press the Less key to turn Accumulation OFF.

Press the **Next** key to select the Water Reduction percentage.

Use the **More** or **Less** keys to select the desired *W*ater *R*eduction percentage.

This completes the basic programming of the controller.



#### 2 Minute Test:


From the *Run* screen press the **More** (Test) key.

Press the **More** key to cycle through the following test options.

2 Min Test Run each station for two minutes. Auto Run All Run all programs (A, B, C, and D). Auto Run Prog A Run program A. Auto Run Prog B Run program B. Auto Run Prog C Run program C. Auto Run Prog D Run program D.

Press the **Next** key to run the selected test. Turn the **Dial** to *Off* and then back to *Run* to quit the test.

#### Manual Mode:



Turn the **Dial** to the position labeled *Manual Single Station*.


Use the **More** or **Less** key to select the station. Press the **Next** key to select the minutes.

Use the **More** or **Less** keys to select the number of minutes to run the selected station.

Turn the **Dial** to the position labeled *Run* to run the station for the selected number of minutes.

Turn the **Dial** to *Off* and then back to *Run* to quit the manual cycle.

For more information please refer to your User's Guide.

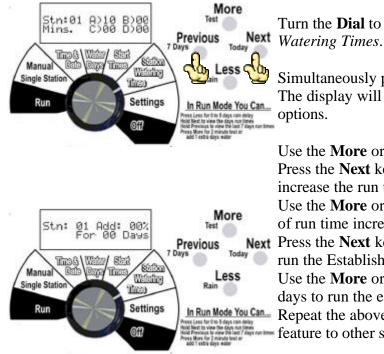

#### **Establishment:**

Turn the **Dial** to the position labeled *Station Watering Times*.

Simultaneously press the **Previous** and **Next** keys. The display will change to show the Establishment options.


Use the **More** or **Less** keys to select the station. Press the **Next** key to select the percentage to increase the run time for the selected station. Use the **More** or **Less** keys to enter the percentage of run time increase.

Next Press the Next key to select the number of days to run the Establishment feature.

Use the **More** or **Less** keys to enter the number of days to run the establishment feature.

Repeat the above step to add the establishment feature to other stations.

Turn the **Dial** to exit the establishment screen.




#### **Resetting the Controller:**

# *Important: The reset will clear all programming and settings.*

Disconnect the battery from the controller. Disconnect the AC power from the controller.

Simultaneously press the **Previous** and **Next** keys. While pressing the keys apply power to the unit.

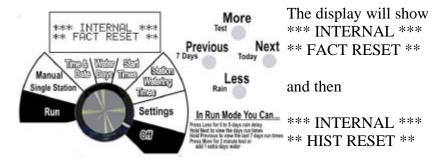

The unit is now reset.