



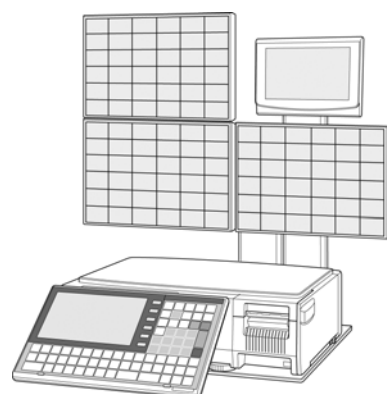

uni-5

User's Manual

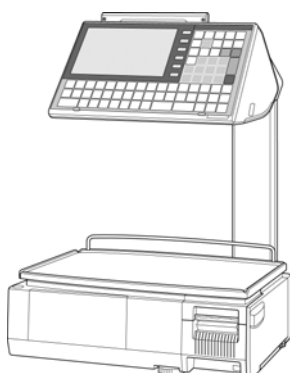

Ver. 1.02

IMPORTANT

- Read this manual thoroughly, and do not perform installation, operation, maintenance, or inspection unless you fully understand all of the contents.
- Keep this manual in a safe place where you can refer to it easily while installing, operating, and carrying out maintenance or inspections.

ISHIDA CO., LTD.

© ISHIDA Co., Ltd. 2008 All rights are reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means mechanical, electronic, photocopying, recording, or otherwise without prior written permission of ISHIDA.

ADJUSTMENT MODE

12.1 ADJUSTMENT MODE ENTRY

1. Make sure that the initial screen is displayed.

PLU 0					21-JUN-2007(THU) 16:31		TARE kg		
Check the weight before operation. Enter PLU No. and press [PLU] key.							0.000		
							ZERO WEIGHT kg		
							0.000		
							UNIT PRICE £/kg		
							0.00		
							TOTAL PRICE £		
							0.00		
GROUND BEEF (TEXAS)		GROUND BEEF (OREGON)		GROUND BEEF (UTAH)		SLICED BEEF		SLICED BEEF SPECIAL	
ROAST BEEF		ROAST BEEF SPECIAL		LAMB CHOPS		LAMB CHOPS SPECIAL		T-BONE STEAK	
OPERATOR GROUP		PRN MD. <AUTO>		CASSETTE 1		SUBTOTAL DISPLAY			

2. Press the [MODE] key on the key sheet.

Mode

The Operation Mode screen appears. Then, press the [ADJUST] button on the screen


MENU SELECT		21-JUN-2007(THU) 16:31		1/1	
OPERATE TOTAL PROGRAM SETUP ADJUST		SALES ACC1 ACC2 ACC3 TOTAL ADJUST			

3. The Adjustment Menu Select screen appears.


MENU SELECT		21-JUN-2007(THU) 16:31		1/1	
OPERATE TOTAL PROGRAM SETUP ADJUST		TIME / DATE SET TOUCH PANEL DISPLAY CHECK			

12.2 DATE / TIME ADJUSTMENT

1. Press the "TIME / DATE SET" field on the Adjustment Menu Select screen.


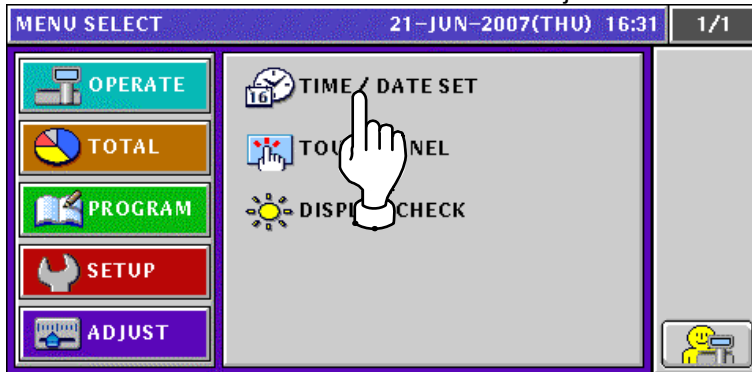


2. The Time/Date Set screen appears.

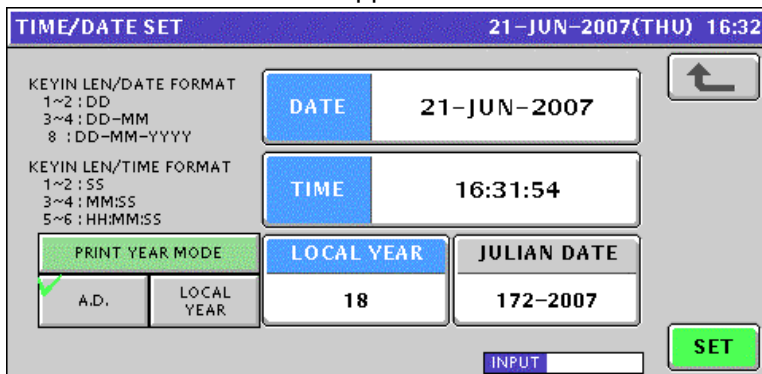

3. To change the date, enter a new date and press the "DATE" field.

EXAMPLE 22 June, 2007

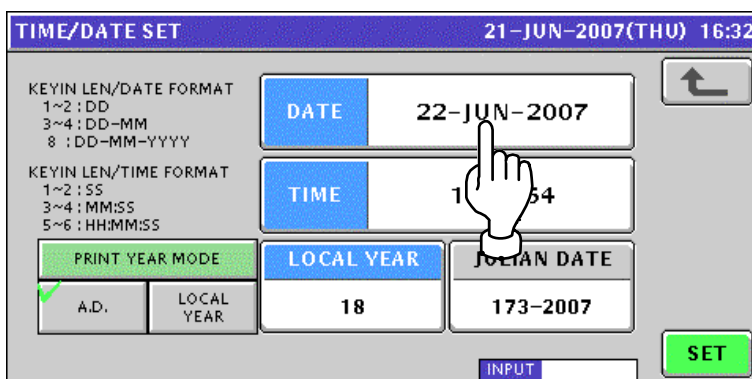

4. To change the time, enter a new time and press the "TIME" field.

EXAMPLE 13:50:00

The screenshot shows the 'TIME/DATE SET' screen. At the top, it displays '21-JUN-2007(THU) 16:32'. On the left, there are format options for KEYIN LEN/DATE FORMAT and KEYIN LEN/TIME FORMAT. The 'DATE' field shows '22-JUN-2007'. The 'TIME' field shows '13:50:00' with a hand cursor pointing to it. Below the time field, there are 'LOCAL YEAR' (18) and 'JULIAN DATE' (173-2007) fields. A 'PRINT YEAR MODE' section shows 'A.D.' and 'LOCAL YEAR' with a checkmark next to 'A.D.'. At the bottom right is a green 'SET' button. An 'INPUT' field is at the bottom center.

5. To register new date and time, press the [SET] button.


This screenshot is identical to the previous one, but a hand cursor is now pointing at the green 'SET' button at the bottom right.

6. The confirmation screen appears. Then, press the [EXEC] button for execution.


The screenshot shows a confirmation screen titled 'CHECKING CLOCK SETTING'. It contains the text: 'IF YOU CHANGE TO PROGRAMED DATE AND TIME [22-JUN-2007/13:50:00] PRESS [EXEC].'. At the bottom left, there is a field showing '1801 - 0000'. At the bottom right, there are two buttons: a yellow 'EXEC' button and a red 'STOP' button. A hand cursor is pointing at the 'EXEC' button.

12.3 TOUCH PANEL ADJUSTMENT


1. Press the "TOUCH PANEL" field on the Adjustment Menu Select screen.

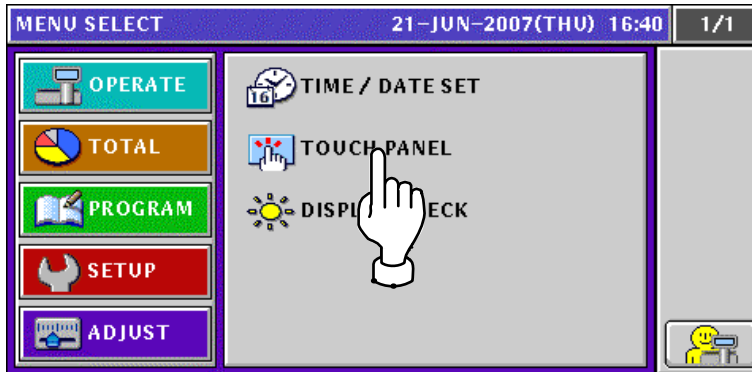


2. The Touch Panel screen appears.

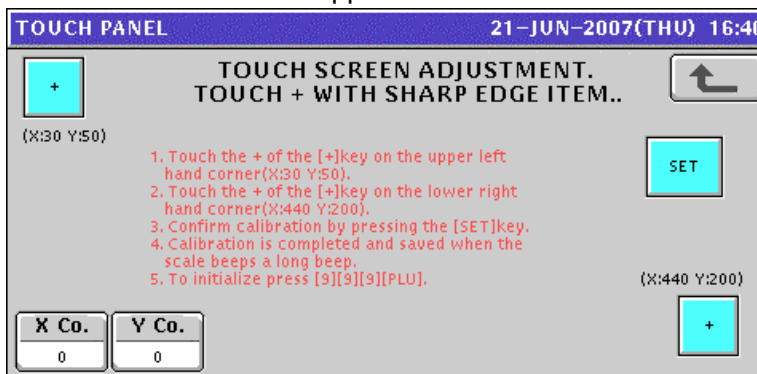


3. Press the [+] button on the upper left of the screen.

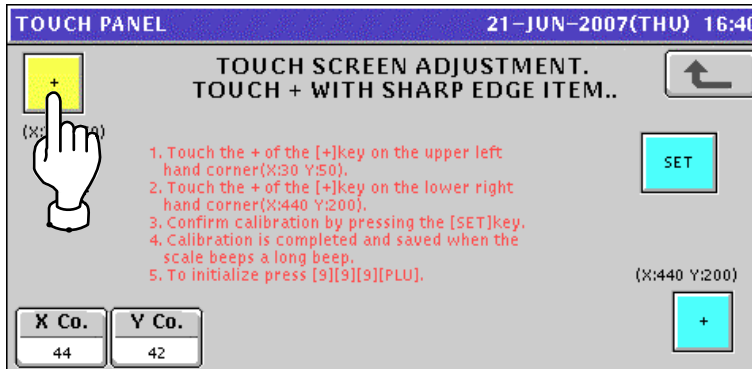


4. Press the [+] button on the lower right of the screen.

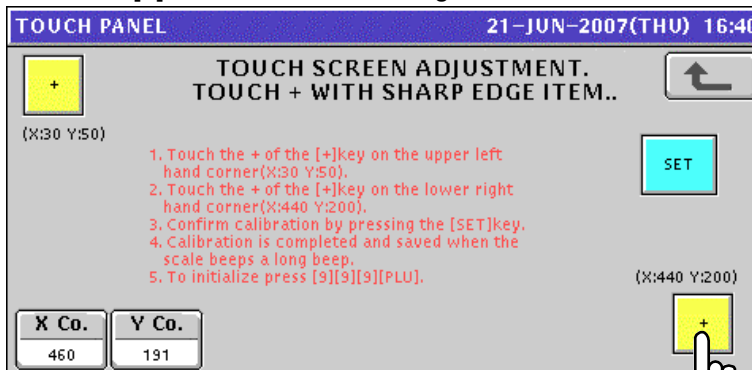

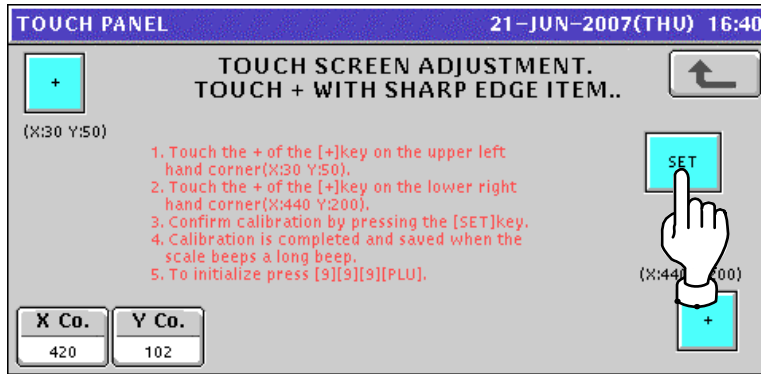
5. Press the [SET] button to confirm calibration.

12.4 DISPLAY CHECK


1. Press the "DISPLAY CHECK" field on the Adjustment Menu Select screen.

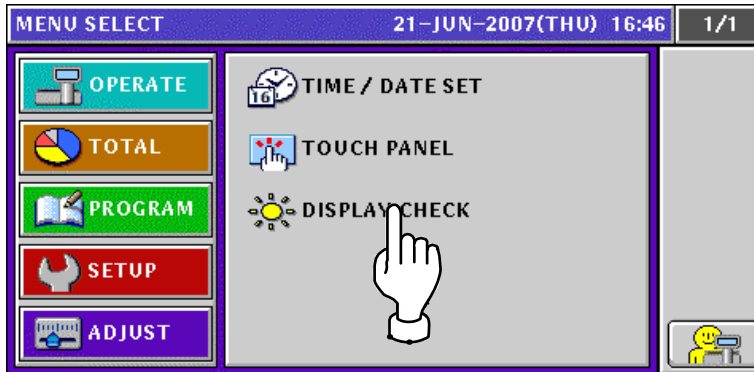


2. The Display Check (Vertical) screen appears. Press the [-] or [+] button to adjust vertical brightnesses for the operator and customer displays.

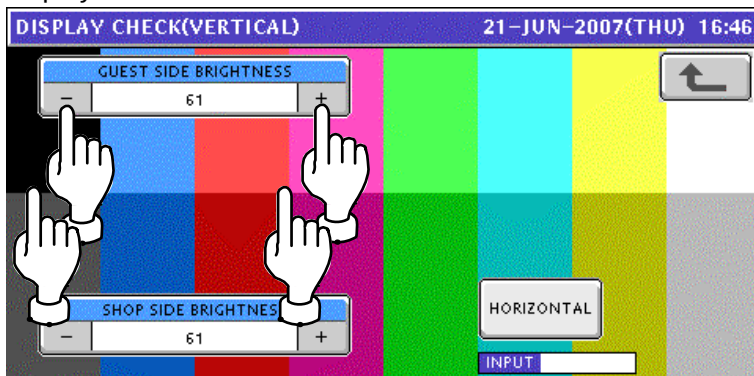

3. Press the [HORIZONTAL] button to change to the horizontal display check screen.

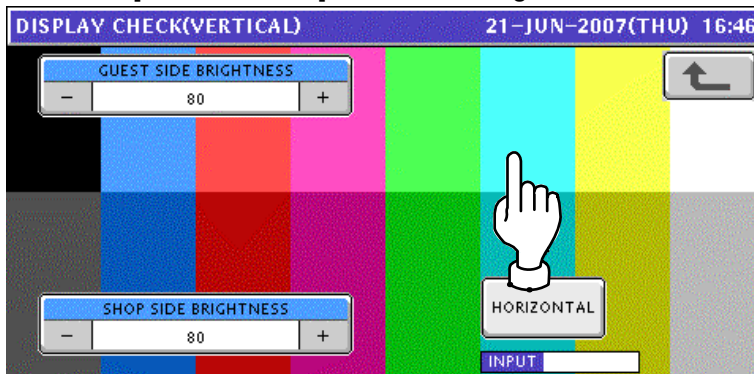

4. The Display Check (Horizontal) screen appears. Press the [-] or [+] button to adjust vertical brightnesses for the operator and customer displays.

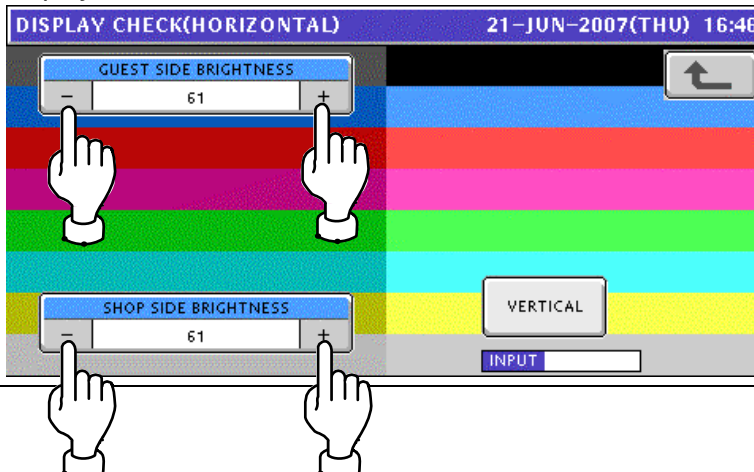


BEFORE USE


1.1 SPECIFICATIONS

Items	Descriptions
Use conditions	Temperature: 5 to 35°C Humidity: 30 to 85%, Non condensing.
Power supply:	AC100 – 240V, 50 / 60Hz
Power consumption	1.0A/0.5A
Weight	Bench type: Approx.11.5 kg Pole type: Approx.12.5 kg
Weighing capacity	15 kg: 0 to 6/0.002 kg, 6 to 15/0.005 kg
Weighing accuracy	1/3000
Operator/Customer display	7.0 inch color, monochrome liquid crystal with back light, 480 X 234dots
Printing method	Direct thermal method
Thermal head	2 inches (448dots) and 8 dots/mm
Printing speed	100mm/second, 120mm/second <i>Note: The printing speed may vary according to label conditions.</i>
Printing effective size	56mm
Label size	Label width: 30mm to 60mm Label length: 20mm to 150mm
Number of label cassettes	7 cassettes
Input/Output	LAN 1 channel USB 1 channel CF 1 channel Drawer 2 channels
Program store medium	Flash ROM (32M bytes)


1.2 MODEL VARIATIONS

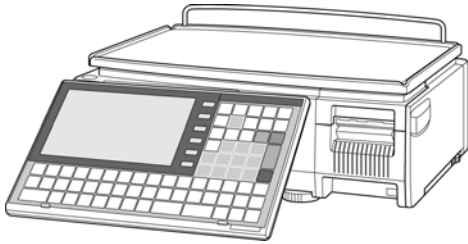


Bench Type

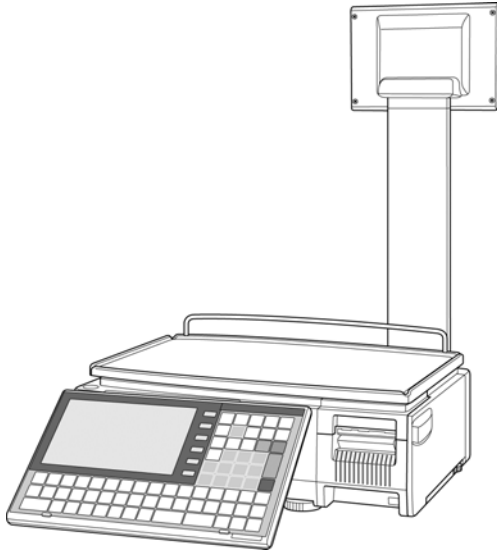

Pole Type

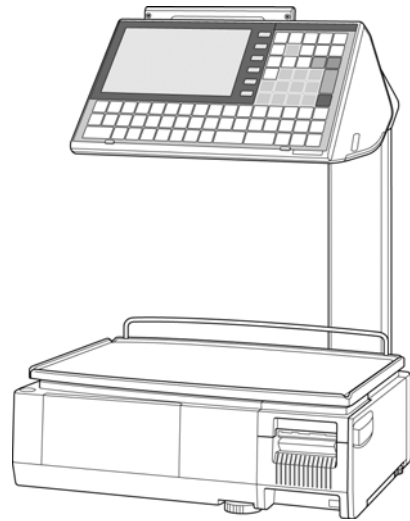


Elevated Type

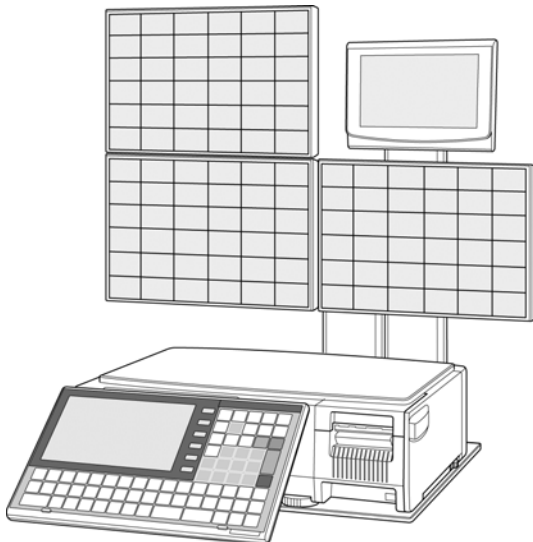


Self-service Type

1.3 PART NAMES AND FUNCTIONS


1.3.1 FRONT VIEW (BENCH TYPE)

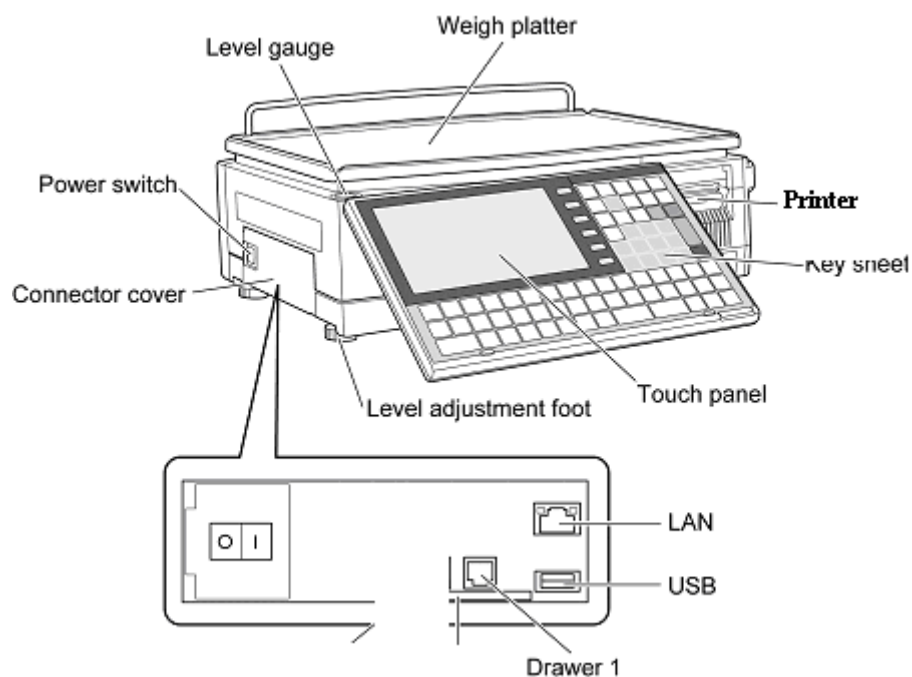

1.3.2 REAR VIEW (BENCH TYPE)

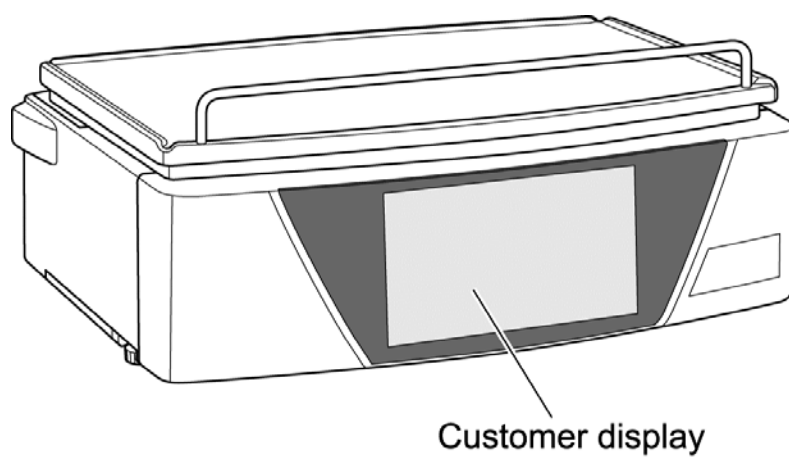

1.4 OPERATION PANEL

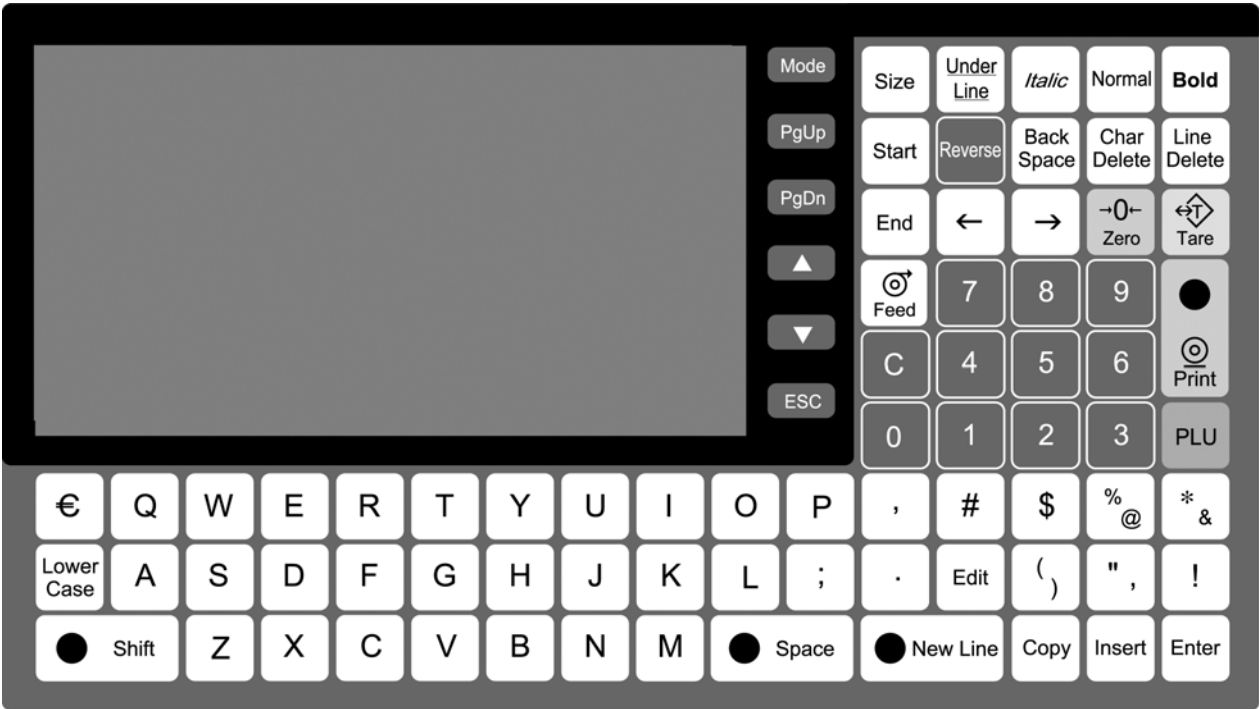

■ Keys for Usual Use

 Used to delete an entered numerical value.

 Used to display Menu Select screen.

 Used to call a registered product data.

 Used to turn the previous page.

 Used to feed labels.

 Used to turn the next page.

 Used to issue a label.

 Used to jump to the top page.

 Used to enter tare weight.

 Used to jump to the end page.

 Used to reset a weigh to zero.


 Used to escape from the current mode.

1.5 ADJUSTMENTS

1.5.1 LEVEL ADJUSTMENT (BENCH TYPE)


CAUTION Install the machine horizontally to use.

Be sure to turn off the power switch before placing the machine on a stable platform, and adjust the machine inclination by turning the four level adjustment feet so that the bubble is located at the center of the level gauge. Accurate measurements cannot be performed if it is not installed horizontally.

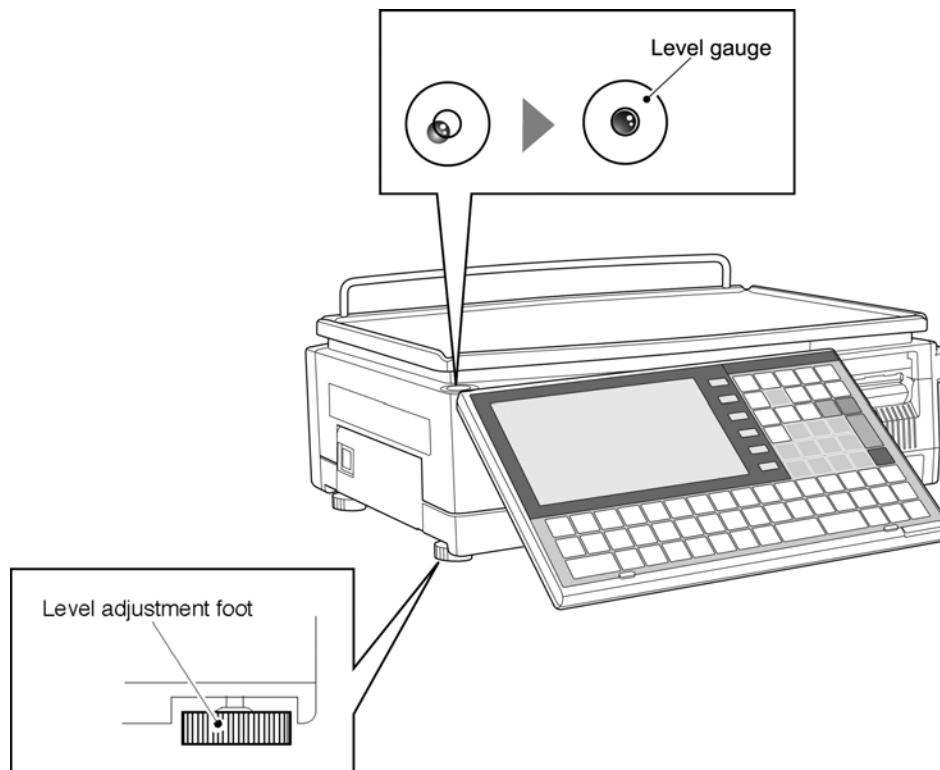


1.5.2 OPERATION PANEL ANGLE ADJUSTMENT (BENCH TYPE)

To obtain a better view, adjust the angle of the operation panel within the range between 0 and 70 degrees.

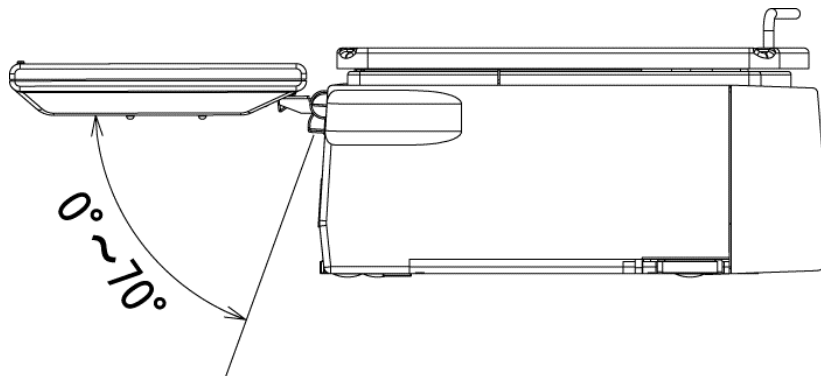


1.6 LABEL / RECEIPT ROLL LOADING



1. Open the cover on the side of main body.

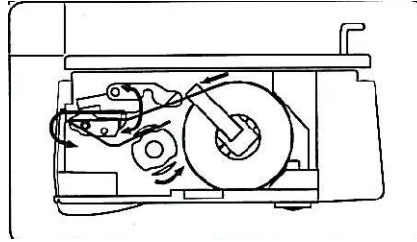


2. Set a new roll around the roll holder and raise the roll stopper to fix the roll position.

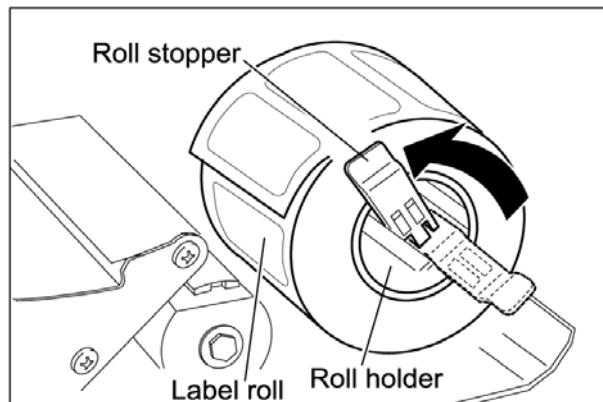



3. Thread the paper as shown in the figures below..

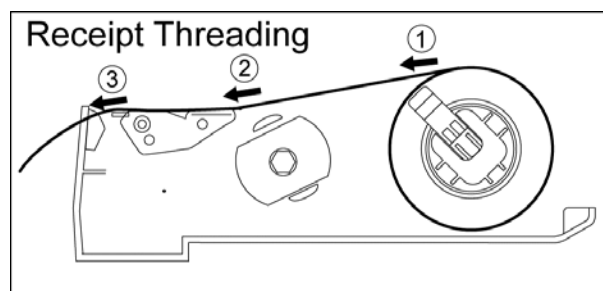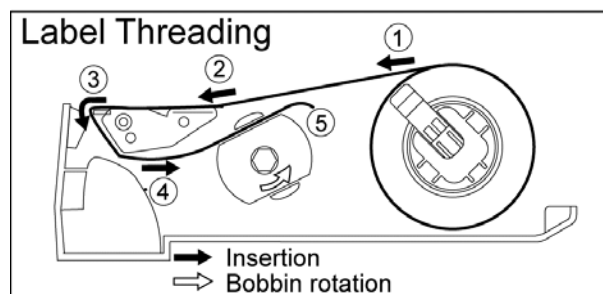


- 4** For labels, fix the paper end with the backing paper stopper, and gently turn the winding bobbin counterclockwise until the label becomes tight.

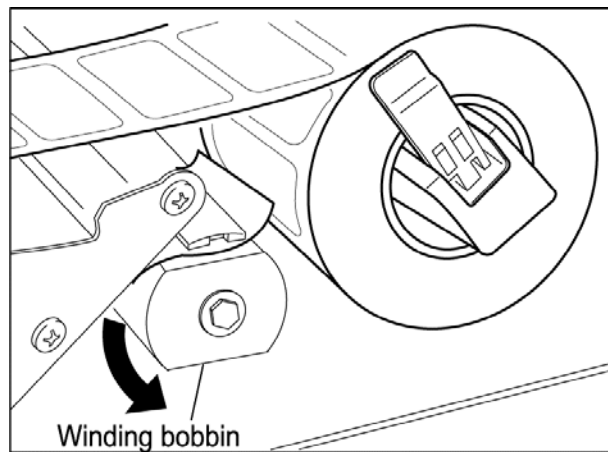

- 5.** Slide the label/receipt guide to help smooth paper feeding according to the paper width.

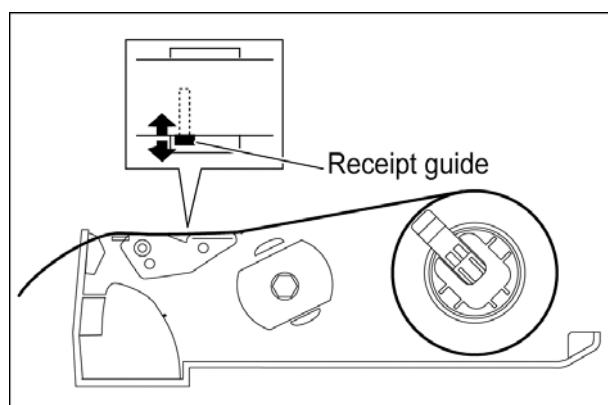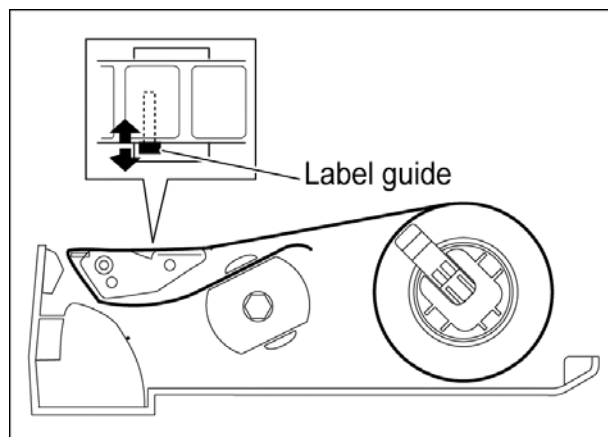

-
- 6.** For labels, press the [FEED] key on the key sheet to issue a label.
At this time, confirm that the label is completely peeled off.

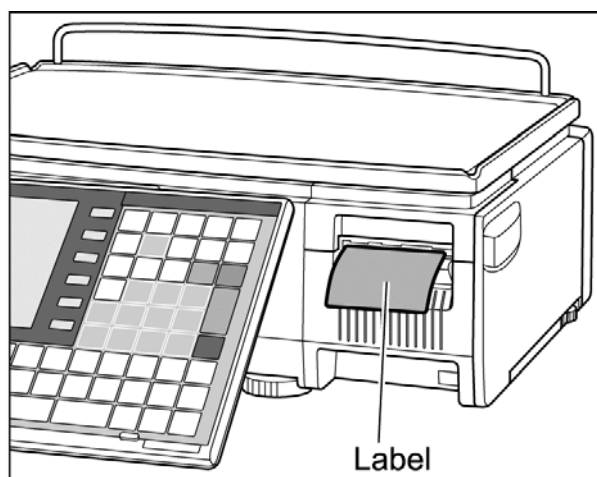


CAUTION

Confirm that the backing paper is wound up smoothly. If the backing paper is wound up diagonally, check that the label is set correctly.

1.7 REMOVING & REPLACING OF WEIGH PLATTER


1.7.1 REMOVING THE WEIGH PLATTER

When removing the weigh platter from the main body, lift the front side to pull out the two pins from the two rubber platter holders and remove the platter by pulling it to disengage the two hooks at the rear side of the platter.

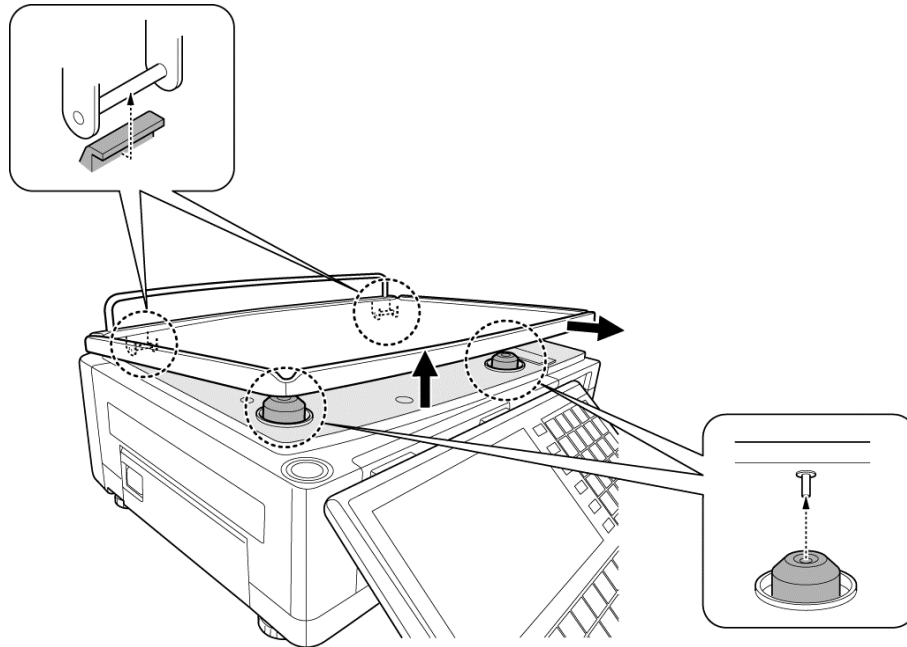

1.7.2 REPLACING THE WEIGH PLATTER

When replacing the weigh platter onto the main body, engage the two hooks at the rear side of the platter and lower the platter so that the two pins on the bottom of the platter are inserted into holes of the rubber platter holders.

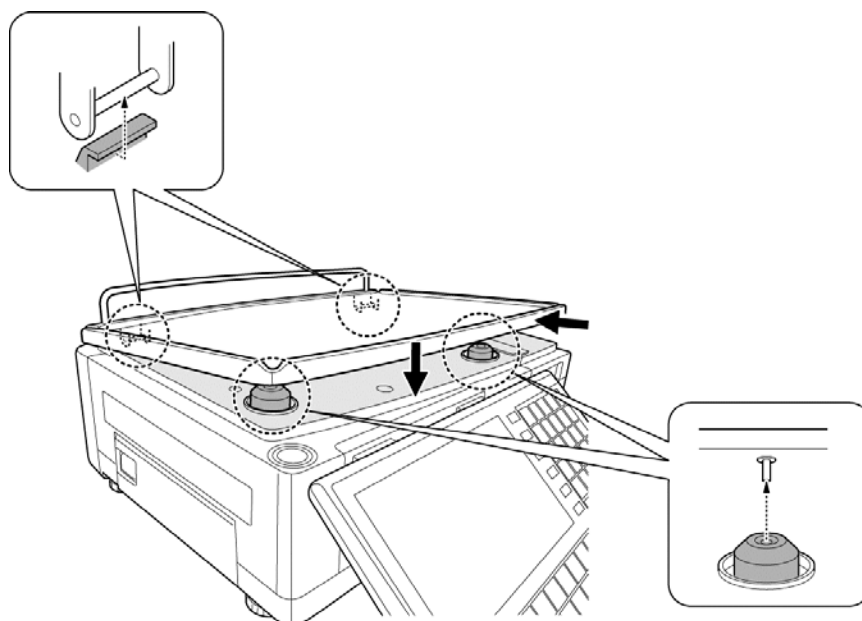

1.8.4 PRECAUTIONS WHEN USING CLEANING FLUIDS

CAUTION

Use a soft cloth and a neutral detergent to clean the machine.
Do not use thinner, benzene, etc. Doing so may damage the original safety functions.
For some parts, use cleaning fluid (isopropyl alcohol).



CAUTION

- Do not use cleaning fluid near fire as the fluid is flammable.
- Do not use cleaning fluid in a poorly ventilated area. Always provide adequate ventilation when cleaning.

Take the following actions in the event of an accident:

If the fluid gets in your eye

- Immediately wash your eye(s) with water for at least 15 minutes, and consult your doctor.
- If you wear contact lenses, remove and wash them.

If the fluid comes into contact with your skin

- Immediately rinse the area of contact with water, and then wash with soap.
- If you notice any skin abnormalities at the area of contact, or if any pain persists, consult your doctor.

If the fumes of the fluid are inhaled

- Immediately move the victim to an area where fresh air is available, and have the victim lie down and keep warm.
- If breathing becomes difficult or stops, provide artificial respiration and seek medical attention immediately.


If the fluid is swallowed

- Do not try to induce vomiting.
- Do not give the victim anything to drink, and do not rinse the mouth.
- If vomiting occurs naturally, have the victim lean forward to reduce risk of aspiration.
- Keep the victim warm and seek medical attention.

1.9 STARTING PROCEDURES


1.9.1 TURNING ON THE POWER

1. Push down the "I" side of the Power Switch to turn on the power.

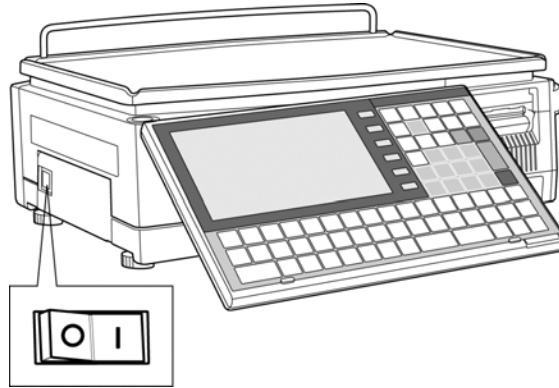

2. The Time Check screen appears. Then, check that displayed date and time agree with current date and time, and press the [ENTER] button on the screen to proceed to the next step.

Note: Refer to "Time/Date Set" menu in Adjust Mode when changing the date or time.

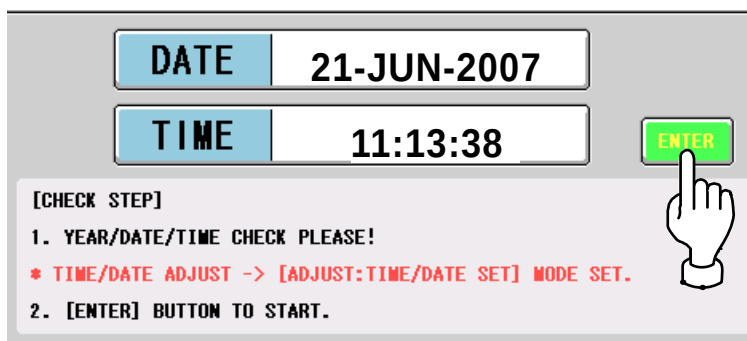

3. After a while, the initial screen appears.

PLU 0		21-JUN-2007(THU) 11:13				TARE	kg	0.000
 		Check the weight before operation. Enter PLU No. and press [PLU] key.				WEIGHT	kg	0.000
PLU No.				PRN MD.	0.000			
0				<MANUAL>				
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE	£/kg	0.00	
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE				
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID	TOTAL PRICE	£	0.00	
1								

1.9.2 PERFORMING ZERO ADJUSTMENT

1. If the weight value is not zero on the initial screen,

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
 Check the weight before operation. Enter PLU No. and press [PLU] key.					WEIGHT kg	0.000
					PRN MD.	
PLU No.				<MANUAL>		
0						
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE		
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID	TOTAL PRICE £	0.00
1						

Press the [ZERO] key on the key sheet to perform zero weight adjustment.




2. The "ZERO" indicator lights up and the weight value becomes zero.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
 Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
					PRN MD.	
PLU No.				<MANUAL>		
0						
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE		
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID	TOTAL PRICE £	0.00
1						

1.9.3 GETTING BACK TO THE INITIAL SCREEN

1. To get back to the initial screen from a Menu Select screen, press either the “SALES” field or the icon at the bottom right on the screen.

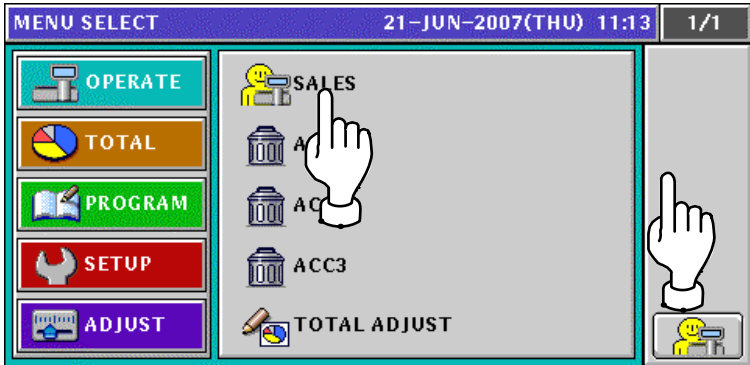

2. The initial screen appears.

PLU 0					21-JUN-2007(THU) 11:13		TARE kg	
							0.000	
Check the weight before operation. Enter PLU No. and press [PLU] key.							WEIGHT kg	
							0.000	
PLU No.				PRN MD.				
0				<MANUAL>				
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg			
					0.00			
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £			
					0.00			
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID				
1								

LABEL ISSUE

2.1 LABEL ISSUE WITHOUT OPERATOR

2.1.1 WEIGHING UNIT PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.	UNIT PRICE £/kg	0.00
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE		
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		0.00
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.	UNIT PRICE £/kg	0.00
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE		
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		0.00
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected PLU screen appears.

Without Preset Tare Weight

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
ROAST BEEF					ZERO WEIGHT kg	0.000
U/P	F/P	FIX UPR	FIX UPR + WEIGHT	COUPONMS	UNIT PRICE £/kg	4.00
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £	0.00
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

With Preset Tare Weight

PLU 6 21-JUN-2007(THU) 11:15					NET	PT	kg
 ROAST BEEF					0.050		
					ZERO	WEIGHT	kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	-0.050		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	UNIT PRICE £/kg		
0.00	0.00	0.0	0.00	0.00	4.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £		
0.0	21-06-07	27-06-07	<ADD>	0	0.00		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP			
<MANUAL>	<INDIV>	1					

Manual Tare Entry

To newly enter a tare weight or overwrite an existing tare weight, enter the tare weight using the numeric keys and press the “TARE” field on the screen.

EXAMPLE Tare weight “50g”

5


0

PLU 6 21-JUN-2007(THU) 11:15					NET	PT	kg
 ROAST BEEF					0.050		
					ZERO	WEIGHT	kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	-0.050		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	UNIT PRICE £/kg		
0.00	0.00	0.0	0.00	0.00	4.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £		
0.0	21-06-07	27-06-07	<ADD>	0	0.00		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP			
<MANUAL>	<INDIV>	1					

5. See Chapter 5 for more details about temporary change operations.

6. Put a product on the weigh platter.

PRODUCT



The weight is measured and the total price is calculated.

PLU 6 21-JUN-2007(THU) 11:15					TARE	kg
 ROAST BEEF					0.000	
					WEIGHT	kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	0.422	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	UNIT PRICE £/kg	
0.00	0.00	0.0	0.00	0.00	4.00	
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	1.69	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

7. When "MANUAL" is set in the Print Mode,

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					WEIGHT kg	0.422
					UNIT PRICE £/kg	4.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	TOTAL PRICE £	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	1.69	
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				


Press the [PRINT] key on the key sheet.



The label is issued.



Non-traceable products



Traceable products

When "AUTO" is set in the Print Mode,

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					WEIGHT kg	0.422
					UNIT PRICE £/kg	4.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	TOTAL PRICE £	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	1.69	
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<AUTO>	<INDIV>	0				

The label is automatically issued as soon as the weighing is stabilized.



Non-traceable products



Traceable products

2.1.2 WEIGHING FIXED PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
					Check the weight before operation. Enter PLU No. and press [PLU] key.	
PLU No.				PRN MD.	ZERO WEIGHT kg	0.000
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"

6 → PLU or

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
					Check the weight before operation. Enter PLU No. and press [PLU] key.	
PLU No.				PRN MD.	ZERO WEIGHT kg	0.000
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected PLU screen appears.

Without Preset Tare Weight

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
					ROAST BEEF	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	ZERO WEIGHT kg	0.000
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	FIXED PRICE £	4.00
<MANUAL>	<INDIV>	1				

With Preset Tare Weight

PLU 6					21-JUN-2007(THU) 11:15		NET	PT	kg
					ROAST BEEF			0.050	
								ZERO	WEIGHT
								-0.050	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS					
				0					
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)					
0.00	0.00	0.0	0.00	0.00					
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY					
0.0	21-06-07	27-06-07	<ADD>	0					
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP					
<MANUAL>	<INDIV>	0							
					FIXED PRICE		£		
							4.00		

Manual Tare Entry

To newly enter a tare weight or overwrite an existing tare weight, enter the tare weight using the numeric keys and press the "TARE" field on the screen.

EXAMPLE Tare weight "50g"

5

0




PLU 6					21-JUN-2007(THU) 11:15					NET	PT	kg
 ROAST BEEF										0.050		
										ZERO	WEIGHT	kg
										-0.050		
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS								
				0								
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)								
0.00	0.00	0.0	0.00	0.00								
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY								
0.0	21-06-07	27-06-07	<ADD>	0								
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP								
<MANUAL>	<INDIV>	0										
										FIXED PRICE £		
										4.00		

5. See Chapter 5 for more details about temporary change operations.

6. Put a product on the weigh platter.

PRODUCT



The weight is measured but the fixed price stays same.

PLU 6					21-JUN-2007(THU) 11:15					TARE		kg
					ROAST BEEF					0.000		
										WEIGHT		kg
										0.422		
U/P		F/P		FIX UPR		FIX UPR +WEIGHT		COUPONMS				
								0				
SPECIAL		- \$		- %		SP. (U/P)		- \$ (U/P)				
0.00		0.00		0.0		0.00		0.00				
- % (U/P)		P DATE		S DATE		TOTALADD		PRN QTY				
0.0		21-06-07		27-06-07		<ADD>		0				
PRN MD.		PEEL MD.		CASSETTE		MULTI		FUNCTION GROUP				
<MANUAL>		<INDIV>		0								
										FIXED PRICE		£
										4.00		

7. When "MANUAL" is set in the Print Mode,

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					WEIGHT kg	0.422
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	FIXED PRICE £	4.00
<MANUAL>	<INDIV>	0				

Press the [PRINT] key on the key sheet.



Non-traceable products



Traceable products


When "AUTO" is set in the Print Mode,

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					WEIGHT kg	0.422
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	FIXED PRICE £	4.00
<AUTO>	<INDIV>	0				

The label is automatically issued as soon as the weighing is stabilized.



Non-traceable products



Traceable products

2.1.3 PROCESSING FIXED PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0					21-JUN-2007(THU) 11:15		TARE kg	
Check the weight before operation. Enter PLU No. and press [PLU] key.							0.000	
PLU No. 0 PRN MD. <MANUAL>							ZERO WEIGHT kg 0.000	
RIB STEAK TOP SIRLOIN WHOLE ROUND STEAK BONELESS PORK CHOPS BONELESS SMOKED SAUSAGE							UNIT PRICE £/kg 0.00	
ROAST BEEF T-BONE STEAK GROUND BEEF EXTRA MAINE LOBSTER FRESH SALMON FILLET GUARANTEE							TOTAL PRICE £ 0.00	
CASSETTE 1 HAM SANDWICH HOT SWEET & SOUR WIN TILAPIA FILLET SKIN-ON VOID								

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"

6 → PLU or


PLU 0					21-JUN-2007(THU) 11:15		TARE kg	
Check the weight before operation. Enter PLU No. and press [PLU] key.							0.000	
PLU No. 6 PRN MD. <MANUAL>							ZERO WEIGHT kg 0.000	
RIB STEAK TOP SIRLOIN WHOLE ROUND STEAK BONELESS PORK CHOPS BONELESS SMOKED SAUSAGE							UNIT PRICE £/kg 0.00	
ROAST BEEF T-BONE STEAK GROUND BEEF EXTRA MAINE LOBSTER FRESH SALMON FILLET GUARANTEE							TOTAL PRICE £ 0.00	
CASSETTE 1 HAM SANDWICH HOT SWEET & SOUR WIN TILAPIA FILLET SKIN-ON VOID								

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected PLU screen appears.


PLU 6					21-JUN-2007(THU) 11:15		PCS 1	
ROAST BEEF							FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS				
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)				
0.00	0.00	0.0	0.00	0.00				
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY				
0.0	21-06-07	27-06-07	<ADD>	0				
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP				
<MANUAL>	<INDIV>	1						
							FIXED PRICE £ 4.00	

5. See Chapter 5 for more details about temporary change operations.


- 6.** Press the [PRINT] key on the key sheet to issue the labels.



The label is issued.




Non-traceable products




Traceable products

Remove the label.



The next label is issued.



Non-traceable products



Traceable products

Note: To stop printing, press the [PRINT] key again.

2.1.4 PROCESSING FIXED WEIGHT/FIXED UNIT PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE		
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID	TOTAL PRICE £	0.00
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE		
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID	TOTAL PRICE £	0.00
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected PLU screen appears.

PLU 6 21-JUN-2007(THU) 11:15						
ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONS	FIXED U.PRI £/kg	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	4.00	
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	0.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

5. See Chapter 5 for more details about temporary change operations.

6. Enter the fixed weight using the numeric keys on the key sheet and press the “FIXED WEIGHT” field.

EXAMPLE Fixed weight “858g”




PLU 6		21-JUN-2007(THU) 11:15			
					FIXED WEIGHT kg
ROAST BEEF					0.858
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	FIXED U.PRI £/kg
				0	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	
0.00	0.00	0.0	0.00	0.00	4.00
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	
0.0	21-06-07	27-06-07	<ADD>	0	TOTAL PRICE £
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	3.43
<MANUAL>	<INDIV>	1			


7. Press the [PRINT] key on the key sheet to issue the labels.



The label is issued.




Non-traceable products



Traceable products


Remove the label.



The next label is issued.



Non-traceable products



Traceable products

Note: To stop printing, press the [PRINT] key again.

2.2 LABEL ISSUE WITH OPERATORS

2.2.1 WEIGHING UNIT PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected product screen appears.

Without Preset Tare Weight

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
ROAST BEEF					ZERO WEIGHT kg	0.000
JACK	BETTY	JONE	ERIC	JODY	UNIT PRICE £/kg	4.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY	TOTAL PRICE £	0.00
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)		
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP		
0.0						

With Preset Tare Weight

PLU 6					21-JUN-2007(THU) 11:15		NET	PT	kg
 ROAST BEEF					0.050				
					ZERO	WEIGHT	kg		
					-0.050				
JACK	BETTY	JONE	ERIC	JODY	UNIT PRICE £/kg				
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY	4.00				
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)	TOTAL PRICE £				
0.00	0.00	0.0	0.00	0.00	0.00				
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP					
0.0									

Manual Tare Entry

To newly enter a tare weight or overwrite an existing tare weight, enter the tare weight using the numeric keys and press the “TARE” field on the screen.

EXAMPLE Tare weight “50g”

5		0		PLU 6					21-JUN-2007(THU) 11:15					NET		PT		kg	
  		ROAST BEEF										0.050							
		ZERO		WEIGHT		kg													
												-0.050							
JACK		BETTY		JONE		ERIC		JODY		UNIT PRICE		£/kg							
U/P		F/P		FIX UPR		FIX UPR +WEIGHT		SUBTOTAL DISPLAY		4.00									
SPECIAL		-£		-%		SP. (U/P)		-£(U/P)		TOTAL PRICE		£							
0.00		0.00		0.0		0.00		0.00		0.00									
-%(U/P)		TOTAL DISPLAY		VOID		TARE		OPERATOR GROUP		0.00									
0.0																			

5. See Chapter 5 for more details about temporary change operations.
6. Put a product on the weigh platter.

PRODUCT



The weight is measured and the total price is calculated.

PLU 6					21-JUN-2007(THU) 11:15		TARE		kg
 ROAST BEEF					0.000				
					WEIGHT				kg
					0.422				
JACK	BETTY	JONE	ERIC	JODY	UNIT PRICE				£/kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY	4.00				
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)	TOTAL PRICE				£
0.00	0.00	0.0	0.00	0.00	1.69				
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP					
0.0									

7. Press a operator button on the screen to issue the label.

EXAMPLE Operator "BETTY"

PLU 6		21-JUN-2007(THU) 11:15			TARE kg	0.000
 		ROAST BEEF			WEIGHT kg	0.422
					UNIT PRICE £/kg	4.00
JACK	BETTY	JONE	ERIC	JODY	TOTAL PRICE £	
U/P		FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY		
SPECIAL		-%	SP. (U/P)	-%(U/P)	1.69	
0.00	0.0	0.0	0.00	0.00		
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP		
0.0						

The label is issued.



2.2.2 WEIGHING FIXED PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected product screen appears.

Without Preset Tare Weight

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
ROAST BEEF					ZERO WEIGHT kg	0.000
JACK	BETTY	JONE	ERIC	JODY		
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY		
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)		
0.00	0.00	0.0	0.00	0.00	FIXED PRICE £	4.00
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP		
0.0						

With Preset Tare Weight

PLU 6					21-JUN-2007(THU) 11:15					NET		PT		kg	
					ROAST BEEF					0.050					
										ZERO		WEIGHT		kg	
										-0.050					
JACK		BETTY		JONE		ERIC		JODY							
U/P		F/P		FIX UPR		FIX UPR +WEIGHT		SUBTOTAL DISPLAY							
SPECIAL		-£		-%		SP. (U/P)		-£(U/P)							
0.00		0.00		0.0		0.00		0.00							
-%(U/P)		TOTAL DISPLAY		VOID		TARE		OPERATOR GROUP		FIXED PRICE		£			
0.0										4.00					

Manual Tare Entry

To newly enter a tare weight or overwrite an existing tare weight, enter the tare weight using the numeric keys and press the "TARE" field on the screen.

EXAMPLE Tare weight "50g"

5	0	PLU 6 21-JUN-2007(THU) 11:15					NET	PT	kg
  		ROAST BEEF					0.050		
							ZERO	WEIGHT	kg
							-0.050		
JACK		BETTY		JONE		ERIC	JODY		
U/P		F/P		FIX UPR		FIX UPR +WEIGHT	SUBTOTAL DISPLAY		
SPECIAL		-£		-%		SP. (U/P)	-£(U/P)		
0.00		0.00		0.0		0.00	0.00		
-%(U/P)		TOTAL DISPLAY		VOID		TARE	OPERATOR GROUP		
0.0							FIXED PRICE £		
							4.00		

5. See Chapter 5 for more details about temporary change operations.

6. Put a product on the weigh platter.

PRODUCT



The weight is measured and the total price is calculated.

PLU 6					21-JUN-2007(THU) 11:16		TARE	kg
 ROAST BEEF					0.000			
					WEIGHT	kg		
					0.422			
JACK	BETTY	JONE	ERIC	JODY				
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY				
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)				
0.00	0.00	0.0	0.00	0.00				
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP	FIXED PRICE £			
0.0					4.00			

7. Press a operator button on the screen to issue the label.

PLU 621-JUN-2007(THU) 11:16

ROAST BEEF

JACKBETTYJONEERICJODY

U/P

SPECIAL0.00

-(U/P)0.0

TARE kg0.000

WEIGHT kg0.422

FIXED PRICE £4.00

FIX UPR

FIX UPR+WEIGHT

SP. (U/P)


-(U/P)

VOID

TARE

OPERATOR GROUP

The label is issued.



2.2.3 PROCESSING FIXED PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected PLU screen appears.

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
ROAST BEEF					FIXED WEIGHT kg	
JACK	BETTY	JONE	ERIC	JODY		
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY		
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)	FIXED PRICE £	4.00
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP		
0.0						

5. See Chapter 5 for more details about temporary change operations.

6. Press a operator button on the screen to issue the label.

PLU 621-JUN-2007(THU) 11:15

PCS1

ROAST BEEF

JACKBETTYJONEERICJODY

U/P0.000.00.00.00


SPECIAL0.000.00.00.00

-(U/P)0.0TOTAL DISPLAYVOIDTAREOPERATOR GROUP

FIXED WEIGHTkg

FIXED PRICE£4.00

The label is issued.



2.2.4 PROCESSING FIXED WEIGHT/FIXED UNIT PRICE PRODUCTS

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU No.6 "Roast Beef"



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

3. When the product is preset as a traceable item, the traceability screen appears. See Chapter 4 for more details about traceability products.
4. The selected PLU screen appears.

PLU 6 21-JUN-2007(THU) 11:15						
ROAST BEEF					FIXED WEIGHT kg	
JACK	BETTY	JONE	ERIC	JODY	FIXED U.PRI £/kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY		4.00
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)	TOTAL PRICE £	0.00
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP		
0.0						

5. See Chapter 5 for more details about temporary change operations.

6. Enter the fixed weight using the numeric keys on the key sheet and press the “FIXED WEIGHT” field.

EXAMPLE Fixed weight “858g”



PLU 6		21-JUN-2007(THU) 11:15					
  		ROAST BEEF				WEIGHT	kg
						0.858	
JACK	BETTY	JONE	ERIC	JODY	FIXED U.PRI		£/kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY	4.00		
SPECIAL	-£	-%	SP. (U/P)	-£(U/P)	TOTAL PRICE		£
0.00	0.00	0.0	0.00	0.00	3.43		
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP			
0.0							

7. Press a operator button on the screen to issue the label.

EXAMPLE Operator “BETTY”

PLU 6		21-JUN-2007(THU) 11:15					
  					ROAST BEEF		FIXED WEIGHT kg
							0.858
JACK	BETTY	JONE	ERIC	JODY	FIXED U.PRI £/kg		
U/P		FIX UPR	FIX UPR +WEIGHT	SUBTOTAL DISPLAY	4.00		
SPECIAL		-%	SP. (U/P)	-£(U/P)	TOTAL PRICE £		
0.00	0	0.0	0.00	0.00			3.43
-%(U/P)	TOTAL DISPLAY	VOID	TARE	OPERATOR GROUP			
0.0							

The label is issued.



RECEIPT ISSUE

3.1 SALES BY THE SAME OPERATOR

1. Ensure that the initial screen is displayed.

PLU 0		21-JUN-2007(THU) 11:20		TARE	kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.				ZERO	WEIGHT	kg
PLU No.	0					0.000
TOTAL DISPLAY				UNIT PRICE	£/kg	0.00
CSIS				TOTAL PRICE	£	0.00
KEY LOCK	<ON>					

2-1 Select a desired product category by pressing the corresponding field on the screen.

EXAMPLE Select "Meat" category.

PLU 0		21-JUN-2007(THU) 11:20		TARE	kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.				ZERO	WEIGHT	kg
PLU No.	0					0.000
TOTAL DISPLAY				UNIT PRICE	£/kg	0.00
CSIS				TOTAL PRICE	£	0.00
KEY LOCK	<ON>					

2-2 The PLU preset screen for the selected category appears.
 Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.1 "Rib Steak".

1 → PLU or

PLU 0		21-JUN-2007(THU) 11:20		TARE	kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.				ZERO	WEIGHT	kg
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE		0.000
					UNIT PRICE	£/kg
						0.00
					TOTAL PRICE	£
						0.00

2-3 The PLU screen appears.**Weighing Unit Price PLU**

PLU 1					21-JUN-2007(THU) 11:20		NET	PT	kg		
        					RIB STEAK					0.050	
					ZERO					WEIGHT	kg
										-0.050	
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	UNIT PRICE					£/kg	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010						3.98	
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	TOTAL PRICE					£	
TARE	TARE	TARE	TARE	OPERATOR GROUP						0.00	

2-4 Put a product on the weigh platter.**PRODUCT**

PLU 1					21-JUN-2007(THU) 11:20		NET	PT	kg		
  					RIB STEAK					0.050	
										WEIGHT	kg
OPE 001					OPE 002	OPE 003	OPE 004	OPE 005	0.362		
OPE 006					OPE 007	OPE 008	OPE 009	OPE 010	UNIT PRICE £/kg		
OPE 011					OPE 012	OPE 013	OPE 014	OPE 015	3.98		
TARE					TARE	TARE	TARE	OPERATOR GROUP	TOTAL PRICE £		
										1.44	

2-5 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 002".

PLU 1					21-JUN-2007(THU) 11:20		NET	PT	kg		
   					RIB STEAK					0.050	
										WEIGHT	kg
										0.362	
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	UNIT PRICE					£/kg	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	3.98						
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	TOTAL PRICE					£	
TARE	TARE	TARE	TARE	OPERATOR GROUP	1.44						

2-6 The subtotal for the selected operator is shown on the screen.

PLU 1		21-JUN-2007(THU) 11:20		OP 2
 RIB STEAK		ITEMS 1 PC(S)		
PLU No.	1	TOTAL £1.51		
TOTAL DISPLAY	 	SUBTOTAL £1.44		
	 	VAT EXCL. £0.07		
KEY LOCK		VAT INCL. (£0.00)		
<ON>		ADDED PRICE £ 1.44		

3-1 Select a desired product category by pressing the corresponding field on the screen.**EXAMPLE** Select "Fish" category.

PLU 1		21-JUN-2007(THU) 11:20		OP 2
 RIB STEAK		ITEMS 1 PC(S)		
PLU No.	1	TOTAL £1.51		
TOTAL DISPLAY	 	SUBTOTAL £1.44		
	 	VAT EXCL. £0.07		
KEY LOCK		VAT INCL. (£0.00)		
<ON>		ADDED PRICE £ 1.44		

3-2 The PLU preset screen for the selected category appears. Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.**EXAMPLE** Select PLU No.102 "Maine Lobster".

1	0	2	→	PLU	or
---	---	---	---	-----	----

PLU 1		21-JUN-2007(THU) 11:20		OP 2
 RIB STEAK		ITEMS 1 PC(S)		
SALMON FILLET GUARANTE	MAINE LOBSTER FRESH	LAKE TROUT TRUCHAS	SHARK TIBURON	YELLOW FIN TUNA
				
				TOTAL £1.51
				SUBTOTAL £1.44
				VAT EXCL. £0.07
				VAT INCL. (£0.00)
				ADDED PRICE £ 1.44

3-3 The PLU screen appears.**Fixed Price PLU**

PLU 102 21-JUN-2007(THU) 11:20					PCS	1
MAINE LOBSTER FRESH DAILY					FIXED WEIGHT	kg
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	FIXED PRICE	£
TARE	TARE	TARE	TARE	OPERATOR GROUP	4.50	

3-4 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 002".

PLU 102 21-JUN-2007(THU) 11:20					PCS	1
MAINE LOBSTER FRESH DAILY					FIXED WEIGHT	kg
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	FIXED PRICE	£
TARE	TARE	TARE	TARE	OPERATOR GROUP	4.50	

3-5 The subtotal for the selected operator is shown on the screen.

PLU 102 21-JUN-2007(THU) 11:20		OP 2	
MAINE LOBSTER FRESH DAILY		ITEMS	
		2PC(S)	
TOTAL DISPLAY		TOTAL	
		£6.23	
KEY LOCK		SUBTOTAL	
<ON>		£5.94	
		VAT EXCL.	
		£0.29	
		VAT INCL.	
		(£0.00)	
		ADDED PRICE	
		£	
		4.50	

4-1 Select a desired product category by pressing the corresponding field on the screen.**EXAMPLE** Select "Bakery" category.

PLU 102 21-JUN-2007(THU) 11:20		OP 2	
MAINE LOBSTER FRESH DAILY		ITEMS	
		2PC(S)	
TOTAL DISPLAY		TOTAL	
		£6.23	
KEY LOCK		SUBTOTAL	
<ON>		£5.94	
		VAT EXCL.	
		£0.29	
		VAT INCL.	
		(£0.00)	
		ADDED PRICE	
		£	
		4.50	

- 4-2** The PLU preset screen for the selected category appears. Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.201 “Live Wild Cherry Clam”.

2 0 1 → PLU or

PLU 102 21-JUN-2007(THU) 11:20					OP 2
MAINE LOBSTER FRESH DAILY					ITEMS
LIVE WIL CHERRYST CLAM(USA) HAM SANDWICH BREAKFAST SANDWICH MEXICAN 7 LAYER DIP HOT BARBECUE SPARE RI					2PC(S)
					TOTAL
					£6.23
					SUBTOTAL £5.94
					VAT EXCL. £0.29
					VAT INCL. (£0.00)
					ADDED PRICE £
					4.50

- 4-3** The PLU screen appears.

Weighing Fixed Price PLU

PLU 201 21-JUN-2007(THU) 11:21					TARE kg
LIVE WILD CHERRYS CLAM(USA)					0.000
					ZERO WEIGHT kg
					0.000
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £
					1.78

- 4-4** Put a product on the weigh platter.

PRODUCT



PLU 201 21-JUN-2007(THU) 11:21					TARE kg
LIVE WILD CHERRYS CLAM(USA)					0.000
					WEIGHT kg
					0.410
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £
					1.78

4-5 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 002".

PLU 201 21-JUN-2007(THU) 11:21					TARE kg
LIVE WILD CHERRYS CLAM(USA)					0.000
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	WEIGHT kg
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	0.410
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £
					1.78

4-6 The subtotal for the selected operator is shown on the screen.

PLU 201 21-JUN-2007(THU) 11:21		OP 2
LIVE WILD CHERRYS CLAM(USA)		ITEMS
		3PC(S)
TOTAL		£8.10
SUBTOTAL		£7.72
VAT EXCL.		£0.38
VAT INCL.		(£0.00)
ADDED PRICE £		1.78

5-1 Select a desired product category by pressing the corresponding field on the screen.**EXAMPLE** Select "Meat" category.

PLU 201 21-JUN-2007(THU) 11:21		OP 2
LIVE WILD CHERRYS CLAM(USA)		ITEMS
		3PC(S)
TOTAL		£8.10
SUBTOTAL		£7.72
VAT EXCL.		£0.38
VAT INCL.		(£0.00)
ADDED PRICE £		1.78

5-2 The PLU preset screen for the selected category appears.
Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.4 “Pork Chops”.



PLU 0					21-JUN-2007(THU) 11:21		TARE	kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO		WEIGHT	kg	0.000
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE			UNIT PRICE	£/kg	0.00
							TOTAL PRICE	£	0.00

5-3 The PLU screen appears.

Fixed Unit Price PLU

PLU 4					21-JUN-2007(THU) 11:21			
PORK CHOPS BONELESS SIRLOIN					FIXED WEIGHT		kg	
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	FIXED U.PRI		£/kg	3.68
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	TOTAL PRICE		£	0.00
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015				
TARE	TARE	TARE	TARE	OPERATOR GROUP				

5-4 Enter the weight using the numeric keys on the key sheet, and press the “Fixed Weight” field on the screen.

EXAMPLE Weight “400g”



PLU 4					21-JUN-2007(THU) 11:21			
PORK CHOPS BONELESS SIRLOIN					FIXED WEIGHT		kg	0.400
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	FIXED U.PRI		£/kg	3.68
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	TOTAL PRICE		£	1.47
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015				
TARE	TARE	TARE	TARE	OPERATOR GROUP				

5-5 Press a button on the screen for the operator who has sold the product.

EXAMPLE Select “Operator 002”.

PLU 4		21-JUN-2007(THU) 11:21			
		PORK CHOPS BONELESS SIRLOIN			FIXED WEIGHT kg 0.400
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	FIXED U.PRI £/kg 3.68
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	TOTAL PRICE £ 1.47
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	
TARE	TARE	TARE	TARE	OPERATOR GROUP	

5-6 The subtotal for the selected operator is shown on the screen.

PLU 4		21-JUN-2007(THU) 11:21		OP 2	
		PORK CHOPS BONELESS SIRLOIN		ITEMS 4PC(S)	
PLU No.		 		TOTAL	
4				£9.64	
TOTAL DISPLAY				SUBTOTAL £9.19	
				VAT EXCL. £0.45	
				VAT INCL. (£0.00)	
KEY LOCK		 		ADDED PRICE £	
<ON>				1.47	

6. Press the subtotal field on the screen to display more detailed subtotal data.

PLU 4		21-JUN-2007(THU) 11:21		OP 2	
  		PORK CHOPS BONELESS SIRLOIN			
PLU No.		 			
4		 			
TOTAL DISPLAY		 			
KEY LOCK		 			
<ON>		 			

ITEMS

4PC(S)

TOTAL

£9.64

SUBTOTAL £9.19

VAT EXCL. £0.45

VAT INCL. (£0.00)

ADDED CE £

1.47

7. The detailed subtotal screen appears for confirmation of product registrations. Then, confirm that the detail of the transaction is correct.

SUBTOTAL		21-JUN-2007(THU) 11:22		ITEMS		4PC(S)	
OP 2		TOTAL		£9.64		(1)RIBSTEAK	
		SUBTOTAL		£9.19			
FIDELITY		VAT EXCL.		£0.45		£/kg kg £	
		VAT INCL.		(£0.00)		3.98 0.362 1.44	
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	(102)MAINE LOBSTERFRE		
VOID	COUPON PAY	TAX PRN <NO-PRN>			£/PC(S) PC(S) £		
					4.50 1 4.50		
					(201)LIVE WILD CHERRYS		
				SUBTOTAL GROUP	kg £		
					0.410 1.78		

8. Press the [PRINT] key on the key sheet to issue the receipt.



MEMBER SAVINGS

* RECEIPT FOR PURCHASE *

ISHIDA JAPAN
<http://www.ishida.co.jp/>
 21-JUN-2007 11:20

PLU	f/kg	kg			f
RIB STEAK					
1	3.98	0.362			1.44
FIDELITY POINT:		0 POINT(S)			

PLU	f/Pcs	Pcs			f
MAINE LOBSTER FRESH DAILY					
102	4.50		1		4.50
FIDELITY POINT:		0 POINT(S)			

PLU	f/kg	kg			f
LIVE WILD CHERRYSTONE CLAM(USA)					
201		0.410			1.78
FIDELITY POINT:		0 POINT(S)			

PLU	f/kg	kg			f
PORK CHOPS BONELESS SIRLOIN					
4	3.68	0.400			1.47
FIDELITY POINT:		0 POINT(S)			

4 items **Sub-total: 9.19**

Total: 9.64

TENDERED: f9.64

TOTAL FIDELITY POINT: 0 POINT

21/06/2007 11:21 No. 0046 MACHINE 01



0 200000 909642

Welcome again.

Thank You

9. The Subtotal screen appears for the settlement.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:22					ITEMS	4PC(\$)
OP 2		TOTAL			£9.64	
FIDELITY 0POINT(S)		SUBTOTAL			£9.19	
		VAT EXCL.			£0.45	
		VAT INCL.			(£0.00)	
					TENDERD	£9.64
					CHANGE	£0.00
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	CASH	£9.64
VOID	COUPON PAY	TAX PRN <NO-PRN>			COUPON	£0.00
					CREDIT	£0.00
				SUBTOTAL GROUP	O.THAN CASH	£0.00

3.2 SALES BY DIFFERENT OPERATORS

1. Ensure that the initial screen is displayed.

PLU 0		21-JUN-2007(THU) 11:20		TARE	kg	0.000
		Check the weight before operation. Enter PLU No. and press [PLU] key.		ZERO	WEIGHT	kg
PLU No.	0					0.000
TOTAL DISPLAY				UNIT PRICE	£/kg	0.00
CSIS				TOTAL PRICE	£	0.00
KEY LOCK	<ON>					

2-1 **EXAMPLE** Product registration by "Operator 002"

Select a desired product category by pressing the corresponding field on the screen.

EXAMPLE Select "Meat" category.

PLU 0		21-JUN-2007(THU) 11:20		TARE	kg	0.000
		Check the weight before operation. Enter PLU No. and press [PLU] key.		ZERO	WEIGHT	kg
PLU No.	0					0.000
TOTAL DISPLAY				UNIT PRICE	£/kg	0.00
CSIS				TOTAL PRICE	£	0.00
KEY LOCK	<ON>					

- 2-2 The PLU preset screen for the selected category appears.
Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.1 "Rib Steak".

1 → PLU or

PLU 0		21-JUN-2007(THU) 11:20		TARE	kg	0.000
		Check the weight before operation. Enter PLU No. and press [PLU] key.		ZERO	WEIGHT	kg
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE		0.000
					UNIT PRICE	£/kg
						0.00
					TOTAL PRICE	£
						0.00

2-3 The PLU screen appears.

Weighing Unit Price PLU										
PLU 1					21-JUN-2007(THU) 11:20					
  RIB STEAK					NET	PT	kg			
					0.050					
					ZERO	WEIGHT	kg			
					-0.050					
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	UNIT PRICE £/kg					
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	3.98					
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	TOTAL PRICE £					
TARE	TARE	TARE	TARE	OPERATOR GROUP	0.00					

2-4 Put a product on the weigh platter.

PRODUCT



PLU 1					21-JUN-2007(THU) 11:20					NET		PT		kg																
   RIB STEAK													0.050																	
													WEIGHT		kg															
OPE 001					OPE 002					OPE 003					OPE 004					OPE 005					0.362					
OPE 006					OPE 007					OPE 008					OPE 009					OPE 010										
OPE 011					OPE 012					OPE 013					OPE 014					OPE 015					UNIT PRICE				£/kg	
TARE					TARE					TARE					TARE					OPERATOR GROUP					3.98					
													TOTAL PRICE				£													
													1.44																	

2-5 Press a button on the screen for the operator who has sold the product.

EXAMPLE Select "Operator 002".

PLU 1					21-JUN-2007(THU) 11:20					NET		PT		kg														
   RIB STEAK													0.050															
											WEIGHT		kg															
													0.362															
OPE 001					OPE 002					OPE 003					OPE 004					OPE 005					UNIT PRICE		£/kg	
OPE 006					OPE 007					OPE 008					OPE 009					OPE 010							3.98	
OPE 011					OPE 012					OPE 013					OPE 014					OPE 015					TOTAL PRICE		£	
TARE					TARE					TARE					TARE					OPERATOR GROUP							1.44	

2-6 The subtotal for the selected operator is shown on the screen.



3-1 **EXAMPLE** Product registration by “Operator 002”


Select a desired product category by pressing the corresponding field on the screen.

EXAMPLE Select “Fish” category.



3-2 The PLU preset screen for the selected category appears. Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.102 “Maine Lobster”.

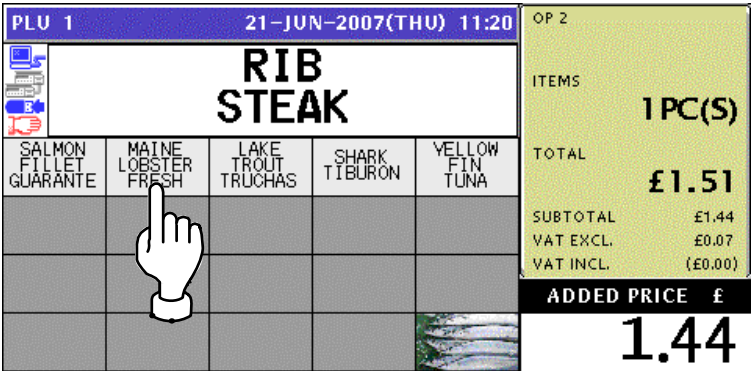

3-3 The PLU screen appears.**Fixed Price PLU**

PLU 102 21-JUN-2007(THU) 11:20					PCS	1
 MAINE LOBSTER FRESH DAILY					FIXED WEIGHT	kg
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	FIXED PRICE	£
TARE	TARE	TARE	TARE	OPERATOR GROUP	4.50	

3-4 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 002".

PLU 102 21-JUN-2007(THU) 11:20					PCS	1
 MAINE LOBSTER FRESH DAILY					FIXED WEIGHT	kg
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	FIXED PRICE	£
TARE	TARE	TARE	TARE	OPERATOR GROUP	4.50	

3-5 The subtotal for the selected operator is shown on the screen.

PLU 102 21-JUN-2007(THU) 11:20		OP 2	
 MAINE LOBSTER FRESH DAILY		ITEMS	
		2PC(S)	
TOTAL DISPLAY		TOTAL	
102		£6.23	
TOTAL DISPLAY		SUBTOTAL £5.94	
KEY LOCK		VAT EXCL. £0.29	
<ON>		VAT INCL. (£0.00)	
		ADDED PRICE £	
		4.50	

4-1 **EXAMPLE** Product registration by "Operator 001"

Select a desired product category by pressing the corresponding field on the screen.

EXAMPLE Select "Bakery" category.

PLU 0 21-JUN-2007(THU) 11:21		TARE	kg
 Check the weight before operation. Enter PLU No. and press [PLU] key.		0.000	
		ZERO	WEIGHT kg
PLU No.		0.000	
0		UNIT PRICE £/kg	
TOTAL DISPLAY		0.00	
KEY LOCK		TOTAL PRICE £	
<ON>		0.00	

- 4-2** The PLU preset screen for the selected category appears. Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.201 "Live Wild Cherry Clam".

2 0 1 → PLU or

PLU 0 21-JUN-2007(THU) 11:21					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
LIVE WILD CHERRY CLAM USA	HAM SANDWICH	BREAKFAST SANDWICH	MEXICAN 7 LAYER DIP	HOT BARBECUE SPARE RI	UNIT PRICE £/kg	0.00
					TOTAL PRICE £	0.00

- 4-3** The PLU screen appears.

Weighing Fixed Price PLU

PLU 201 21-JUN-2007(THU) 11:21					TARE kg	0.000
LIVE WILD CHERRYS CLAM(USA)					ZERO WEIGHT kg	0.000
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015		
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £	1.78

- 4-4** Put a product on the weigh platter.

PRODUCT



PLU 201 21-JUN-2007(THU) 11:21					TARE kg	0.000
LIVE WILD CHERRYS CLAM(USA)					WEIGHT kg	0.410
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015		
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £	1.78

4-5 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 001".

PLU 201 21-JUN-2007(THU) 11:21					TARE kg	0.000
LIVE WILD CHERRYS CLAM(USA)					WEIGHT kg	0.410
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015		
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £	1.78

4-6 The subtotal for the selected operator is shown on the screen.

PLU 201 21-JUN-2007(THU) 11:22		OP 1	
LIVE WILD CHERRYS CLAM(USA)		ITEMS 1 PC(S)	
PLU No. 201			TOTAL £1.86
TOTAL DISPLAY			SUBTOTAL £1.78
KEY LOCK <ON>			VAT EXCL. £0.08
			VAT INCL. (£0.00)
			ADDED PRICE £ 1.78

5-1 **EXAMPLE** Product registration by "Operator 002"

Select a desired product category by pressing the corresponding field on the screen.

EXAMPLE Select "Meat" category.

PLU 0 21-JUN-2007(THU) 11:21		TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.		ZERO WEIGHT kg	0.000
PLU No. 0		UNIT PRICE £/kg	0.00
TOTAL DISPLAY		TOTAL PRICE £	0.00
KEY LOCK <ON>			
			

- 5-2** The PLU preset screen for the selected category appears.
Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.4 “Pork Chops”.

4 → PLU or

PLU 0					21-JUN-2007(THU) 11:21		TARE	kg	0.000	
Check the weight before operation. Enter PLU No. and press [PLU] key.							ZERO	WEIGHT	kg	0.000
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE			UNIT PRICE		£/kg	0.00
							TOTAL PRICE		£	0.00

- 5-3** The PLU screen appears.

Fixed Unit Price PLU

PLU 4					21-JUN-2007(THU) 11:21				FIXED WEIGHT	kg	
PORK CHOPS BONELESS SIRLOIN							FIXED U.PRI		£/kg	3.68	
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005			TOTAL PRICE		£	0.00	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010							
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015							
TARE	TARE	TARE	TARE	OPERATOR GROUP							

- 5-4** Enter the weight using the numeric keys on the key sheet, and press the “Fixed Weight” field on the screen.

EXAMPLE Weight “400g”

4 0 0

PLU 4					21-JUN-2007(THU) 11:21				FIXED WEIGHT	kg	0.400
PORK CHOPS BONELESS SIRLOIN							FIXED U.PRI		£/kg	3.68	
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005			TOTAL PRICE		£	1.47	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010							
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015							
TARE	TARE	TARE	TARE	OPERATOR GROUP							

5-5 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 002".

PLU 4 21-JUN-2007(THU) 11:21						
PORK CHOPS BONELESS SIRLOIN					FIXED WEIGHT	kg
					0.400	
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	FIXED U.PRI	£/kg
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	3.68	
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	TOTAL PRICE	£
TARE	TARE	TARE	TARE	OPERATOR GROUP	1.47	

5-6 The subtotal for the selected operator is shown on the screen.

PLU 4 21-JUN-2007(THU) 11:22					OP 2	
PORK CHOPS BONELESS SIRLOIN					ITEMS	3PC(S)
					TOTAL	£7.78
					SUBTOTAL	£7.41
					VAT EXCL.	£0.37
					VAT INCL.	(£0.00)
					ADDED PRICE	£
					1.47	

6. Press the subtotal field on the screen to display more detailed subtotal data.

PLU 4 21-JUN-2007(THU) 11:22					OP 2	
PORK CHOPS BONELESS SIRLOIN					ITEMS	3PC(S)
					TOTAL	£7.78
					SUBTOTAL	£7.41
					VAT EXCL.	£0.37
					VAT INCL.	(£0.00)
					ADDED PRICE	£
					1.47	

7. The detailed subtotal screen appears for confirmation of product registrations. Then, confirm that the detail of the transaction is correct.

SUBTOTAL 21-JUN-2007(THU) 11:21					ITEMS 3PC(S)	
OP 2		TOTAL £7.78			{ 1)RIBSTEAK	
		SUBTOTAL £7.41				
		VAT EXCL. £0.37			£/kg kg £	
		VAT INCL. (£0.00)			3.98 0.362 1.44	
FIDELITY		OPOINT(S)			{ 102)MAINE LOBSTERFRE:	
					E/PC(S) PC(S) £	
					4.50 1 4.50	
					{ 4)PORK CHOPSBONELE:	
					£/kg kg £	
					3.68 0.400 1.47	

8. Press the [PRINT] key on the key sheet to issue the receipt.



MEMBER SAVINGS

* RECEIPT FOR PURCHASE *

ISHIDA JAPAN
http://www.ishida.co.jp/
21-JUN-2007 11:20

PLU	f/kg	kg	f
RIB STEAK			
1	3.98	0.362	1.44
FIDELITY POINT: 0 POINT(S)			

PLU	f/Pcs	Pcs	f
MAINE LOBSTER FRESH DAILY			
102	4.50	1	4.50
FIDELITY POINT: 0 POINT(S)			

PLU	f/kg	kg	f
PORK CHOPS BONELESS SIRLOIN			
4	3.68	0.400	1.47
FIDELITY POINT: 0 POINT(S)			

3 items **Sub-total: 7.41**

Total: 7.78

TENDERED: £7.78

TOTAL FIDELITY POINT: 0 POINT

21/06/2007 11:21 No. 0060 MACHINE 01

0 200000 007782

Welcome again.

Thank You

9. The Subtotal screen appears for the settlement.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:21				ITEMS	3PC(S)
OP 2		TOTAL			£7.78
		SUBTOTAL		TENDERD	£7.78
		VAT EXCL.		CHANGE	£0.00
FIDELITY 0POINT(S)		VAT INCL.			
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	CASH	£7.78
VOID	COUPON PAY	TAX PRN <NO-PRN>		COUPON	£0.00
				CREDIT	£0.00
				OTHER THAN CASH	£0.00
			SUBTOTAL GROUP		£0.00

10-1 **EXAMPLE** Product registration by "Operator 001"

Select a desired product category by pressing the corresponding field on the screen.

EXAMPLE Select "Meat" category.


PLU 0		21-JUN-2007(THU) 11:23		TARE kg	0.000
 Check the weight before operation. Enter PLU No. and press [PLU] key.				ZERO WEIGHT kg	0.000
PLU No.	0	 		UNIT PRICE £/kg	0.00
TOTAL DISPLAY				TOTAL PRICE £	0.00
KEY LOCK	<ON>	 			

10-2 The PLU preset screen for the selected category appears.

Then, enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where a desired product is allocated.

EXAMPLE Select PLU No.3 "Round Steak".



PLU 0		21-JUN-2007(THU) 11:23		TARE kg	0.000
 Check the weight before operation. Enter PLU No. and press [PLU] key.				ZERO WEIGHT kg	0.000
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg
					0.00
					TOTAL PRICE £
					0.00

10-3 The PLU screen appears.**Weighing Unit Price PLU**

PLU 3		21-JUN-2007(THU) 11:23		TARE kg	0.000
 ROUND STEAK BONELESS				ZERO WEIGHT kg	0.000
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005	
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010	
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015	
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £
					3.98

10-4 Put a product on the weigh platter.**PRODUCT**

PLU 3 21-JUN-2007(THU) 11:23					TARE kg	0.000
  ROUND STEAK BONELESS					WEIGHT kg	0.412
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015		
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £	3.98

10-5 Press a button on the screen for the operator who has sold the product.**EXAMPLE** Select "Operator 001".

PLU 3 21-JUN-2007(THU) 11:23					TARE kg	0.000
  ROUND STEAK BONELESS					WEIGHT kg	0.412
OPE 001	OPE 002	OPE 003	OPE 004	OPE 005		
OPE 006	OPE 007	OPE 008	OPE 009	OPE 010		
OPE 011	OPE 012	OPE 013	OPE 014	OPE 015		
TARE	TARE	TARE	TARE	OPERATOR GROUP	FIXED PRICE £	3.98

10-6 The subtotal for the selected operator is shown on the screen.

PLU 3 21-JUN-2007(THU) 11:23					OP 1	
  ROUND STEAK BONELESS					ITEMS	
					2PC(S)	
PLU No.					TOTAL	£6.04
3					SUBTOTAL	£5.76
TOTAL DISPLAY					VAT EXCL.	£0.28
KEY LOCK <ON>					VAT INCL.	(£0.00)
					ADDED PRICE £	3.98

11 **EXAMPLE** Receipt issue by “Operator 001”

Press the subtotal field on the screen to display more detailed subtotal data.

PLU 3

21-JUN-2007(THU) 11:23

ROUND STEAK BONELESS

PLU No.

3

TOTAL DISPLAY

KEY LOCK

<ON>









OP 1

ITEMS

2PC(S)

TOTAL

£6.04

SUBTOTAL

£5.76

VAT EXCL.

£0.28

VAT INCL.

(£0.00)

ADDED

3.98

12 The Subtotal screen appears for confirmation of product registrations.

SUBTOTAL

21-JUN-2007(THU) 11:23

OP 1

FIDELITY

0POINT(S)

RECEIPT DELETE

RECEIPT <PRINT>

OPEN DRAWER

CREDIT

OTHER TRAN CASH

VOID

COUPON PAY

TAX PRN <NO-PRN>

SUBTOTAL GROUP

ITEMS

2PC(S)

(201)LIVE WILD CHERRYS

kg £

0.410 1.78

(3)ROUND STEAKBONEL

kg £

0.412 3.98

TOTAL

£6.04

SUBTOTAL

£5.76


VAT EXCL.

£0.28

VAT INCL.

(£0.00)

13 Press the [PRINT] key on the key sheet to issue the receipt.



MEMBER SAVINGS

* RECEIPT FOR PURCHASE *

ISHIDA JAPAN
http://www.ishida.co.jp/
21-JUN-2007 11:21

PLU	f/kg	kg	f
LIVE WILD CHERRYSTONE CLAM(USA)			
201		0.410	1.78
FIDELITY POINT: 0 POINT(S)			
ROUND STEAK BONELESS			
3		0.412	3.98
FIDELITY POINT: 0 POINT(S)			
2 items Sub-total:			5.76
Total:			6.04
TENDERED:			£6.04
TOTAL FIDELITY POINT:			0 POINT
21/06/2007 11:23 No. 0062 MACHINE 01			

0 200000 706043
Welcome again.
Thank You

14 The Subtotal screen appears for the settlement.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:23					ITEMS	2PC(S)
OP 1		TOTAL			£6.04	
FIDELITY 0POINT(S)		SUBTOTAL			TENDERD	£6.04
		VAT EXCL.			CHANGE	£0.00
		VAT INCL.				
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	CASH	£6.04
VOID	COUPON PAY	TAX PRN <NO-PRN>			COUPON	£0.00
					CREDIT	£0.00
				SUBTOTAL GROUP	O.THAN CASH	£0.00

3.3 VOIDING PRODUCT REGISTRATION

1. To void a product registration that has been made in the transaction, display the Subtotal screen for confirmation of product registrations.

SUBTOTAL 21-JUN-2007(THU) 11:33				ITEMS	3PC(S)
OP 2		TOTAL		£7.47	
FIDELITY 0POINT(S)		SUBTOTAL		£7.12	
		VAT EXCL.		£0.35	
		VAT INCL.		(£0.00)	
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	(3)ROUND STEAKBONEL
					kg £
					0.412 3.98
					(103)LAKE TROUTTRUCH.
					E/PC(S) PC(S) £
					2.50 1 2.50
					(205)HOT BARBECUESPAF
					E/kg kg £
					2.38 0.268 0.64
SUBTOTAL GROUP					

2. Press to select a desired product registration field.

EXAMPLE Void the third item.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:33				ITEMS	3PC(S)
OP 2		TOTAL		£7.47	
FIDELITY 0POINT(S)		SUBTOTAL		£7.12	
		VAT EXCL.		£0.35	
		VAT INCL.		(£0.00)	
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	(3)ROUND STEAKBONEL
					kg £
					0.412 3.98
					(103)LAKE TROUTTRUCH.
					E/PC(S) PC(S) £
					2.50 1 2.50
					(205)HOT BARBECUESPAF
					E/kg kg £
					2.38 0.268 0.64
SUBTOTAL GROUP					

Note: To scroll the selection up or down, press the [▲] or [▼] keys on the key sheet.

3. Press the [VOID] button on the screen.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:33				ITEMS	3PC(S)
OP 2		TOTAL		£7.47	
FIDELITY 0POINT(S)		SUBTOTAL		£7.12	
		VAT EXCL.		£0.35	
		VAT INCL.		(£0.00)	
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	(3)ROUND STEAKBONEL
					kg £
					0.412 3.98
					(103)LAKE TROUTTRUCH.
					E/PC(S) PC(S) £
					2.50 1 2.50
					(205)HOT BARBECUESPAF
					E/kg kg £
					2.38 0.268 0.64
SUBTOTAL GROUP					

4. The confirmation screen appears. Then, press the [EXEC] button for execution.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:33		ITEMS	3PC(S)
21-JUN-2007(THU) 11:33			
DESIGNATED CORRECTION			
DO YOU WANT TO DELETE DESIGNATED PRODUCT?			
1827 - 0000		EXEC	STOP

5. The selected item has been voided.

SUBTOTAL 21-JUN-2007(THU) 11:33				ITEMS 2PC(S)			
OP 2 FIDELITY 0POINT(S)		TOTAL £6.80		(3)ROUND STEAKBONE			
		SUBTOTAL £6.48					
		VAT EXCL. £0.32		kg £			
		VAT INCL. (£0.00)		0.412 3.98			
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	(103)LAKE TROUTTRUCH			
VOID	COUPON PAY	TAX PRN		E/PC(S) PC(S) £			
		<NO-PRN>		2.50 1 2.50			
				(205)HOT BARBECUESPA			
				£/kg kg £			
			SUBTOTAL GROUP	2.38 0.268 0.64			

6. Press the [PRINT] key on the key sheet to issue the receipt.



MEMBER SAVINGS

* RECEIPT FOR PURCHASE *

ISHIDA JAPAN
http://www.ishida.co.jp/
21-JUN-200711:32

PLU f/kg kg f
ROUND STEAK
BONELESS
3 0.412 3.98
FIDELITY POINT: 0 POINT(S)

PLU f/Pcs Pcs f
LAKE TROUT
TRUCHAS
103 2.50 1 2.50
FIDELITY POINT: 0 POINT(S)

PLU f/kg kg f
HOT BARBECUE
SPARE RIB PLATTER
205 2.38 0.268 0.64
FIDELITY POINT: 0 POINT(S)

2 items Sub-total: 6.48

Total: 6.80

TENDERED: £6.80

TOTAL FIDELITY POINT: 0 POINT

21/06/2007 11:33 No. 0038 MACHINE 01


0 200000 506803
Welcome again.
Thank You

Deleted by a dashed line

7. The Subtotal screen appears for the settlement.

SUBTOTAL(HOLD) 21-JUN-2007(THU) 11:33					ITEMS	2PC(S)
OP 2		TOTAL			£6.80	
FIDELITY 0POINT(S)		SUBTOTAL			£6.48	
		VAT EXCL.			£0.32	
		VAT INCL.			(£0.00)	
RECEIPT DELETE	RECEIPT <PRINT>	OPEN DRAWER	CREDIT	OTHER TRAN CASH	CASH	£6.80
VOID	COUPON PAY	TAX PRN <NO-PRN>			COUPON	£0.00
					CREDIT	£0.00
				SUBTOTAL GROUP	O.THAN CASH	£0.00

TRACEABILITY PRODUCTS

4.1 REFERRING TO PREVIOUS TRACEABILITY DATA

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU number "6".



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					WEIGHT kg	0.000
PLU No.				PRN MD.		
6				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

3. When the product is preset as a traceable item, the Traceability screen appears.

TRACEABILITY 21-JUN-2007(THU) 11:15		
6	ROAST BEEF	
LOT	0123456789	
TITLE TEXT	COUNTRY	FACTORY
Born in:	ARGENTINA	ATTR.1-1
Breed in:	ARGENTINA	ATTR.1-1
Breed in #2:	FRANCE	ATTR.2-2
Slaughtered in:	FRANCE	ATTR.2-2
Cut Up in:	FRANCE	ATTR.2-2
INPUT		LIST SET

4. To refer to the previously processed traceability data, press the [LIST] button.

TRACEABILITY			21-JUN-2007(THU) 11:15
6	ROAST BEEF		↑
LOT	0123456789		
TITLE TEXT	COUNTRY	FACTORY	 LIST SET
Born in:	ARGENTINA	ATTR.1-1	
Breed in:	ARGENTINA	ATTR.1-1	
Breed in #2:	FRANCE	ATTR.2-2	
Slaughtered in:	FRANCE	ATTR.2-2	
Cut Up in:	FRANCE	ATTR.2-2	INPUT

5. The Traceability History screen appears. Then, press to select a desired data field.

TRACEABILITY HISTORY		21-JUN-2007(THU) 11:15	1/1
DATE/TIME	LOT	↑	 SET DELETE
21-JUN-2007 11:15:47	0123456789		
INPUT			

6. The selected data appears. Then, press the [SET] button.

TRACEABILITY			21-JUN-2007(THU) 11:15
6	ROAST BEEF		↑
LOT	0123456789		
TITLE TEXT	COUNTRY	FACTORY	 SET SET
Born in:	ARGENTINA	ATTR.1-1	
Breed in:	ARGENTINA	ATTR.1-1	
Breed in #2:	FRANCE	ATTR.2-2	
Slaughtered in:	FRANCE	ATTR.2-2	
Cut Up in:	FRANCE	ATTR.2-2	INPUT

7. The selected PLU screen appears.

Weighing Unit Price Products

PLU 6					21-JUN-2007(THU) 11:15	TARE	kg
 ROAST BEEF					0.000		
					ZERO WEIGHT kg		
0.000					0.000		
U/P	F/P	FIX UPR	FIX UPR + WEIGHT	COUPONMS	UNIT PRICE £/kg		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	4.00		
0.00	0.00	0.0	0.00	0.00	TOTAL PRICE £		
0.0	21-06-07	27-06-07	<ADD>	0	0.00		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP			
<MANUAL>	<INDIV>	1					

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	Fix UPR	FIX UPR +WEIGHT	COUPONMS		
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				
					FIXED PRICE £	
					4.00	

Fixed Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15						
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	Fix UPR	FIX UPR +WEIGHT	COUPONMS		
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				
					FIXED U.PRI £/kg	
					4.00	
					TOTAL PRICE £	
					0.00	

Weighing Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE	kg
 ROAST BEEF					0.000	
U/P	F/P	Fix UPR	FIX UPR +WEIGHT	COUPONMS	ZERO	WEIGHT kg
				0	0.000	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				
					FIXED PRICE £	
					4.00	

4.2 CHANGING TRACEABILITY DATA

1. Ensure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
 Check the weight before operation. Enter PLU No. and press [PLU] key.					WEIGHT kg	0.000
PLU No.				PRN MD.		
0				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

2. Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet, or simply press a preset key on the screen where the product is allocated.

EXAMPLE PLU number "6".



PLU 0 21-JUN-2007(THU) 11:15					TARE kg	0.000
 Check the weight before operation. Enter PLU No. and press [PLU] key.					WEIGHT kg	0.000
PLU No.				PRN MD.		
6				<MANUAL>		
RIB STEAK	TOP SIRLOIN WHOLE	ROUND STEAK BONELESS	PORK CHOPS BONELESS	SMOKED SAUSAGE	UNIT PRICE £/kg	0.00
ROAST BEEF	T-BONE STEAK	GROUND BEEF EXTRA	MAINE LOBSTER FRESH	SALMON FILLET GUARANTEE	TOTAL PRICE £	0.00
CASSETTE	HAM SANDWICH	HOT SWEET & SOUR WIN	TILAPIA FILLET SKIN-ON	VOID		
1						

- 3-1 When the product is preset as a traceable item, the Traceability screen appears. Then, confirm whether information on the screen is correct or not.

When the data is correct, press the [SET] button.

TRACEABILITY 21-JUN-2007(THU) 11:15		
6	ROAST BEEF	
LOT	0123456789	
TITLE TEXT	COUNTRY	FACTORY
Born in:	ARGENTINA	ATTR.1-1
Breed in:	FRANCE	ATTR.2-2
Breed in #2:	FRANCE	ATTR.2-2
Slaughtered in:	FRANCE	ATTR.2-2
Cut Up in:	FRANCE	ATTR.2-2
INPUT		  SET

3-2 If the data is not correct, press to select a desired data field.**EXAMPLE** Select "France".

TRACEABILITY			21-JUN-2007(THU) 11:15	
6	ROAST BEEF			
LOT	0123456789			
TITLE TEXT	COUNTRY	FACTORY		
Born in:	ARGENTINA	ATTR.1-1		
Breed in:	FRANCE	ATTR.2-2		
Breed in #2:	FRANCE	ATTR.2-2		
Slaughtered in:	FRANCE	ATTR.2-2		
Cut Up in:	FRANCE	ATTR.2-2		
			INPUT	
			LIST	SET

EXAMPLE Change to "Argentina".

LOOKUP TABLE		21-JUN-2007(THU) 11:15		1/2
0	NONE			
1	ARGENTINA			
2	FRANCE			
3	NETHERLANDS			
4	ENGLAND			
5	PORTUGAL			
FIND PLU		SEARCH	INPUT	

The data has been changed.

To change the "FACTORY" data, press the corresponding field.

TRACEABILITY			21-JUN-2007(THU) 11:15	
6	ROAST BEEF			
LOT	0123456789			
TITLE TEXT	COUNTRY	FACTORY		
Born in:	ARGENTINA	ATTR.1-1		
Breed in:	ARGENTINA			
Breed in #2:	FRANCE	ATTR.2-2		
Slaughtered in:	FRANCE	ATTR.2-2		
Cut Up in:	FRANCE	ATTR.2-2		
			INPUT	
			LIST	SET

Press to select a desired data field.

LOOKUP TABLE DATA		21-JUN-2007(THU) 11:15		1/3
0	NONE			
1	ATTR.1-1			
5	ATTR.1-5			
7	ATTR.1-7			
10	ATTR.1-10			
12	ATTR.1-12			
FIND PLU		SEARCH	DISP. LINE 1	INPUT

The data has been changed. Then, press the [SET] button.

TRACEABILITY			21-JUN-2007(THU) 11:15
6	ROAST BEEF		  
LOT	0123456789		
TITLE TEXT	COUNTRY	FACTORY	
Born in:	ARGENTINA	ATTR.1-1	
Breed in:	ARGENTINA	ATTR.1-1	
Breed in #2:	FRANCE	ATTR.2-2	
Slaughtered in:	FRANCE	ATTR.2-2	
Cut Up in:	FRANCE	ATTR.2-2	
INPUT			

4. When changing the lot data, press the “LOT” filed.

TRACEABILITY			21-JUN-2007(THU) 11:15
6	ROAST BEEF		   
LOT	0123456789		
TITLE TEXT	COUNTRY	FACTORY	
Born in:	ARGENTINA	ATTR.1-1	
Breed in:	ARGENTINA	ATTR.1-1	
Breed in #2:	FRANCE	ATTR.2-2	
Slaughtered in:	FRANCE	ATTR.2-2	
Cut Up in:	FRANCE	ATTR.2-2	
INPUT			

The Traceability Lot Number Set screen appears.

TRACEABILITY LOT NUMBER SET		21-JUN-2007(THU) 11:15							
0123456789									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M		
ABC		ERASE	BACK SPACE	BACK					

Change the lot number using the [ABC] [ERASE] and [BACK SPACE] buttons, and press the [BACK] button to finish.

TRACEABILITY LOT NUMBER SET		21-JUN-2007(THU) 11:15							
ABC0123456789									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M		
ABC		ERASE	BACK SPACE	BACK					
   									

The confirmation screen appears. Then, press the [SAVE] button to save the data.

TRACEABILITY LOT NUMBER SET 21-JUN-2007(THU) 11:15
21-JUN-2007(THU) 11:16

PROGRAM CHECK

Are you sure you want to save changes?
To confirm changes press SAVE
to undo changes press CANCEL

19001 - 0000

SAVE **CANCEL**

The Traceability screen appears. Then, press the [SET] button.

TRACEABILITY 21-JUN-2007(THU) 11:16

6 ROAST BEEF

LOT ABC0123456789

TITLE TEXT	COUNTRY	FACTORY
Born in:	ARGENTINA	ATTR.1-1
Breed in:	ARGENTINA	ATTR.1-1
Breed in #2:	FRANCE	ATTR.2-2
Slaughtered in:	FRANCE	ATTR.2-2
Cut Up in:	FRANCE	ATTR.2-2

INPUT

SET

5. The selected PLU screen appears.

Weighing Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15

ROAST BEEF

U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)
0.00	0.00	0.0	0.00	0.00
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY
0.0	21-06-07	27-06-07	<ADD>	0
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP
<MANUAL>	<INDIV>	1		

TARE kg 0.000

ZERO WEIGHT kg 0.000

UNIT PRICE £/kg 4.00

TOTAL PRICE £ 0.00

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15

ROAST BEEF

U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)
0.00	0.00	0.0	0.00	0.00
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY
0.0	21-06-07	27-06-07	<ADD>	0
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP
<MANUAL>	<INDIV>	1		

PCS 1

FIXED WEIGHT kg

FIXED PRICE £ 4.00

Fixed Unit Price Products

PLU 6		21-JUN-2007(THU) 11:15			
		ROAST BEEF			FIXED WEIGHT kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	FIXED U.PRI £/kg
				0	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	4.00
0.00	0.00	0.0	0.00	0.00	
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £
0.0	21-06-07	27-06-07	<ADD>	0	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	0.00
<MANUAL>	<INDIV>	1			

Weighing Fixed Price Products

PLU 6		21-JUN-2007(THU) 11:15			TARE kg
		ROAST BEEF			0.000
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	ZERO WEIGHT kg
				0	0.000
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	
0.00	0.00	0.0	0.00	0.00	
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	
0.0	21-06-07	27-06-07	<ADD>	0	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	FIXED PRICE £
<MANUAL>	<INDIV>	1			4.00

TEMPORARY CHANGE OPERATIONS

5.1 UNIT PRICE CHANGE

1. Ensure that the selected PLU screen is displayed.

Weighing Products

PLU 6 21-JUN-2007(THU) 11:15					TARE kg
 ROAST BEEF					0.000
					ZERO WEIGHT kg
					0.000
					UNIT PRICE £/kg
					4.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	TOTAL PRICE £
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	0.00
0.00	0.00	0.0	0.00	0.00	0.00
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	
0.0	21-06-07	27-06-07	<ADD>	0	
PRN MD.	PEEL MD.	CASSETTE		FUNCTION GROUP	
<MANUAL>	<INDIV>	1	MULTI		0.00

Fixed Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15					
 ROAST BEEF					FIXED WEIGHT kg
					FIXED U.PRI £/kg
					4.00
					TOTAL PRICE £
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	0.00
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	
0.00	0.00	0.0	0.00	0.00	
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	
0.0	21-06-07	27-06-07	<ADD>	0	
PRN MD.	PEEL MD.	CASSETTE		FUNCTION GROUP	
<MANUAL>	<INDIV>	1	MULTI		0.00

2. Enter a desired unit price using the numeric keys and press the "UNIT PRICE" or "FIXED UNIT PRICE" field.

EXAMPLE "\$3.80"



Weighing Products

PLU 6 21-JUN-2007(THU) 11:15					TARE kg
 ROAST BEEF					0.000
					ZERO WEIGHT kg
					0.000
					UNIT PRICE £/kg
					3.80
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	TOTAL PRICE £
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	
0.00	0.00	0.0	0.00	0.00	
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	
0.0	21-06-07	27-06-07	<ADD>	0	
PRN MD.	PEEL MD.	CASSETTE		FUNCTION GROUP	
<MANUAL>	<INDIV>	1	MULTI		0.00



Fixed Unit Price Products

PLU 6		21-JUN-2007(THU) 11:15			
 ROAST BEEF					FIXED WEIGHT kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS 0	FIXED U.PRI £/kg
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	3.80
0.00	0.00	0.0	0.00	0.00	
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TO PRICE £
0.0	21-06-07	27-06-07	<ADD>	0	0.00
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	
<MANUAL>	<INDIV>	1			

5.2 FIXED PRICE CHANGE

1. Ensure that the selected PLU screen is displayed.

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

Weighing Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE	kg
 ROAST BEEF					0.000	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	ZERO	WEIGHT kg
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	0.000	
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0	FIXED PRICE £	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	4.00	
<MANUAL>	<INDIV>	1				

2. Enter a desired price using the numeric keys, and press the "FIXED PRICE" field.

EXAMPLE "\$3.80"



Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	3.80	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				



PLU 6

21-JUN-2007(THU) 11:15

ROAST BEEF

U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)
0.00	0.00	0.0	0.00	0.00
-% (U/P)	P. DATE	S. DATE	TOTALADD	PRN QTY
0.0	21-06-07	27-06-07	<ADD>	0
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP
<MANUAL>	<INDIV>	1		

TARE kg

0.000

ZERO WEIGHT kg

0.000

FIXED PRICE £

3.80



5-4

UNI-5 User's Manual

5.3 AMOUNT DISCOUNT FOR UNIT PRICE

1. Ensure that the selected PLU screen is displayed.

Weighing Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					ZERO WEIGHT kg	0.000
					UNIT PRICE £/kg	4.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	TOTAL PRICE £	0.00
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

Fixed Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15					FIXED WEIGHT kg	
 ROAST BEEF					FIXED U.PRI £/kg	4.00
					TOTAL PRICE £	0.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

2. Enter a desired discount amount using the numeric keys, and press the “-\$ (U/P)” field.

EXAMPLE Discount amount “\$1.00”.



Weighing Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					ZERO WEIGHT kg	0.000
					UNIT PRICE £/kg	3.00
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	TOTAL PRICE £	0.00
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	1.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

Fixed Unit Price Products

PLU 6		21-JUN-2007(THU) 11:15			
ROAST BEEF					FIXED WEIGHT kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	FIXED U.PRI £/kg
				0	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	3.00
0.00	0.00	0.0	0.00	1.00	
-%(U/P)	P. DATE	S. DATE	TOTALADD	PRN 0	TOTAL PRICE £
0.0	21-06-07	27-06-07	<ADD>	0	0.00
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	
<MANUAL>	<INDIV>	1			

5.4 PERCENT DISCOUNT FOR UNIT PRICE

1. Ensure that the selected PLU screen is displayed.

Weighing Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					ZERO WEIGHT kg	0.000
					UNIT PRICE £/kg	4.00
U/P	F/P	Fix UPR	Fix UPR +WEIGHT	COUPONMS	TOTAL PRICE £	0.00
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

Fixed Unit Price Products

PLU 6 21-JUN-2007(THU) 11:15					FIXED WEIGHT kg	
 ROAST BEEF					FIXED U.PRI £/kg	4.00
					TOTAL PRICE £	0.00
U/P	F/P	Fix UPR	Fix UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

2. Enter a desired discount percentage using the numeric keys on the key sheet, and press the “-% (U/P)” field.

EXAMPLE Discount percentage “10%”.



PLU 6 21-JUN-2007(THU) 11:15					TARE kg	0.000
 ROAST BEEF					ZERO WEIGHT kg	0.000
					UNIT PRICE £/kg	3.60
U/P	F/P	Fix UPR	Fix UPR +WEIGHT	COUPONMS	TOTAL PRICE £	0.00
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
10.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANU	<INDIV>	1				



Fixed Unit Price Products

PLU 621-JUN-2007(THU) 11:15					
ROAST BEEF					FIXED WEIGHT kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	FIXED U.PRI £/kg
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	3.60
0.00	0.00	0.0	0.00	0.00	
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	TOTAL PRICE £
10.0	21-06-07	27-06-07	<ADD>	0	0.00
PRN MD	REEL MD	CASSETTE	MULTI	FUNCTION GROUP	
<MANL	INDIV>	1			



5.5 AMOUNT DISCOUNT FOR TOTAL PRICE

1. Ensure that the selected PLU screen is displayed.

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

Weighing Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE	kg
ROAST BEEF					0.000	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS	ZERO WEIGHT kg	
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)	0.000	
0.00	0.00	0.0	0.00	0.00		
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

2. Enter a desired discount amount using the numeric keys, and press the “-\$” field.

EXAMPLE Discount amount “\$1.00”.

1	0	0
---	---	---

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	1.00	0.0	0.00	0.00		
-%(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	3.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

PLU 6

21-JUN-2007(THU) 11:15

ROAST BEEF

U/P

F/P

FIX UPR

FIX UPR +WEIGHT

COUPONMS

SPECIAL

0.00

-\$

1.00

-%

0.0

SP. (U/P)

0.00

-\$ (U/P)

0.00

-% (U/P)

0.0

P. DATE

21-06

S. DATE

-06-07

TOTALADD

<ADD>

PRN QTY

0

PRN MD.

<MANUAL>

PEEL MD.

<INDIV

CASSETTE

1

MULTI

FUNCTION GROUP

TARE kg

0.000

ZERO WEIGHT kg

0.000

FIXED PRICE £

3.00

5.6 PERCENT DISCOUNT FOR TOTAL PRICE

1. Ensure that the selected PLU screen is displayed.

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
ROAST BEEF					FIXED WEIGHT	kg
U/P	F/P	Fix UPR	FIX UPR +WEIGHT	COUPONMS		
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE	£
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				4.00

Weighing Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE	kg
ROAST BEEF					0.000	
					ZERO WEIGHT	kg
U/P	F/P	Fix UPR	FIX UPR +WEIGHT	COUPONMS	0.000	
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP	FIXED PRICE	£
<MANUAL>	<INDIV>	1				4.00

2. Enter a desired discount percentage using the numeric keys on the key sheet, and press the “-%” field.

EXAMPLE Discount percentage “10%”.



PLU 6 21-JUN-2007(THU) 11:15					PCS	1
ROAST BEEF					FIXED WEIGHT	kg
U/P	F/P	Fix UPR	FIX UPR +WEIGHT	COUPONMS		
				0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	10.0	0.00	0.00		
-% (U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE	£
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				3.60

Weighing Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					TARE kg	
 ROAST BEEF					0.000	
					ZERO WEIGHT kg	
					0.000	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	10.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY		
0.0	21-06-07	27-06-07	<ADD>	0		
PRN MD.	PEEL MD.	CASSET	MULTI	FUNCTION GROUP	FIXED PRICE £	
<MANUAL>	<INDIV>	1			3.60	

5.7 PRODUCT QUANTITY CHANGE

1. Ensure that the selected PLU screen is displayed.

Fixed Price Products

PLU 6 21-JUN-2007(THU) 11:15					PCS	1
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

2. Enter a desired quantity using the numeric keys, and press the "PCS" field.

EXAMPLE Quantity "2 pieces"

2

PLU 6 21-JUN-2007(THU) 11:15					PCS	2
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

3. To select a desired fix price mark, press the "PCS" field again.

PLU 6 21-JUN-2007(THU) 11:15					PCS	2
 ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

- 4.** The Fix Price mark List screen appears. Then, select a desired mark by pressing the corresponding field.

EXAMPLE Price mark “PC. PCS.”

FIX PRICE MARK LIST		21-JUN-2007(THU) 11:15	1/3
0	NONE	 	
1	oz oz		
2	lb lb		
3	kg kg		
4	g g		
5	PC. PCS.		

FIND
PLU

SEARCH

INPUT

PLU 6		21-JUN-2007(THU) 11:15			PCS	2PCS.
  ROAST BEEF					FIXED WEIGHT kg	
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS 0		
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)		
0.00	0.00	0.0	0.00	0.00		
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY	FIXED PRICE £	
0.0	21-06-07	27-06-07	<ADD>	0	4.00	
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP		
<MANUAL>	<INDIV>	1				

5.8 PRINT QUANTITY SETTING

1. Ensure that the selected PLU screen is displayed and “AUTO” is selected in the Printing Mode.

Fixed Price Products				
PLU 6		21-JUN-2007(THU) 11:15		PCS 1
ROAST BEEF				FIXED WEIGHT kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)
0.00	0.00	0.0	0.00	0.00
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY
0.0	21-06-07	27-06-07	<ADD>	0
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP
<AUTO>	<INDIV>	1		
				FIXED PRICE £
				4.00

2. Enter a desired number of labels and press the “PRN QTY (Print Quantity)” field on the screen.

EXAMPLE Print quantity “3”.

3

Fixed Price Products				
PLU 6		21-JUN-2007(THU) 11:15		PCS 1
ROAST BEEF				FIXED WEIGHT kg
U/P	F/P	FIX UPR	FIX UPR +WEIGHT	COUPONMS
SPECIAL	-\$	-%	SP. (U/P)	-\$ (U/P)
0.00	0.00	0.0	0.00	0.00
-(U/P)	P DATE	S DATE	TOTALADD	PRN QTY
0.0	21-06-07	27-06-07	<ADD>	3
PRN MD.	PEEL MD.	CASSETTE	MULTI	FUNCTION GROUP
<AUTO>	<INDIV>	1		
				FIXED PRICE £
				4.00

3. Press the [PRINT] key on the key sheet.



The set number of labels will be issued.



Note: To interrupt the issue of labels, press the [PRINT] key again.
To continue the issue of labels, press the [PRINT] key again.

SELF-SERVICE OPERATIONS

6.1 WEIGHING PRODUCTS

1. Ensure that the initial screen is displayed.




2. Select a desired product by pressing the corresponding button on the screen.

EXAMPLE Select "Roast Beef"



3. The selected product screen appears.

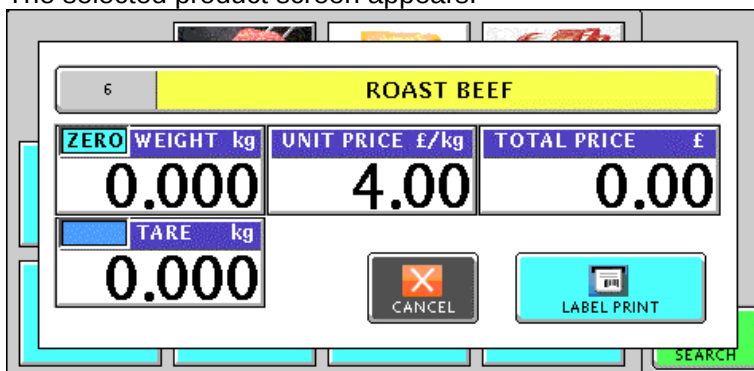


4. Put a product on the weigh platter.


PRODUCT




The weight is measured and the total price is calculated.

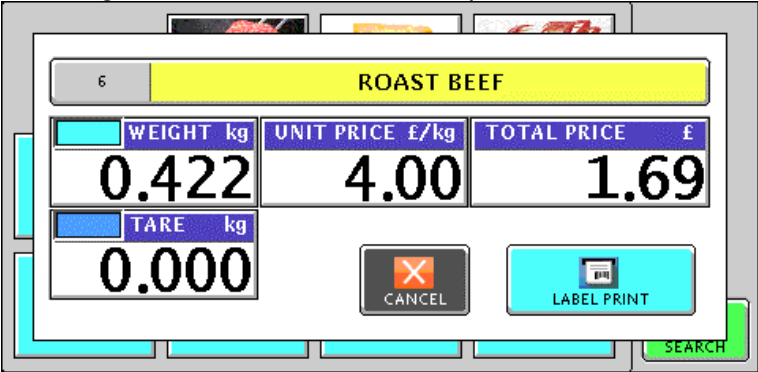

5. Press the [LABEL PRINT] button on the screen to issue the label.

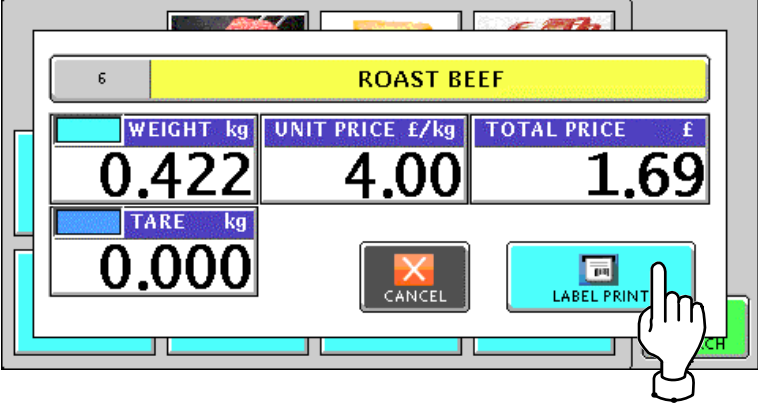

The label is issued.



6.2 FIXED PRICE PRODUCTS

1. Ensure that the initial screen is displayed.




2. Select a desired product by pressing the corresponding button on the screen.

EXAMPLE Select "Roast Beef"



3. The selected product screen appears.
Then, press the [LABEL PRINT] button on the screen to issue the label.

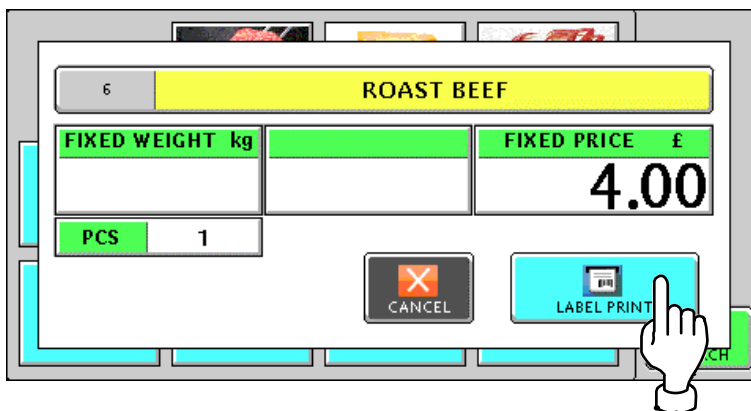

The label is issued.



ACCUMULATOR MODE

7.1 MANUAL INPUT ACCUMULATION


1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode

Then, press the "ACC (Accumulator)" filed.



2. The Accumulator (Input Number Accumulation) screen appears.

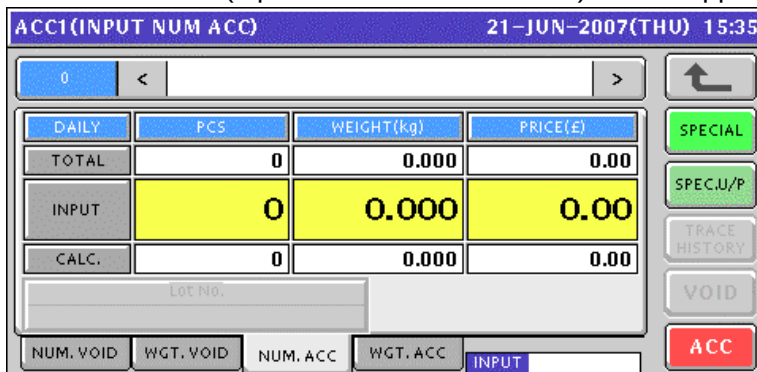


3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Input Number Accumulation screen for the selected product appears.

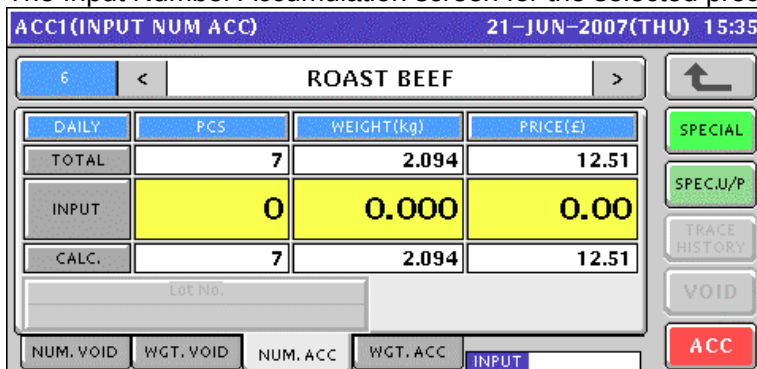

4. Enter a quantity, weight, and price that are to be accumulated and press the corresponding fields for registration. Then, press the [ACC] button on the screen.

EXAMPLE Quantity "1 pc.", Weight "169g", Price "\$0.84"

ACC1(INPUT NUM ACC)				21-JUN-2007(THU) 15:35	
6 < ROAST BEEF >					
DAILY	PCS	WEIGHT(kg)	PRICE(£)	SPECIAL	
TOTAL	7	2.094	12.51	SPEC.U/P	
INPUT	1	0.169	0.84	↑	
CALC.	8	2.263	13.35	↓	
Lot No.				ACC	
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

ACC1(INPUT NUM ACC)		21-JUN-2007(THU) 15:35	
21-JUN-2007(THU) 15:35			
CHECK FOR ADD			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11006 - 0000		↑	
		EXEC STOP	

6. The registration has been completed.


ACC1(INPUT NUM ACC)				21-JUN-2007(THU) 15:36	
6 < ROAST BEEF >					
DAILY	PCS	WEIGHT(kg)	PRICE(£)	SPECIAL	
TOTAL	8	2.263	13.35	SPEC.U/P	
INPUT	0	0.000	0.00	TRACE HISTORY	
CALC.	8	2.263	13.35	VOID	
Lot No.				ACC	
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	

7.2 WEIGHING ACCUMULATION

1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode


Then, press the “ACC (Accumulator)” filed.

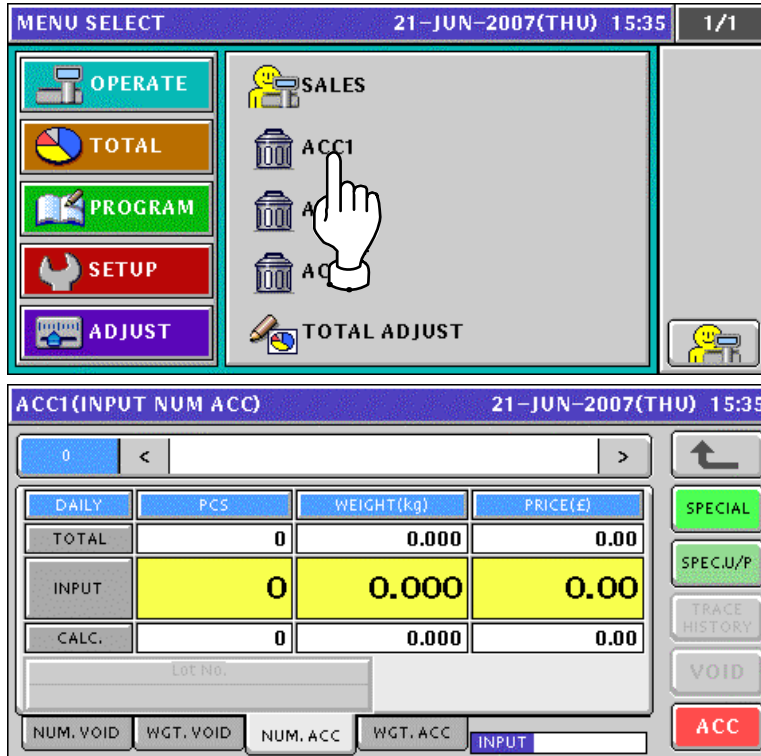

The screenshot shows the 'MENU SELECT' screen with a date and time display of '21-JUN-2007(THU) 15:35' and a page indicator '1/1'. On the left, there are five menu options: OPERATE, TOTAL, PROGRAM, SETUP, and ADJUST. On the right, under the 'SALES' heading, there are three options: ACC1, ACC2, and ACC3, each with a trash can icon. A hand cursor is pointing at the ACC1 option. Below these is a 'TOTAL ADJUST' option with a pencil icon. On the far right, there is a small icon of a person at a counter.

Below the menu screen is the 'ACC1 (INPUT NUM ACC)' screen, also showing the date and time '21-JUN-2007(THU) 15:35'. It features a numeric keypad at the top with a '0' button highlighted. Below the keypad is a table with four columns: DAILY, PCS, WEIGHT(kg), and PRICE(£). The table has four rows: TOTAL, INPUT, and CALC., with the bottom row being empty. The 'INPUT' row is highlighted in yellow. To the right of the table are several buttons: SPECIAL, SPEC.U/P, TRACE HISTORY, VOID, and ACC. At the bottom, there are tabs for NUM. VOID, WGT. VOID, NUM. ACC, and WGT. ACC, with the 'INPUT' tab selected.

2. To get the Weighing Accumulation screen, press the [WGT. ACC] tab.

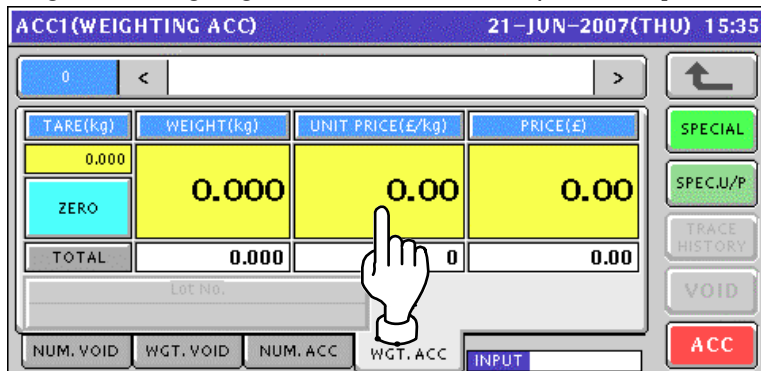

The screenshot shows the 'ACC1 (WEIGHTING ACC)' screen with the same date and time '21-JUN-2007(THU) 15:35'. It features a numeric keypad at the top with a '0' button highlighted. Below the keypad is a table with four columns: TARE(kg), WEIGHT(kg), UNIT PRICE(£/kg), and PRICE(£). The table has four rows: ZERO, TOTAL, and two empty rows. The 'ZERO' row is highlighted in cyan. To the right of the table are several buttons: SPECIAL, SPEC.U/P, TRACE HISTORY, VOID, and ACC. At the bottom, there are tabs for NUM. VOID, WGT. VOID, NUM. ACC, and WGT. ACC, with the 'WGT. ACC' tab selected. A hand cursor is pointing at the 'WGT. ACC' tab.

3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Weighing Accumulation screen for the selected product appears.

ACCI(WEIGHTING ACC)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	2.685	9 PC(S)	15.04		
LOT NO.					
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	ACC

4. Put a product on the weigh platter and press the [ACC] button on the screen..



ACCI(WEIGHTING ACC)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.422	4.00	1.69		
TOTAL	2.685	9 PC(S)	15.04		
LOT NO.					
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	ACC

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

ACCI(WEIGHTING ACC)		21-JUN-2007(THU) 15:35	
CHECK FOR ADD			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11006 - 0000		EXEC	STOP

6. Remove the product from the weigh platter.

PRODUCT



ACC1(WEIGHTING ACC)				21-JUN-2007(THU) 15:36	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	3.107	10 PC(S)	16.73		
Lot No.					
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	ACC

SPECIAL
SPEC.U/P
TRACE HISTORY
VOID

7.3 MANUAL INPUT VOID

1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode

Then, press the “ACC (Accumulator)” filed.

ACC1(INPUT NUM ACC)

DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	0	0.000	0.00
INPUT	0	0.000	0.00
CALC.	0	0.000	0.00

NUM. VOID WGT. VOID NUM. ACC WGT. ACC INPUT

2. To get the Input Number Void screen, press the [NUM. VOID] tab.

ACC1(INPUT NUM VOID)

DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	0	0.000	0.00
INPUT	0	0.000	0.00
CALC.	0	0.000	0.00

NUM. VOID WGT. VOID NUM. ACC WGT. ACC INPUT

3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Input Number Void screen for the selected product appears.

ACC1(INPUT NUM VOID) 21-JUN-2007(THU) 15:35			
6	<	ROAST BEEF	>
DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	10	3.107	16.73
INPUT	0	0.000	0.00
CALC.	10	3.107	16.73
LOT NO.			
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC
INPUT			

4. Enter a quantity, weight, and price that are to be voided and press the corresponding fields for registration. Then, press the [VOID] button on the screen.

EXAMPLE Quantity "1 pc.", Weight "169g", Price "\$0.84"

ACC1(INPUT NUM VOID) 21-JUN-2007(THU) 15:35			
6	<	ROAST BEEF	>
DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	10	3.107	16.73
INPUT	1	0.169	0.84
CALC.	9	0.338	15.89
LOT NO.			
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC
INPUT			

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

ACC1(INPUT NUM VOID) 21-JUN-2007(THU) 15:35	
CHECK FOR SUBTRACTION	
IS IT OK TO CALCULATE DESIGNATED DATA?	
11005 - 0000	
EXEC	STOP

6. The registration has been completed.

ACC1(INPUT NUM VOID)21-JUN-2007(THU) 15:36

6<ROAST BEEF>

↑

DAILY	PCS	WEIGHT(kg)	PRICE(¥)
TOTAL	9	2.938	15.89
INPUT	0	0.000	0.00
CALC.	9	2.938	15.89

Lot No.

NUM. VOIDWGT. VOIDNUM. ACCWGT. ACC

INPUT

SPECIAL

SPEC.U/P

TRACE HISTORY

VOID

ACC

7.4 WEIGHING VOID

1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode

Then, press the “ACC (Accumulator)” filed.

ACC1(INPUT NUM ACC)

DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	0	0.000	0.00
INPUT	0	0.000	0.00
CALC.	0	0.000	0.00

NUM. VOID WGT. VOID NUM. ACC WGT. ACC INPUT

2. To get the Weighing Void screen, press the [WGT. VOID] tab.

ACC1(WEIGHING VOID)

TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)
0.000	0.000	0.00	0.00
ZERO	0.000	0	0.00
TOTAL	0.000	0	0.00

NUM. VOID WGT. VOID NUM. ACC WGT. ACC INPUT

3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Weighing Void screen for the selected product appears.

ACC1(WEIGHTING VOID)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	2.938	9 PC(S)	15.89		
LOT NO.					
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	

SPECIAL
 SPEC.U/P
 TRACE HISTORY
 VOID
 ACC

4. Put a product on the weigh platter and press the [VOID] button on the screen..



ACC1(WEIGHTING VOID)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.422	4.00	1.69		
TOTAL	2.938	9 PC(S)	15.89		
LOT NO.					
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	

SPECIAL
 SPEC.U/P
 TRACE HISTORY
 VOID
 ACC

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

ACC1(WEIGHTING VOID)		21-JUN-2007(THU) 15:35	
21-JUN-2007(THU) 15:35			
CHECK FOR SUBTRACTION			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11005 - 0000			
		EXEC STOP	

6. Remove the product from the weigh platter.

PRODUCT



ACC1(WEIGHTING VOID)				21-JUN-2007(THU) 15:36	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	2.516	8 PC(S)	14.20		
Lot No.					
NUM. VOID	WGT. VOID	NUM. ACC	WGT. ACC	INPUT	

SPECIAL

SPEC.U/P

TRACE HISTORY

VOID

ACC

TOTAL ADJUST MODE

8.1 MANUAL INPUT SUBTRACTION

1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode

Then, press the "TOTAL ADJUST" filed.

DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	0	0.000	0.00
INPUT	0	0.000	0.00
CALC.	0	0.000	0.00

2. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Total Adjust (Input Number Subtraction) screen for the selected product appears.

DAILY	PCS	WEIGHT(kg)	PRICE(£)
TOTAL	39	5.936	130.16
INPUT	0	0.000	0.00
CALC.	39	5.936	130.16

3. Enter a quantity, weight, and price that are to be subtracted and press the corresponding fields for registration. Then, press the [SUB] button on the screen.

EXAMPLE Quantity "1 pc.", Weight "169g", Price "\$0.84"

TOTAL ADJUST(INPUT NUM SUB)				21-JUN-2007(THU) 15:35	
6 < ROAST BEEF >					
DAILY	PCS	WEIGHT(kg)	PRICE(€)	SPECIAL	
TOTAL	39	5.936	130.16	SPEC.U/P	
INPUT	1	0.169	0.84	TRACE HISTORY	
CALC.	38	5.767	129.32	SUB	
LOT NO.				ADD	
NUM. SUB	WGT. SUB	NUM. ADD	T. ADD	INPUT	

4. The confirmation screen appears. Then, press the [EXEC] button on the screen.

ACCI(INPUT NUM ACC)		21-JUN-2007(THU) 15:35	
21-JUN-2007(THU) 15:35			
CHECK FOR ADD			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11006 - 0000		EXEC STOP	

5. The registration has been completed.



TOTAL ADJUST(INPUT NUM SUB)				21-JUN-2007(THU) 15:35	
6 < ROAST BEEF >					
DAILY	PCS	WEIGHT(kg)	PRICE(€)	SPECIAL	
TOTAL	38	5.767	129.32	SPEC.U/P	
INPUT	0	0.000	0.00	TRACE HISTORY	
CALC.	38	5.767	129.32	SUB	
LOT NO.				ADD	
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	

8.2 WEIGHING SUBTRACTION


1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode

Then, press the "TOTAL ADJUST" filed.

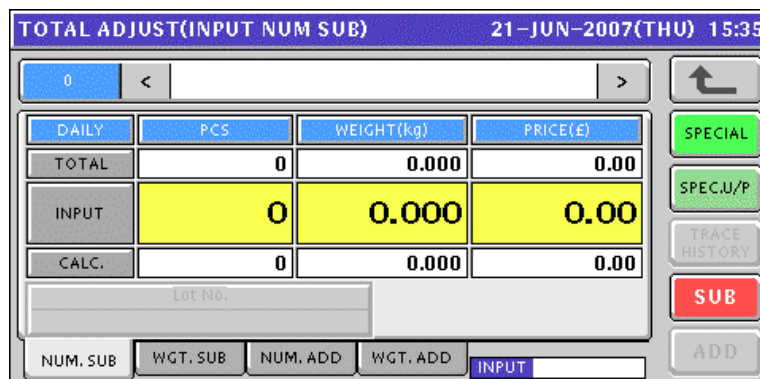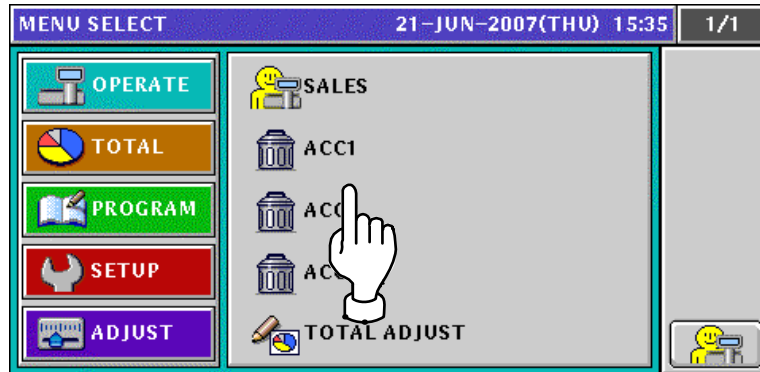


2. To get the Total Adjust (Weighing Subtraction) screen, press the [WGT. SUB] tab.

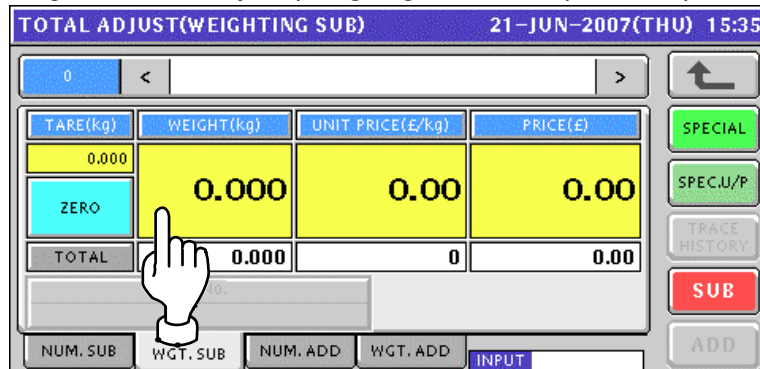

3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number “6”.



The Total Adjust (Weighing Subtraction) screen for the selected product appears.

TOTAL ADJUST(WEIGHTING SUB)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	5.767	38 PC(S)	129.32		
LOT NO.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	

SPECIAL

SPEC.U/P

TRACE HISTORY

SUB

ADD

4. Put a product on the weigh platter and press the [SUB] button on the screen..



TOTAL ADJUST(WEIGHTING SUB)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.422	4.00	1.69		
TOTAL	5.767	38 PC(S)	129.32		
LOT NO.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	

SPECIAL

SPEC.U/P

TRACE HISTORY

SUB

ADD

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

TOTAL ADJUST(WEIGHTING SUB)		21-JUN-2007(THU) 15:35	
CHECK FOR SUBTRACTION			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11005 - 0000			
EXEC		STOP	

6. Remove the product from the weigh platter.

PRODUCT





TOTAL ADJUST(WEIGHTING SUB)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)	SPECIAL	
0.000	0.000	4.00	0.00	SPEC.U/P	
ZERO				TRACE HISTORY	
TOTAL	5.345	37 PC(S)	127.63	SUB	
Lot No.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	ADD

8.3 MANUAL INPUT ADDITION


1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.



Then, press the “TOTAL ADJUST” filed.

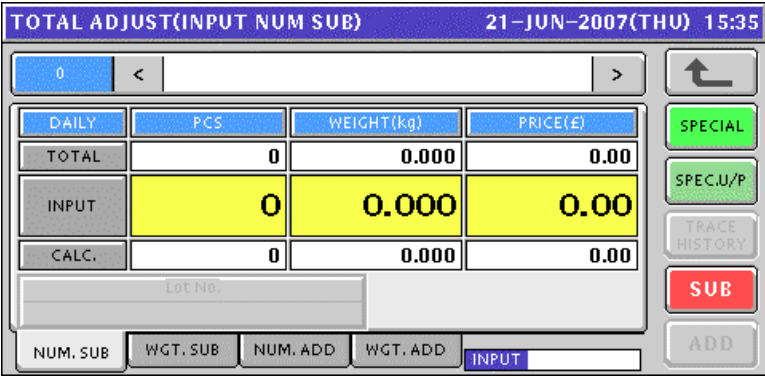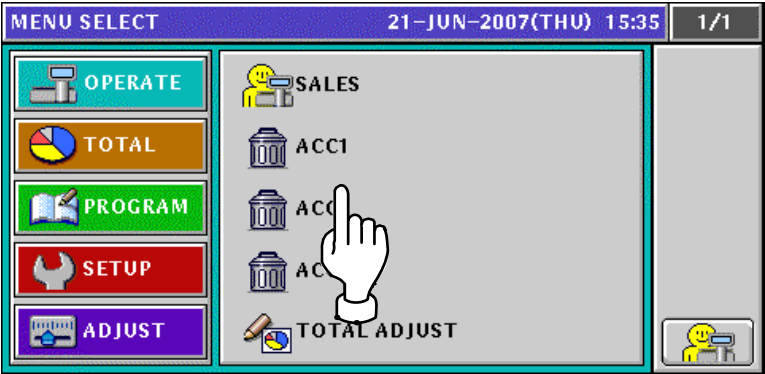

2. To get the Total Adjust (Input Number Addition) screen, press the [NUM. ADD] tab.

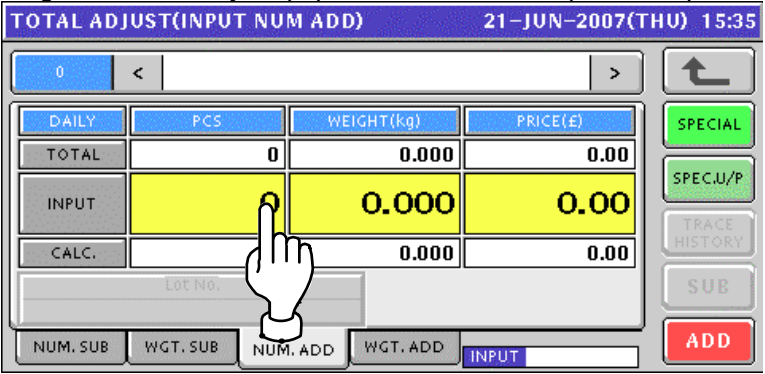

3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Total Adjust (Input Number Addition) screen for the selected product appears.

TOTAL ADJUST(INPUT NUM ADD)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
DAILY	PCS	WEIGHT(kg)	PRICE(£)		
TOTAL	37	5.345	127.63		
INPUT	0	0.000	0.00		
CALC.	37	5.345	127.63		
LOT NO.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	

SPECIAL
 SPEC.U/P
 TRACE HISTORY
 SUB
 ADD

4. Enter a quantity, weight, and price that are to be added and press the corresponding fields for registration. Then, press the [ADD] button on the screen.

EXAMPLE Quantity "1 pc.", Weight "169g", Price "\$0.84"

TOTAL ADJUST(INPUT NUM ADD)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
DAILY	PCS	WEIGHT(kg)	PRICE(£)		
TOTAL	37	5.345	127.63		
INPUT	1	0.169	0.84		
CALC.	38	5.514	128.47		
LOT NO.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	

SPECIAL
 SPEC.U/P
 TRACE HISTORY
 SUB
 ADD

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

ACC1(INPUT NUM ADD)		21-JUN-2007(THU) 15:35	
CHECK FOR ADD			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11006 - 0000		EXEC STOP	

6. The registration has been completed.

TOTAL ADJUST(INPUT NUM ADD)21-JUN-2007(THU) 15:35

6<ROAST BEEF>

DAILYPCSWEIGHT(kg)PRICE(£)

TOTAL385.514128.47

INPUT00.0000.00

CALC.385.514128.47

Lot No.

NUM. SUBWGT. SUBNUM. ADDWGT. ADD

INPUT

SPECIAL

SPEC.U/P

TRACE HISTORY

SUB



ADD

8.4 WEIGHING ADDITION


1. To get the Operation Menu Select screen, press the [MODE] key on the key sheet.

Mode

Then, press the "TOTAL ADJUST" filed.

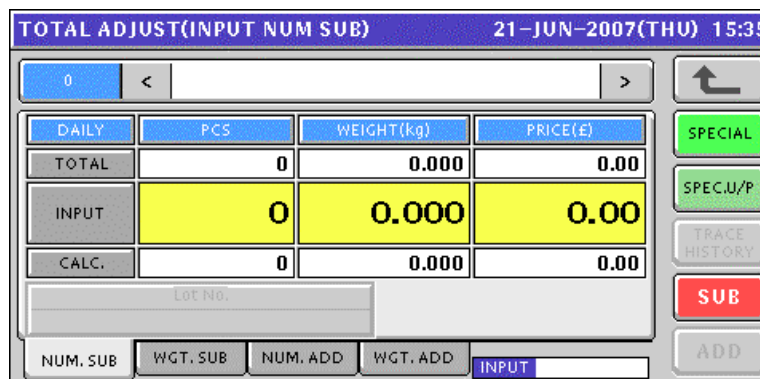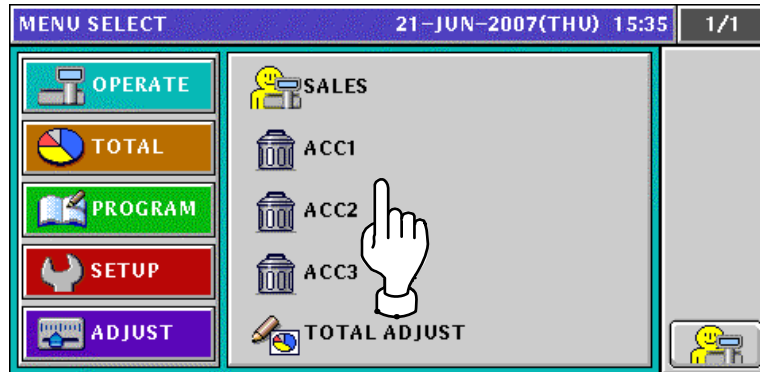

2. To get the Total Adjust (Weighing Add) screen, press the [WGT. ADD] tab.

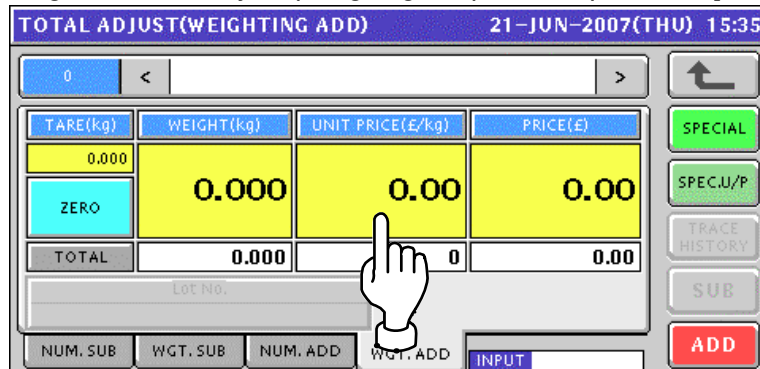

3. Enter a desired PLU number and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



The Total Adjust (Weighing Add) screen for the selected product appears.

TOTAL ADJUST(WEIGHTING ADD)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	5.514	38 PC(S)	128.47		
LOT NO.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	
				ADD	

4. Put a product on the weigh platter and press the [ADD] button on the screen..



TOTAL ADJUST(WEIGHTING ADD)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.422	4.00	1.69		
TOTAL	5.514	38 PC(S)	128.47		
LOT NO.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	
				ADD	

5. The confirmation screen appears. Then, press the [EXEC] button on the screen.

TOTAL ADJUST(WEIGHTING ADD)		21-JUN-2007(THU) 15:35	
CHECK FOR ADD			
IS IT OK TO CALCULATE DESIGNATED DATA?			
11006 - 0000			
		EXEC	
		STOP	

6. Remove the product from the weigh platter.

PRODUCT




TOTAL ADJUST(WEIGHTING ADD)				21-JUN-2007(THU) 15:35	
6	<	ROAST BEEF		>	
TARE(kg)	WEIGHT(kg)	UNIT PRICE(£/kg)	PRICE(£)		
0.000	0.000	4.00	0.00		
ZERO					
TOTAL	5.936	39 PC(S)	130.16		
Lot No.					
NUM. SUB	WGT. SUB	NUM. ADD	WGT. ADD	INPUT	ADD

SPECIAL
SPEC.U/P
TRACE HISTORY
SUB

TOTAL MODE

9.1 DAILY TOTAL

1. Press the "PRODUCTION DAILY TOTAL" filed.

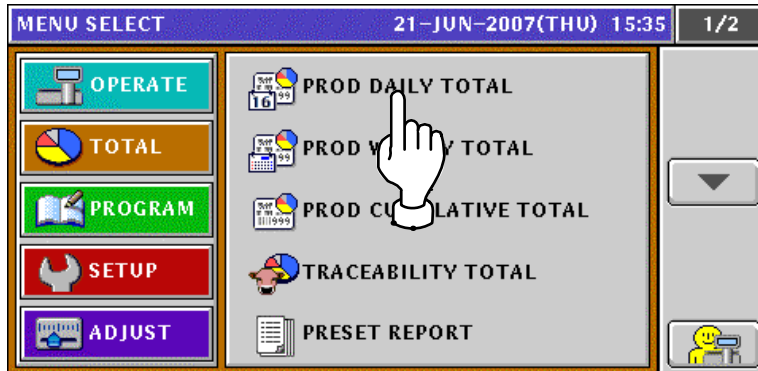

2. The Daily Total screen appears.

The screenshot shows the 'PROD DAILY TOTAL(TOTAL)' screen with a header bar displaying '21-JUN-2007(THU) 15:35'. The screen is divided into sections for 'MACHINE No.' (0:ALL), 'GRAND' totals, 'SUBTRACT' totals, and 'TOTAL' summary. The 'GRAND' section shows PCS (0), WEIGHT(kg) (0.000), and PRICE(£) (0.00). The 'SUBTRACT' section shows PCS (0), WEIGHT(kg) (0.000), and PRICE(£) (0.00). The 'TOTAL' section shows a table with columns: HOUR., DEPT., GROUP, ITEM, OPER., and CLASS. A hand icon is shown pointing to the 'TOTAL' button at the bottom left.

3. To obtain the Hourly Total screen, press the [HOUR.] tab.
To change the pages, press the [▼] or [▲] button on the screen.

The screenshot shows the 'PROD DAILY TOTAL(HOUR)' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '1/5'. The screen displays a table with columns: No., HOURLY(hh:mm), PCS, WEIGHT(kg), and PRICE(£). The table has five rows: 0 (00:00 ~ 00:59), 1 (01:00 ~ 01:59), 2 (02:00 ~ 02:59), 3 (03:00 ~ 03:59), and 4 (04:00 ~ 04:59). The 'TOTAL' row shows PCS (0), WEIGHT(kg) (0.000), and PRICE(£) (0.00). A hand icon is shown pointing to the 'HOUR.' tab at the bottom left. On the right, there are navigation buttons: a back arrow, a down arrow (highlighted with a hand icon), and a right arrow.



PROD DAILY TOTAL(HOUR)					21-JUN-2007(THU) 15:35		5/5	
No.	HOURLY(hh:mm)	PCS	WEIGHT(kg)	PRICE(£)				
20	20:00 ~ 20:59	0	0.000	0.00				
21	21:00 ~ 21:59	0	0.000	0.00				
22	22:00 ~ 22:59	0	0.000	0.00				
23	23:00 ~ 23:59	0	0.000	0.00				
TOTAL		0	0.000	0.00				

TOTAL

DEPT.

GROUP

ITEM

OPER.

CLASS

4. To obtain the Department Total screen, press the [DEPT.] tab.
To change the pages, press the [▼] or [▲] button on the screen.

PROD DAILY TOTAL(DEPT) 21-JUN-2007(THU) 15:35 1/1

No.	DEPARTMENT	PCS	WEIGHT(kg)	PRICE(E)
TOTAL				

TOTAL HOUR. DEPT. GROUP ITEM OPER. CLASS

- To obtain the Group Total screen, press the [GROUP] tab.
To change the pages, press the [▼] or [▲] button on the screen.

PROD DAILY TOTAL(GROUP)					21-JUN-2007(THU) 15:35		1/1	
No.	GROUP	PCS	WEIGHT(kg)	PRICE(E)				
TOTAL								

TOTAL
HOUR.
DEPT.
GROUP
ITEM
OPER.
CLASS

- 6.** To obtain the Designated Item Total screen, press the [ITEM] tab.

PROD DAILY TOTAL (ITEM) 21-JUN-2007(THU) 15:35

0

PCS 0

WEIGHT(kg) 0.000

PRICE(£) 0.00

TOTAL HOUR. DEPT. GROUP ITEM OPER. CLASS

Enter a desired PLU number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE PLU number "6".



PROD DAILY TOTAL(ITEM) 21-JUN-2007(THU) 15:35

6 ROAST BEEF

PCS 7 WEIGHT(kg) 2.954 PRICE(£) 11.83

TOTAL HOUR. DEPT. GROUP ITEM OPER. CLASS

7. To obtain the Operator Total screen, press the [ORER.] tab.

PROD DAILY TOTAL(OPER) 21-JUN-2007(THU) 15:35 1/1

No.	OPERATOR	PCS	WEIGHT(kg)	PRICE(£)
TOTAL		0		0.00

TOTAL HOUR. DEPT. GROUP ITEM OPER. CLASS

8. To obtain the Class Total screen, press the [CLASS] tab.

PROD DAILY TOTAL(CLASS) 21-JUN-2007(THU) 15:35

CLASS ANALYZE

NO	DEPT.	GROUP

CLASS


PLU No.
ABC PRICE
ABC WEIGHT
ABC PCS
Z PRICE
Z WEIGHT
Z PCS

TOTAL HOUR. DEPT. GROUP ITEM OPER. CLASS ANALY SYS

NO	The object of analysis is not specified.
DEPT.	The object of analysis is specified to be departments.
GROUP	The object of analysis is specified to be groups.
PLU No.	Analysis is performed in ascending PLU number order.
ABC PRICE	Analysis is performed in descending price order.
ABC WEIGHT	Analysis is performed in descending weight order.
ABC PCS	Analysis is performed in descending quantity order.
Z PRICE	Analysis is performed in ascending price order.
Z WEIGHT	Analysis is performed in ascending weight order.
Z PCS	Analysis is performed in ascending quantity order.

9.2 WEEKLY TOTAL

1. Press the "PRODUCTION WEEKLY TOTAL" filed.

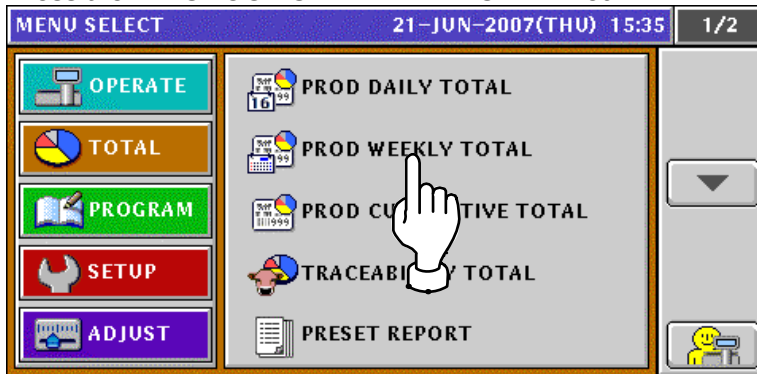

2. The Weekly Total screen appears.
To change the pages, press the [▼] or [▲] button on the screen.

The screenshot shows the 'PROD WEEKLY TOTAL(WEEK)' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '1/2'. The screen displays a table with the following data:

No.	WEEK HOULY	PCS	WEIGHT(kg)	PRICE(£)
0	SUN	0	0.000	0.00
1	MON	0	0.000	0.00
2	TUE	0	0.000	0.00
3	WED	0	0.000	0.00
4	THU	7	2.954	11.83
TOTAL		13	5.306	23.99

Below the table, there are tabs for the days of the week: 'WEEK', 'SUN', 'MON', 'TUE', 'WED', 'THU', 'FRI', 'SAT'. A hand cursor is pointing at the 'WED' tab. On the right side, there are navigation buttons: a back arrow, a down arrow (highlighted with a hand cursor), and an up arrow.

The screenshot shows the 'PROD WEEKLY TOTAL(WEEK)' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '2/2'. The screen displays a table with the following data:

No.	WEEK HOULY	PCS	WEIGHT(kg)	PRICE(£)
5	FRI	0	0.000	0.00
6	SAT	0	0.000	0.00
TOTAL		0	0.000	0.00

Below the table, there are tabs for the days of the week: 'WEEK', 'SUN', 'MON', 'TUE', 'WED', 'THU', 'FRI', 'SAT'. A hand cursor is pointing at the 'FRI' tab. On the right side, there are navigation buttons: a back arrow, an up arrow (highlighted with a hand cursor), and a down arrow.

3. To obtain total for the day-of-the week, press a desired day-of-the week tab.
To change the pages, press the [▼] or [▲] button on the screen.

The screenshot shows the 'PROD WEEKLY TOTAL(SUN)' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '1/5'. The screen displays a table with the following data:

No.	HOURLY	PCS	WEIGHT(kg)	PRICE(£)
0	00:00 ~ 00:59	0	0.000	0.00
1	01:00 ~ 01:59	0	0.000	0.00
2	02:00 ~ 02:59	0	0.000	0.00
3	03:00 ~ 03:59	0	0.000	0.00
4	04:00 ~ 04:59	0	0.000	0.00
TOTAL		0	0.000	0.00

Below the table, there are tabs for the days of the week: 'WEEK', 'SUN', 'MON', 'TUE', 'WED', 'THU', 'FRI', 'SAT'. A hand cursor is pointing at the 'SUN' tab. On the right side, there are navigation buttons: a back arrow, a down arrow (highlighted with a hand cursor), and an up arrow.

●
●
●

PROD WEEKLY TOTAL(SUN)21-JUN-2007(THU) 15:355/5

No.	HOURLY	PCS	WEIGHT(kg)	PRICE(£)
20	20:00 ~ 20:59	0	0.000	0.00
21	21:00 ~ 21:59	0	0.000	0.00
22	22:00 ~ 22:59	0	0.000	0.00
23	23:00 ~ 23:59	0	0.000	0.00
TOTAL		0	0.000	0.00

WEEK

SUN

MON

TUE

WED

THU

FRI

SAT

↶

↑



9.3 CUMULATIVE TOTAL

- 1.** Press the “PRODUCTION CUMULATIVE TOTAL” filed.

- 2.** The Cumulative Total screen appears.

PROD CUMULATIVE TOTAL(TOTAL)				21-JUN-2007(THU) 15:35	
MACHINE No.		0:ALL			
GRAND	PCS	WEIGHT(kg)	PRICE(£)		
	0	0.000	0.00		
	AVERAGE WEIGHT(kg/PCS)		AVERAGE PRICE(£/PCS)		
-----		-----			
SUB TRACT	PCS	WEIGHT(kg)	PRICE(£)		
	0	0.000	0.00		
	AVERAGE WEIGHT(kg/PCS)		AVERAGE PRICE(£/PCS)		
-----		-----			
TOTAL	DEPT.	GROUP	OPER. CLASS		

- 3.** To obtain total for each department, press the [DEPT.] tab on the screen.
To change the pages, press the [▼] or [▲] button on the screen.

PROD CUMULATIVE TOTAL(DEPT) 21-JUN-2007(THU) 15:35 1/1

No.	DEPARTMENT	PCS	WEIGHT(kg)	PRICE(£)
TOTAL				

TOTAL DEPT. GROUP OPER. CLASS

- 4.** To obtain total for each group, press the [GROUP] tab on the screen.
To change the pages, press the [▼] or [▲] button on the screen.

PROD CUMULATIVE TOTAL(GROUP)21-JUN-2007(THU) 15:35 1/1

No.	GROUP	PCS	WEIGHT(kg)	PRICE(¥)
TOTAL				

Hand icon pointing to the GROUP column.

Bottom navigation bar: TOTAL, DEPT., GROUP, OPER., CLASS

5. To obtain total for each operator, press the [OPER.] tab on the screen.
To change the pages, press the [▼] or [▲] button on the screen.

No.	OPERATOR	PCS	WEIGHT(kg)	PRICE(£)
TOTAL		0		0.00

TOTAL DEPT. GROUP OPER. CLASS

6. To obtain analysis totals, press the [CLASS] tab on the screen.
To change the pages, press the [▼] or [▲] button on the screen.

CLASS ANALYZE			CLASS
✓ NO	DEPT.	GROUP	PLU No.
			ABC PRICE
			ABC WEIGHT
			ABC PCS
			Z PRICE
			Z WEIGHT
			Z PCS

TOTAL DEPT. GROUP OPER. CLASS ANALY SYS

NO	The object of analysis is not specified.
DEPT.	The object of analysis is specified to be departments.
GROUP	The object of analysis is specified to be groups.
PLU No.	Analysis is performed in ascending PLU number order.
ABC PRICE	Analysis is performed in descending price order.
ABC WEIGHT	Analysis is performed in descending weight order.
ABC PCS	Analysis is performed in descending quantity order.
Z PRICE	Analysis is performed in ascending price order.
Z WEIGHT	Analysis is performed in ascending weight order.
Z PCS	Analysis is performed in ascending quantity order.

9.4 TRACEABILITY TOTAL

1. Press the "TRACEABILITY TOTAL" filed.

The screenshot shows the 'MENU SELECT' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '1/2'. On the left is a vertical menu with buttons: OPERATE, TOTAL, PROGRAM, SETUP, and ADJUST. The main area contains several options with icons: PROD DAILY TOTAL, PROD WEEKLY TOTAL, PROD CUMULATIVE TOTAL, TRACEABILITY TOTAL (highlighted with a hand cursor), and PRESET REPO. A hand cursor is pointing at the 'TRACEABILITY TOTAL' option.

2. The Traceability Item screen appears.

To change the pages, press the [▼] or [▲] button on the screen.

To obtain Traceability Total screen, press the [DETAIL] button on the screen.


The screenshot shows the 'TRACEABILITY ITEM' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '1/1'. It features a table with columns 'No.' and 'TRACEABILITY TOTAL ITEM'. The first row is highlighted in yellow. To the right of the table is a green 'DETAIL' button, which is being pressed by a hand cursor. Below the table is an 'INPUT' field.

3. The Traceability Total screen appears.


The screenshot shows the 'TRACEABILITY TOTAL' screen with a header bar displaying '21-JUN-2007(THU) 15:35' and '1/1'. It contains fields for 'ITEM No.' (00000001) and 'ITEM NAME' (GROUND BEEF/(TEXAS)). Below these is a table with columns: LOT No., PCS, WEIGHT, PRICE(£), and DATE/TIME. The first row of the table is highlighted in yellow.

9.5 PRESET REPORT PRINTING


1. Press the "PRESET REPORT" filed.

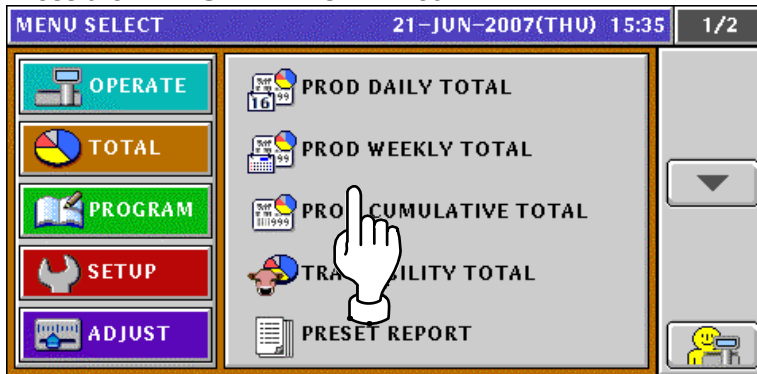

2. The Preset Report screen appears.

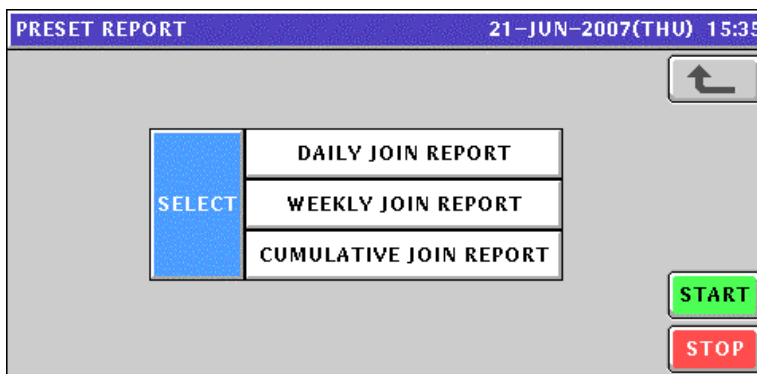


3. Select desired reports by pressing the corresponding fields.
Press the [STRAT] button to issue selected join reports.

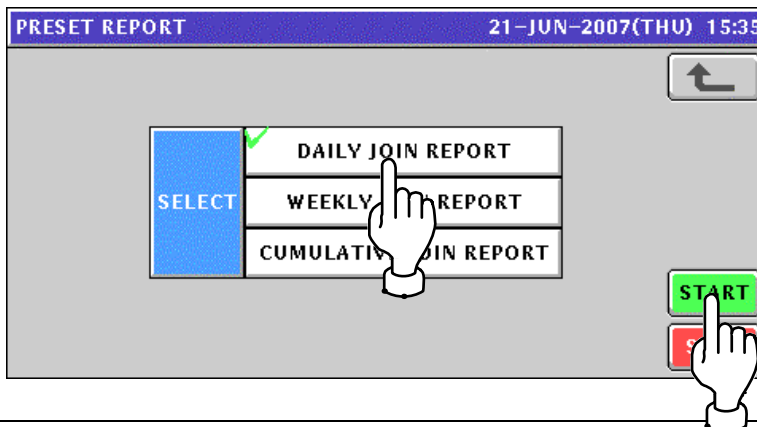


9.6 TOTAL CLEAR


1. Press the [▼] button on the screen.

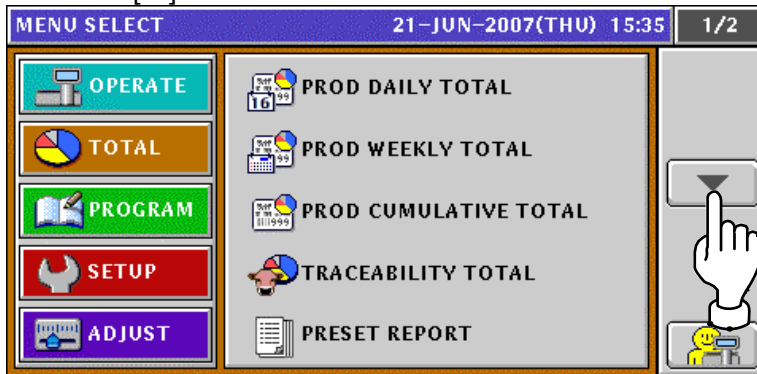


2. The second page of the Menu Select screen appears.
To obtain the Total Clear screen, press the "TOTAL CLEAR" field on the screen.

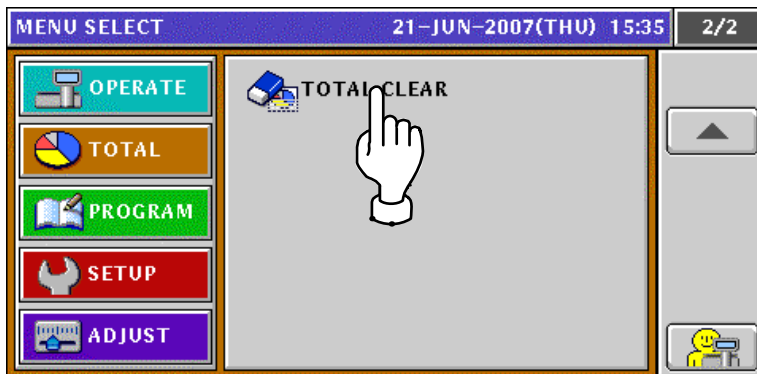


3. The Total Clear screen appears.

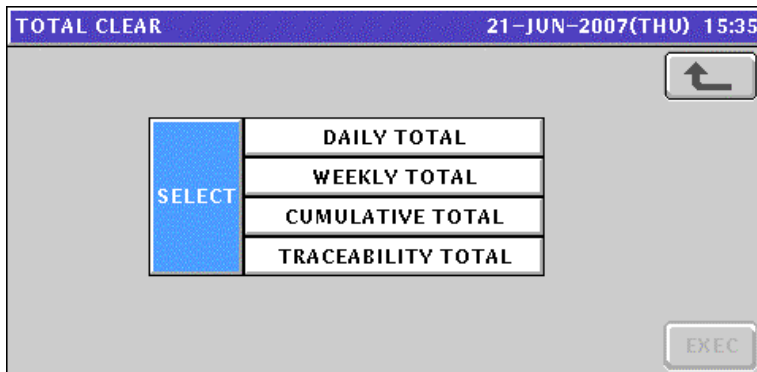


4. Select desired reports to be cleared by pressing the corresponding fields.

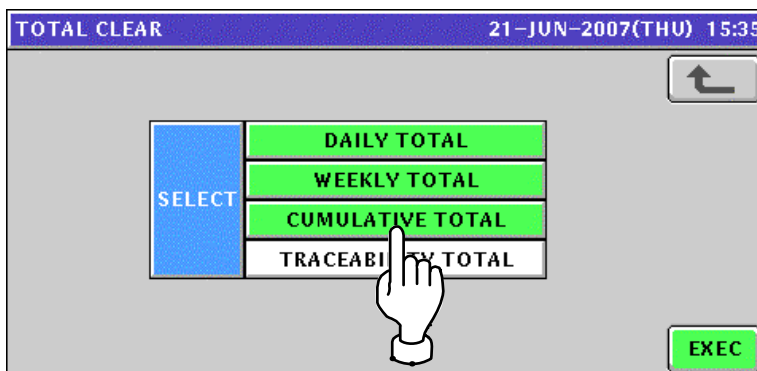

5. Press the [EXEC] button.

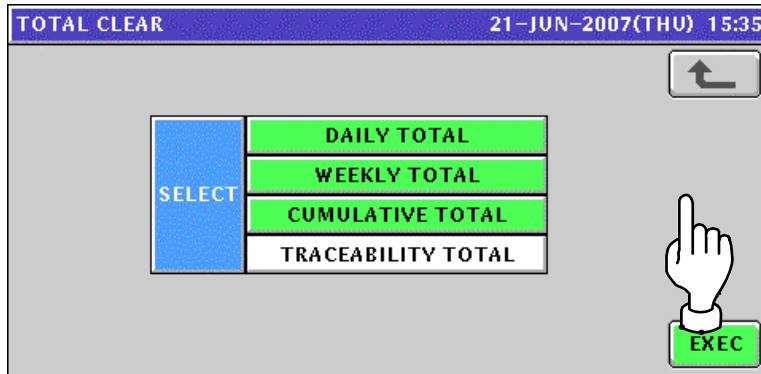

6. The confirmation screen appears. Then, press the [EXEC] button on the screen for execution.

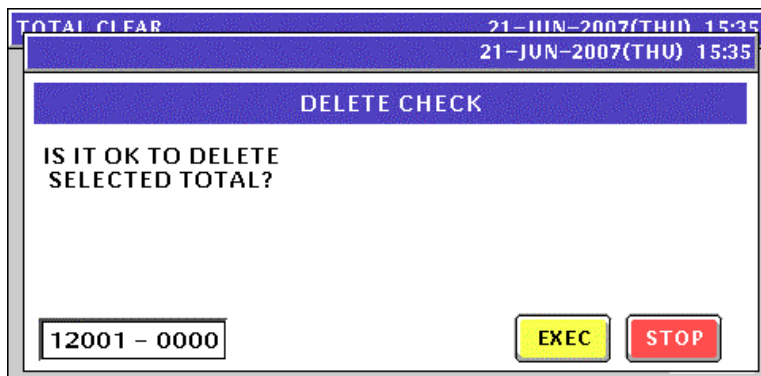

PROGRAM MODE

10.1 PROGRAM MODE ENTRY

1. Ensure that the initial screen is displayed.

PLU 0		21-JUN-2007(THU) 11:13		TARE	kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.				ZERO	WEIGHT	kg
						0.000
GROUND BEEF (TEXAS)		GROUND BEEF (OREGON)	GROUND BEEF (UTAH)	SLICED BEEF	SLICED BEEF SPECIAL	UNIT PRICE £/kg
ROAST BEEF		ROAST BEEF SPECIAL	LAMB CHOPS	LAMB CHOPS SPECIAL	T-BONE STEAK	0.00
OPERATOR GROUP		PRN MD. <AUTO>	CASSETTE 1	SUBTOTAL DISPLAY		TOTAL PRICE £
						0.00

2. Press the [MODE] key on the key sheet.

Mode

The Operation Menu Select screen appears.


Then, press the [PROGRAM] button on the screen.

MENU SELECT		21-JUN-2007(THU) 11:13		1/1
OPERATE	SALES			
TOTAL	ACC1			
PROGRAM	ACC2			
SETUP	ACC3			
ADJUST	TOTAL ADJUST			

3. The Program Menu Select screen appears.
To change the pages, press the [▼] or [▲] button on the screen.

MENU SELECT		21-JUN-2007(THU) 11:13		1/8
OPERATE	PLU PLU FILE			
TOTAL	CAMPAIGN			
PROGRAM	OPERATORS			
SETUP	PRESET KEY			
ADJUST	AD MSG			




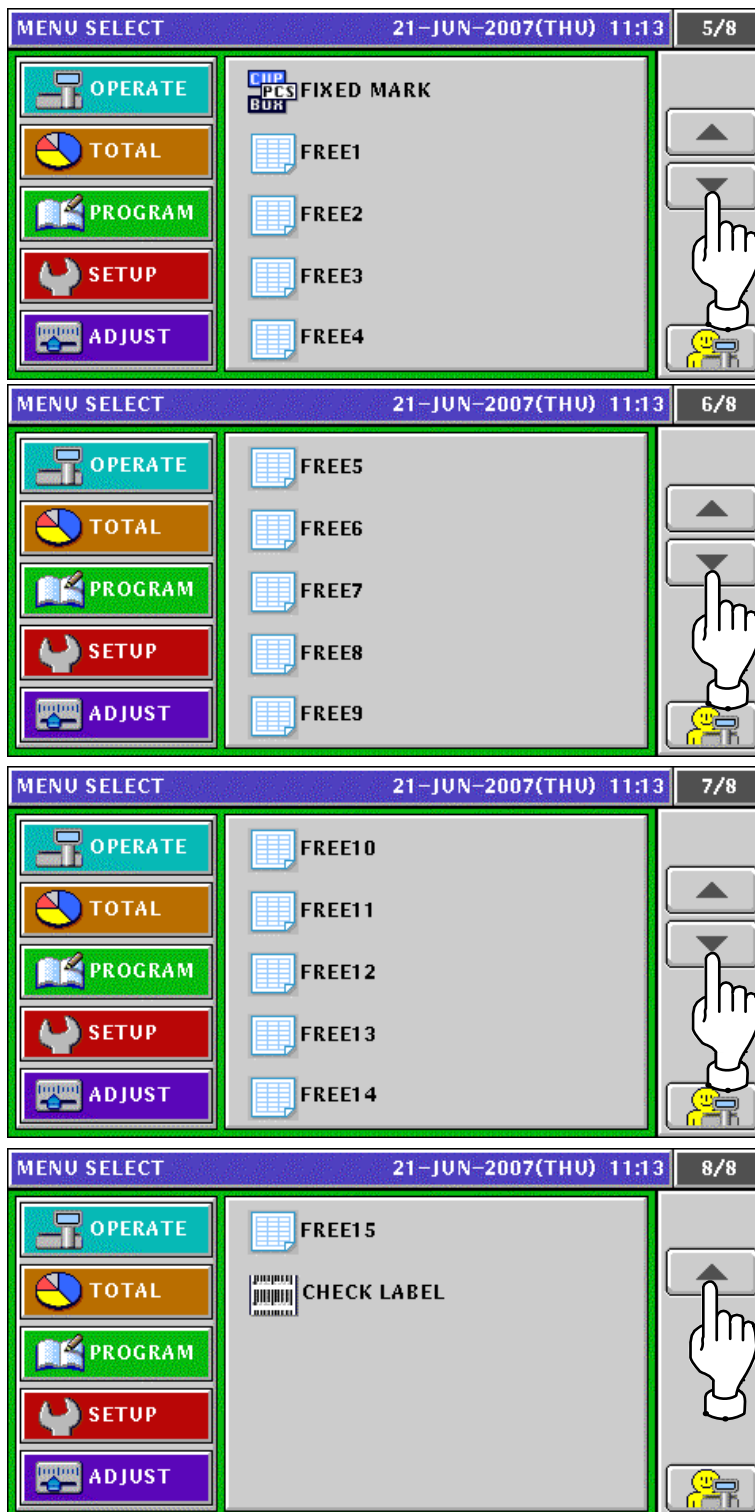

Note: To exit the Program Mode, press the [ESC] (Escape) key on the key sheet.

10.2 PLU FILE REGISTRATION


1. Press the "PLU FILE" field on the Program Menu Select screen.

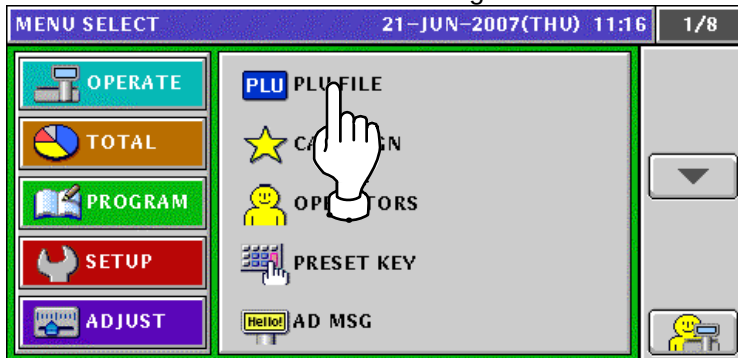


2. The Item List screen appears.
To change the pages, press the [▼] or [▲] button on the screen



3. Press to select a desired field. Then, press the [DETAIL] button on the screen.

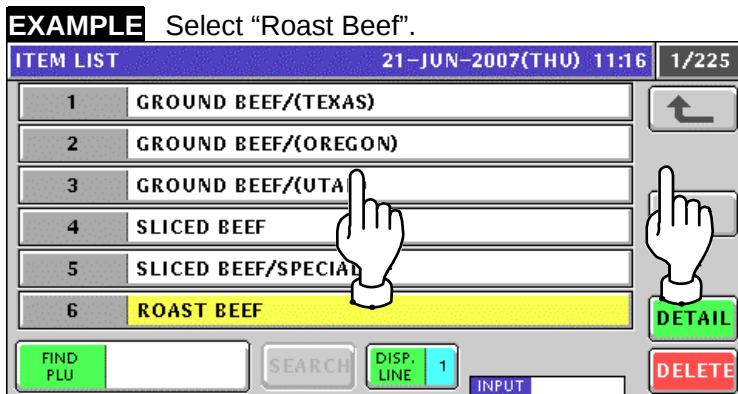

4. The Item Detail screen appears.
To edit the PLU name, press the [EDIT] button on the screen.

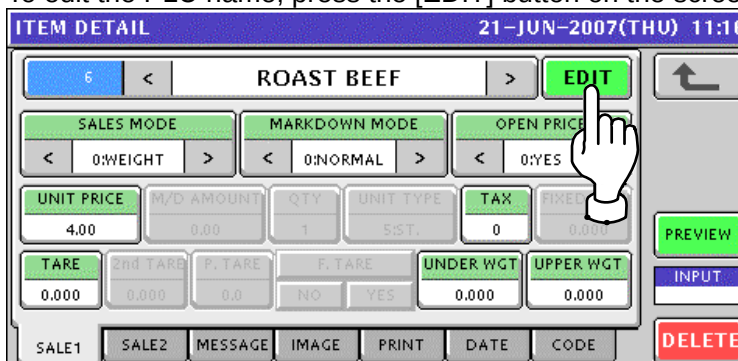

5. The text edit screen appears.
Edit a text according to the procedure explained in Appendix "Text Editing".

ITEM DETAIL(ITEM NAME EDIT)					21-JUN-2007(THU) 11:16	
ROAST BEEF						
Q	W	E	R	T	Y	U
A	S	D	F	G	H	J
	Z	X	C	V	B	N
No.	CHAR	REMAIN	STYLE	FONT	INPUT	
6	010	5109	/	30x15/30x15	ERASE	

6. Ensure that the first sales related screen is displayed.

Sales Mode: Weighing Product

ITEM DETAIL					21-JUN-2007(THU) 11:16	
6	<	ROAST BEEF	>	EDIT		
SALES MODE		MARKDOWN MODE		OPEN PRICE		
< 0:WEIGHT >		< 0:NORMAL >		< 0:YES >		
UNIT PRICE	M/D AMOUNT	QTY	UNIT TYPE	TAX	FIXED WGT	
4.00	0.00	1	S:ST.	0	0.000	
TARE	2nd TARE	P. TARE	F. TARE	UNDER WGT	UPPER WGT	
0.000	0.000	0.0	NO YES	0.000	0.000	
SALE1	SALE2	MESSAGE	IMAGE	PRINT	DATE	
					CODE	
					DELETE	

Sales Mode: Fixed Price Product

ITEM DETAIL					21-JUN-2007(THU) 11:16	
6	<	ROAST BEEF	>	EDIT		
SALES MODE		MARKDOWN MODE		OPEN PRICE		
< 1:FIX PRI >		< 0:NORMAL >		< 0:YES >		
FIXED PRICE	M/D AMOUNT	QTY	UNIT TYPE	TAX	FIXED WGT	
4.00	0.00	0	0:NO PRN	0	0.000	
TARE	2nd TARE	P. TARE	F. TARE	UNDER WGT	UPPER WGT	
0.000	0.000	0.0	NO YES	0.000	0.000	
SALE1	SALE2	MESSAGE	IMAGE	PRINT	DATE	
					CODE	
					DELETE	

Sales Mode: Weighing Fixed Price Product

ITEM DETAIL					21-JUN-2007(THU) 11:16	
6	<	ROAST BEEF	>	EDIT		
SALES MODE		MARKDOWN MODE		OPEN PRICE		
< 2:WGT F/PRI >		< 0:NORMAL >		< 0:YES >		
FIXED PRICE	M/D AMOUNT	QTY	UNIT TYPE	TAX	FIXED WGT	
4.00	0.00	0	0:NO PRN	0	0.000	
TARE	2nd TARE	P. TARE	F. TARE	UNDER WGT	UPPER WGT	
0.000	0.000	0.0	NO YES	0.000	0.000	
SALE1	SALE2	MESSAGE	IMAGE	PRINT	DATE	
					CODE	
					DELETE	

Sales Mode: Fixed Unit Price Product

ITEM DETAIL 21-JUN-2007(THU) 11:16

5 < ROAST BEEF > EDIT

SALES MODE MARKDOWN MODE OPEN PRICE

< 3:FIX UP > < 0:NORMAL > < 0:YES >

UNIT PRICE M/D AMOUNT QTY UNIT TYPE TAX FIXED WGT

4.00 0.00 0 0:NO PRN 0 0.000

TARE 2nd TARE P. TARE F. TARE UNDER WGT UPPER WGT

0.000 0.000 0.0 NO YES 0.000 0.000

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE PREVIEW INPUT DELETE

ITEM	DESCRIPTION
SALES MODE	Press the [<] or [>] button to select a desired sales mode. 0: Weighing product 1: Fixed price product 2: Weighing fixed price product 3: Fixed unit price product
MARKDOWN MODE	Press the [<] or [>] button to select a desired markdown mode. 0: Normal price 1: Special price 2: Amount discount for total price 3: Percent discount for total price 4: Special unit price 5: Amount discount for unit price 6: Percent discount for unit price
OPEN PRICE	Press the [<] or [>] button to select whether or not to allow an open price system.
UNIT PRICE FIXED PRICE	Enter a unit price or fixed price, and press this field.
M/D AMOUNT	Enter a markdown amount or percentage and press this field.
QTY (Quantity)	Enter a packed quantity, and press this field.
UNIT TYPE	Press this field to display the Fix Price Mark List screen. FIX PRICE MARK LIST 21-JUN-2007(THU) 11:16 1/2 0 NONE 1 oz oz 2 PACK PACKS 3 kg kg 4 g g 5 PC. PCS. FIND PLU SEARCH INPUT
TAX	Press to select a desired field.
FIXED WEIGHT	Enter a desired number and press this field.
TARE	Enter a fixed weight, and press this field.
UNDER WEIGHT	Enter a tare weight, and press this field.
UPPER WEIGHT	Enter a lower weight limit, and press this field.

7. Press the [SALE2] tab to select the second sales related screen.

ITEM DETAIL 21-JUN-2007(THU) 11:16

6 < ROAST BEEF > EDIT

POINT FLAG: < 0:OFF > POINT TYPE: < 0:WGT > POINTS: 0

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

PREVIEW INPUT DELETE

ITEM	DESCRIPTION
POINT FLAG	Press the [<] or [>] button to select whether or not to use the Point Flag. 0: OFF 1: ON
POINT TYPE	Press the [<] or [>] button to select a desired Point Type. 0: Weight 1: Fixed weight
POINTS	Enter a desired number and press this field

8-1 Press the [MESSAGE] tab to select the message related screen.

ITEM DETAIL(MESSAGE) 21-JUN-2007(THU) 11:16 1/6

6 < ROAST BEEF >

NUTRITION(USA) 0 NONE
EXTRA MESSAGE1 0 NONE
EXTRA MESSAGE2 0 NONE
EXTRA MESSAGE3 0 NONE

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

PREVIEW INPUT

8-2 Press to select a desired field.

EXAMPLE "Extra Message 1".

ITEM DETAIL(MESSAGE) 21-JUN-2007(THU) 11:16 1/6

6 < ROAST BEEF >

NUTRITION(USA) 0 NONE
EXTRA MESSAGE1 0 NONE
EXTRA MESSAGE2 0 NONE
EXTRA MESSAGE3 0 NONE

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

PREVIEW INPUT

8-3 The Extra Message List screen appears. Then, press to select a desired field.

EXAMPLE “Extra Message BB”.

EXTRA MSG1 LIST 21-JUN-2007(THU) 11:16 1/1

0	NONE
1	EXTRA MESSAGE AA
2	EXTRA MESSAGE BB
3	EXTRA MESSAGE

FIND PLU SEARCH DISP. LINE 1 INPUT

ITEM DETAIL(MESSAGE) 21-JUN-2007(THU) 11:17 1/6

6 < ROAST BEEF >

NUTRITION(USA)	0	NONE
EXTRA MESSAGE1	2	EXTRA MESSAGE BB
EXTRA MESSAGE2	0	NONE
EXTRA MESSAGE3	0	NONE

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE PREVIEW INPUT

9-1 Press the [IMAGE] tab to select the image related screen.

ITEM DETAIL(IMAGE) 21-JUN-2007(THU) 11:16

6 < ROAST BEEF >

IMAGE1	0	IMAGE2	0
IMAGE3	0	DISP IMG	3
SH IMAGE	2	SAFE HANDLING IMAGE	

NO PRINT PRINT PREVIEW INPUT

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

9-2 Press to select a desired field.

EXAMPLE Select a desired image for “Image 1”.

ITEM DETAIL(IMAGE) 21-JUN-2007(THU) 11:16

6 < ROAST BEEF >

IMAGE1	0	IMAGE2	0
IMAGE3	0	DISP IMG	3
SH IMAGE	2	SAFE HANDLING IMAGE	

NO PRINT PRINT PREVIEW INPUT

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

- 9-3** The Image List screen appears. Then, press to select a desired field and press the [SET] button.

EXAMPLE Select "Image No.8".

SCREEN: IMAGE1 LIST DATE/TIME: 21-JUN-2007(THU) 11:16 PAGE: 1/4

No.	IMAGE	No.	IMAGE
0	NO IMAGE	5	[Image]
1	[Image]	6	[Image]
2	[Image]	8	MEMBER SAVINGS
3	[Image]	9	THANK YOU FOR YOUR BUSINESS
4	[Image]	10	YOU SAVED

Buttons: [Back], [Down Arrow], [MAIL], [SET]

- 10.** Select whether or not to print Safe handling Image by pressing a desired field.

SCREEN: ITEM DETAIL(IMAGE) DATE/TIME: 21-JUN-2007(THU) 11:16

Item: 6 ROAST BEEF

IMAGE1: 8 MEMBER SAVINGS

IMAGE2: 0 [Image]

IMAGE3: 0

SH IMAGE: 2 [Image]

DISP IM: 3 [Image]

SAFE HANDLING IMAGE: [X] NO PRINT [] PRINT

Buttons: [Back], [Preview], [Input], [SALE1], [SALE2], [MESSAGE], [IMAGE], [PRINT], [DATE], [CODE]

- 11-1** Press the [PRINT] tab to select the print related screen.

SCREEN: ITEM DETAIL(PRINT) DATE/TIME: 21-JUN-2007(THU) 11:16

Item: 6 ROAST BEEF

FIRST LABEL FORMAT NO.: 3

SECOND LABEL FORMAT NO.: 0

FIRST LABEL PRINT: 1: YES

SECOND LABEL PRINT: NO

Buttons: [Back], [Preview], [Input], [SALE1], [SALE2], [MESSAGE], [IMAGE], [PRINT], [DATE], [CODE]

- 11-2** Press the [First Label Format No.] button.

SCREEN: ITEM DETAIL(PRINT) DATE/TIME: 21-JUN-2007(THU) 11:16

Item: 6 ROAST BEEF

FIRST LABEL FORMAT NO.: 3

SECOND LABEL FORMAT NO.: 0

FIRST LABEL PRINT: 2: NO

SECOND LABEL PRINT: 2: NO

Buttons: [Back], [Preview], [Input], [SALE1], [SALE2], [MESSAGE], [IMAGE], [PRINT], [DATE], [CODE]

11-3 The Format List screen appears.
Then, select a desired format by pressing the corresponding field.

EXAMPLE Select "Format No.5".

FORMAT LIST

21-JUN-2007(THU) 11:16

1/9

0	NONE	↑ ↓ INPUT
1	/ W:56.00 X H:76.00	
2	/ W:56.00 X H:85.00	
3	/ W:56.00 X H:59.00	
4	/ W:56.00 X H:73.00	
5	/ W:56.00 X H:59.00	

ITEM DETAIL(PRINT)

21-JUN-2007(THU) 11:16

6

<

ROAST BEEF

>

↑

FIRST LABEL FORMAT No.

5

SECOND LABEL FORMAT No.

0

FIRST LABEL PRINT

<

1:YES

>

SECOND LABEL PRINT

<

2:NO

>

PREVIEW

INPUT

SALE1

SALE2

MESSAGE

IMAGE

PRINT

DATE

CODE

ITEM	DESCRIPTION
FIRST LABEL PRINT	Press the [<] or [>] button to select whether or not to print the first labels.
	1: YES 2: NO
SECOND LABEL PRINT	Press the [<] or [>] button to select whether or not to print the second labels.
	1: YES 2: NO

Note: The same procedure applies to the Second Label Format Number setting.

12. Pressing the [DATE] tab to select the date related screen.

The screenshot shows the 'ITEM DETAIL(ROAST BEEF)' screen. At the top, it displays '21-JUN-2007(THU) 11:16'. Below this, there are several sections for date-related settings:

- PACK DATE PRINT:** YES (checked), NO
- PACK TIME PRINT:** < 1:DESIGNATE >
- PACK TIME DATA:** 00:00
- SB DATE PRINT:** YES (checked), NO
- SB TIME PRINT:** < 0:NO PRINT > (A hand icon points to this field)
- SB TIME DATA:** 48 HOUR(S) AFTER
- SHELF LIFE(days):** 2 days
- UB DATE PRINT:** YES (checked), NO
- UB DATE DATA:** 5 days

At the bottom, there are buttons for SALE1, SALE2, MESSAGE, IMAGE, PRINT, DATE (highlighted), and CODE. On the right side, there are buttons for PREVIEW and INPUT.

ITEM	DESCRIPTION
PACK DATE PRINT	Select whether or not to print the Pack Date.
PACK TIME PRINT	Press the [<] or [>] button to select a desired printing method. 0: No print 1: Designated time 2: System clock time
PACK TIME DATA	This field is available only when "Designated time" is selected in "PACK TIME PRINT". Enter the time and press this field.
SB DATE PRINT	Select whether or not to print the Sell-By Date.
SB TIME PRINT	Press the [<] or [>] button to select a desired printing method. 0: No print 1: Designated time 2: Relative time
SB TIME DATA	This field is available only when "Yes" is selected in "SB TIME PRINT". Enter the number of hours and press this field.
SHELF LIFE (days)	This field is available only when "Yes" is selected in "SB DATE PRINT". Enter the number of days and press this field.
UB DATE PRINT	Select whether or not to print the Use-By Date.
UB DATE DATA	This field is available only when "Yes" is selected in "UB DATE PRINT". Enter the number of hours and press this field

13. Select the code related screen by pressing the [CODE] tab.

ITEM DETAIL(CODE) 21-JUN-2007(THU) 11:17

6 < ROAST BEEF >

ITEM CODE: 00311006 REGI CODE: 0 POS FLAG: 02 BARCODE: 00000000000000

POS REFERENCE: < 0:REFER > BARCODE TYPE: 0:REFER POS FORMAT: REFER

TRACE ENABLE: YES ☒ NO

DEPARTMENT No.: 3 GROW:

PREVIEW INPUT


SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

ITEM	DESCRIPTION
ITEM CODE	Enter an item code and press this field.
REGISTER CODE	Enter the register code and press this field.
POS FLAG	This field is available only when "PLU File" is selected in "POS REFERENCE". Enter the POS flag number and press this field.
BARCODE	Enter the barcode number and press this field.
POS REFERENCE	Select one of the following reference methods 0: Refer 1: PLU file
BARCODE TYPE	This field is available only when "PLU File" is selected in "POS REFERENCE". Press this field to get the Barcode Type screen and press to select one of the PLU types. BARCODE TYPE 21-JUN-2007(THU) 11:17 1/1 00 REFER 07 RSS-14 STO 01 NON PLU 13 08 RSS-14 LIM 02 NON PLU 8 09 RSS-14 EXP 03 PLU 13 10 ITF 04 PLU 8 11 Not Available 05 RSS-14 06 RSS-14 ST
	Press this field to get the Barcode Format screen and press to select one of the barcode formats. BARCODE FORMAT 21-JUN-2007(THU) 11:18 1/3 00 REFER 07 FFFCCCCCWWWW(C/D) 01 FFFCCCC(C/P)PPPP(C/D) 08 FFFCCCCCWWWW(C/D) 02 FFFCCCCPPPP(C/D) 09 FFFCCCCIIIII(C/D) 03 FFFCCCC(C/P)PPPP(C/D) 0A FFFCCCCPPPP(C/D) * 04 FFFCCCCPPPP(C/D) 0B FFFCCCCCWWWW(C/D) * 05 FFFCCCCPPPP(C/D) 0C FFFCCCC(C/W)WWWW(C/D) 06 FFFCCCC(C/P)PPPP(C/D) 0D Not Available


	BARCODE FORMAT 21-JUN-2007(THU) 11:18 2/3 <table><tr><td>0E</td><td>Not Available</td><td>15</td><td>FFCCCCPPPPP(C/D)</td></tr><tr><td>0F</td><td>FFCCCC(0)PPPP(C/D)</td><td>16</td><td>FFCCWWWWPPPPP(C/D)</td></tr><tr><td>10</td><td>FFCCCCWWWWW(C/D)</td><td>17</td><td>FFCCCCQQPPPP(C/D)</td></tr><tr><td>11</td><td>FFCCCCPPPPP(/10)(C/D)</td><td>18</td><td>FFFFFFFFPPPP(C/D)</td></tr><tr><td>12</td><td>FFCCCC(C/P)PPPP(/10)(C/D)</td><td>19</td><td>FFFFFFFFPPPP(C/D)</td></tr><tr><td>13</td><td>FFCCCC(C/W)WWWW(C/D)</td><td>1A</td><td>FFCCCCPPPPP(C/D)</td></tr><tr><td>14</td><td>FFCCCCPPPPP(C/D)</td><td>1B</td><td>FFFFFFFFPPPP(/10)(C/D)</td></tr></table> ↩ ⬆ ☞	0E	Not Available	15	FFCCCCPPPPP(C/D)	0F	FFCCCC(0)PPPP(C/D)	16	FFCCWWWWPPPPP(C/D)	10	FFCCCCWWWWW(C/D)	17	FFCCCCQQPPPP(C/D)	11	FFCCCCPPPPP(/10)(C/D)	18	FFFFFFFFPPPP(C/D)	12	FFCCCC(C/P)PPPP(/10)(C/D)	19	FFFFFFFFPPPP(C/D)	13	FFCCCC(C/W)WWWW(C/D)	1A	FFCCCCPPPPP(C/D)	14	FFCCCCPPPPP(C/D)	1B	FFFFFFFFPPPP(/10)(C/D)
0E	Not Available	15	FFCCCCPPPPP(C/D)																										
0F	FFCCCC(0)PPPP(C/D)	16	FFCCWWWWPPPPP(C/D)																										
10	FFCCCCWWWWW(C/D)	17	FFCCCCQQPPPP(C/D)																										
11	FFCCCCPPPPP(/10)(C/D)	18	FFFFFFFFPPPP(C/D)																										
12	FFCCCC(C/P)PPPP(/10)(C/D)	19	FFFFFFFFPPPP(C/D)																										
13	FFCCCC(C/W)WWWW(C/D)	1A	FFCCCCPPPPP(C/D)																										
14	FFCCCCPPPPP(C/D)	1B	FFFFFFFFPPPP(/10)(C/D)																										
	BARCODE FORMAT 21-JUN-2007(THU) 11:18 3/3 <table><tr><td>1C</td><td>FFFFFFFFPPPP(/10)(C/D)</td><td></td></tr><tr><td>1D</td><td>FFCCCCPPPPP(/10)(C/D)</td><td></td></tr><tr><td>1E</td><td>FFCCCCPPPPP(/10)(C/D)</td><td></td></tr><tr><td>1F</td><td>FFCCCCQQQQ(C/D)</td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table> ↩ ☞	1C	FFFFFFFFPPPP(/10)(C/D)		1D	FFCCCCPPPPP(/10)(C/D)		1E	FFCCCCPPPPP(/10)(C/D)		1F	FFCCCCQQQQ(C/D)																	
1C	FFFFFFFFPPPP(/10)(C/D)																												
1D	FFCCCCPPPPP(/10)(C/D)																												
1E	FFCCCCPPPPP(/10)(C/D)																												
1F	FFCCCCQQQQ(C/D)																												
TRACE ENABLE	Select whether or not to enable a traceability function.																												
DEPARTMENT No.	Press this field to get the Department List screen. Set the desired department simply by pressing the field on the list, or pressing the “Department No.” field after a numeric entry.																												
GROUP No.	Pressing this field displays the Group List. Set the desired group simply by pressing the field on the list, or pressing the “Group No.” field after a numeric entry.																												

10.3 CAMPAIGN LIST REGISTRATION

1. Press the "CAMPAIGN" field on the Program Menu Select screen.

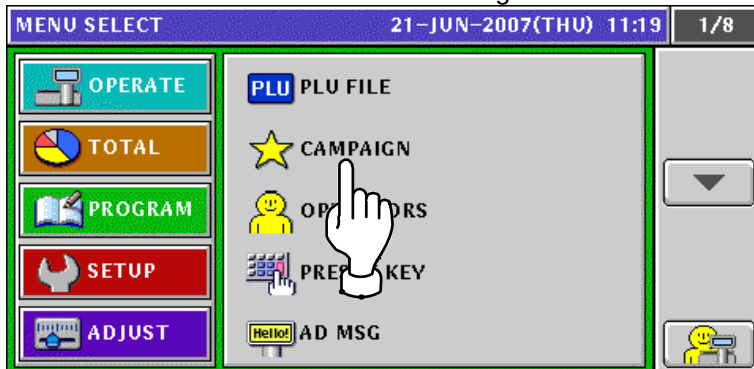

2. The Campaign List appears.
To change the pages, press the [▼] or [▲] button on the screen.

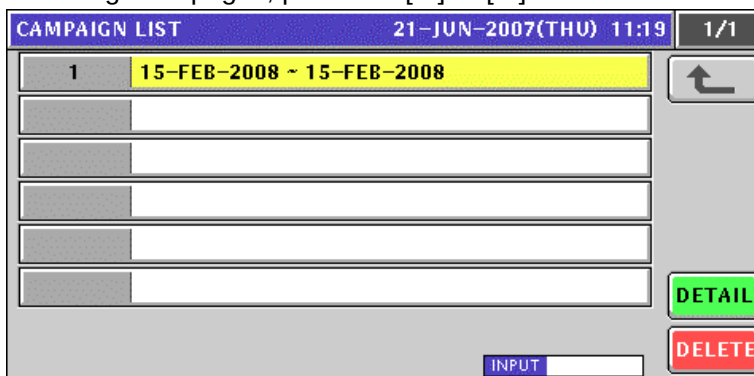


3. Create a new campaign file by entering a campaign number and pressing the [PLU] key on the key sheet.

EXAMPLE Campaign number "2".



The confirmation screen appears. Then, press the [ENTER] button.

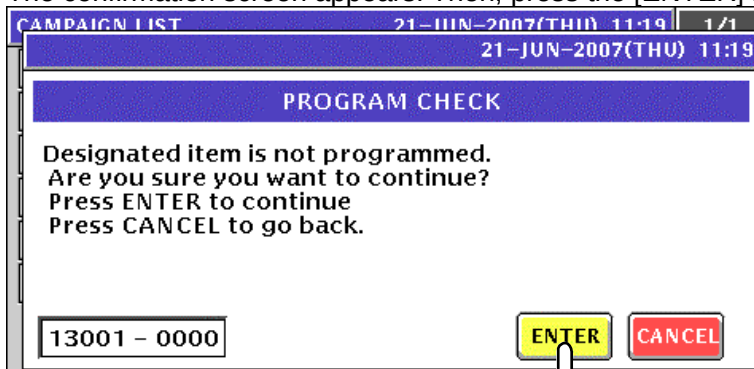

4. The designated Campaign Data List screen appears.

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:20		1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)	21-JUN-2007	START TIME(HH:MM)	00:00	
END DATE(DD/MM/YYYY)	21-JUN-2007	END TIME(HH:MM)	23:59	
ITEM No	ITEM NAME	MD MODE	MD PRI	
			CALL	
			DELETE	
INPUT				

5. Enter the campaign start date and press the "Start Date" display field. .

EXAMPLE Start date "June 25, 2007"

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:20		1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00	
END DATE(DD/MM/YYYY)	21-JUN-2007	END TIME(HH:MM)	23:59	
ITEM No	ITEM NAME	MD MODE	MD PRI	
			CALL	
			DELETE	
INPUT 29062007				

6. Enter the start time and press the "Start Time" display field. .

EXAMPLE Start time "08:00"

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:21		1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00	
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	23:59	
ITEM No	ITEM NAME	MD MODE	MD PRI	
			CALL	
			DELETE	
INPUT				

7. Enter the campaign end date and press the “End Date” display field. .

EXAMPLE End date "June 27, 2007"



CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:21		1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00	
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	21:00	
ITEM No	ITEM NAME	MD MODE	MD PRI	
		INPUT		CALL
				DELETE

8. Enter the end time and press the “End Time” display field.

EXAMPLE End time "21:00"



CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:21		1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00	
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	21:00	
ITEM No	ITEM NAME	MD MODE	MD PRI	
		INPUT		CALL
				DELETE

9. Press the [CALL] button to call up Item List screens

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:21		1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00	
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	21:00	
ITEM No	ITEM NAME	MD MODE	MD PRI	
		INPUT		CALL
				DELETE

- 10.** The Item List screen appears. Then, press to select a desired item field.

EXAMPLE PLU number “4”

ITEM LIST		21-JUN-2007(THU) 11:21	1/225
1	GROUND BEEF/(TEXAS)		
2	GROUND BEEF/(OREGON)		
3	GROUND BEEF/(UTAH)		
4	SLICED BEEF		
5	SLICED BEEF/SPECIAL		
6	ROAST BEEF		

FIND PLU SEARCH DISP. LINE 1 INPUT

- 11.** The Campaign Data List screen appears. Then, press the [CALL] button again when selecting the next item.

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:21	1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)	
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	21:00
ITEM No	ITEM NAME	MD MODE	MD PRI
4	SLICED BEEF	SPECIAL	0.00

CALL DELETE INPUT

The pop-up list appears. Then, press to select a desired field.

EXAMPLE Percent discount “-0%”

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:21	1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)	
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	21:00
ITEM No	ITEM NAME	MD MODE	MD PRI
4	SLICED BEEF	SPECIAL	0.00

CALL DELETE INPUT

CAMPAIGN DATA LIST		21-JUN-2007(THU) 11:22	1/1
CAMPAIGN No	2	INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)	
START DATE(DD/MM/YYYY)	25-JUN-2007	START TIME(HH:MM)	08:00
END DATE(DD/MM/YYYY)	27-JUN-2007	END TIME(HH:MM)	21:00
ITEM No	ITEM NAME	MD MODE	MD PRI
4	SLICED BEEF	-0%	0.0

CALL DELETE INPUT

- 12.** Enter a numeric value and press the “Markdown Price” field for registration.

EXAMPLE 10%

1	0	0
---	---	---

CAMPAIGN DATA LIST				21-JUN-2007(THU) 11:22		1/1
CAMPAIGN No		2		INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)		25-JUN-2007		START TIME(HH:MM)		08:00
END DATE(DD/MM/YYYY)		27-JUN-2007		END TIME(HH:MM)		21:00
ITEM No	ITEM NAME	MD MODE	MD PRI			
4	SLICED BEEF	-%	10.0			
INPUT				CALL		
				DELETE		

- 13.** Repeat steps 9 through 12 for further registration.
Then, press the Return button to finalize this procedure.


CAMPAIGN DATA LIST				21-JUN-2007(THU) 11:23		1/1
CAMPAIGN No		2		INPUT THE TIMES(24 HOUR) AND DATES(8 DIGIT)		
START DATE(DD/MM/YYYY)		25-JUN-2007		START TIME(HH:MM)		08:00
END DATE(DD/MM/YYYY)		27-JUN-2007		END TIME(HH:MM)		21:00
ITEM No	ITEM NAME	MD MODE	MD PRI			
4	SLICED BEEF	-%	10.0			
6	ROAST BEEF	SPECIAL	1.00			
INPUT				CALL		
				DELETE		

The Campaign List screen appears.

CAMPAIGN LIST		21-JUN-2007(THU) 11:23		1/1
1	15-FEB-2008 ~ 15-FEB-2008			
2	25-JUN-2007 ~ 27-JUN-2007			
INPUT		DETAIL		
		DELETE		

10.4 OPERATOR REGISTRATION

1. Press the "OPERATORS" field on the Program Menu Select screen.

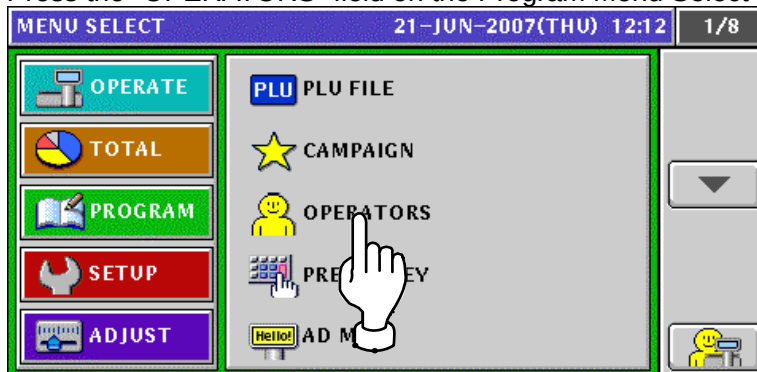

2. The Operator List screen appears.




3. To create a new operator, enter the operator number and press the [PLU] key on the key sheet.

EXAMPLE Operator number "7".



The confirmation screen appears. Press the [ENTER] button.

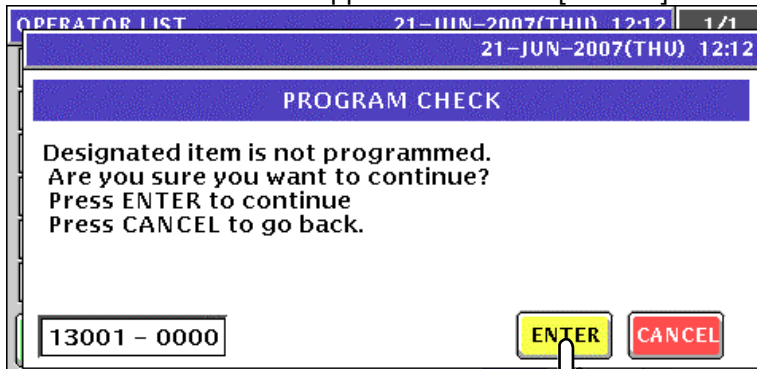

4. The Operator Edit screen appears for the selected operator number.

OPERATOR EDIT					21-JUN-2007(THU) 12:13				
									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN	STYLE	FONT		INPUT		ERASE	
7	000	024	/	14x07/14x07					

Edit a text according to the procedures described in Appendix "Text Editing".

OPERATOR EDIT					21-JUN-2007(THU) 12:13				
TARO ISHIDA									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN	STYLE	FONT		INPUT		ERASE	
7	011	013	/	14x07/14x07					

5. Press the [ESC] key on the key sheet to escape from text editing mode.



The confirmation screen appears.
Then, press the [SAVE] button to save the data.

OPERATOR EDIT		21-JUN-2007(THU) 12:13	
PROGRAM CHECK			
Are you sure you want to save changes? To confirm changes press SAVE to undo changes press CANCEL			
19001 - 0000		SAVE	CANCEL



6. The edited text has been registered.

OPERATOR LIST		21-JUN-2007(THU) 12:13	2/2
7	TARO ISHIDA		
		DETAIL	
FIND PLU	SEARCH	DISP. LINE 1	INPUT
			DELETE

7. Press the Return button to finalize this procedure.


OPERATOR LIST		21-JUN-2007(THU) 12:13	2/2
7	TARO ISHIDA		
		DETAIL	
FIND PLU	SEARCH	DISP. LINE 1	INPUT
			DELETE




10.5 PRESET KEY REGISTRATION

10.5.1 SETTING PRESET FUNCTIONS


1. Press the "PRESET KEY" field on the screen.

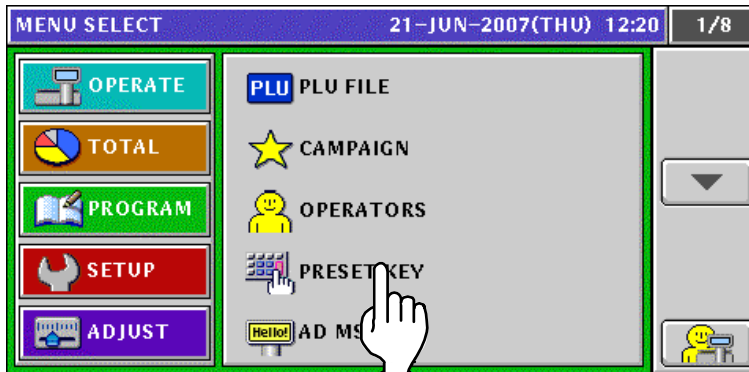


2. The Preset Key (Panel) screen appears.

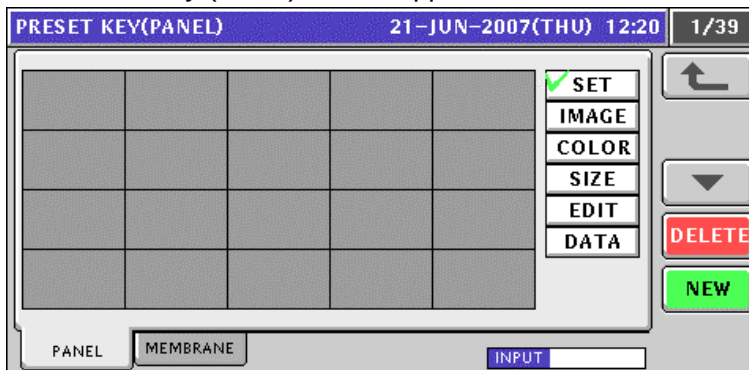




3. Ensure that the [SET] button is selected.

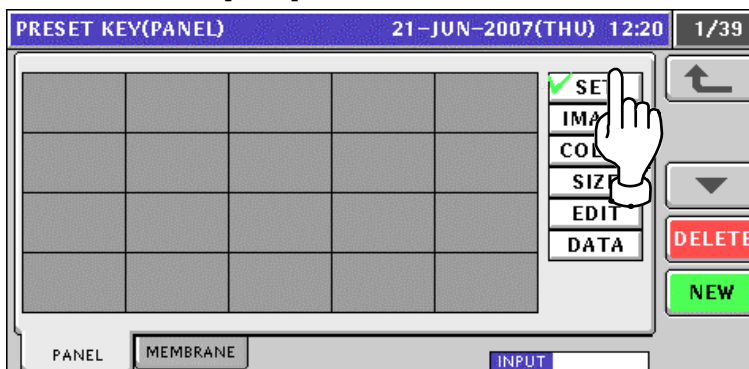

4. Press a desired button to which a preset function will be assigned.

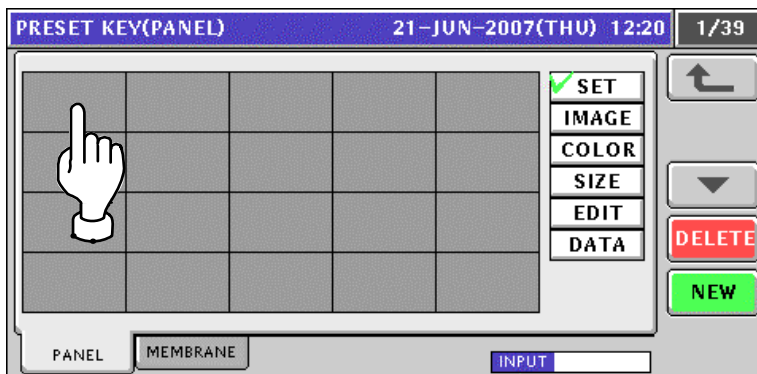

5. Available functions are listed on the screens. To change the pages, press the [▼] or [▲] button on the screen.

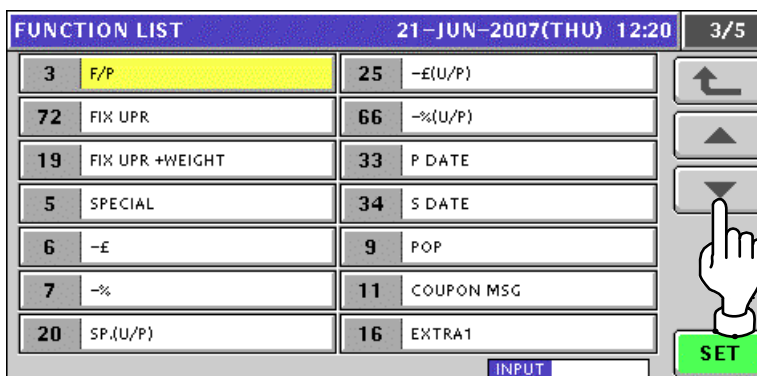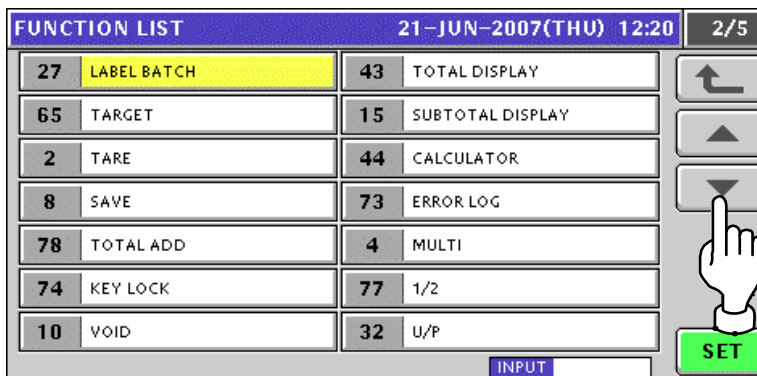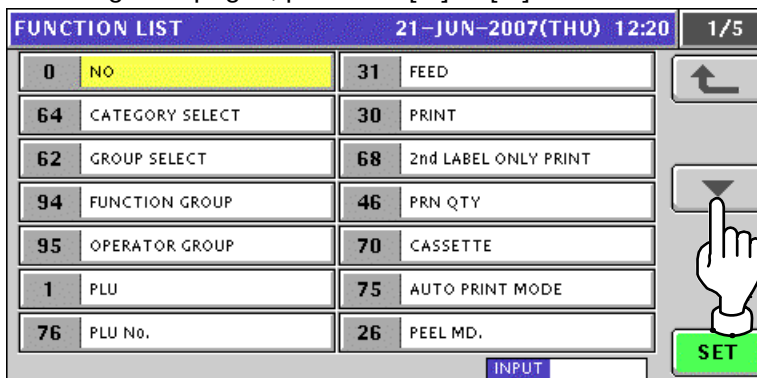

FUNCTION LIST 21-JUN-2007(THU) 12:20 4/5

17	EXTRA2	52	FREE6
18	EXTRA3	53	FREE7
47	FREE1	54	FREE8
48	FREE2	55	FREE9
49	FREE3	56	FREE10
50	FREE4	57	FREE11
51	FREE5	58	FREE12

INPUT SET

FUNCTION LIST 21-JUN-2007(THU) 12:20 5/5

59	FREE13	67	FORMAT2
60	FREE14	37	BAR Y/N
61	FREE15	79	TRACE
23	IMAGE1	80	PASSPORT
24	IMAGE2	92	BROWSER
45	IMAGE3		
22	FORMAT		

INPUT SET

6. Press to select the desired function on the list, and press the [SET] button.

EXAMPLE Select PLU function.

FUNCTION LIST 21-JUN-2007(THU) 12:21 1/5

0	NO	31	FEED
64	CATEGORY SELECT	30	PRINT
62	GROUP SELECT	68	2nd LABEL ONLY PRINT
94	FUNCTION GROUP	46	PRN QTY
95	OPERATOR GROUP	70	CASSETTE
1	PLU	75	AUTO PRINT MODE
76	PLU No.	26	PEEL MD.

INPUT SET

7. The Item List screen appears. Then, press to select a desired field.

EXAMPLE Select PLU No.2.

ITEM LIST 21-JUN-2007(THU) 12:21 1/225

1	GROUND BEEF/(TEXAS)
2	GROUND BEEF/(OREGON)
3	GROUND BEEF/(UTAH)
4	SLICED BEEF
5	SLICED BEEF/SPECIAL
6	ROAST BEEF

FIND PLU SEARCH DISP. LINE 1 INPUT

8. The selected PLU has been assigned.

PRESET KEY(PANEL)					21-JUN-2007(THU) 12:21	1/39
GROUND BEEF (OREGON)					☒ SET	↶ ▼ DELETE NEW
					IMAGE	
					COLOR	
					SIZE	
					EDIT	
					DATA	
PANEL					MEMBRANE	INPUT


- 9.** Repeat steps 4 through 8 for more registrations.
-

10.5.2 ASSIGNING IMAGES ON THE PRESET KEYS


1. Press the “PRESET KEY” field on the screen.



2. The Preset Key (Panel) screen appears.

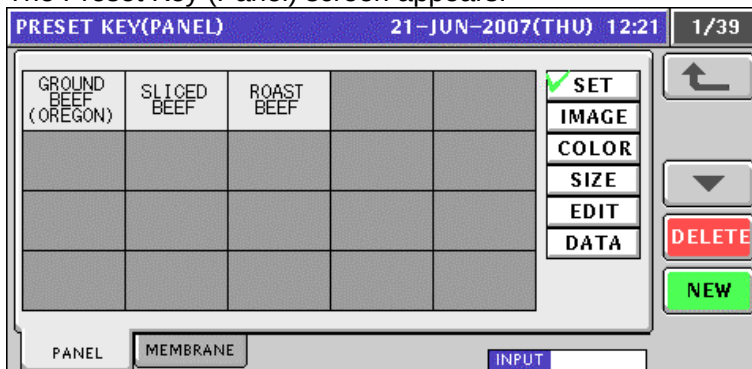


3. Press the [IMAGE] button.

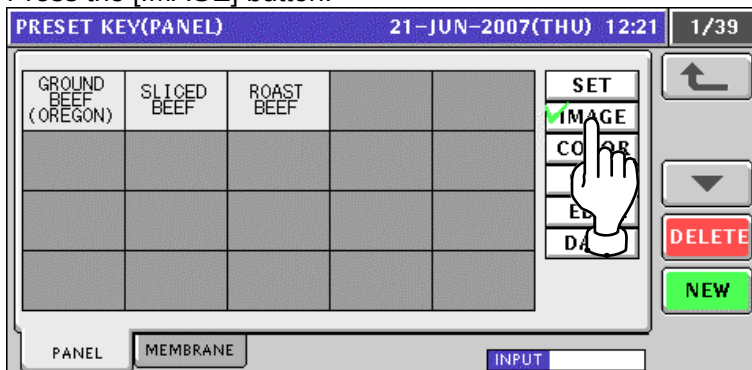


4. Press a desired preset key where the function is already assigned.

EXAMPLE Select “Roast Beef”

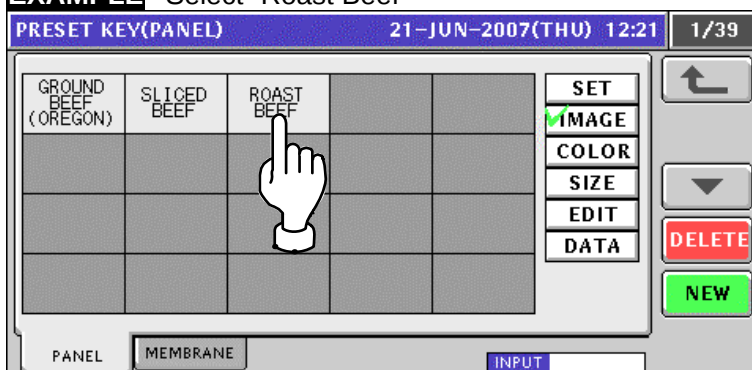

5. The Image List screen appears.

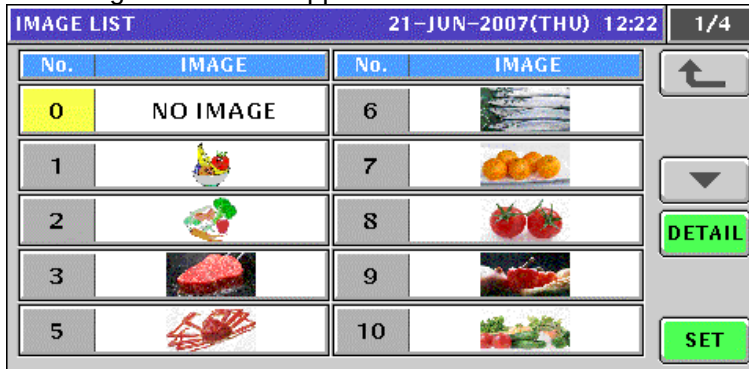


6. Press to select a desired image.

EXAMPLE Image No.3




7. The image has been assigned.

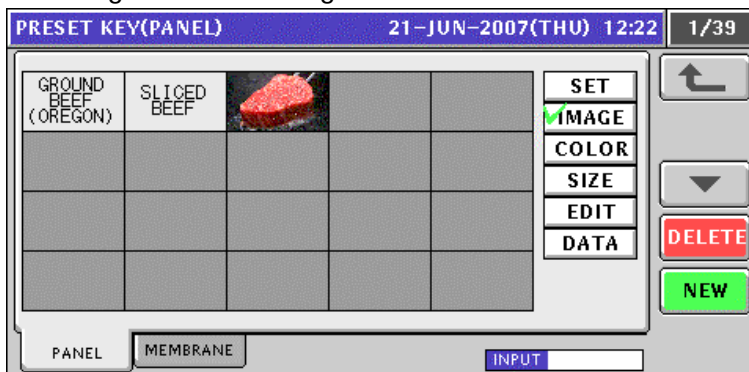


8. Repeat steps 4 through 7 for more registrations.

10.5.3 COLORING PRESET KEYS


1. Press the “PRESET KEY” field on the screen.

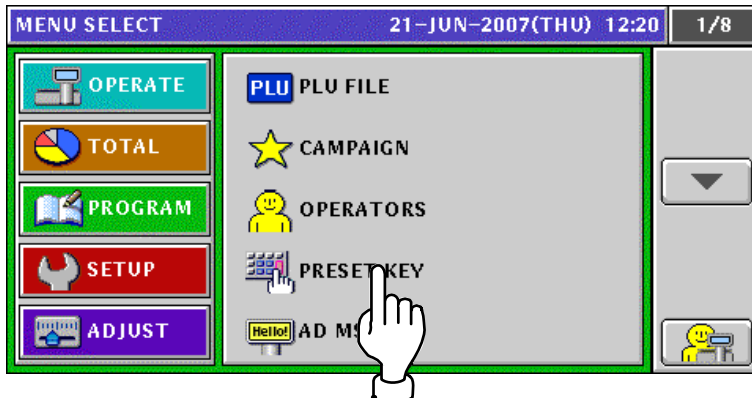

2. The Preset Key (Panel) screen appears.

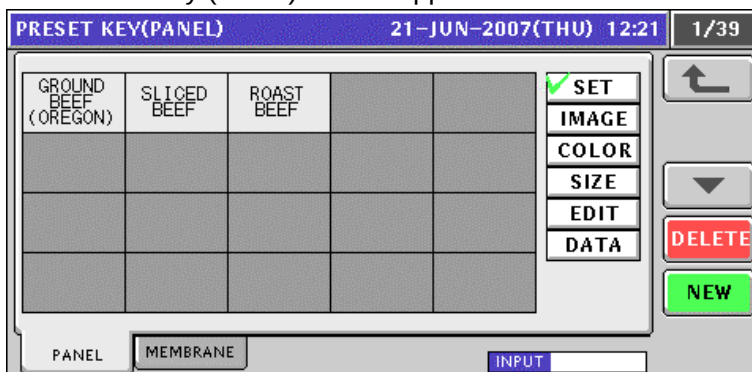


3. Press the [COLOR] button. Then, ensure that “Back Color” is selected.

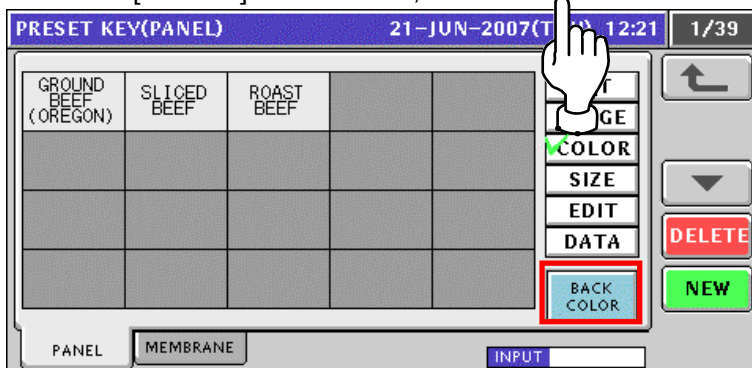


4. Press to select a desired preset key.


EXAMPLE Select “Roast Beef”

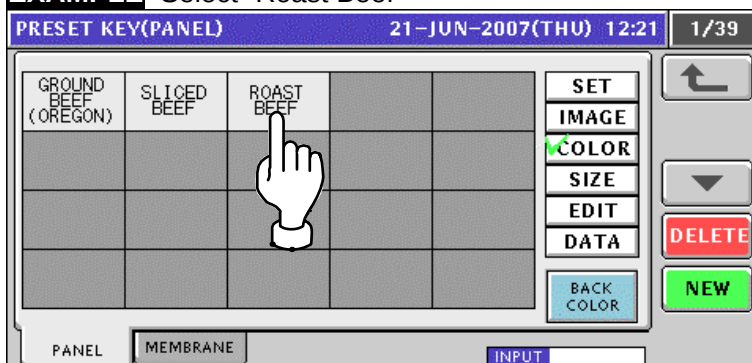


5. The Preset Key (Color) screen appears. Then, press to select a desired color.

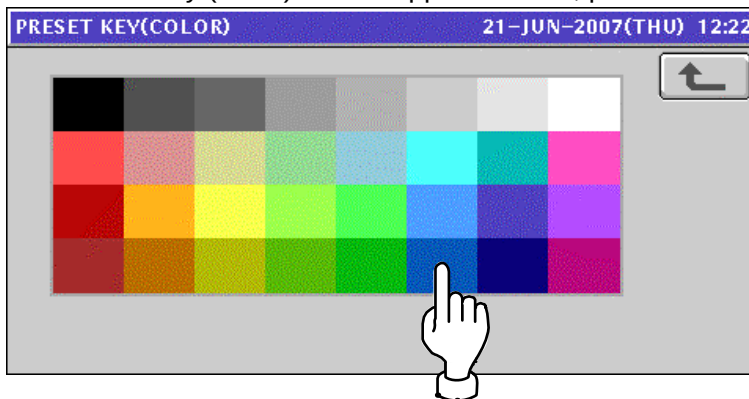

6. Selected color has been given to the background of the key.

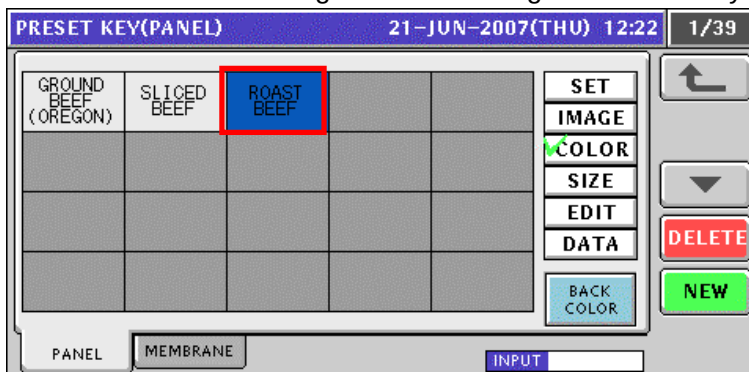


7. Press the [BACK COLOR] button to change to the [FORE COLOR] button.

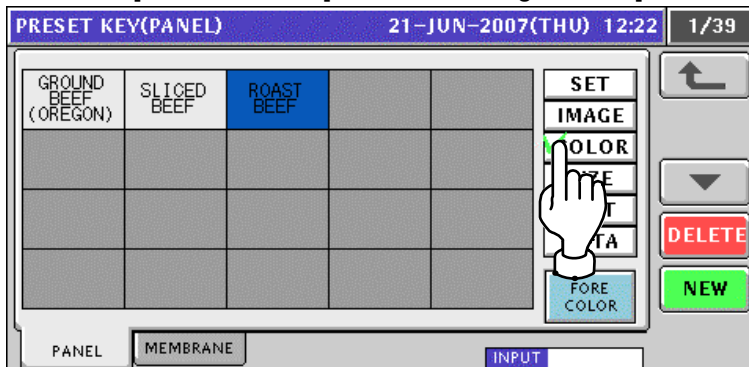


8. Press to select a desired preset key.


EXAMPLE Select "Roast Beef"

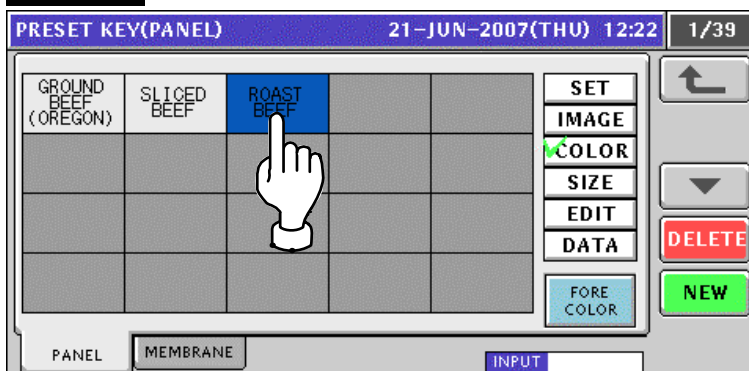

9. The Preset Key (Color) screen appears. Then, press to select a desired color.

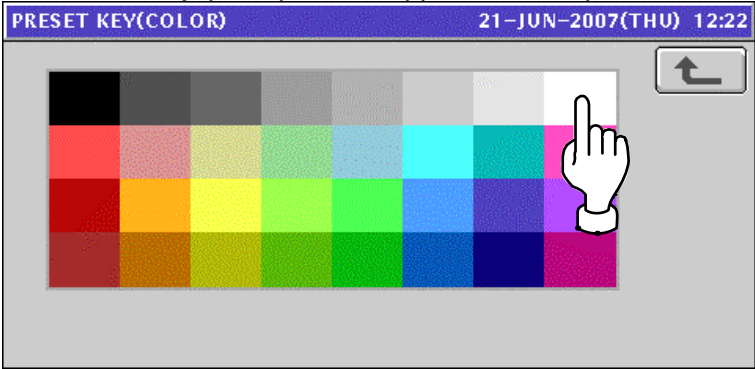


10. Selected color has been given to the foreground of the key.

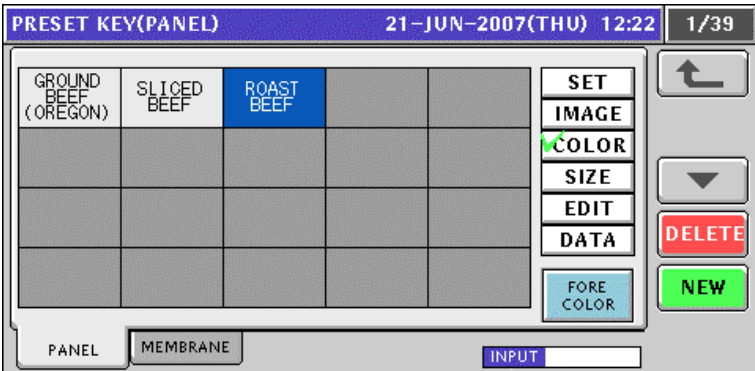


11. Repeat steps 4 through 10 for more registrations.

10.5.4 CHANGING PRESET KEY SIZES


1. Press the "PRESET KEY" field on the screen.

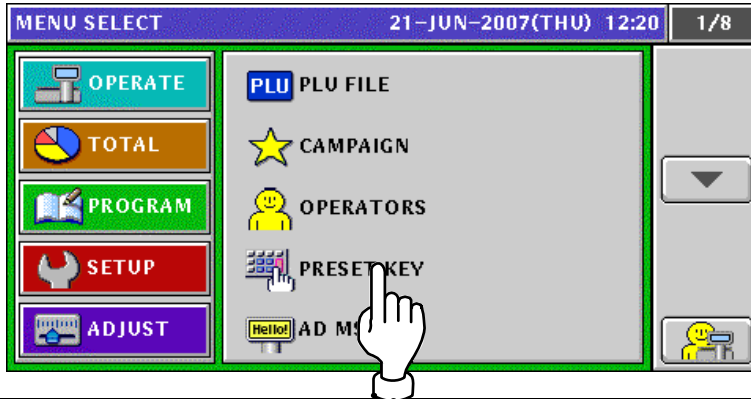


2. The Preset Key (Panel) screen appears.

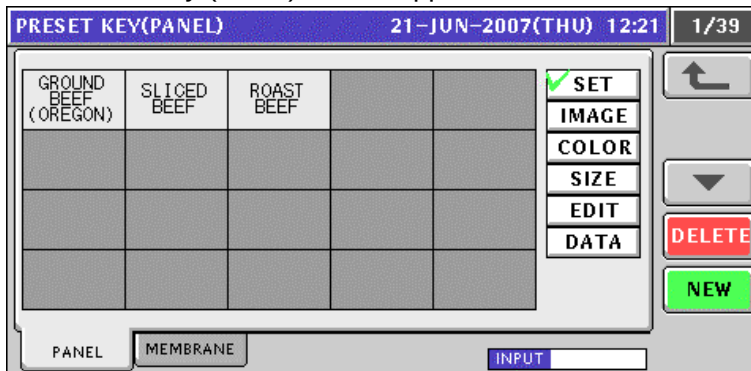


3. Press the [SIZE] button, and ensure that "SMALL" is selected.

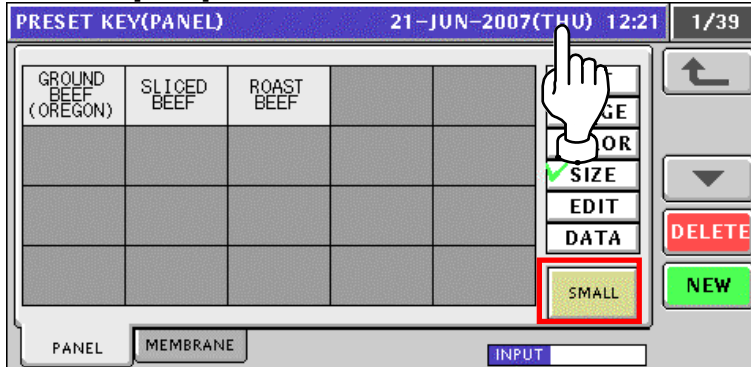

Press the [SMALL] button to change to the [MIDDLE] button.

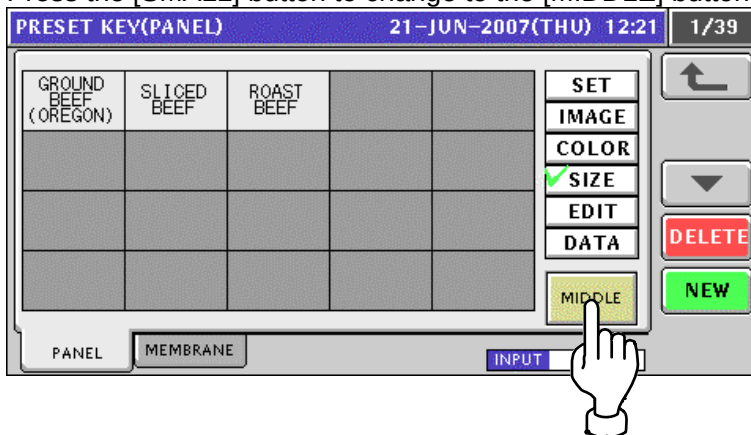


Press the [MIDDLE] button to change to the [LARGE] button.

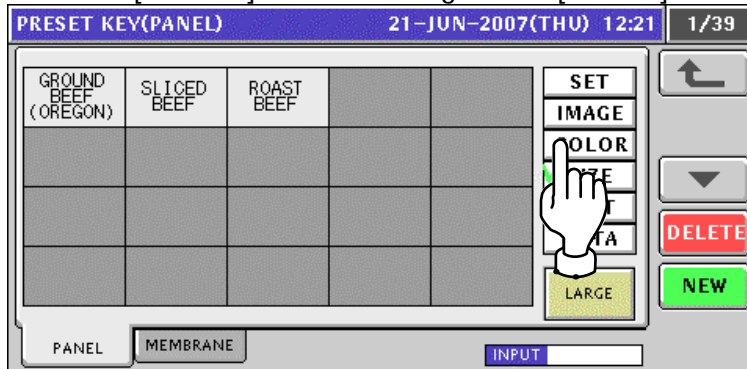


4-1 Change the size of a desired key.

EXAMPLE Change to the middle size of the “Roast Beef” key.

Ensure that the [MIDDLE] button is selected.

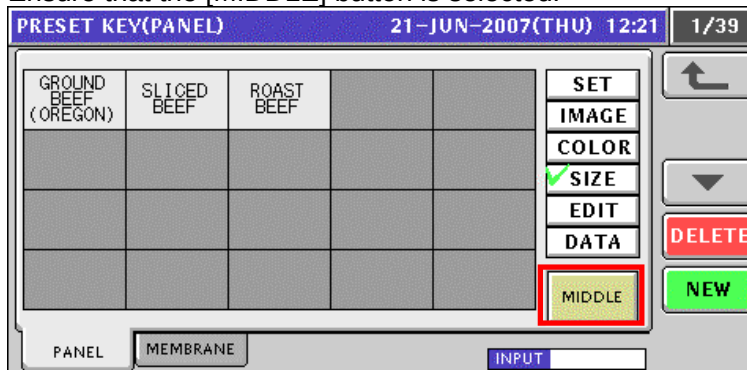


Press the “Roast Beef” key.

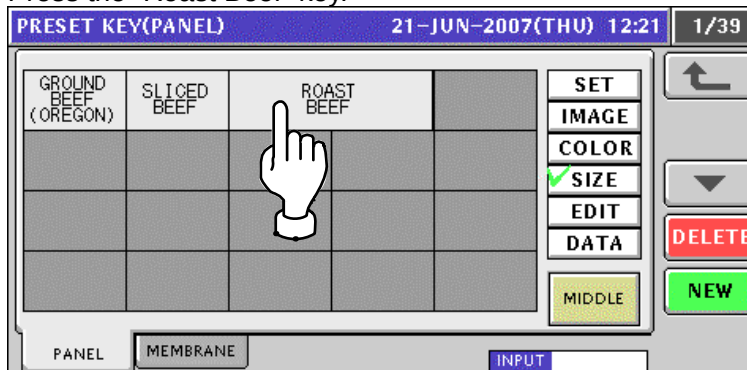


4-2 Change the size of a desired key.**EXAMPLE** Change to the large size of the “Roast Beef” key.

Ensure that the [LARGE] button is selected.

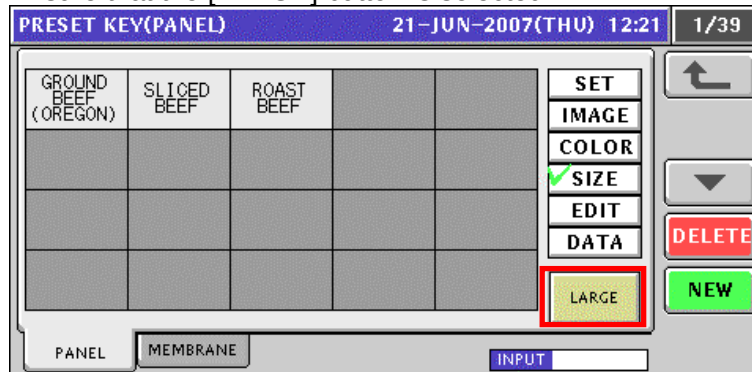


Press the “Roast Beef” key.

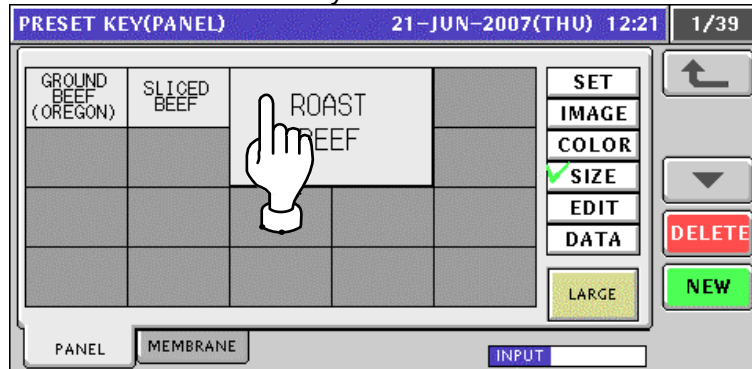
**5.** Repeat steps 3 through 4-2 for more registrations.

10.5.5 EDITING PRESET KEY NAMES


1. Press the "PRESET KEY" field on the screen.

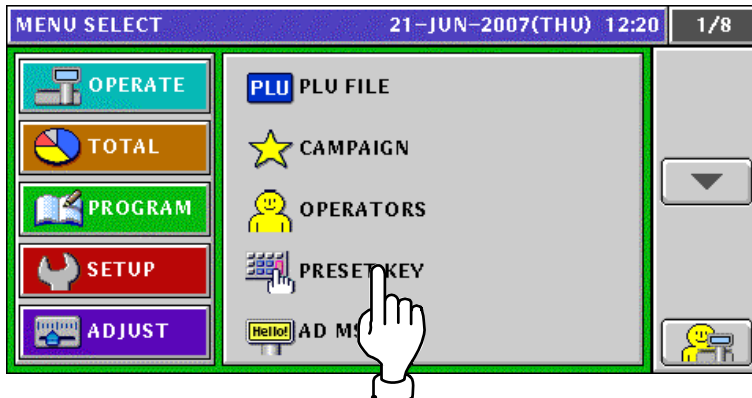

2. The Preset Key (Panel) screen appears.

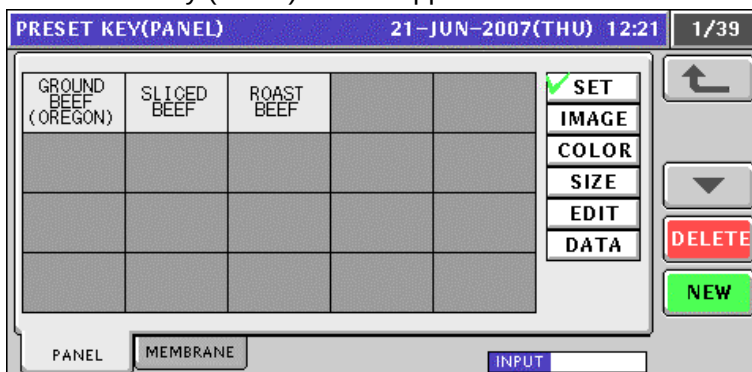


3. Press to select the [EDIT] button.

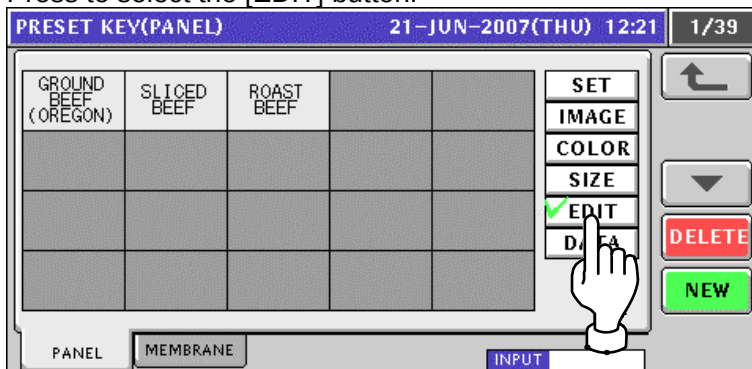

4. Press to select a desired preset key.

EXAMPLE Select the [Roast Beef] key.

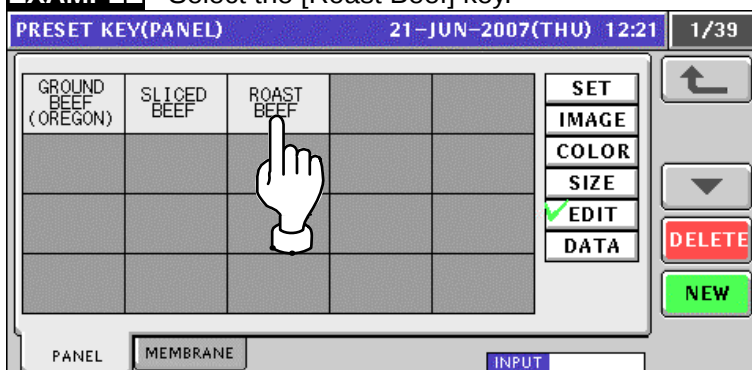

5. The text edit screen appears.

PRESET KEY NAME EDIT 21-JUN-2007(THU) 12:21

ROAST

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.

No.	CHAR	REMAIN
3	012	107

INPUT ERASE

6. Edit a desired text according to the procedures described in Appendix "Text Editing".

EXAMPLE "Beef Fillet".

PRESET KEY NAME EDIT 21-JUN-2007(THU) 12:21

BEEF

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.

No.	CHAR	REMAIN
3	003	114

INPUT ERASE



PRESET KEY NAME EDIT 21-JUN-2007(THU) 12:21

FILLET

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.

No.	CHAR	REMAIN
3	013	106

INPUT ERASE

7. To finalize the editing, press the [ESC] key on the key sheet.



The confirmation screen appears. Then, press the [SAVE] button to save the data.

PRESET KEY NAME EDIT 21-JUN-2007(THU) 12:21

PROGRAM CHECK


Are you sure you want to save changes?
To confirm changes press SAVE
to undo changes press CANCEL

19001 - 0000

SAVE CANCEL




8. The edited text has been registered.

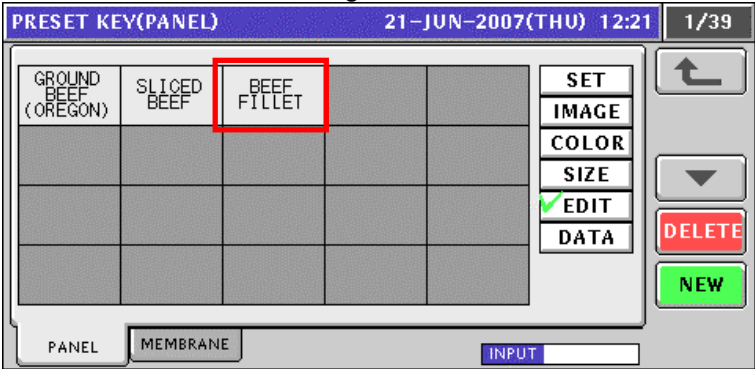


9. Repeat steps 4 through 8 for more registrations.

10.5.6 CONFIRMING PRESET KEY DATA


1. Press the “PRESET KEY” field on the screen.

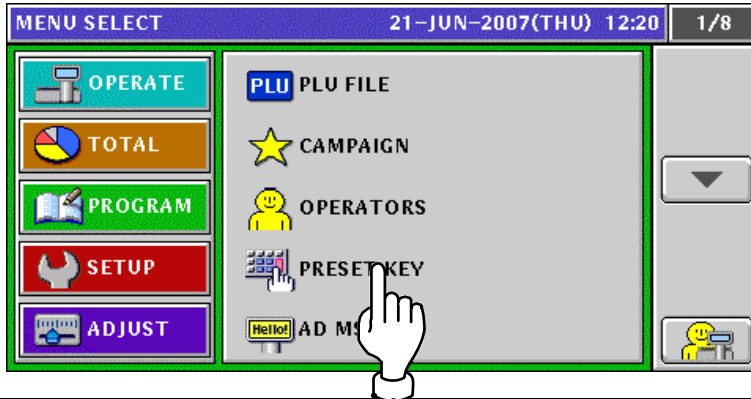

2. The Preset Key (Panel) screen appears.

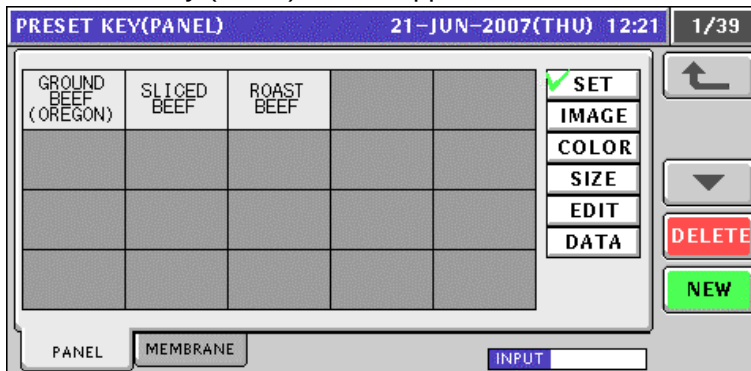


3. Press to select the [DATA] button.

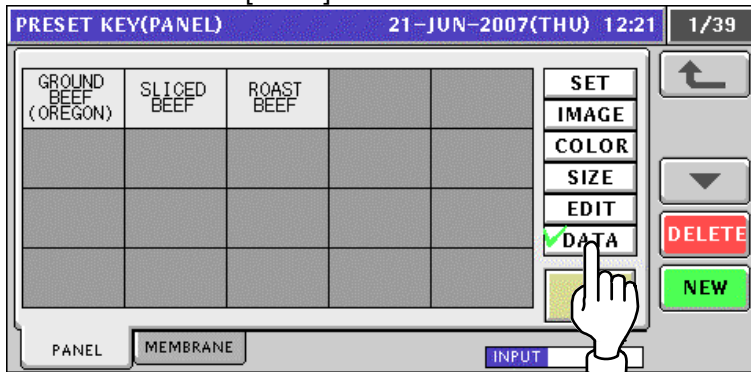


4. Press a desired preset key. The related data is displayed on the button.

EXAMPLE “Beef Fillet” and the PLU No.6

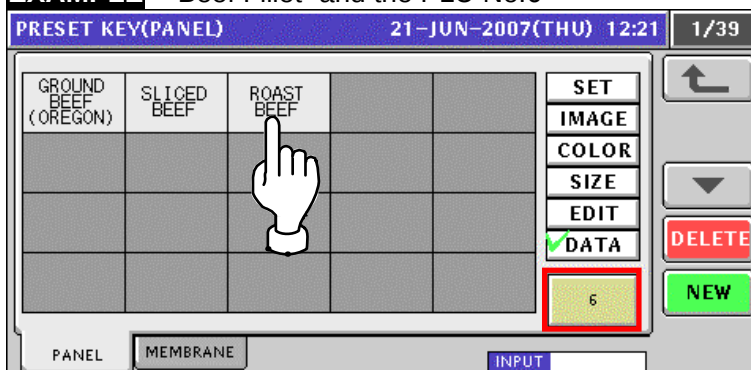


10.5.7 DELETING PRESET KEYS

1. Press the "PRESET KEY" field on the screen.

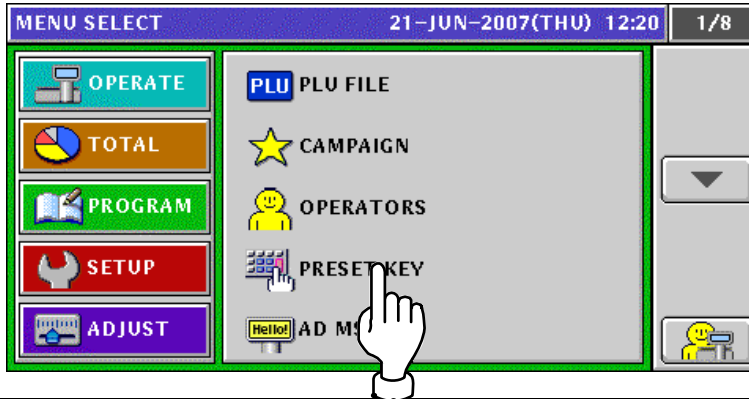


2. The Preset Key (Panel) screen appears. Ensure that the [SET] button is selected.

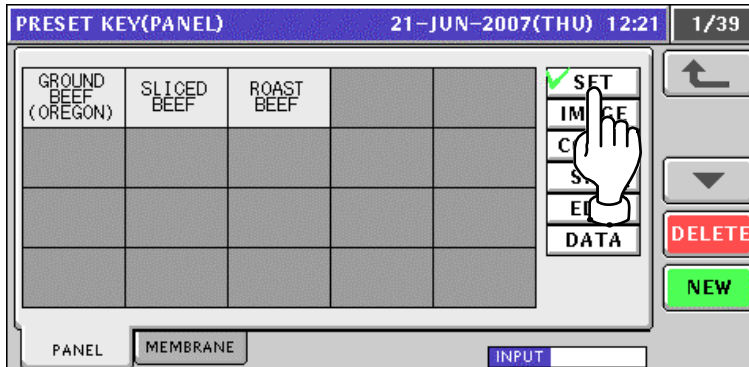


3. Press a desired preset key to be deleted.


EXAMPLE Delete the [Roast Beef] key".

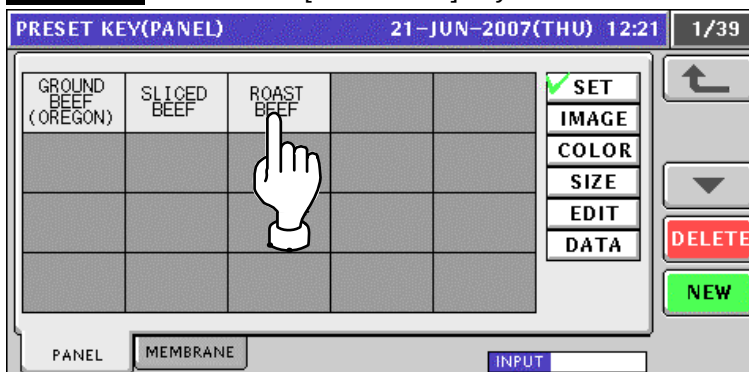

4. The Function List screen appears, and the assigned function field is highlighted.

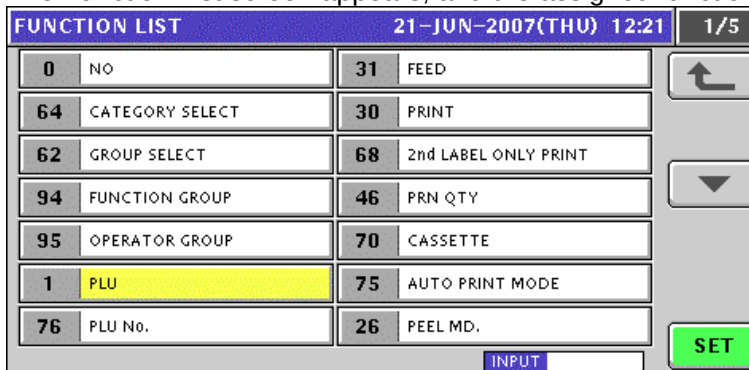

5. Press to select the "NO" field, and press the [SET] button.

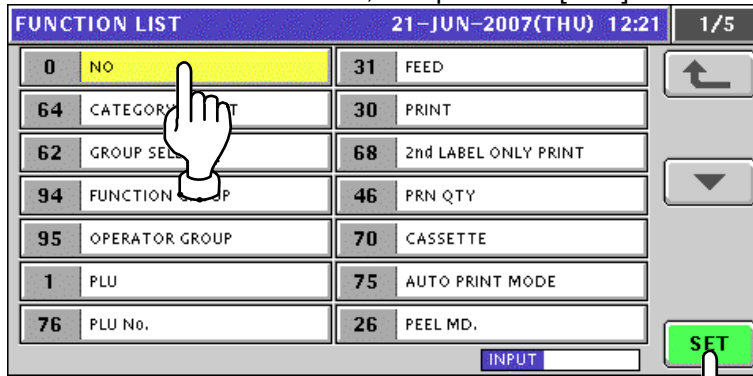


FUNCTION LIST 21-JUN-2007(THU) 12:21 1/5

0	NO	31	FEED
64	CATEGORY	30	PRINT
62	GROUP SEL	68	2nd LABEL ONLY PRINT
94	FUNCTION GROUP	46	PRN QTY
95	OPERATOR GROUP	70	CASSETTE
1	PLU	75	AUTO PRINT MODE
76	PLU No.	26	PEEL MD.

INPUT

6. The selected key has been deleted.

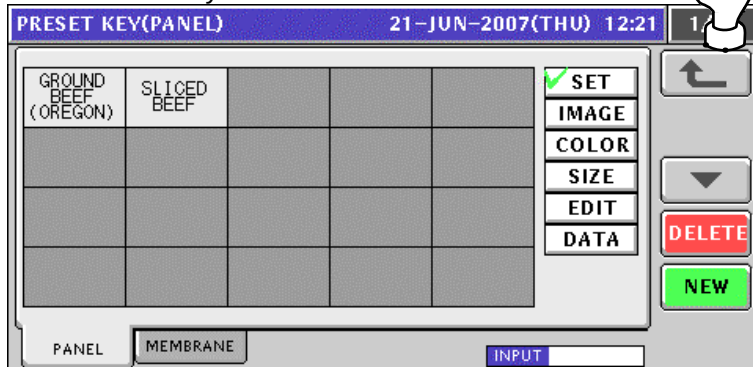

PRESET KEY(PANEL) 21-JUN-2007(THU) 12:21 1/5

GROUND BEEF (OREGON)	SLICED BEEF				

PANEL MEMBRANE

INPUT

SET
IMAGE
COLOR
SIZE
EDIT
DATA
DELETE
NEW


7. Repeat steps 3 through 6 for more deletions.

10.5.8 MEMBRANE KEYS


1. Press the "PRESET KEY" field on the screen.




2. The Preset Key (Panel) screen appears. Then, press the [MEMBRANE] tab.

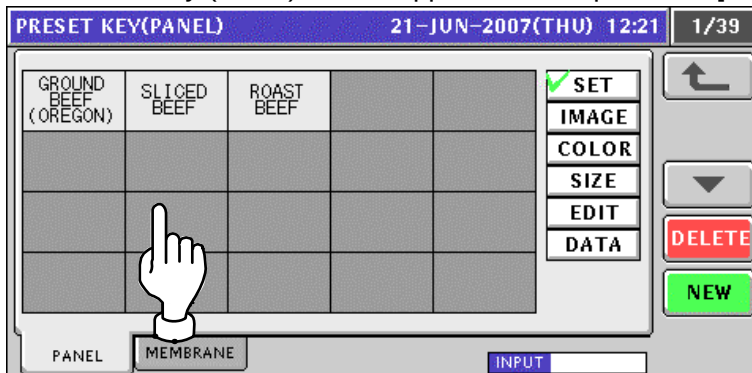

3. The Preset Key (Membrane) screen appears.

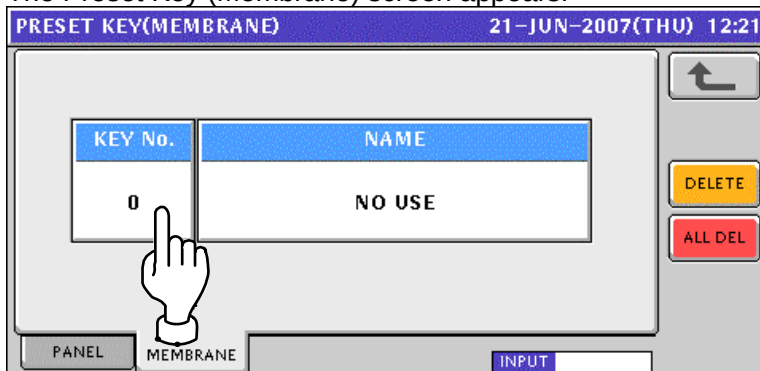

4. Press to select a desired membrane key to which the preset data is assigned.

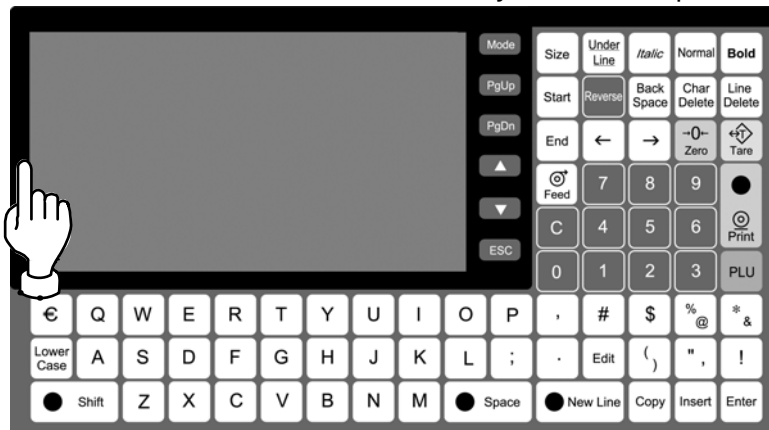

The selected key number and name are shown on the screen.
To assign a desired function to the selected key, press the Name field.

KEY No.	NAME
1	NO USE

DATE/TIME: 21-JUN-2007(THU) 12:21

Buttons: [Back Arrow], [DELETE], [ALL DEL]

Bottom Bar: [PANEL] [MEMBRANE] [INPUT]

5. The Function List screen appears.

KEY No.	NAME
0	NO
64	CATEGORY SELECT
62	GROUP SELECT
94	FUNCTION GROUP
95	OPERATOR GROUP
1	PLU
76	PLU No.

DATE/TIME: 21-JUN-2007(THU) 12:21

Page: 1/5

Buttons: [Back Arrow], [Down Arrow], [SET]

Bottom Bar: [INPUT]

6. Select a desired function to be assigned by pressing the corresponding field, and press the [SET] button.

EXAMPLE Select "PLU"

KEY No.	NAME
0	NO
64	CATEGORY SELECT
62	GROUP SELECT
94	FUNCTION GROUP
95	OPERATOR GROUP
1	PLU
76	PLU No.

DATE/TIME: 21-JUN-2007(THU) 12:21

Page: 1/5

Buttons: [Back Arrow], [Down Arrow], [SET]

Bottom Bar: [INPUT]

7. The Item List screen appears. Then, press to select a desired field.

EXAMPLE PLU No.5

KEY No.	NAME
1	GROUND BEEF/(TEXAS)
2	GROUND BEEF/(OREGON)
3	GROUND BEEF/(UTAH)
4	SLICED BEEF
5	SLICED BEEF/SPECIAL
6	ROAST BEEF

DATE/TIME: 21-JUN-2007(THU) 12:21

Page: 1/225

Buttons: [Back Arrow], [Down Arrow], [SET]

Bottom Bar: [FIND PLU] [SEARCH] [1] [INPUT]

8. The selected PLU has been assigned to the selected membrane key.

PRESET KEY(MEMBRANE)

21-JUN-2007(THU) 12:21

KEY No.	NAME
1	SLICED BEEFSPECIAL (00000005)

↑

DELETE

ALL DEL


PANEL

MEMBRANE


INPUT

10.6 ADVERTISEMENT MESSAGE REGISTRATION

1. Press the "AD MSG (Advertisement Message)" field on the Program Menu Select screen.

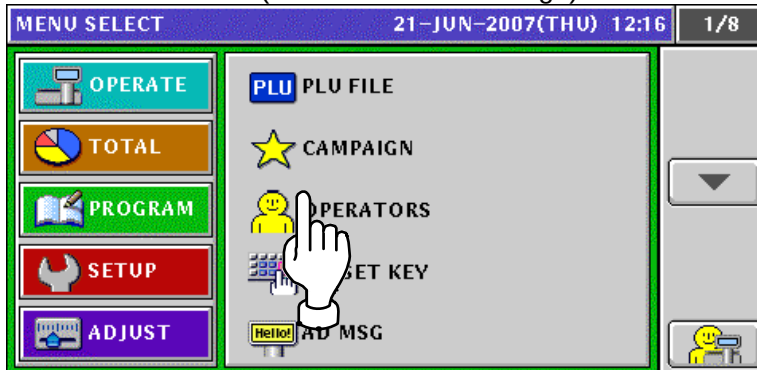

- 2-1 The Advertisement Message List screen appears.
When creating the first message, press the [NEW] button.

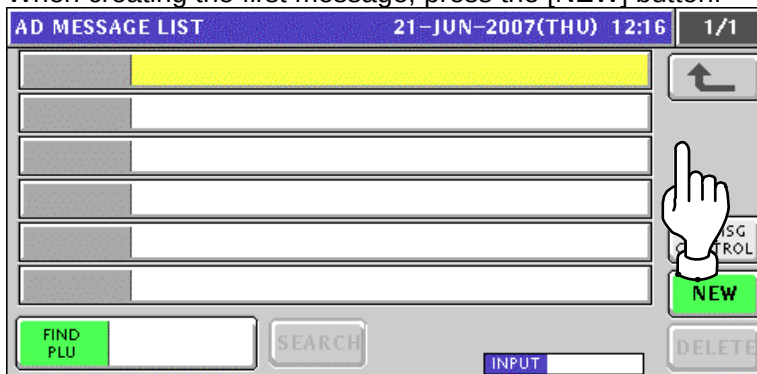


- 2-2 When creating a message other than the first one, enter a desired message number using the numeric keys and press the [PLU] key on the key sheet.

XAMPLE Message number "2".



3. The confirmation screen appears.
Then, press the [ENTER] button.

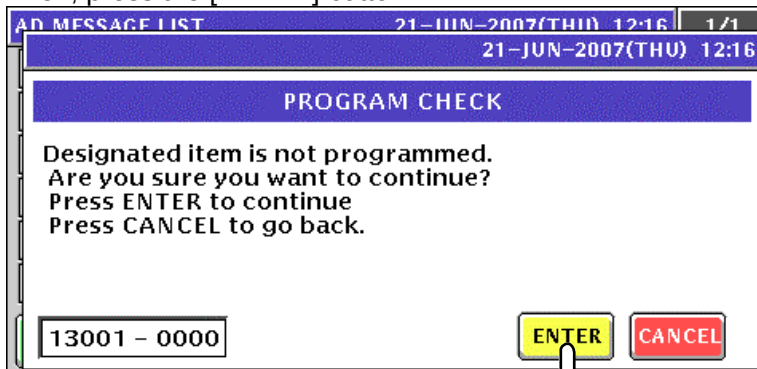

4. The Advertisement Message (Text) screen appears. Then, press the [EDIT] button.

The Advertisement Message Edit screen appears.

No.	CHAR	REMAIN
1	000	060

Edit a desired message according to the procedures described in Appendix "Text Editing".

No.	CHAR	REMAIN
1	014	046

Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button to save the data.

5. The Advertisement Message (Text) screen for the designated message number appears.

ITEM	DESCRIPTION
TEXT DISPLAY TYPE	Press the [<] or [>] button to select a desired display type. 0: None 1: Slide 2: Flash
IMAGE DISPLAY TYPE	Press the [<] or [>] button to select a desired display type. 0: None 1: Slide 2: Flash
TEXT DISPLAY SPEED	Press the [<] or [>] button to select a desired display speed. 0: Fast 1: Medium 2: Slow
DISPLAY COUNT	Enter a display count data and press this field.

6. Press the [IMAGE] tab. Then, the Advertisement Message (Image) screen appears.

7. When setting an image, press a desired field.

8. The Image List appears.

IMAGE LIST				21-JUN-2007(THU) 12:17		1/4	
No.	IMAGE	No.	IMAGE				
0	NO IMAGE	6		↑ ↓ DETAIL SET			
1		7					
2		8					
3		9					
5		10					

9. Press to select a desired field and press the [SET] button.

IMAGE LIST				21-JUN-2007(THU) 12:17		1/4	
No.	IMAGE	No.	IMAGE				
0	NO IMAGE	6		↑ ↓ DETAIL SET			
1		7					
2		8					
3		9					
5		10					

The selected image has been assigned in the designated field.

AD MESSAGE(IMAGE)				21-JUN-2007(THU) 12:18			
01	<	AD MESSAGE AA		>		↑ EDIT DELETE	
IMAGE1	3		IMAGE2	0			
IMAGE3	0		IMAGE4	0			
IMAGE5	0		IMAGE6	0			
TEXT IMAGE INPUT							


10. Repeat steps 7 through 9 for more registrations.
Then, press the Return button to finalize this procedure.
The edited message has been registered.

AD MESSAGE LIST				21-JUN-2007(THU) 12:19		1/1	
1	AD MESSAGE AA			↑ AD MSG CONTROL DETAIL DELETE			
FIND PLU SEARCH INPUT							


10.7 STORE NAME REGISTRATION

10.7.1 CHANGING EXISTING STORE DATA

1. Press the "STORE NAME" field on the Program Menu Select screen.

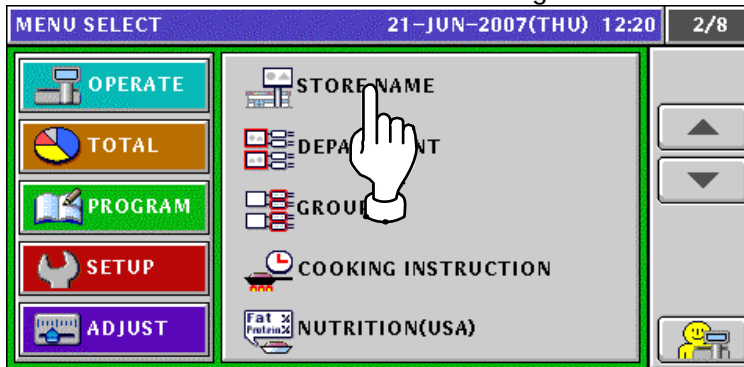


2. The default store data screen appears. When changing the store data, press the [EDIT] button.

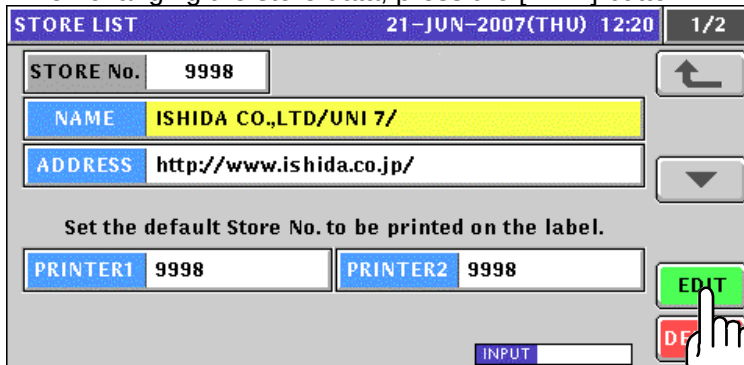

3. The Store Name Edit screen appears.



4. Edit a text according to the procedures described in Appendix "Text Editing".

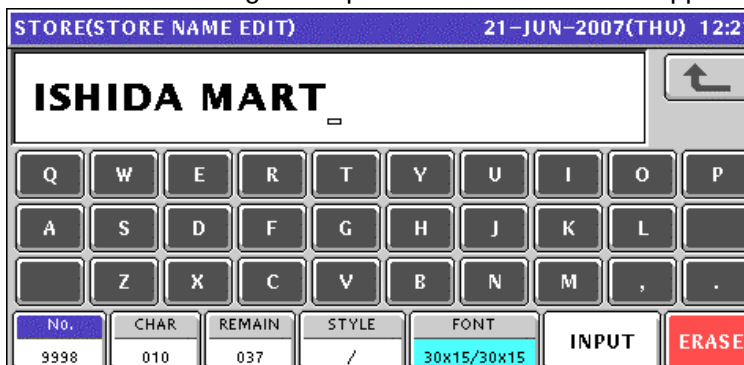

5. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

6. The store name has been changed.

7. Press to select the address field line and press the [EDIT] button.

8. The Store Address Edit screen appears.

9. Edit a text according to the procedures described in Appendix "Text Editing".

10. Press the [ESC] key on the key sheet to escape from text editing mode.


ESC

The confirmation screen appears. Then, press the [SAVE] button.


11. The store address has been changed.

10.7.2 CREATING NEW STORE DATA

1. Press the "STORE NAME" field on the Program Menu Select screen.

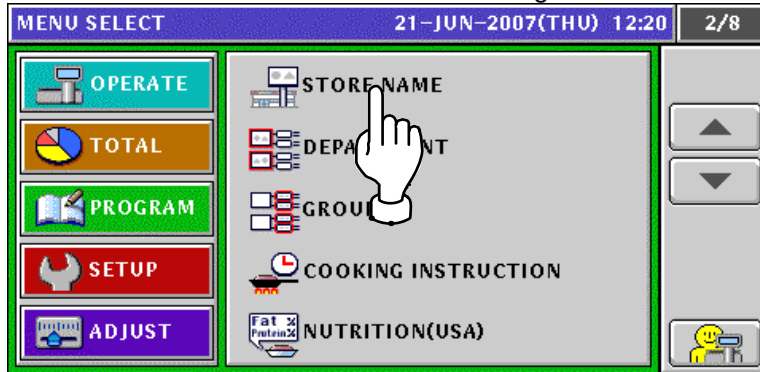

2. The default store data screen appears.

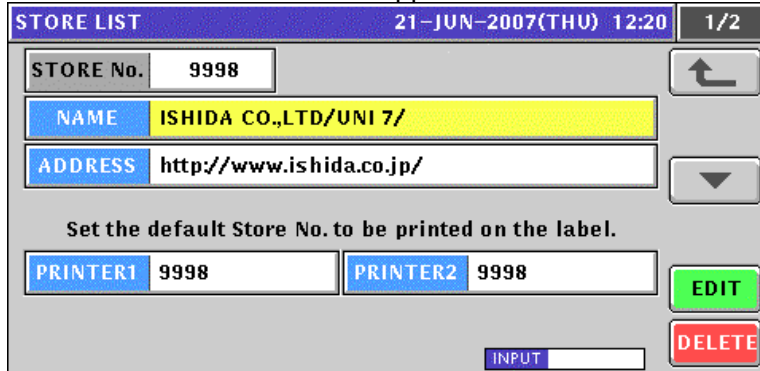


3. When creating a new store data, enter the desired store number and press the [PLU] key.

EXAMPLE Store number "1"



The confirmation screen appears. Then, press the [ENTER] button.

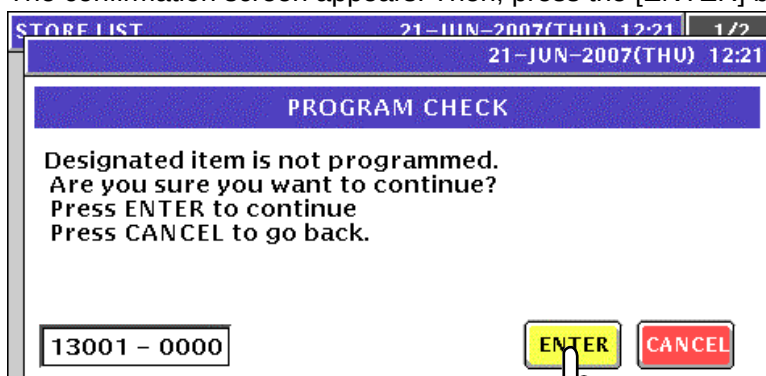

4. The Store Name Edit screen appears for the selected store number.

5. Edit a text according to the procedures described in Appendix "Text Editing".

6. Press the [ESC] key on the key sheet to escape from text editing mode.



The confirmation screen appears. Then, press the [SAVE] button.

7. The store name has been registered

8. Press to select the "Address" field and press the [EDIT] button.

STORE LIST 21-JUN-2007(THU) 12:22 1/3

STORE No. 0001

NAME HYPER ISHIDA

ADDRESS

Set the default Store No. to [blank] entered on the label.

PRINTER1 9998 PRINTER2 9998

EDIT

INPUT

9. The Store Address Edit screen appears.

STORE(ADDRESS EDIT) 21-JUN-2007(THU) 12:22

Q W E R T Y U I O P

A S D F G H J K L

Z X C V B N M , .

No. CHAR REMAIN STYLE FONT

1 000 048 / 30x15/30x15

INPUT ERASE

10. Edit a text according to the procedures described in Appendix "Text Editing".

STORE(ADDRESS EDIT) 21-JUN-2007(THU) 12:23

BIWAKO SHIGA JAPAN

Q W E R T Y U I O P

A S D F G H J K L

Z X C V B N M , .

No. CHAR REMAIN STYLE FONT

1 018 030 / 30x15/30x15

INPUT ERASE

11. Press the [ESC] key on the key sheet to escape from text editing mode.



The confirmation screen appears. Then, press the [SAVE] button.

STORE(ADDRESS EDIT) 21-JUN-2007(THU) 12:23

PROGRAM CHECK

Are you sure you want to save changes?
To confirm changes press SAVE
to undo changes press CANCEL

19001 - 0000

SAVE CANCEL

12. The store address has been registered.

STORE LIST		21-JUN-2007(THU) 12:23	1/3	
STORE No.	0001	↶ ↵		
NAME	HYPER ISHIDA			
ADDRESS	BIWAKO SHIGA JAPAN			
Set the default Store No. to be printed on the label.				
PRINTER1	9998	PRINTER2	9998	EDIT DELETE
INPUT				

13. Enter a desired store number as a default store data and press the “Printer 1” or “Printer 2” display field.**EXAMPLE** Set the store number “1” for printer #1.

1

STORE LIST		21-JUN-2007(THU) 12:23	1/3	
STORE No.	0001	↶ ↵		
NAME	HYPER ISHIDA			
ADDRESS	BIWAKO SHIGA JAPAN			
Set the default Store No. to be printed on the label.				
PRINTER1	0001	PRINTER2	9998	EDIT DELETE
INPUT				


10.8 DEPARTMENT NAME REGISTRATION

10.8.1 CREATING NEW DEPARTMENT NAMES


1. Press the "Department" field on the Program Menu Select screen.




2. The Department List screen appears. Then, press the [NEW] button.

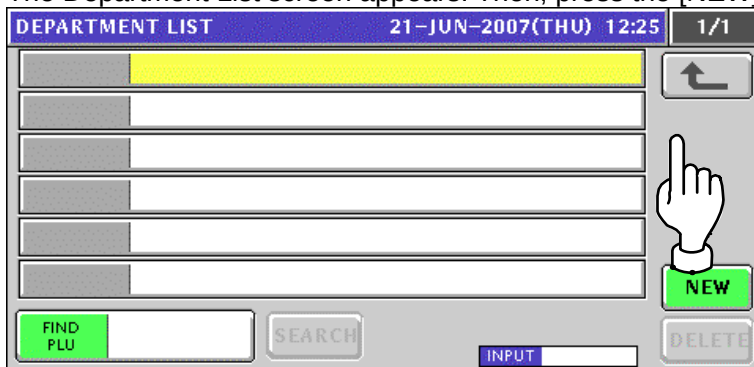

3. The confirmation screen appears. Then, press the [ENTER] button.

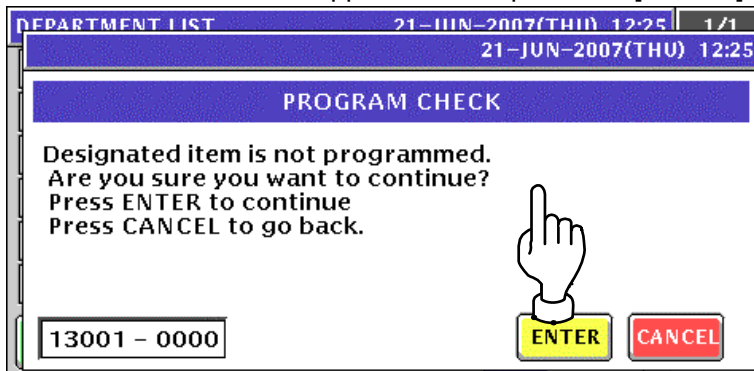

4. The Department Name Edit screen appears.

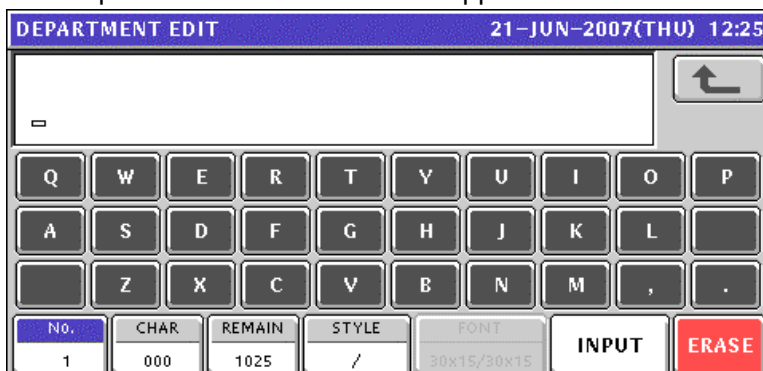

5. Edit a text according to the procedures described in Appendix “Text Editing”.

6. Press the [ESC] key on the key sheet to escape from text editing mode.


ESC

The confirmation screen appears. Then, press the [SAVE] button.


7. The edited text has been registered.

8. When creating more department names, enter a desired department number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Department number “2”.



The confirmation screen appears. Then, press the [ENTER] button.

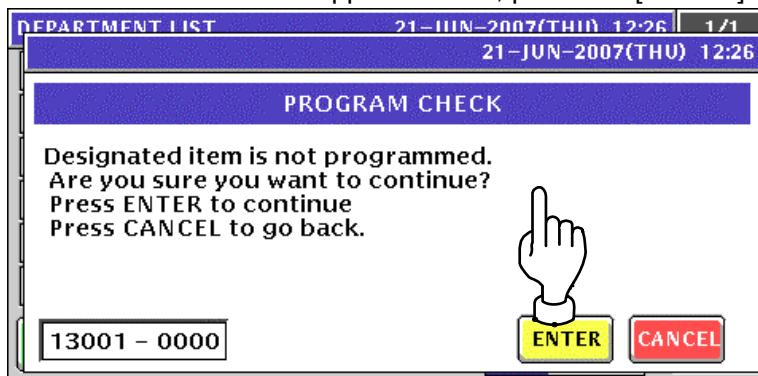

9. The Department Name Edit screen appears.




10. Edit a text according to the procedures described in Appendix "Text Editing".



11. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

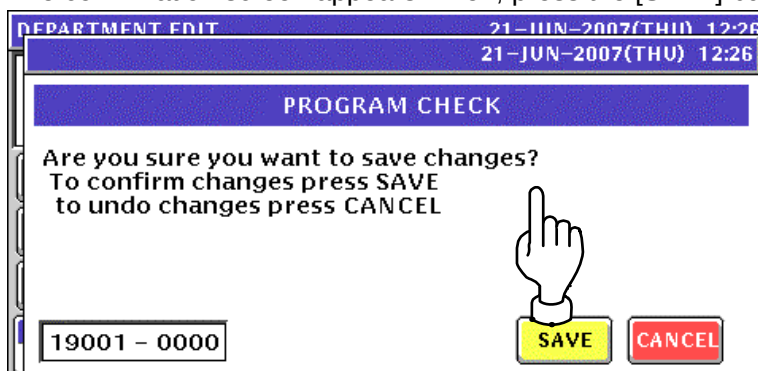

12. The edited text has been registered.

DEPARTMENT LIST		21-JUN-2007(THU) 12:26	1/1
1	DEPARTMENT AA		
2	DEPARTMENT BB		
			








13. Repeat steps 8 through 12 for more registrations.

10.8.2 CHANGING EXISTING DEPARTMENT NAMES

1. Press the "Department" field on the Program Menu Select screen.




2. The Department List screen appears.

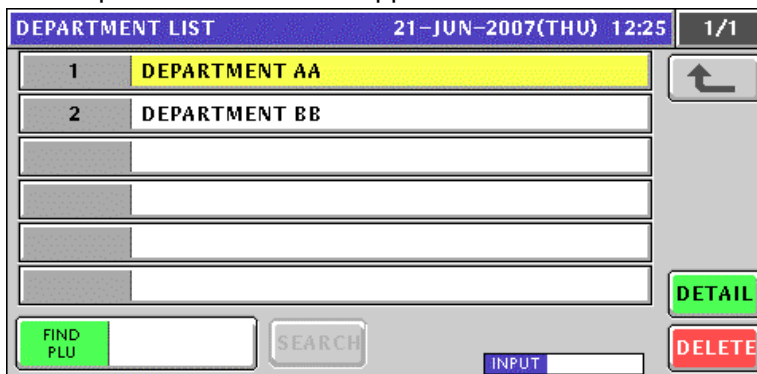

3. When changing an existing data, press to select a desired field.



4. The Department Name Edit screen appears for the selected department.

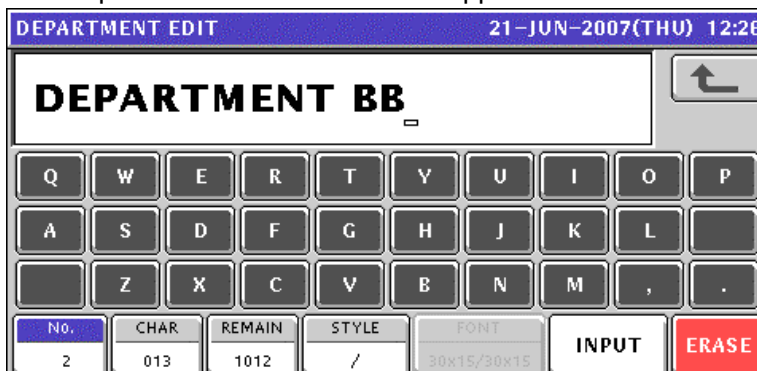

5. Edit a text according to the procedures described in Appendix “Text Editing”.

DEPARTMENT EDIT 21-JUN-2007(THU) 12:25

DEPT. BB

Q W E R T Y U I O P
A S D F G H J K L
Z X C V B N M , .

NO. 2 CHAR 008 REMAIN 1017 STYLE / FONT 30x15/30x15 INPUT ERASE

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

DEPARTMENT EDIT 21-JUN-2007(THU) 12:25

PROGRAM CHECK

Are you sure you want to save changes?
To confirm changes press SAVE
to undo changes press CANCEL

19001 - 0000 SAVE CANCEL

7. The edited text has been registered.

DEPARTMENT LIST 21-JUN-2007(THU) 12:25 1/1

1 DEPARTMENT AA
2 DEPT. BB
DEPT. BB
DEPT. BB
DEPT. BB

FIND SEARCH INPUT DELETE

8. Repeat steps 3 through 7 for more registrations.


10.9 GROUP NAME REGISTRATION

10.9.1 CREATING NEW GROUP NAMES


1. Press the "Group" field on the Program Menu Select screen.




2. The Group List screen appears. Then, press the [NEW] button.

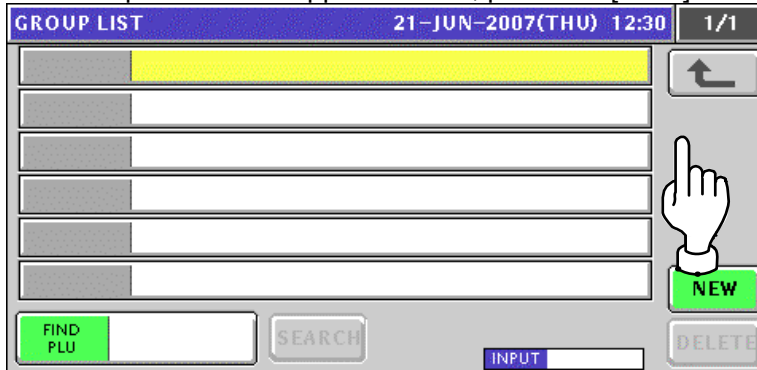

3. The confirmation screen appears. Then, press the [ENTER] button.

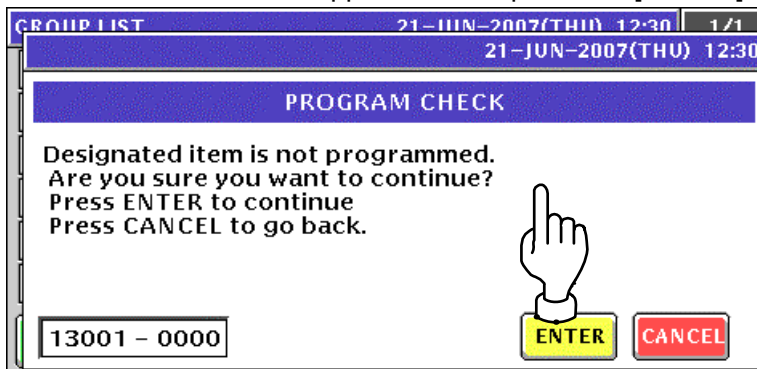

4. The Group Name Edit screen appears.

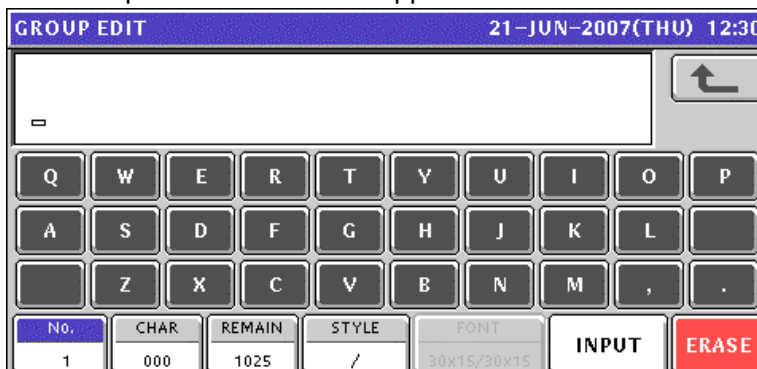

5. Edit a text according to the procedures described in Appendix “Text Editing”.

The screenshot shows the 'GROUP EDIT' screen with a title bar '21-JUN-2007(THU) 12:30'. The main display area shows 'GROUP AA'. Below the display is a numeric keypad with letters Q through Z, comma, and period. At the bottom, there are fields for 'No.' (1), 'CHAR' (008), 'REMAIN' (1017), 'STYLE' (/), 'FONT' (30x15/30x15), and buttons for 'INPUT' and 'ERASE'.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

The screenshot shows the 'PROGRAM CHECK' screen with a title bar '21-JUN-2007(THU) 12:30'. The main display area asks 'Are you sure you want to save changes?' and provides instructions: 'To confirm changes press SAVE' and 'to undo changes press CANCEL'. At the bottom, there is a field '19001 - 0000' and buttons for 'SAVE' and 'CANCEL'. A hand icon is pointing at the 'SAVE' button.

7. The edited text has been registered.


The screenshot shows the 'GROUP LIST' screen with a title bar '21-JUN-2007(THU) 12:30' and a page indicator '1/1'. The main display area shows a list of groups, with '1 GROUP AA' highlighted in yellow. Below the list are buttons for 'DETAIL' and 'DELETE'. At the bottom, there are fields for 'FIND PLU', 'SEARCH', and 'INPUT'.

8. When creating more group names, enter a desired group number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Group number “2”.



The confirmation screen appears. Then, press the [ENTER] button.

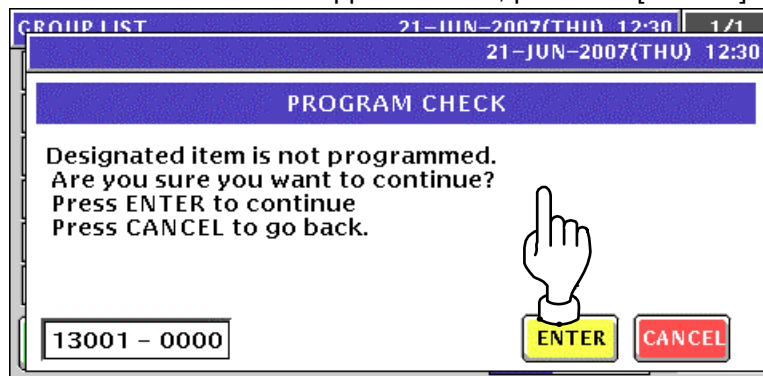

- 9.** The Group Name Edit screen appears.




- 10.** Repeat steps 5 through 9 for more registrations.

10.9.2 CHANGING EXISTING GROUP NAMES


1. Press the "Group" field on the Program Menu Select screen.



2. The Group List screen appears.

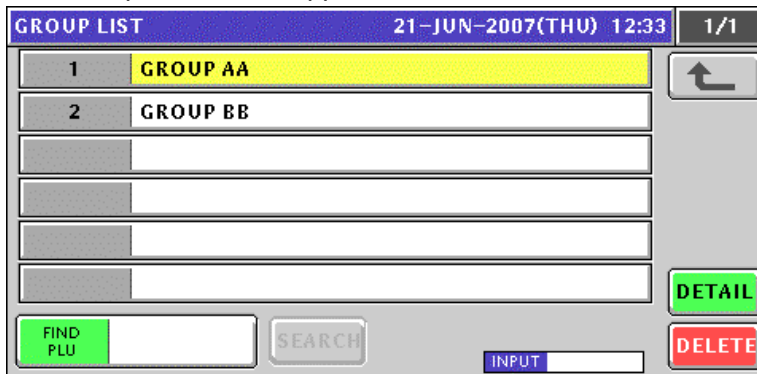

3. When changing an existing data, press to select a desired field.

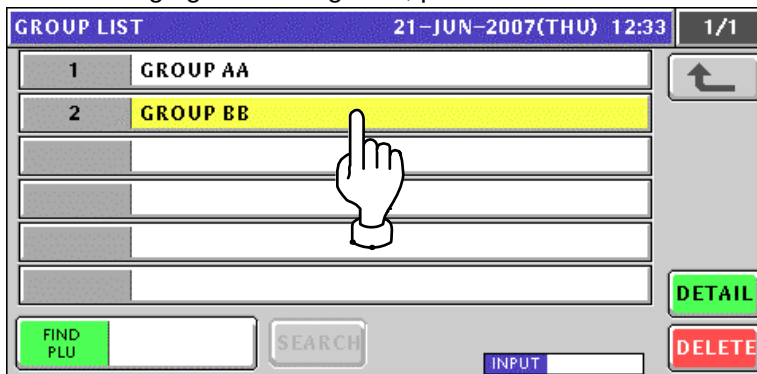

4. The Group Edit screen appears for the selected group



5. Edit a text according to the procedures described in Appendix “Text Editing”.

The screenshot shows the 'GROUP EDIT' screen with a title bar '21-JUN-2007(THU) 12:33'. The main text area displays 'GRP. BB'. Below the text area is a keyboard layout with letters Q through P, A through L, and Z through M, along with comma and period keys. At the bottom, there are status fields: 'No.' (2), 'CHAR' (007), 'REMAIN' (1018), 'STYLE' (/), 'FONT' (30x15/30x15), and buttons for 'INPUT' and 'ERASE'.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

The screenshot shows the 'PROGRAM CHECK' screen with a title bar '21-JUN-2007(THU) 12:33'. The main text area asks: 'Are you sure you want to save changes? To confirm changes press SAVE to undo changes press CANCEL'. At the bottom, there is a text field containing '19001 - 0000' and two buttons: 'SAVE' and 'CANCEL'. A hand icon is pointing at the 'SAVE' button.

7. The edited text has been registered.

The screenshot shows the 'GROUP LIST' screen with a title bar '21-JUN-2007(THU) 12:33' and a page indicator '1/1'. The list contains two entries: '1 GROUP AA' and '2 GRP. BB', with the second entry highlighted in yellow. Below the list are several empty input fields. At the bottom, there are buttons for 'FIND PLU', 'SEARCH', 'INPUT', 'DETAIL', and 'DELETE'.

8. Repeat steps 3 through 7 for more registrations.


10.10 COOKING INSTRUCTION REGISTRATION

10.10.1 CREATING NEW INSTRUCTIONS


1. Press the "Cooking Instruction" field on the Program Menu Select screen.




2. The Cooking Time List screen appears. Then, press the [NEW] button.

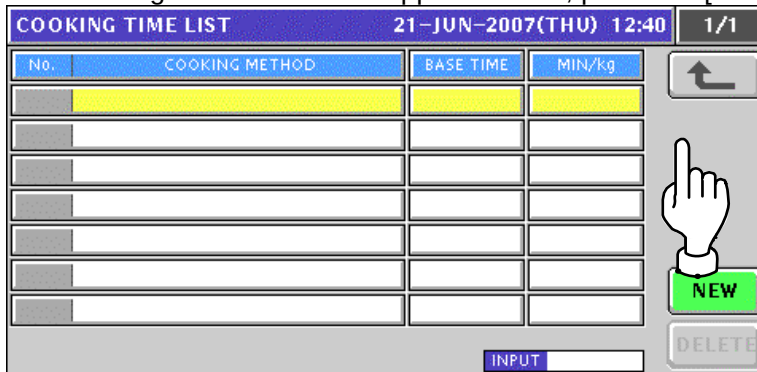

3. The confirmation screen appears. Then, press the [ENTER] button.

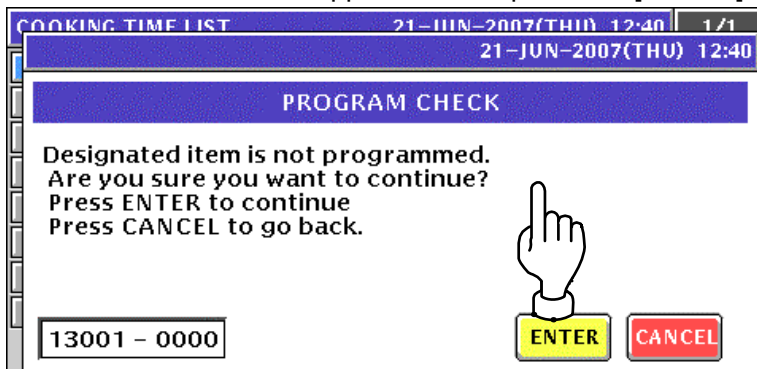

4. The Cooking Time Edit screen appears.

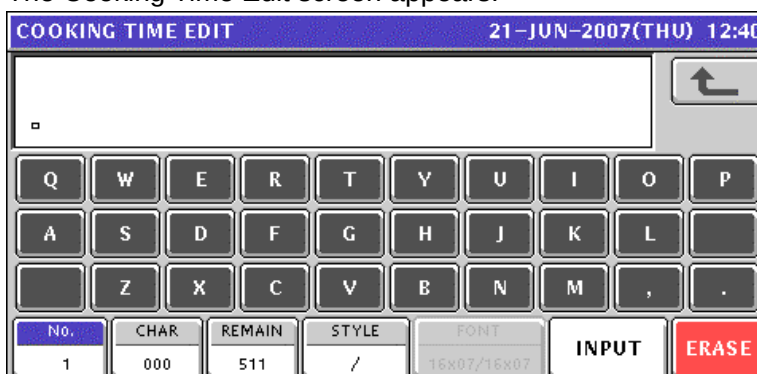

5. Edit a text according to the procedures described in Appendix “Text Editing”.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

7. The edited text has been registered.

No.	COOKING METHOD	BASE TIME	MIN/kg
1	COOKING INSTRUCTION AA	0	0

8. Enter a numeric value for each filed using the numeric keys and press the corresponding field for registration.


EXAMPLE Base time “35 minutes”

COOKING TIME LIST				21-JUN-2007(THU) 12:41		1/1
No.	COOKING METHOD	BASE TIME	MIN/kg			
1	COOKING INSTRUCTION AA	35				

INPUT

- 9.** When creating more instructions, enter a desired cooking instruction number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Cooking instruction number "2".



The confirmation screen appears. Then, press the [ENTER] button.

COOKING TIME LIST				21-JUN-2007(THU) 12:41		1/1
PROGRAM CHECK						
Designated item is not programmed. Are you sure you want to continue? Press ENTER to continue Press CANCEL to go back.						
13001 - 0000				ENTER CANCEL		

- 10.** The Cooking Time Edit screen appears.

COOKING TIME EDIT				21-JUN-2007(THU) 12:42					
						↑			
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN	STYLE	FONT		INPUT		ERASE	
2	000	511	/	16x07/16x07					

- 11.** Repeat steps 5 through 10 for more registrations.

10.10.2 CHANGING EXISTING INSTRUCTIONS

1. Press the "Cooking Instruction" field on the Program Menu Select screen.



2. The Cooking Time List screen appears.

The screenshot shows the 'COOKING TIME LIST' screen with a header bar displaying '21-JUN-2007(THU) 12:45' and '1/1'. It contains a table with the following data:

No.	COOKING METHOD	BASE TIME	MIN/kg
1	COOKING INSTRUCTION AA	35	20
2	COOKING INSTRUCTION BB	20	25

On the right side of the table are a back arrow button, a 'DETAIL' button, and a 'DELETE' button. At the bottom is an 'INPUT' field.

3. When changing an existing data, press to select a desired field and press the [DETAIL] button.

This screenshot is identical to the previous one, but with a hand cursor pointing to the 'COOKING INSTRUCTION BB' row in the table and another hand cursor pointing to the 'DETAIL' button on the right.

4. The Cooking Time Edit screen appears for the selected instruction

The screenshot shows the 'COOKING TIME EDIT' screen with a header bar displaying '21-JUN-2007(THU) 12:45'. The main area shows 'COOKING INSTRUCTION BB' in a text field. Below the text field is a QWERTY keyboard. At the bottom are several input fields and buttons:

No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
2	022	489	/	16x07/16x07		

5. Edit a text according to the procedures described in Appendix “Text Editing”.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

7. The edited text has been registered.

No.	COOKING METHOD	BASE TIME	MIN/kg
1	COOKING INSTRUCTION AA	35	20
2	COOKING INST. BB	20	25

8. Repeat steps 3 through 7 for more registrations.


10.11 NUTRITION FILE REIGISTRATION

10.11.1 CREATING NEW NUTRITION DATA


1. Press the "Nutrition (USA)" field on the Program Menu Select screen.




2. The Nutrition List screen appears. Then, press the [NEW] button.

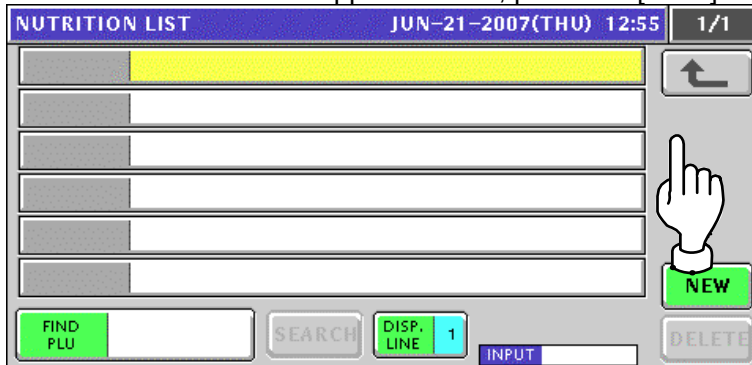

3. The confirmation screen appears. Then, press the [ENTER] button.

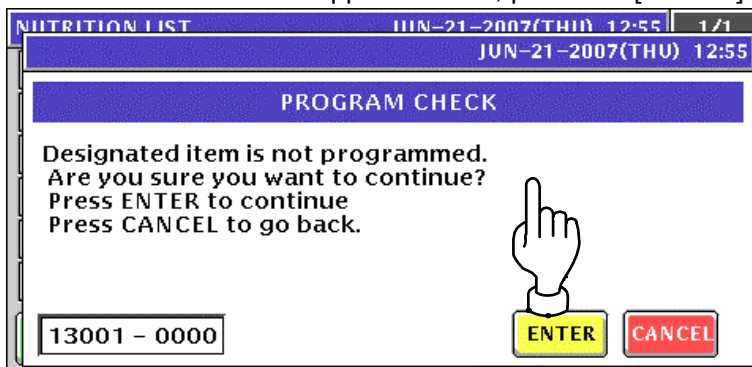

4. The Nutrition Data Programming screen for the selected nutrition number appears. When creating a text for "Serving Size", press the [EDIT] button.

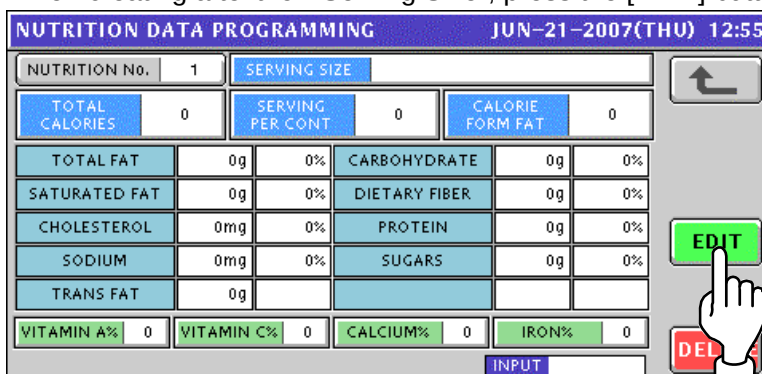

5. The Nutrition Edit screen appears.

6. Edit a text according to the procedures described in Appendix "Text Editing".

7. Press the [ESC] key on the key sheet to escape from text editing mode.


ESC

The confirmation screen appears. Then, press the [SAVE] button.


8. The edited text has been registered. Then, enter a nutrition data for each field using the numeric keys and press the corresponding field for registration.

- 9.** When creating more nutrition data, enter a desired nutrition number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Nutrition number “2”.



The confirmation screen appears. Then, press the [ENTER] button.

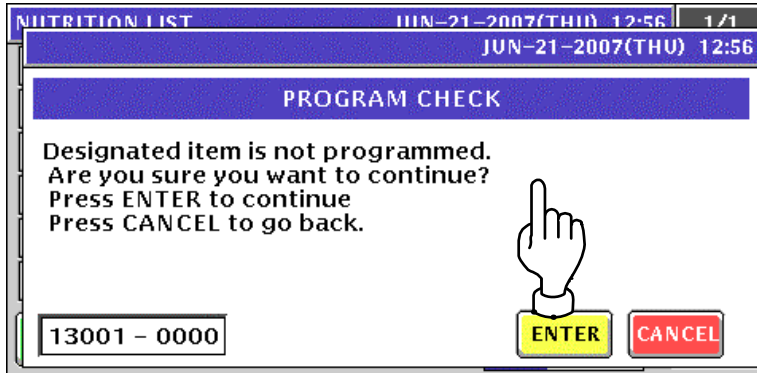


- 10.** Repeat steps 4 through 9 for more registrations.
-

10.11.2 CHANGING EXISTING NUTRITION DATA

1. Press the "Nutrition (USA)" field on the Program Menu Select screen.



2. The Nutrition List screen appears.

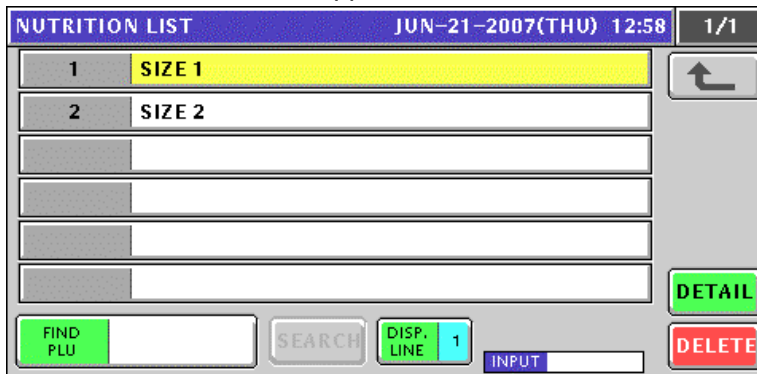

3. Select a desired nutrition number.

EXAMPLE Nutrition number "2".



or press the [PLU] key on the key sheet after a numeric entry.



4. Press the [DETAIL] button,

NUTRITION LIST		JUN-21-2007(THU) 12:58		1/1
1	SIZE 1			
2	SIZE 2			
FIND PLU		SEARCH	DISP. LINE 1	INPUT
				DELETE

5. The Nutrition Data Programming screen for the selected nutrition number appears. When changing a text for "Serving Size", press the [EDIT] button.

NUTRITION DATA PROGRAMMING				JUN-21-2007(THU) 12:58	
NUTRITION No. 2		SERVING SIZE		SIZE 2	
TOTAL CALORIES	0	SERVING PER CONT	0	CALORIE FORM FAT	0
TOTAL FAT	0g	0%	CARBOHYDRATE	0g	10%
SATURATED FAT	0g	0%	DIETARY FIBER	10g	0%
CHOLESTEROL	0mg	0%	PROTEIN	0g	0%
SODIUM	0mg	0%	SUGARS	0g	0%
TRANS FAT	0g				
VITAMIN A%	0	VITAMIN C%	20	CALCIUM%	0
				IRON%	0
INPUT					

6. The Nutrition Edit screen appears.

NUTRITION EDIT		JUN-21-2007(THU) 12:58	
SIZE 2			
Q	W	E	R
A	S	D	F
	Z	X	C
No.	CHAR	REMAIN	STYLE
2	006	012	/
FONT		INPUT	
16x07/16x07		ERASE	

7. Edit a text according to the procedures described in Appendix "Text Editing".

NUTRITION EDIT		JUN-21-2007(THU) 12:58	
SIZE BB			
Q	W	E	R
A	S	D	F
	Z	X	C
No.	CHAR	REMAIN	STYLE
2	007	011	/
FONT		INPUT	
16x07/16x07		ERASE	

8. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

9. The edited text has been registered. When necessary, enter a nutrition data for each field using the numeric keys and press the corresponding field for registration.

NUTRITION No.		SERVING SIZE		SIZE BB	
TOTAL CALORIES	0	SERVING PER CONT	0	CALORIE FORM FAT	0
TOTAL FAT	0g	0%	CARBOHYDRATE	0g	10%
SATURATED FAT	0g	0%	DIETARY FIBER	10g	0%
CHOLESTEROL	0mg	0%	PROTEIN	0g	0%
SODIUM	0mg	0%	SUGARS	0g	0%
TRANS FAT	0g				
VITAMIN A%	0	VITAMIN C%	20	CALCIUM%	0
				IRON%	0

10. Press the Return button after making necessary changes.

11. Repeat steps 3 through 10 for more registrations.


10.12 EXTRA MESSAGE REGISTRATION

10.12.1 CREATING NEW MESSAGES


1. Press the "Extra Message" field on the Program Menu Select screen.



2. The Extra Message List screen appears. Then, press the [NEW] button.

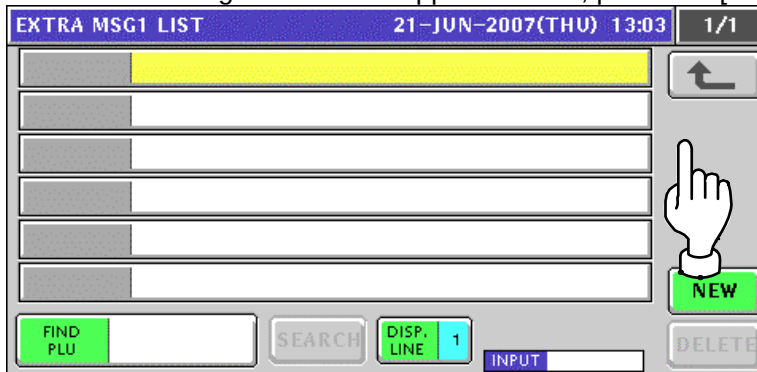

3. The confirmation screen appears. Then, press the [ENTER] button.

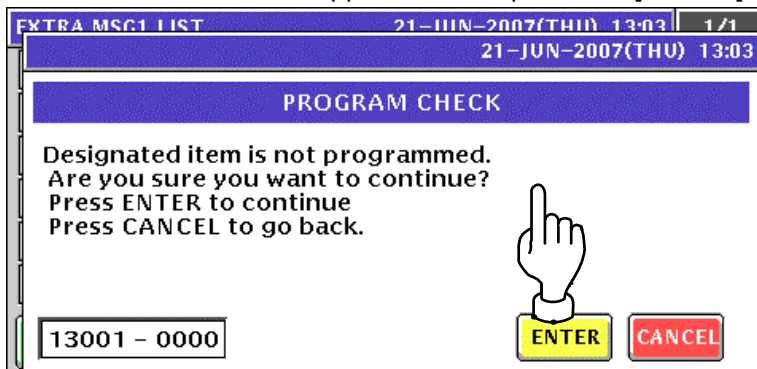

4. The Extra Message Edit screen appears.



5. Edit a text according to the procedures described in Appendix “Text Editing”.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.


7. The edited text has been registered.

8. When creating more messages, enter a desired message number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Message number “2”.




The confirmation screen appears. Then, press the [ENTER] button.

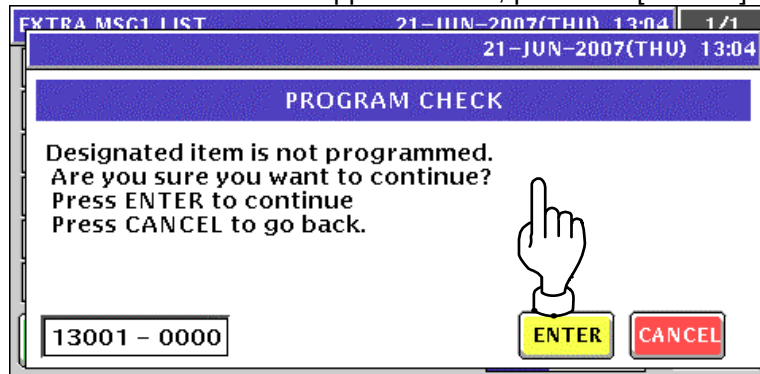


-
- 9.** Repeat steps 4 through 8 for more registrations.
-

10.12.2 CHANGING EXISITING MESSAGES

1. Press the "Extra Message" field on the Program Menu Select screen.

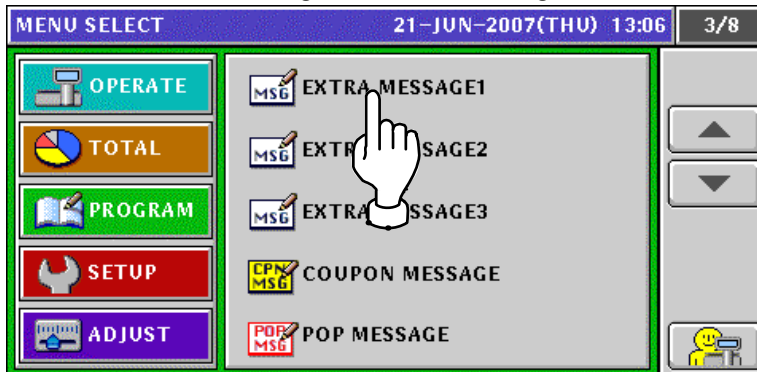

2. The Extra Message List screen appears.

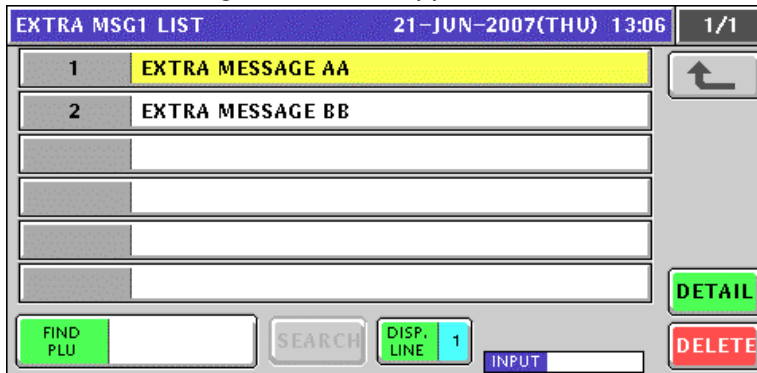

3. Select a desired message number.

EXAMPLE Message number "2".


Press a desired field,



or press the [PLU] key on the key sheet after a numeric entry.



4. Press the [DETAIL] button.

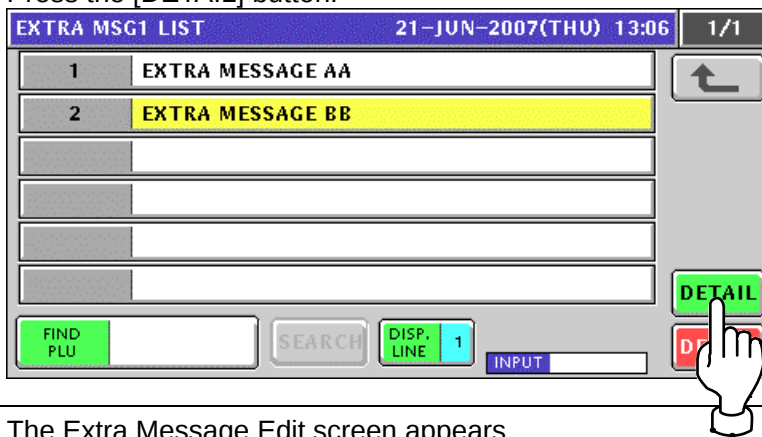

5. The Extra Message Edit screen appears.




6. Edit a text according to the procedures described in Appendix "Text Editing".



7. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

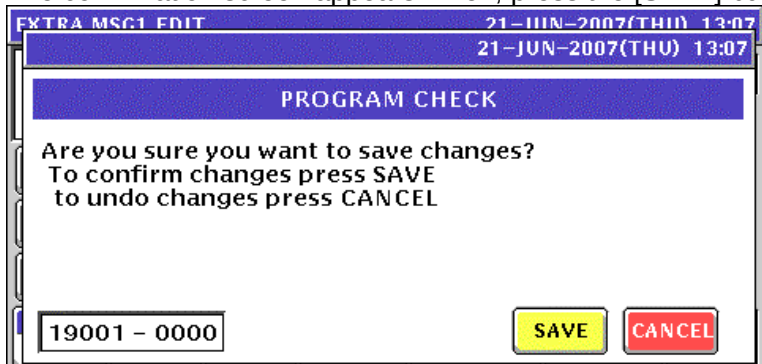


8. Repeat steps 3 through 7 for more registrations.


10.13 COUPON MESSAGE REGISTRATION

10.13.1 CREATING NEW MESSAGES


1. Press the "Coupon Message" field on the Program Menu Select screen.

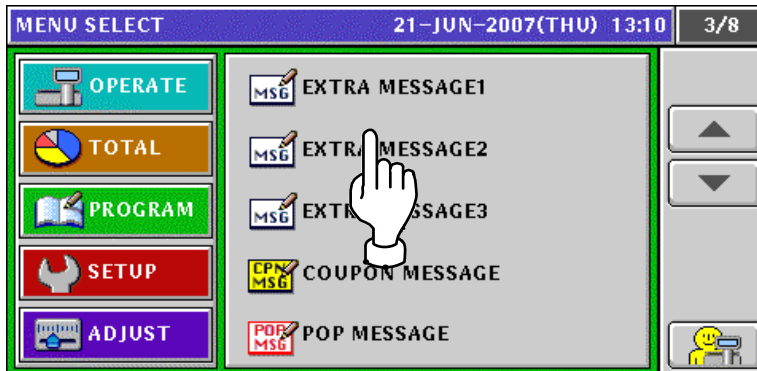


2. The Coupon Message List screen appears. Then, press the [NEW] button.

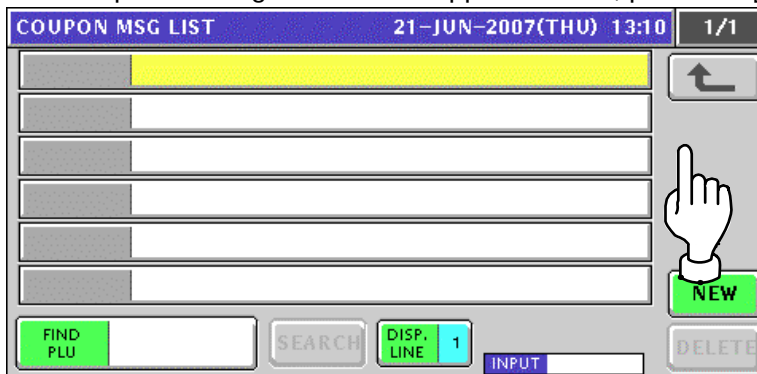

3. The confirmation screen appears. Then, press the [ENTER] button.

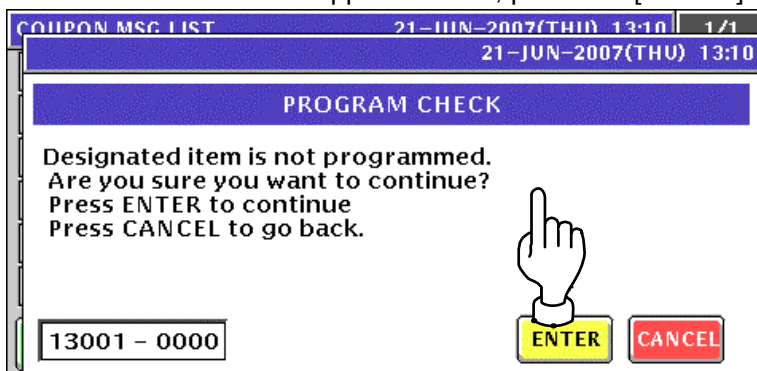

4. The Coupon Message Edit screen appears.

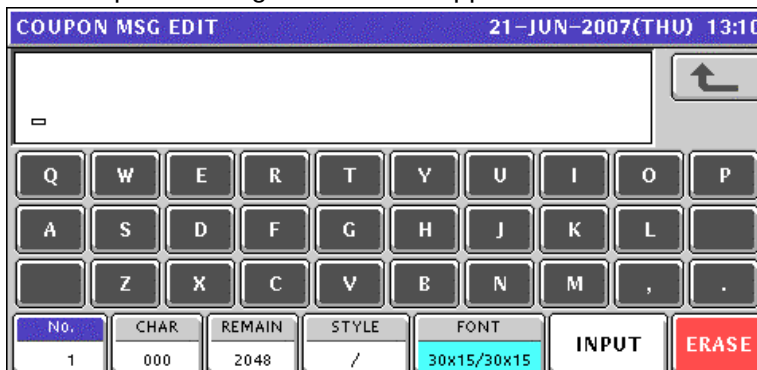

5. Edit a text according to the procedures described in Appendix “Text Editing”.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.


7. The edited text has been registered.

8. When creating more messages, enter a desired message number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Message number “2”.

2 → PLU


The confirmation screen appears. Then, press the [ENTER] button.

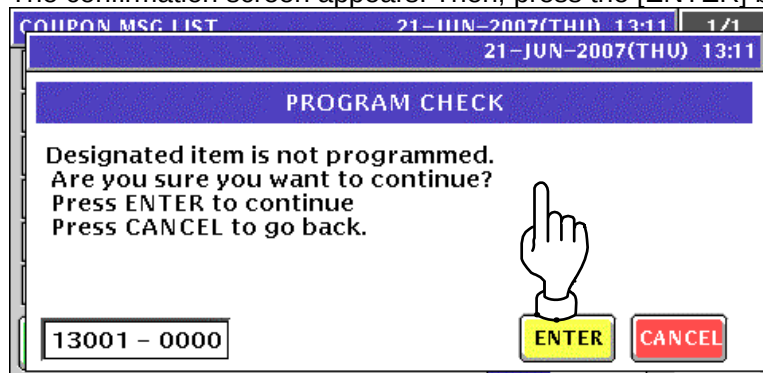


9. Repeat steps 4 through 8 for more registrations.

10.13.2 CHANGING EXISITING MESSAGES

1. Press the "Extra Message" field on the Program Menu Select screen.

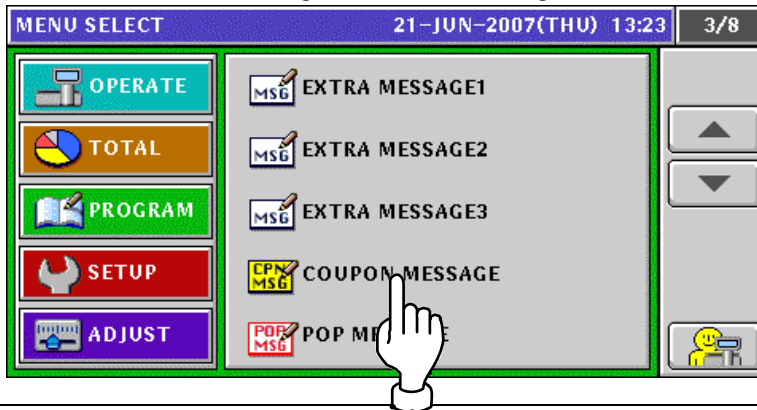

2. The Coupon Message List screen appears.

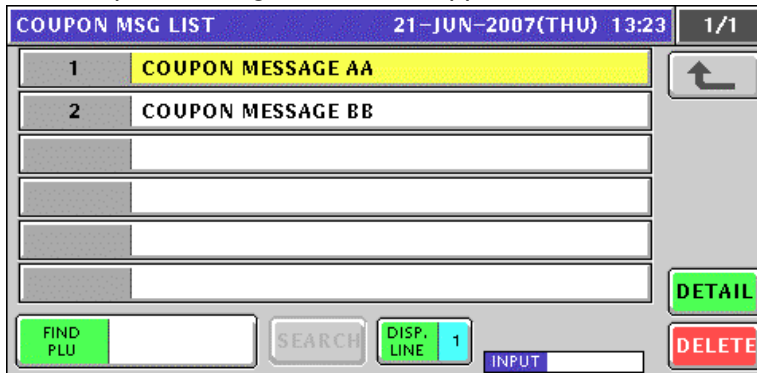

3. Select a desired message number.

EXAMPLE Message number "2".

Press a desired field,



or press the [PLU] key on the key sheet after a numeric entry.



4. Press the [DETAIL] button.

COUPON MSG LIST 21-JUN-2007(THU) 13:23 1/1

1	COUPON MESSAGE AA
2	COUPON MESSAGE BB

FIND PLU SEARCH DISP. LINE 1 INPUT

DETAIL

5. The Coupon Message Edit screen appears.

COUPON MSG EDIT 21-JUN-2007(THU) 13:23

COUPON MESSAGE BB

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.

No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
2	017	2031	/	30x15/30x15		

6. Edit a text according to the procedures described in Appendix "Text Editing".

COUPON MSG EDIT 21-JUN-2007(THU) 13:24

COUPON MSG BB

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.

No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
2	013	2035	/	30x15/30x15		

7. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

COUPON MSG EDIT 21-JUN-2007(THU) 13:24

21-JUN-2007(THU) 13:24

PROGRAM CHECK

Are you sure you want to save changes?
To confirm changes press SAVE
to undo changes press CANCEL

19001 - 0000

SAVE CANCEL

8. Repeat steps 3 through 7 for more registrations.

10.14 POP MESSAGE REGISTRATION

1. Press the "POP Message" field on the Program Menu Select screen.



2. The message list screen appears.




3. Enter a desired message number and press the [PLU] key on the key sheet.

EXAMPLE Message number "7".



The confirmation screen appears. Then, press the [ENTER] button.

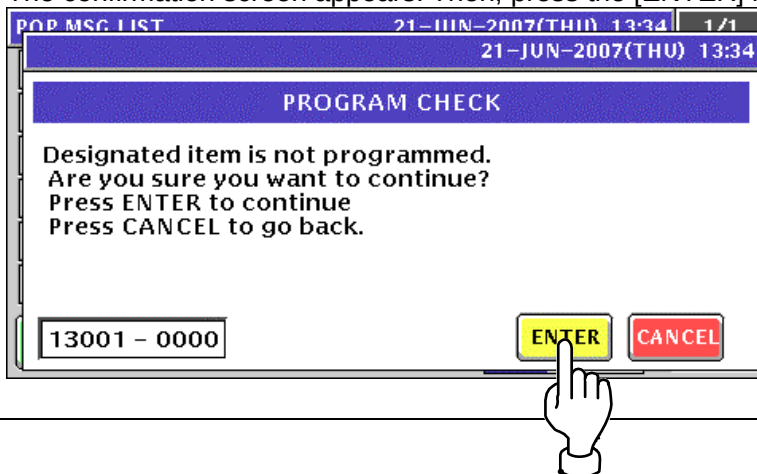

4. The POP Message Edit screen appears.

Edit a text according to the procedures described in Appendix "Text Editing".

5. P Press the [ESC] key on the key sheet to escape from text editing mode.

ESC


The confirmation screen appears. Then, press the [SAVE] button.

6. The edited text has been registered.

7. Repeat steps 3 through 6 for more registrations.

10.15 TAX REGISTRATION

1. Press the "Tax" field on the Program Menu Select screen.

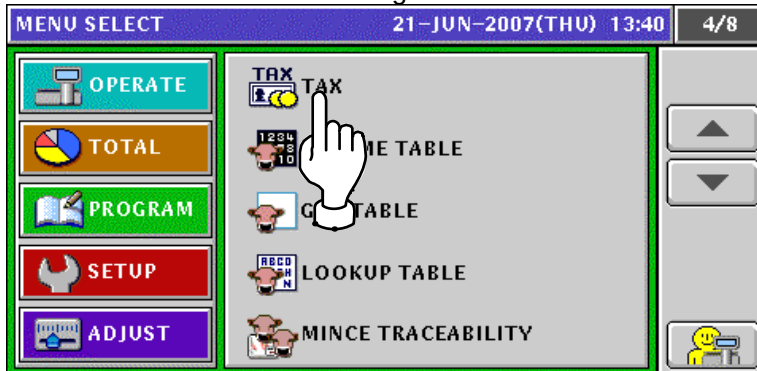

2. The Tax List screen appears.

TAX 21-JUN-2007(THU) 13:40 1/2				
TAX No.	TAX TYPE			TAX RATE
0	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
1	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
2	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
3	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
4	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
INPUT				

3. When changing a tax system, press to select a desired field.


TAX 21-JUN-2007(THU) 13:40 1/2				
TAX No.	TAX TYPE			TAX RATE
0	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
1	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
2	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
	✓ EXCLUSIVE	INCLUSIVE	EXEMPT	5.00 %
INPUT				

ITEM	DESCRIPTION
TAX TYPE	Press to select one of tax types. Exclusive tax Inclusive tax Tax exemption
TAX RATE	Enter a numeric value and press this field.

10.16 SCHEME TABLE REGISTRATION

10.16.1 CREATING NEW TABLES


1. Press the "Scheme Table" field on the Program Menu Select screen.

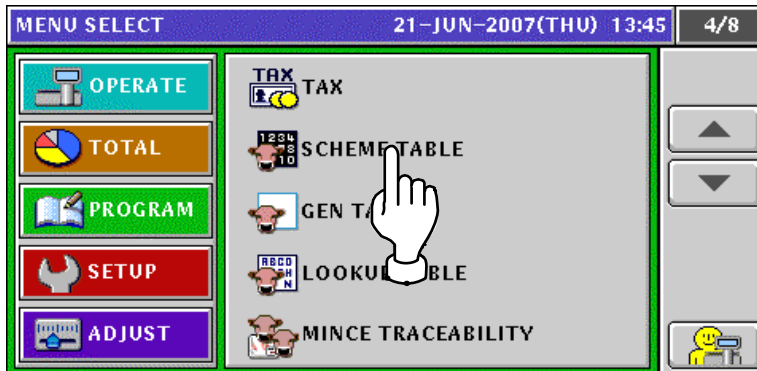


2. The Scheme Table screen appears. Then, press the [NEW] button.



3. The confirmation screen appears. Then, press the [ENTER] button.

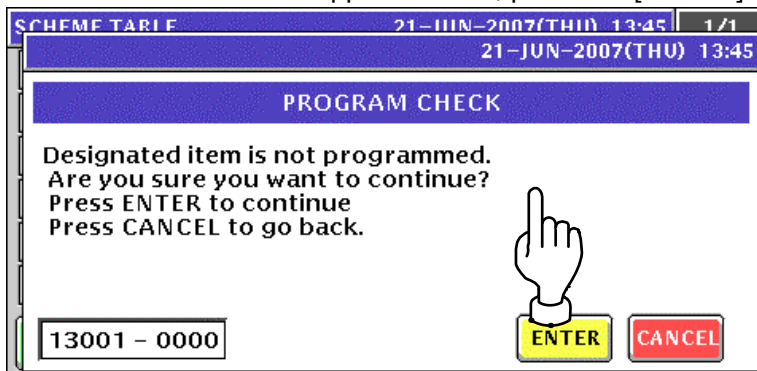

4. The Scheme Table Detail (Basic) screen appears. Then, press the [EDIT] button.

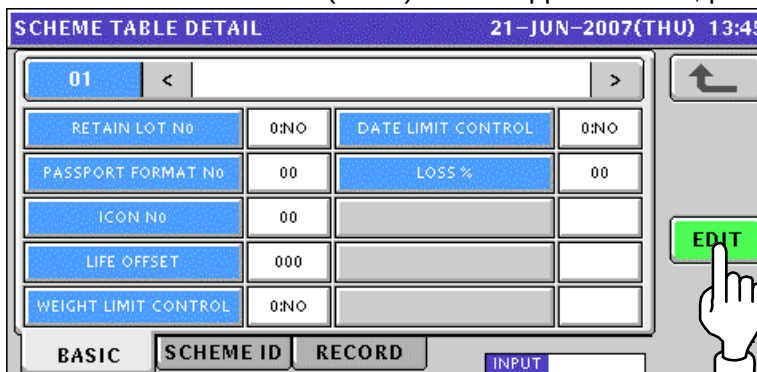

5. The Scheme Table Edit screen appears.

The screen displays 'SCHEME TABLE EDIT' at the top with a date/time stamp '21-JUN-2007(THU) 13:46'. Below the title is a large text input field containing a cursor. To the right of the input field is a return key. Below the input field is a numeric keypad with letters Q through Z, comma, and period. At the bottom, there are three status boxes: 'No.' with value '1', 'CHAR' with value '000', and 'REMAIN' with value '032'. To the right of these are 'INPUT' and 'ERASE' buttons.

6. Edit a text according to the procedures described in Appendix "Text Editing".

The screen is identical to the previous one, but the text input field now contains 'SCHEME TABLE 1' followed by a cursor. The status boxes show 'No.' as '1', 'CHAR' as '013', and 'REMAIN' as '018'.

7. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

The screen shows 'PROGRAM CHECK' in a blue header. The main text asks: 'Are you sure you want to save changes? To confirm changes press SAVE to undo changes press CANCEL'. At the bottom left, a box shows '19001 - 0000'. At the bottom right are 'SAVE' and 'CANCEL' buttons. A hand icon points to the 'SAVE' button.

8. The edited text has been registered.

The screen displays 'SCHEME TABLE DETAIL' at the top with a date/time stamp '21-JUN-2007(THU) 13:46'. Below the title is a tabbed interface with '01' selected. The main area shows details for 'SCHEME TABLE 1' with fields for 'RETAIN LOT No', 'DATE LIMIT CONTROL', 'PASSPORT FORMAT No', 'LOSS %', 'ICON No', 'LIFE OFFSET', and 'WEIGHT LIMIT CONTROL'. At the bottom, there are tabs for 'BASIC', 'SCHEME ID', and 'RECORD'. A hand icon points to the 'BASIC' tab. To the right of the details is an 'EDIT' button.

ITEM	DESCRIPTION
RETAIN LOT No.	Press to select whether or not to use this lot number. 0: No 1: Yes
PASSPORT FORMAT No.	Enter a numeric value and press this field.
ICON No.	Enter a numeric value and press this field.
LIFE OFFSET	Enter a numeric value and press this field.
WEIGHT LIMIT CONTROL	Press to select whether or not to control the weight limit. 0: No 1: Yes
DATE LIMIT CONTROL	Press to select whether or not to control the date limit. 0: No 1: Yes
LOSS %	Enter a numeric value and press this field

SCHEME TABLE DETAIL 21-JUN-2007(THU) 13:46

01 < SCHEME TABLE 1 >

	AI	START	STOP	MAX DIGIT
LOT/CARCASS		00	00	00
GTIN		00	00	00
WEIGHT		00	00	00
PASSPORT LOT START		0		
PASSPORT GTIN START		0		

BASIC SCHEME ID RECORD INPUT

EDIT

ITEM	DESCRIPTION
LOT/CARCASS	Enter a numeric value and press the corresponding field.
GTIN	Enter a numeric value and press the corresponding field.
WEIGHT	Enter a numeric value and press the corresponding field.
PASSPORT LOT START	Enter a numeric value and press this field.
PASSPORT GTIN START	Enter a numeric value and press this field.

SCHEME TABLE DETAIL 21-JUN-2007(THU) 13:46 1/4

01 < SCHEME TABLE 1 >

TITLE TEXT	START	STOP	AI	VARIBLE
	00	00		0:NO
	00	00		0:NO
	00	00		0:NO
	00	00		0:NO


BASIC SCHEME ID RECORD INPUT

DELETE


EDIT

- 9.** When creating more tables, enter a desired table number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Table number "2".




The confirmation screen appears. Then, press the [ENTER] button.

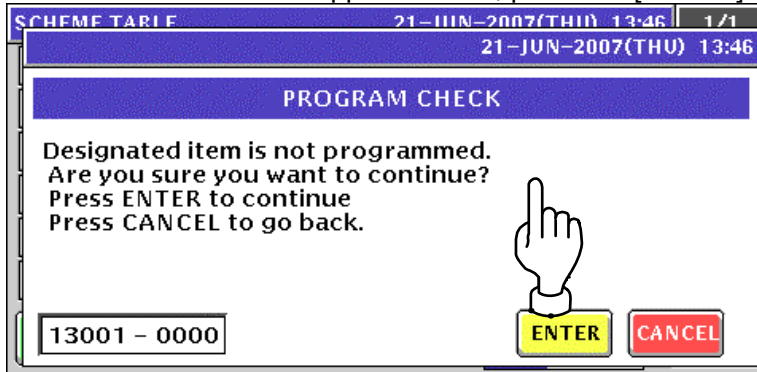


- 10.** Repeat steps 4 through 9 for more registrations.
-

10.16.2 CHANGING EXISITING MESSAGES

1. Press the "Scheme Table" field on the Program Menu Select screen.

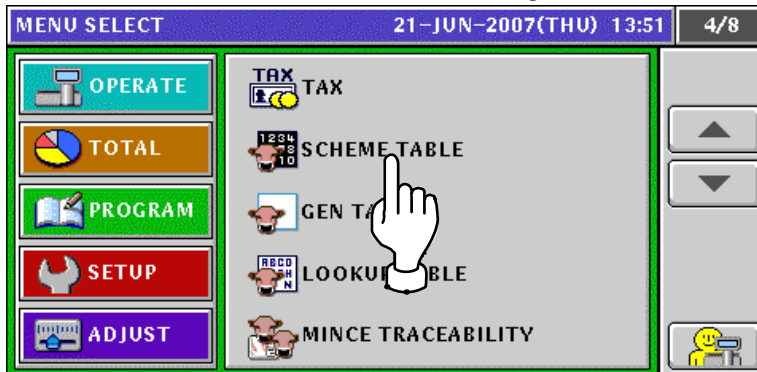

2. The Scheme Table screen appears.

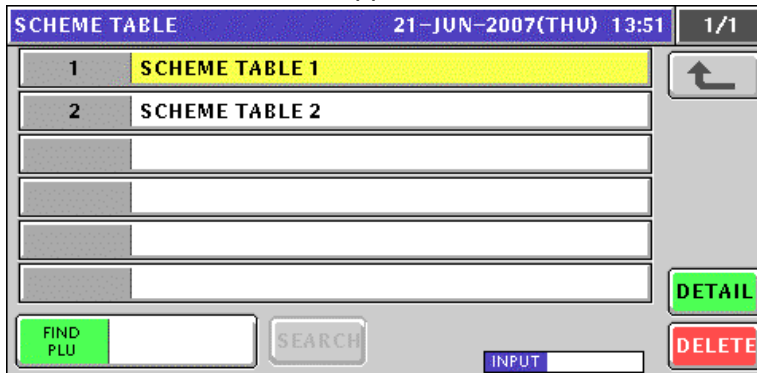

3. Select a desired table number by pressing the corresponding field.

EXAMPLE Table number "2".



or press the [PLU] key on the key sheet after a numeric entry.



4. Press the [DETAIL] button.

5. The Scheme Table Detail (Basic) screen appears.

ITEM	DESCRIPTION
RETAIN LOT No.	Press to select whether or not to use this lot number. 0: No 1: Yes
PASSPORT FORMAT No.	Enter a numeric value and press this field.
ICON No.	Enter a numeric value and press this field.
LIFE OFFSET	Enter a numeric value and press this field.
WEIGHT LIMIT CONTROL	Press to select whether or not to control the weight limit. 0: No 1: Yes
DATE LIMIT CONTROL	Press to select whether or not to control the date limit. 0: No 1: Yes
LOSS %	Enter a numeric value and press this field

SCHEME TABLE DETAIL 21-JUN-2007(THU) 13:52

02 < SCHEME TABLE 2 >

AI	START	STOP	MAX DIGIT
LOT/CARCASS	00	00	00
GTIN	00	00	00
WEIGHT	00	00	00
PASSPORT LOT START	0		
PASSPORT GTIN START	0		

BASIC SCHEME ID RECORD INPUT

EDIT

ITEM	DESCRIPTION
LOT/CARCASS	Enter a numeric value and press the corresponding field.
GTIN	Enter a numeric value and press the corresponding field.
WEIGHT	Enter a numeric value and press the corresponding field.
PASSPORT LOT START	Enter a numeric value and press this field.
PASSPORT GTIN START	Enter a numeric value and press this field.

SCHEME TABLE DETAIL 21-JUN-2007(THU) 13:52 1/4

02 < SCHEME TABLE 2 >

TITLE TEXT	START	STOP	AI	VARIBLE
	00	00		0:NO
	00	00		0:NO
	00	00		0:NO
	00	00		0:NO

BASIC SCHEME ID RECORD INPUT

EDIT

DELETE

6. When changing the table name, press the [EDIT] button.

SCHEME TABLE DETAIL 21-JUN-2007(THU) 13:52

02 < SCHEME TABLE 2 >

RETAIN LOT NO	0:NO	DATE LIMIT CONTROL	0:NO
PASSPORT FORMAT NO	00	LOSS %	00
ICON NO	00		
LIFE OFFSET	000		
WEIGHT LIMIT CONTROL	0:NO		

BASIC SCHEME ID RECORD INPUT

EDIT

7. The Scheme Table Edit screen appears.

SCHEME TABLE EDIT 21-JUN-2007(THU) 13:52

SCHEME TABLE 2

Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN							
2	014	018							

INPUT ERASE

8. Edit a text according to the procedures described in Appendix “Text Editing”.

9. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.


10. The edited text has been registered. Then, press the Return button.

11. The Scheme Table screen appears.


12. Repeat steps 3 through 11 for more registrations.

10.17 GEN TABLE REGISTRATION


1. Press the "GEN Table" field on the Program Menu Select screen.

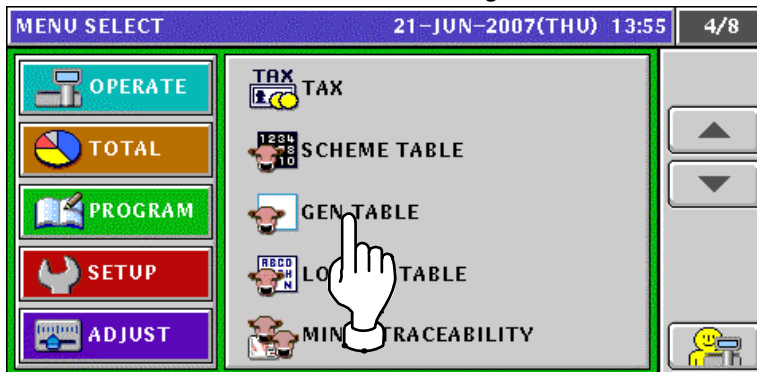


2. The GEN Table screen appears.

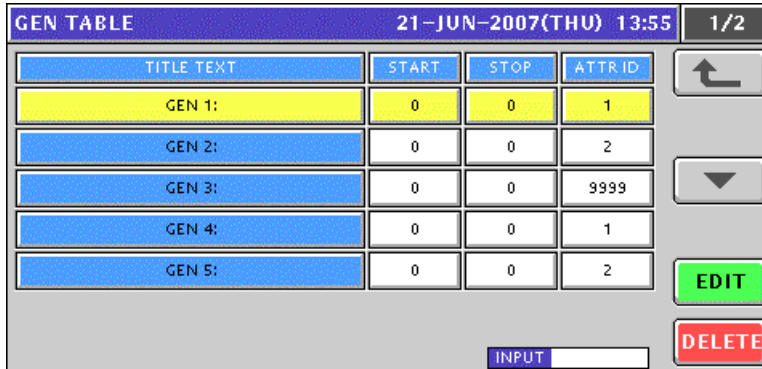

3. Select a desired GEN table by pressing the corresponding field.

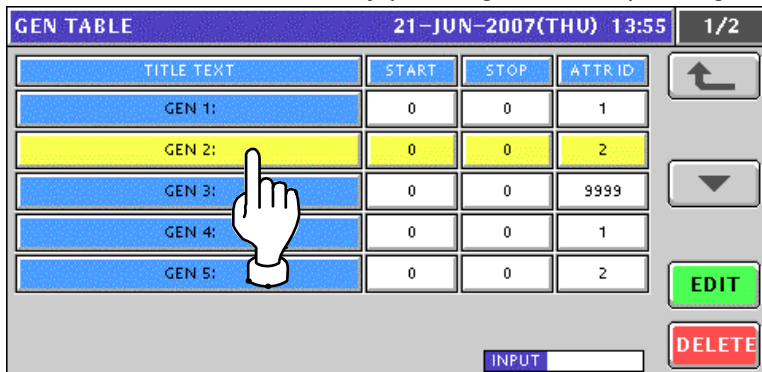

4. Enter a numeric value and press the corresponding field.

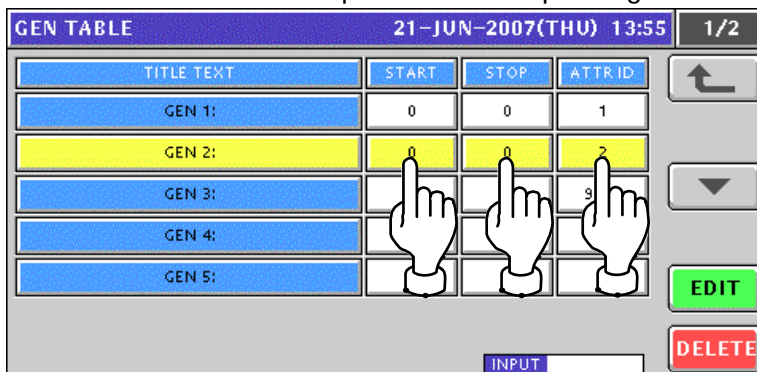

5. When changing the title text, press the [EDIT] button.

TITLE TEXT	START	STOP	ATTRID
GEN 1:	0	0	1
GEN 2:	0	0	2
GEN 3:	0	0	9999
GEN 4:	0	0	1
GEN 5:	0	0	2

6. The GEN Table Edit screen appears.

7. Edit a text according to the procedures described in Appendix "Text Editing".

8. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

9. The edited text has been registered.


GEN TABLE		21-JUN-2007(THU) 13:56		1/2
TITLE TEXT	START	STOP	ATTR ID	
GEN 1:	0	0	1	   
GEN TABLE 2:	0	0	2	
GEN 3:	0	0	9999	
GEN 4:	0	0	1	
GEN 5:	0	0	2	
INPUT				

10. Repeat steps 3 through 9 for more registrations.


10.18 LOOKUP TABLE REGISTRATION

10.18.1 CREATING NEW TABLES


1. Press the "Lookup Table" field on the Program Menu Select screen.

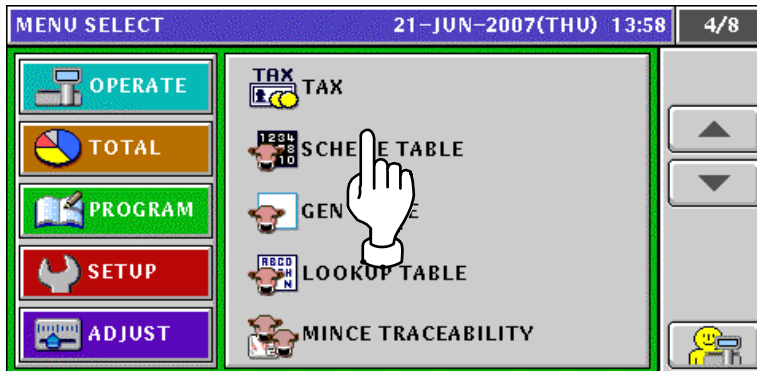


2. The Lookup Table screen appears. Then, press the [NEW] button.

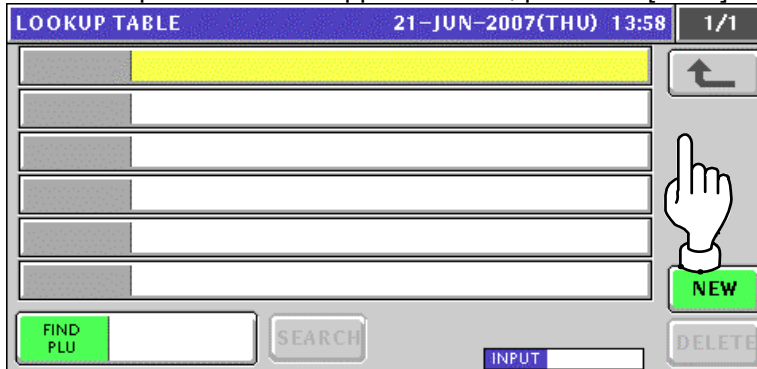

3. The confirmation screen appears. Then, press the [ENTER] button.

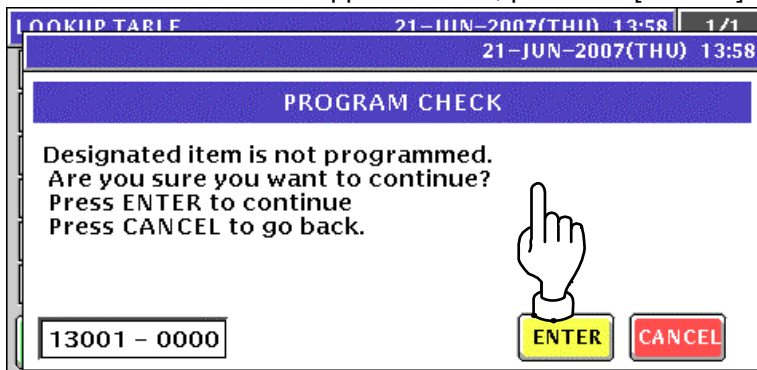

4. The Lookup Table Data List screen appears. Then, press the [EDIT] button.

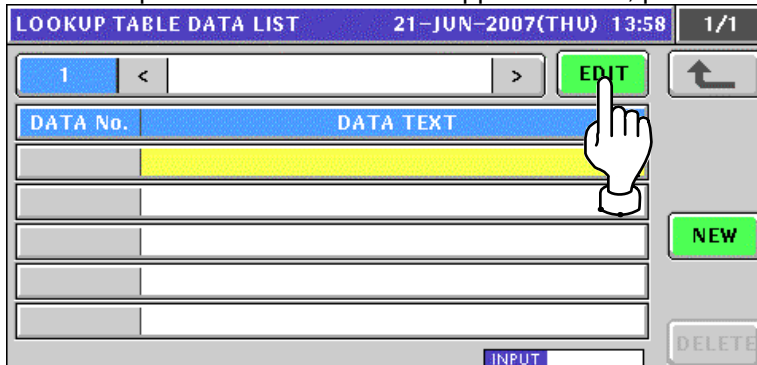

5. The Lookup Header Table Edit screen appears.

6. Edit a text according to the procedures described in Appendix "Text Editing".


7. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

8. The edited text has been registered. Then, press the [NEW] button.


9. The confirmation screen appears. Then, press the [ENTER] button.

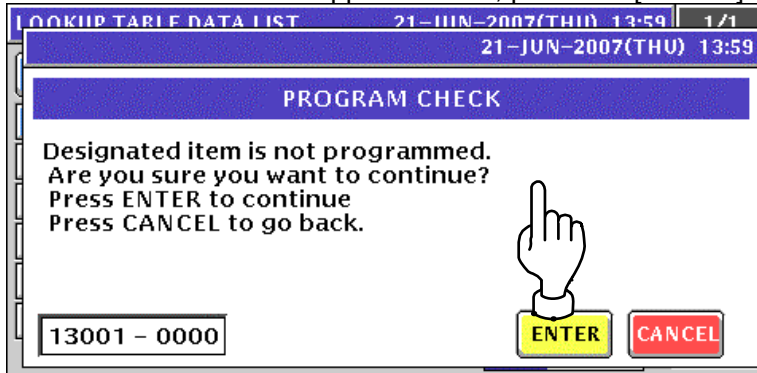

10. The Lookup Data Table Edit screen appears.




11. Edit a text according to the procedures described in Appendix "Text Editing".

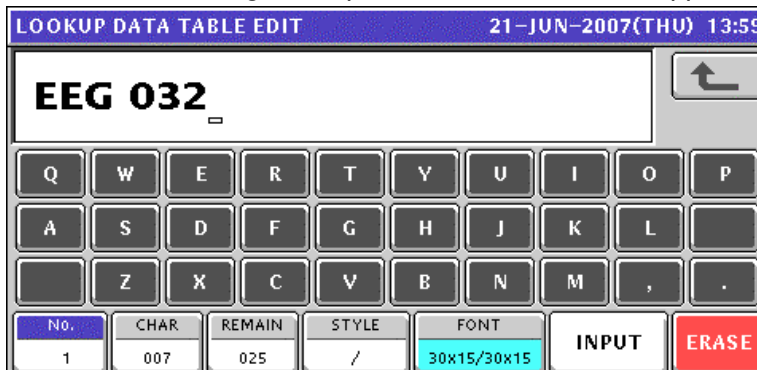

12. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

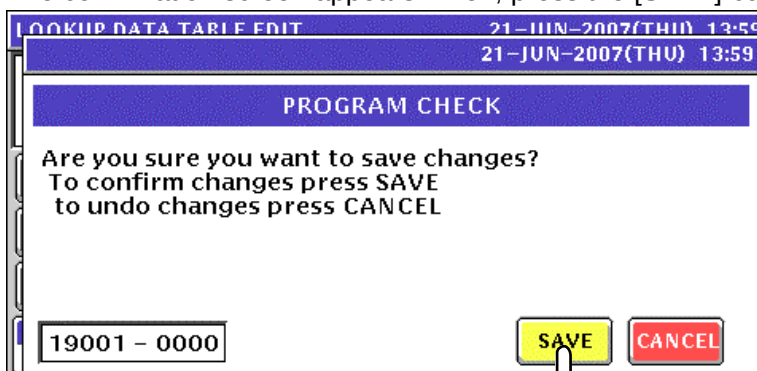

13. The edited text has been registered.

DATA No.	DATA TEXT
1	EEG 032

14. When registering the next data text, enter the data number and press the [PLU] key on the key sheet.

EXAMPLE Data number "2".



The confirmation screen appears. Then, press the [ENTER] button.

15. The Lookup Data Table Edit screen appears.

16. Edit a text according to the procedures described in Appendix "Text Editing".

- 17.** Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

- 18.** The edited text has been registered.

- 19.** Repeat steps 14 through 18 for more data registrations.

- 20.** Press the Return button to return to the Lookup Table screen.


- 21.** The Lookup Table screen appears.

22. When registering the next header text, enter the header number and press the [PLU] key on the key sheet.


EXAMPLE Header number “2”.



The confirmation screen appears. Then, press the [ENTER] button.

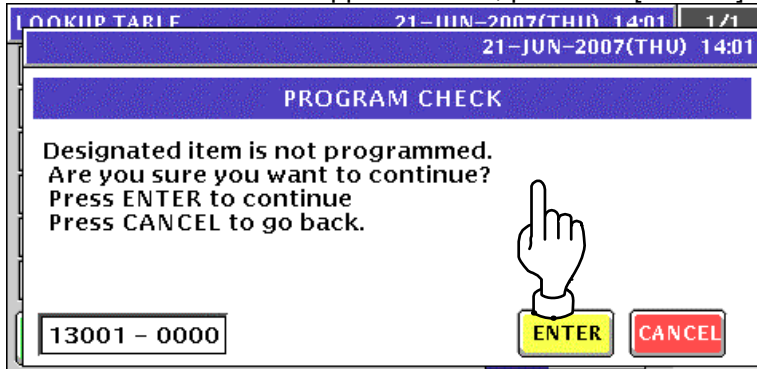

23. The Lookup Table Data List screen appears. Then, press the [EDIT] button.

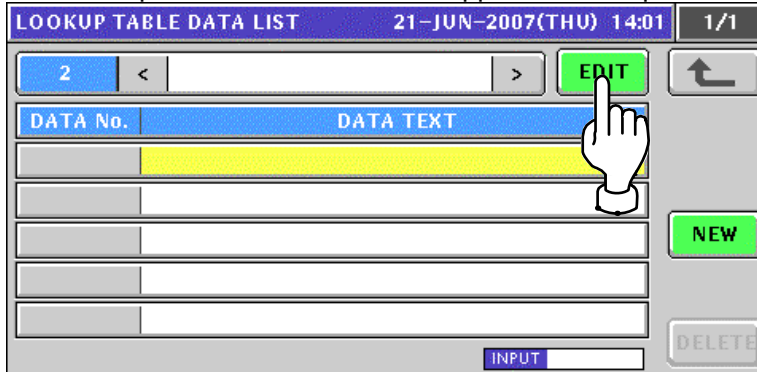

24. The Lookup Header Table Edit screen appears.



25. Edit a text according to the procedures described in Appendix “Text Editing”.



- 26.** Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.


- 27.** The edited text has been registered. Then, press the Return button.

- 28.** The Lookup Table screen appears


- 29.** Repeat steps 22 through 28 for more header registrations.

10.18.2 CHANGING EXISITING TABLES

1. Press the "Lookup Table" field on the Program Menu Select screen.

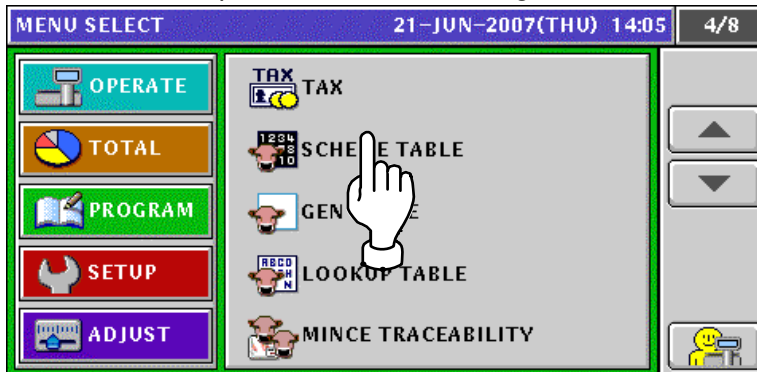

2. The Lookup Table screen appears.

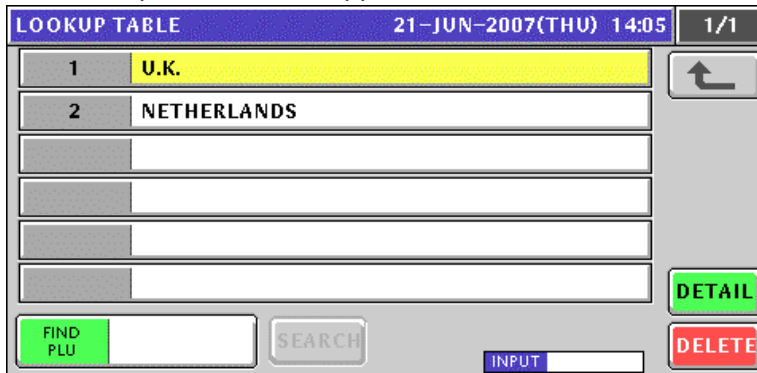

3. Select a desired header table by pressing the corresponding field.

EXAMPLE Table number "2".



or press the [PLU] key on the key sheet after a numeric entry.



4. Press the [DETAIL] button.

5. The Lookup Table Data List screen appears.
When changing the header name, press the [EDIT] button


6. The Lookup Header Table Edit screen appears.

7. Edit a text according to the procedures described in Appendix "Text Editing".


8. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC


The confirmation screen appears. Then, press the [SAVE] button.

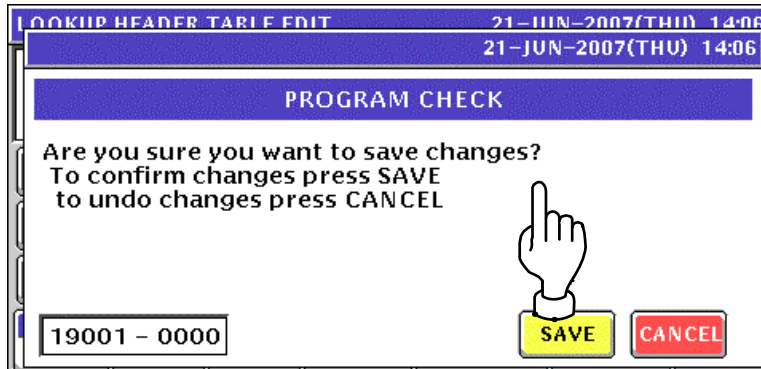

9. The edited text has been registered.

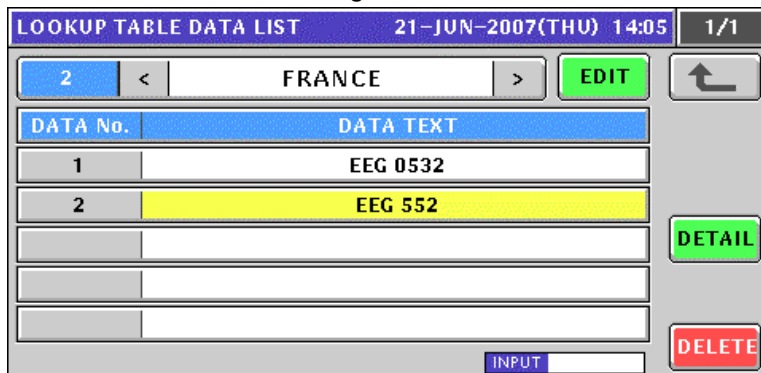

10. When changing the data text, select a desired data text by pressing the corresponding field. and press the [DETAIL] button.

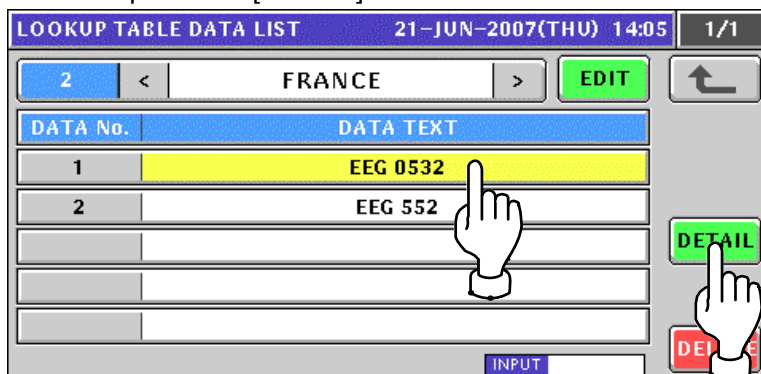

11. The Lookup Data Table Edit screen appears.



- 12.** Edit a text according to the procedures described in Appendix “Text Editing”.

- 13.** Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.


- 14.** The edited text has been registered.

- 15.** Repeat steps 10 through 14 for more data text registrations.


- 16.** Repeat steps 3 through 15 for more header table text registrations.

10.19 MINCE TRACEABILITY REGISTRATION


1. Press the "Mince Traceability" field on the Program Menu Select screen.

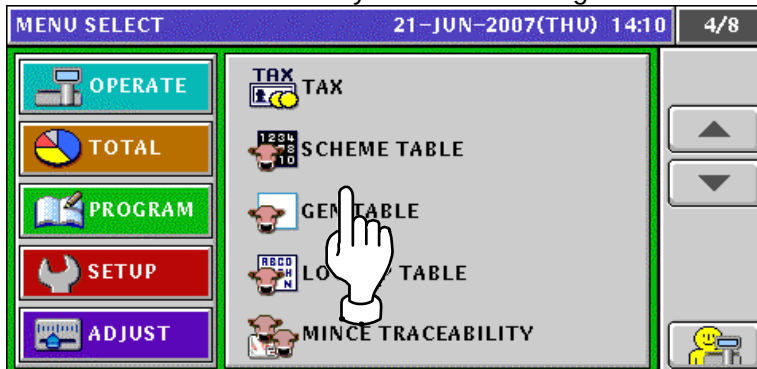

2. The Mince Traceability screen appears.

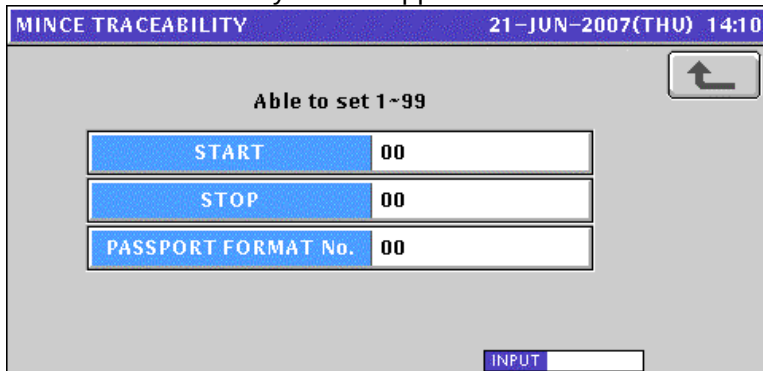

3. Enter a numeric value and press the corresponding field for registration. Then, press the Return button to finalize this procedure.

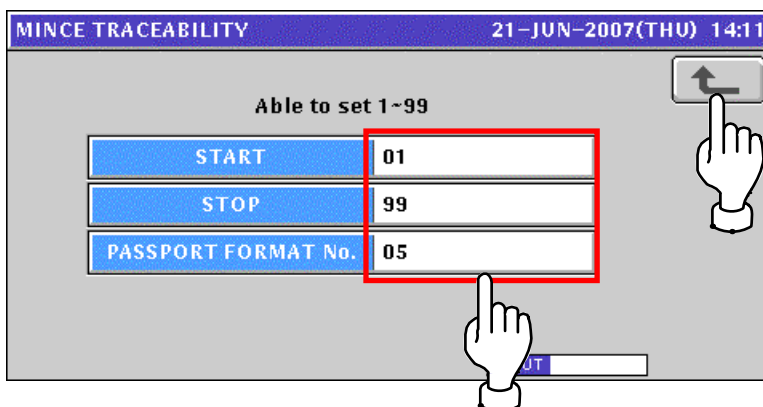


10.20 FIXED PRICE MARK REGISTRATION

10.20.1 CREATING NEW PRICE MARKS

1. Press the "Fixed Mark" field on the Program Menu Select screen.



2. The Fix Price Mark List screen appears.

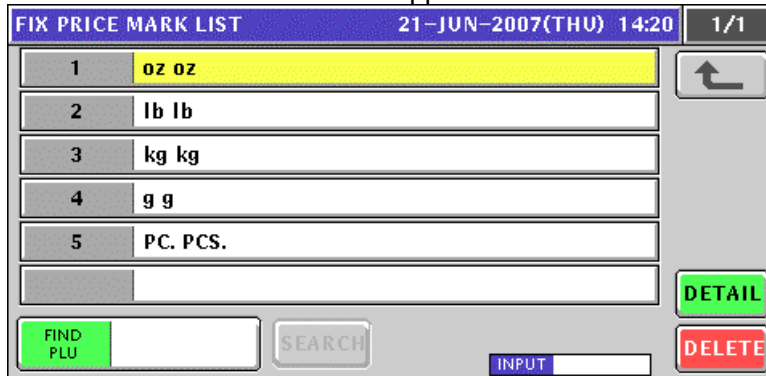


3. Enter a desired mark number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Mark number "6".



The confirmation screen appears. Then, press the [ENTER] button.

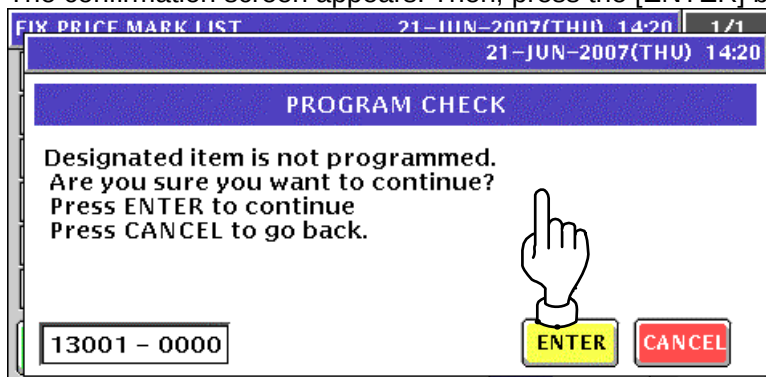

4. The Fix Price Mark Edit screen appears.

The screen displays the title "FIX PRICE MARK EDIT" and the date/time "21-JUN-2007(THU) 14:20". Below the title is a large input field with a cursor. To the right of the input field is a return button. Below the input field is a numeric keypad with letters Q through Z, numbers 0-9, and a decimal point. At the bottom, there are several status fields: "No." (6), "CHAR" (000), "REMAIN" (020), "STYLE" (/), "FONT" (30x15/30x15), "INPUT", and "ERASE".

5. Edit a text according to the procedures described in Appendix "Text Editing".

The screen displays the title "FIX PRICE MARK EDIT" and the date/time "21-JUN-2007(THU) 14:20". The input field now contains the text "BOX BOXES" with a cursor at the end. The numeric keypad and status fields at the bottom are the same as in the previous screen.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

The screen displays the title "FIX PRICE MARK EDIT" and the date/time "21-JUN-2007(THU) 14:20". Below the title is a blue bar with the text "PROGRAM CHECK". The main area contains the text: "Are you sure you want to save changes? To confirm changes press SAVE to undo changes press CANCEL". At the bottom left, there is a field showing "19001 - 0000". At the bottom right, there are two buttons: "SAVE" (yellow) and "CANCEL" (red). A hand icon is pointing at the "SAVE" button.

7. The edited text has been registered.
To finalize this procedure, press the Return button.


The screen displays the title "FIX PRICE MARK LIST" and the date/time "21-JUN-2007(THU) 14:20". On the right side, there is a page indicator "1/1". The main area is a list of items with their codes and descriptions:

1	oz oz
2	lb lb
3	kg kg
4	g g
5	PC. PCS.
6	BOX BOXES

 The item "BOX BOXES" is highlighted in yellow. To the right of the list is a return button. Below the list are several buttons: "FIND PLU", "SEARCH", "INPUT", "DETAIL", and "DELETE". A hand icon is pointing at the return button.

10.20.2 CHANGING EXISITING PRICE MARKS

1. Press the "Fixed Mark" field on the Program Menu Select screen.

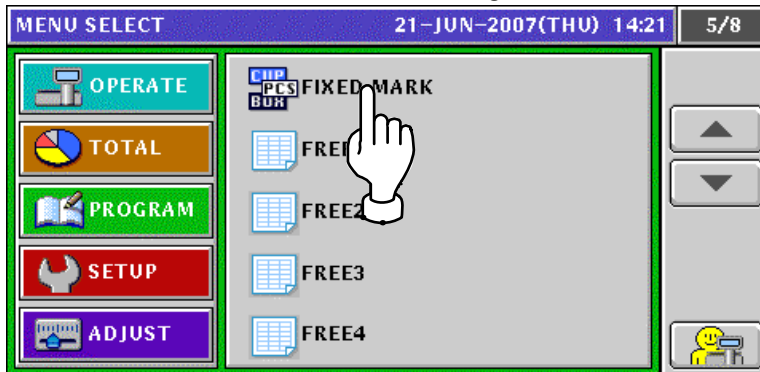

2. Select a desired mark number by pressing the corresponding field.

EXAMPLE Mark number "2".



or press the [PLU] key on the key sheet after a numeric entry.



3. The Fix Price Mark Edit screen appears.



4. Edit a text according to the procedures described in Appendix “Text Editing”.

5. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.


6. The edited text has been registered.

7. Repeat steps 2 through 6 for more registrations.


10.21 FREE MESSAGE REGISTRATION

10.21.1 CREATING NEW MESSAGES


1. Press the "Free" field on the Program Menu Select screen.

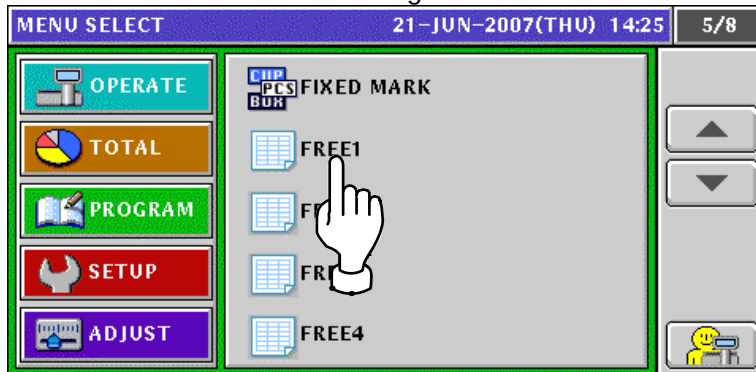

2. The Free Message List screen appears. Then, press the [NEW] button.

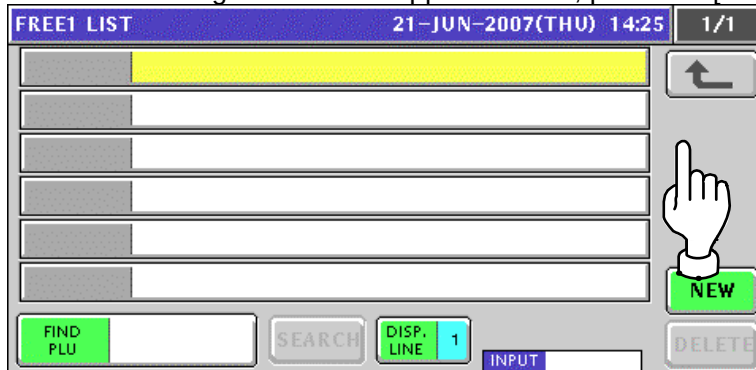

3. The confirmation screen appears. Then, press the [ENTER] button.

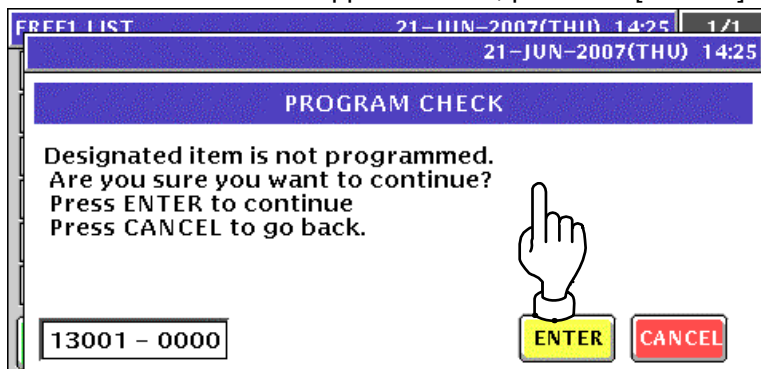

4. The Free Message Edit screen appears.



5. Edit a text according to the procedures described in Appendix "Text Editing".

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC

The confirmation screen appears. Then, press the [SAVE] button.

7. The edited text has been registered.

8. Enter a desired message number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Message number "2".




Enter a desired message number using the numeric keys and press the [PLU] key on the key sheet.

EXAMPLE Message number "2".




The confirmation screen appears. Then, press the [ENTER] button.

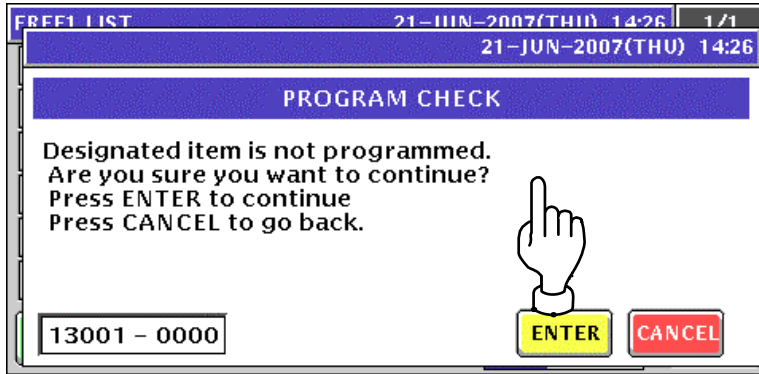

-
- 9.** Repeat steps 4 through 8 for more registrations.
-

10.21.2 CHANGING EXISITING MESSAGES

1. Press the "Fixed Mark" field on the Program Menu Select screen.

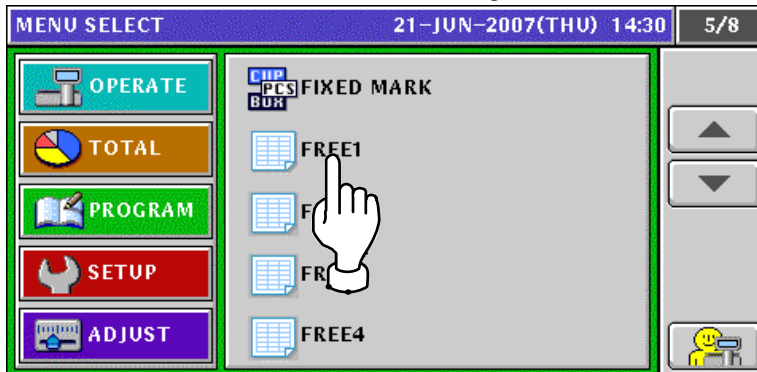

2. The Free Message List screen appears.



3. Select a desired message number by pressing the corresponding field.

EXAMPLE Message number "2".



or press the [PLU] key on the key sheet after a numeric entry.



4. The Free Message Edit screen appears.

5. Edit a text according to the procedures described in Appendix “Text Editing”.

6. Press the [ESC] key on the key sheet to escape from text editing mode.

ESC


The confirmation screen appears. Then, press the [SAVE] button.

7. The edited text has been registered.


8. Repeat steps 3 through 7 for more registrations.

10.22 CHECK LABEL REGISTRATION


1. Press the "Check Label" field on the Program Menu Select screen.

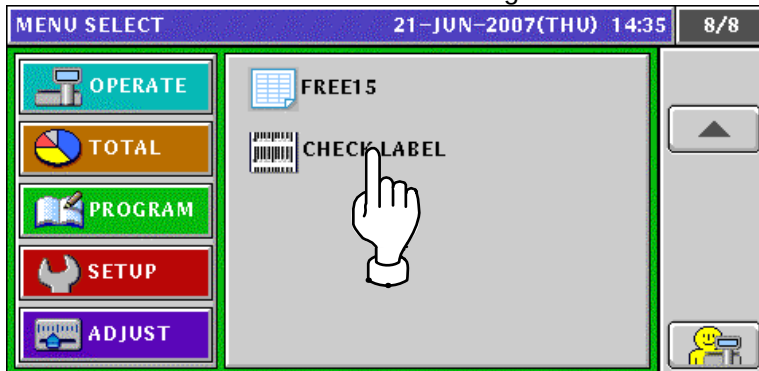

2. The Check Label screen appears.

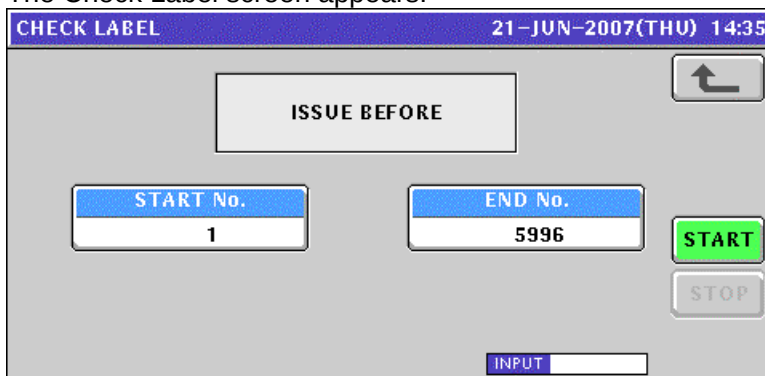


3. Enter Start Number and End Number using the numeric keys and press the corresponding fields for registration.

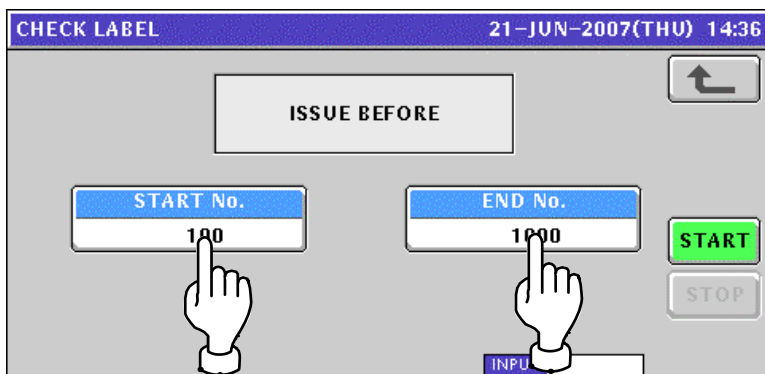

- 4.** Press the [STRAT] button to print the labels.

The screenshot shows a screen titled "CHECK LABEL" with a date and time display "21-JUN-2007(THU) 14:36". The screen contains several fields and buttons:

- A button labeled "ISSUE BEFORE" with a return arrow icon.
- A "START No." field with the value "100".
- An "END No." field with the value "1000".
- A green "START" button being pressed by a hand icon.
- An "INPUT" field at the bottom.

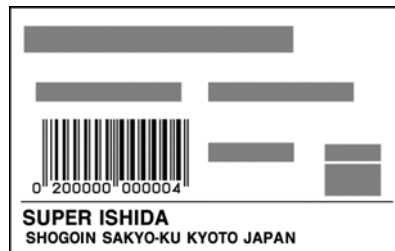

SETUP MODE

11.1 SETUP MODE ENTRY

1. Make sure that the initial screen is displayed.

PLU 0 21-JUN-2007(THU) 15:03					TARE kg	0.000
Check the weight before operation. Enter PLU No. and press [PLU] key.					ZERO WEIGHT kg	0.000
					UNIT PRICE £/kg	0.00
GROUND BEEF (TEXAS)	GROUND BEEF (OREGON)	GROUND BEEF (UTAH)	SLICED BEEF	SLICED BEEF SPECIAL	TOTAL PRICE £	0.00
ROAST BEEF	ROAST BEEF SPECIAL	LAMB CHOPS	LAMB CHOPS SPECIAL	T-BONE STEAK		
OPERATOR GROUP	PRN MD. <AUTO>	CASSETTE 1	SUBTOTAL	DISPLAY		

2. Press the [MODE] key on the key sheet.


Mode

The Operation Mode screen appears. Then, press the [SETUP] button on the screen

MENU SELECT 21-JUN-2007(THU) 15:03		1/1
OPERATE TOTAL PROGRAM SETUP ADJUST	SALES ACC1 ACC2 ACC3 TOTAL ADJUST	

3. The Setup Menu Select screen appears.
To change the pages, press the [▼] or [▲] button on the screen.

MENU SELECT 21-JUN-2007(THU) 15:03		1/2
OPERATE TOTAL PROGRAM SETUP ADJUST	MACHINE No. SALES MODE PASSWORD KEY LOCK DATA STORAGE	

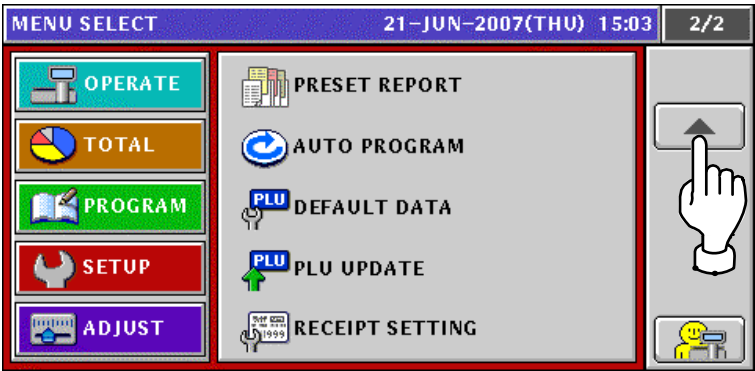


11.2 MACHINE NUMBER SETTING

1. Press the "MACHINE No." field on the Setup Menu Select screen.




2. The Machine Number (Basis) screen appears.

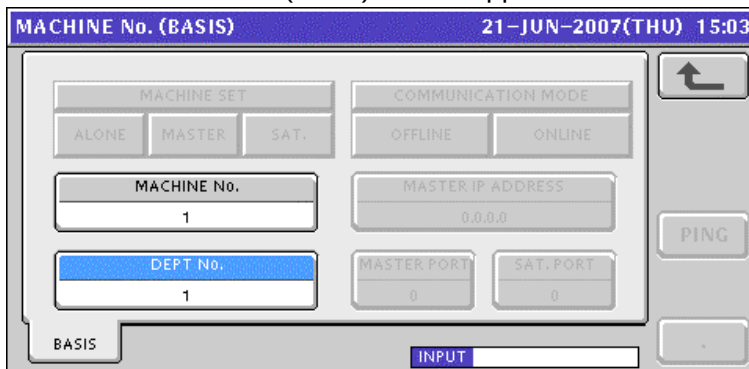


3. Enter a desired numeric value and press the "Dept No." field.

EXAMPLE Dept number "9"

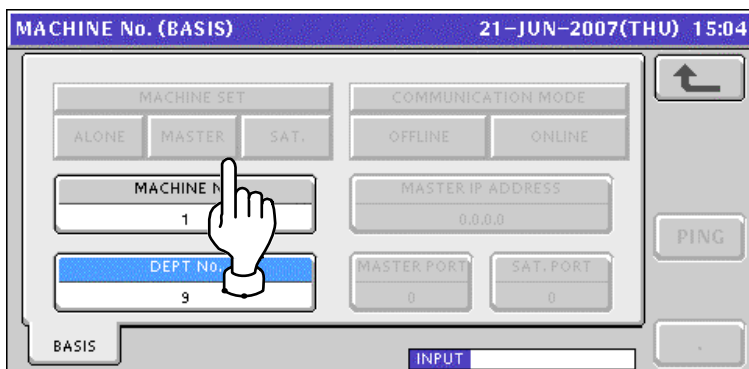


4. The confirmation screen appears. Then, press the [EXEC] button to continue.

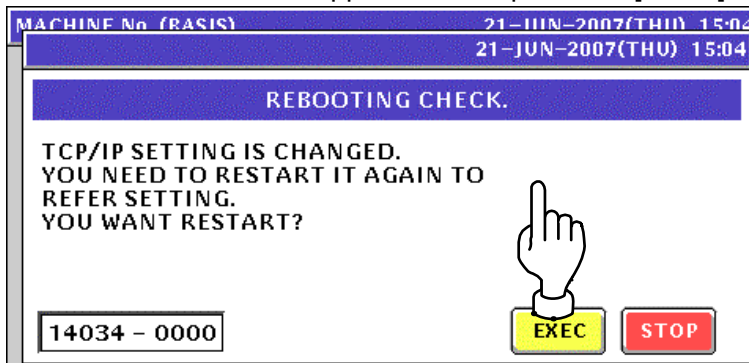

11.3 SALES MODE SETTING

1. Press the "Sales Mode" field on the Setup Menu Select screen.

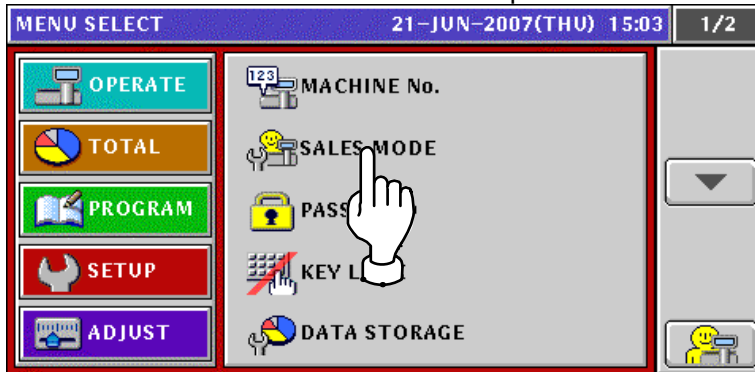


2. The Sales Mode screen appears.



3. Select a desired mode by pressing the corresponding button.

EXAMPLE "Self-service Mode"


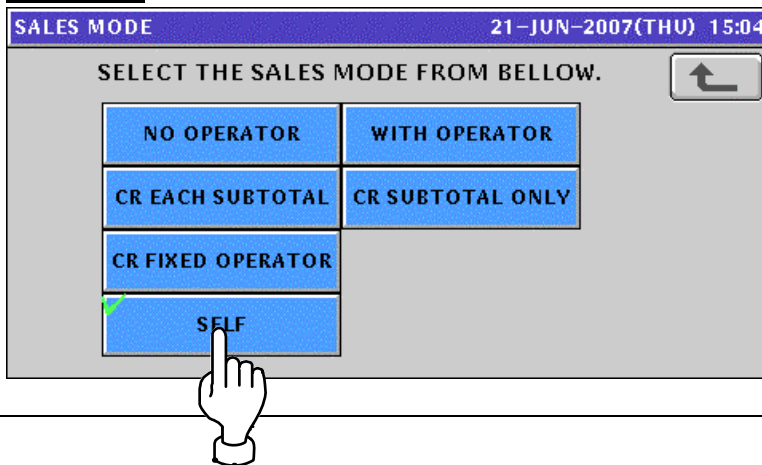


11.4 PASSWORD SETTING


1. Press the "Password" field on the Setup Menu Select screen.



2. The Password (Operate) screen appears.
To change the pages, press the [▼] or [▲] button on the screen.

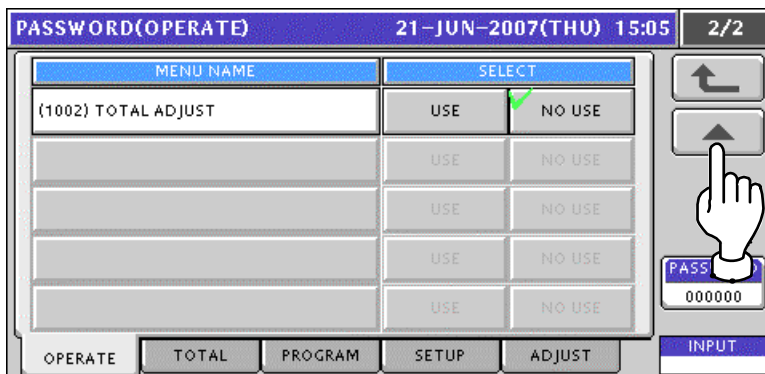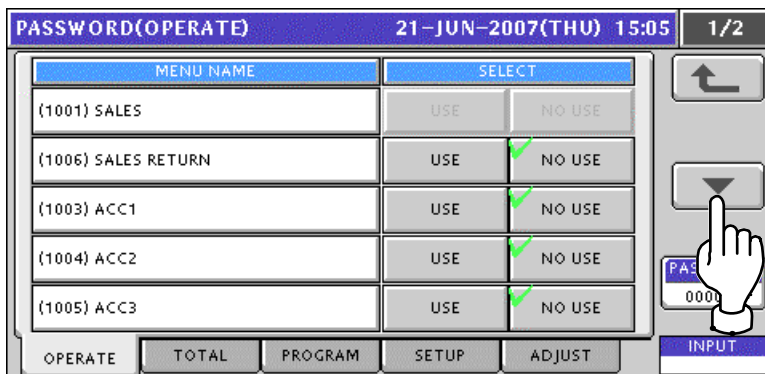

3. Press the [TOTAL] tab to display the Password (Total) screen.
To change the pages, press the [▼] or [▲] button on the screen.

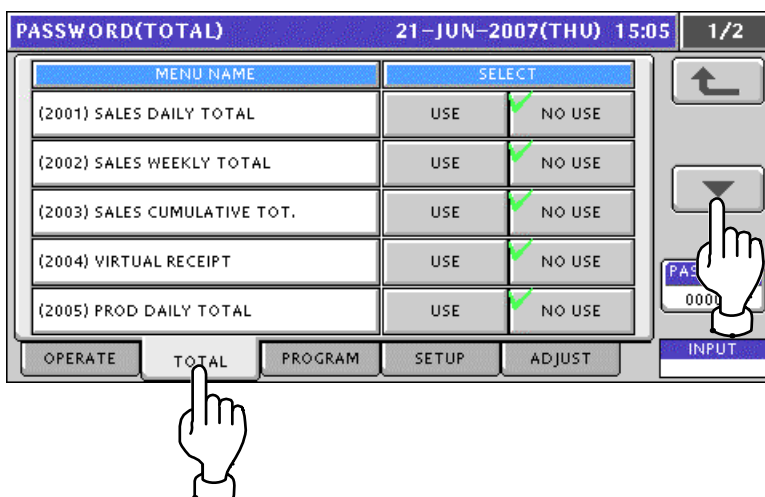

PASSWORD(TOTAL)		21-JUN-2007(THU) 15:05		2/2	
MENU NAME	SELECT				
(2006) PROD WEEKLY TOTAL	USE	☒ NO USE	 PASS 000000 INPUT		
(2007) PROD CUMULATIVE TOTAL	USE	☒ NO USE			
(2008) TRACEABILITY TOTAL	USE	☒ NO USE			
(2009) PRESET REPORT	USE	☒ NO USE			
(2010) TOTAL CLEAR	USE	☒ NO USE			
OPERATE		TOTAL	PROGRAM	SETUP	ADJUST

4. Press the [PROGRAM] tab to display the Password (Program) screen. To change the pages, press the [▼] or [▲] button on the screen.

PASSWORD(PROGRAM)		21-JUN-2007(THU) 15:05		1/8	
MENU NAME	SELECT				
(3001) PLU FILE	USE	☒ NO USE	 PAS 000 INPUT		
(3002) CAMPAIGN	USE	☒ NO USE			
(3006) OPERATORS	USE	☒ NO USE			
(3004) PRESET KEY	USE	☒ NO USE			
(3005) AD MSG	USE	☒ NO USE			
OPERATE		TOTAL	PROGRAM	SETUP	ADJUST

PASSWORD(PROGRAM)		21-JUN-2007(THU) 15:05		2/8	
MENU NAME	SELECT				
(3003) STORE NAME	USE	☒ NO USE	 PAS 000 INPUT		
(3012) DEPARTMENT	USE	☒ NO USE			
(3013) GROUP	USE	☒ NO USE			
(3019) COOKING INSTRUCTION	USE	☒ NO USE			
(3007) NUTRITION(USA)	USE	☒ NO USE			
OPERATE		TOTAL	PROGRAM	SETUP	ADJUST

PASSWORD(PROGRAM)		21-JUN-2007(THU) 15:05		3/8	
MENU NAME	SELECT				
(3008) EXTRA MESSAGE1	USE	☒ NO USE	 PAS 000 INPUT		
(3009) EXTRA MESSAGE2	USE	☒ NO USE			
(3010) EXTRA MESSAGE3	USE	☒ NO USE			
(3011) COUPON MESSAGE	USE	☒ NO USE			
(3014) POP MESSAGE	USE	☒ NO USE			
OPERATE		TOTAL	PROGRAM	SETUP	ADJUST

PASSWORD(PROGRAM) 21-JUN-2007(THU) 15:05 4/8

MENU NAME	SELECT	
(3037) TAX	USE	NO USE
(3016) SCHEME TABLE	USE	NO USE
(3017) GEN TABLE	USE	NO USE
(3018) LOOKUP TABLE	USE	NO USE
(3036) MINCE TRACEABILITY	USE	NO USE

OPERATE TOTAL PROGRAM SETUP ADJUST INPUT

PASS 0000

PASSWORD(PROGRAM) 21-JUN-2007(THU) 15:05 5/8

MENU NAME	SELECT	
(3035) FIXED MARK	USE	NO USE
(3020) FREE1	USE	NO USE
(3021) FREE2	USE	NO USE
(3022) FREE3	USE	NO USE
(3023) FREE4	USE	NO USE

OPERATE TOTAL PROGRAM SETUP ADJUST INPUT

PASS 0000

PASSWORD(PROGRAM) 21-JUN-2007(THU) 15:06 6/8

MENU NAME	SELECT	
(3024) FREE5	USE	NO USE
(3025) FREE6	USE	NO USE
(3026) FREE7	USE	NO USE
(3027) FREE8	USE	NO USE
(3028) FREE9	USE	NO USE

OPERATE TOTAL PROGRAM SETUP ADJUST INPUT

PASS 0000

PASSWORD(PROGRAM) 21-JUN-2007(THU) 15:06 7/8

MENU NAME	SELECT	
(3029) FREE10	USE	NO USE
(3030) FREE11	USE	NO USE
(3031) FREE12	USE	NO USE
(3032) FREE13	USE	NO USE
(3033) FREE14	USE	NO USE

OPERATE TOTAL PROGRAM SETUP ADJUST INPUT

PASS 0000

PASSWORD(PROGRAM) 21-JUN-2007(THU) 15:06 8/8

MENU NAME	SELECT	
(3034) FREE15	USE	NO USE
(3015) CHECK LABEL	USE	NO USE
	USE	NO USE
	USE	NO USE
	USE	NO USE

OPERATE TOTAL PROGRAM SETUP ADJUST INPUT

PASS 000000

5. Press the [SETUP] tab to display the Password (Setup) screen. To change the pages, press the [▼] or [▲] button on the screen.

PASSWORD(SETUP) 21-JUN-2007(THU) 15:06 1/2

MENU NAME	USE	SELECT
(4002) MACHINE No.	USE	NO USE
(4001) SALES MODE	USE	NO USE
(4003) PASSWORD	USE	NO USE
(4004) KEY LOCK	USE	NO USE
(4005) DATA STORAGE	USE	NO USE

OPERATE TOTAL PROGRAM **SETUP** ADJUST INPUT

PASSWORD(SETUP) 21-JUN-2007(THU) 15:06 2/2

MENU NAME	USE	SELECT
(4026) PRESET REPORT	USE	NO USE
(4006) AUTO PROGRAM	USE	NO USE
(4007) DEFAULT DATA	USE	NO USE
(4008) PLU UPDATE	USE	NO USE
(4021) RECEIPT SETTING	USE	NO USE

OPERATE TOTAL PROGRAM **SETUP** ADJUST INPUT

6. Press the [ADJUST] tab to display the Password (Adjust) screen.

PASSWORD(ADJUST) 21-JUN-2007(THU) 15:06 1/1

MENU NAME	USE	SELECT
(5001) TIME / DATE SET	USE	NO USE
(5002) TOUCH PANEL	USE	NO USE
(5003) DISPLAY CHECK	USE	NO USE
	USE	NO USE
	USE	NO USE

OPERATE TOTAL PROGRAM **SETUP** **ADJUST** INPUT

7. Enter a 6-digit password using the numeric keys and press the [PASSWORD] display field on the screen.

EXAMPLE Password "999999"

9 9 9 9 9 9

PASSWORD(OPERATE) 21-JUN-2007(THU) 15:07 1/2

MENU NAME	USE	SELECT
(1001) SALES	USE	NO USE
(1006) SALES RETURN	USE	NO USE
(1003) ACC1	USE	NO USE
(1004) ACC2	USE	NO USE
(1005) ACC3	USE	NO USE

OPERATE TOTAL PROGRAM **SETUP** **ADJUST** INPUT

PASSWORD
999999


8. Press desired buttons to set whether or not to use the password.

EXAMPLE Set to apply the password to “Virtual Receipt” in Total Mode.


PASSWORD(TOTAL)		21-JUN-2007(THU) 15:07		1/2
MENU NAME		SELECT		⬆ ⬇ PASSWORD 999999 INPUT
(2001) SALES DAILY TOTAL	USE	☒	NO USE	
(2002) SALES WEEKLY TOTAL	USE	☒	NO USE	
(2003) SALES CUMULATIVE TOT.	USE	☒	NO USE	
(2004) VIRTUAL RECEIPT	☒ USE	☐	NO USE	
(2005) PROD DAILY TOTAL	☐ USE	☒	NO USE	
OPERATE	TOTAL	PROGRAM	SE	ADJUST

11.5 KEY LOCK SETTING


1. Press the “Key Lock” field on the Setup Menu Select screen.

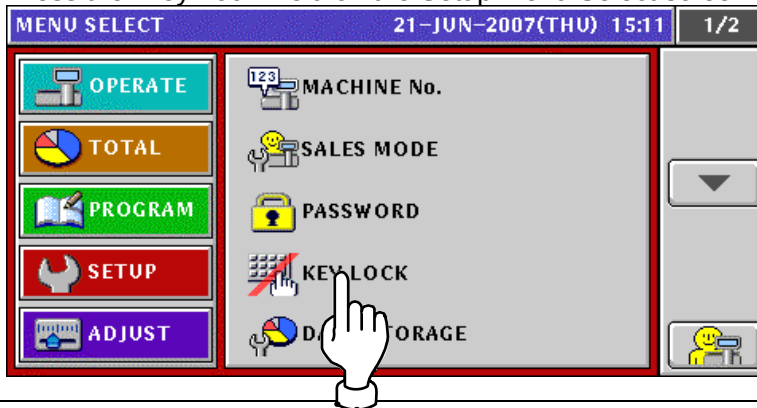

2. The Key Lock (Display Key) screen appears.

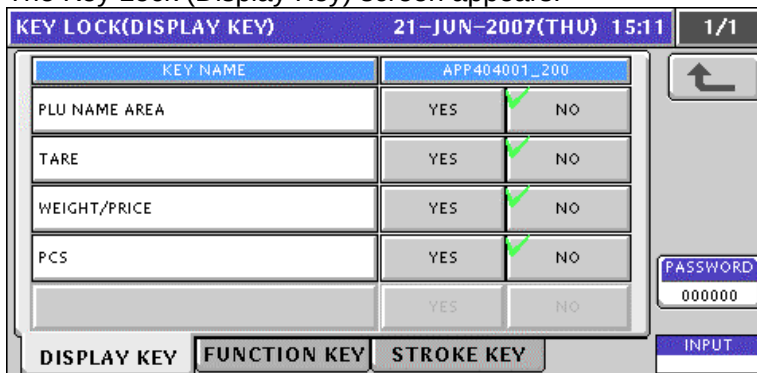

3. Press the [FUNCTION KEY] tab to display the Key Lock (Function Key) screen. Press the [▼] or [▲] button to change the pages.

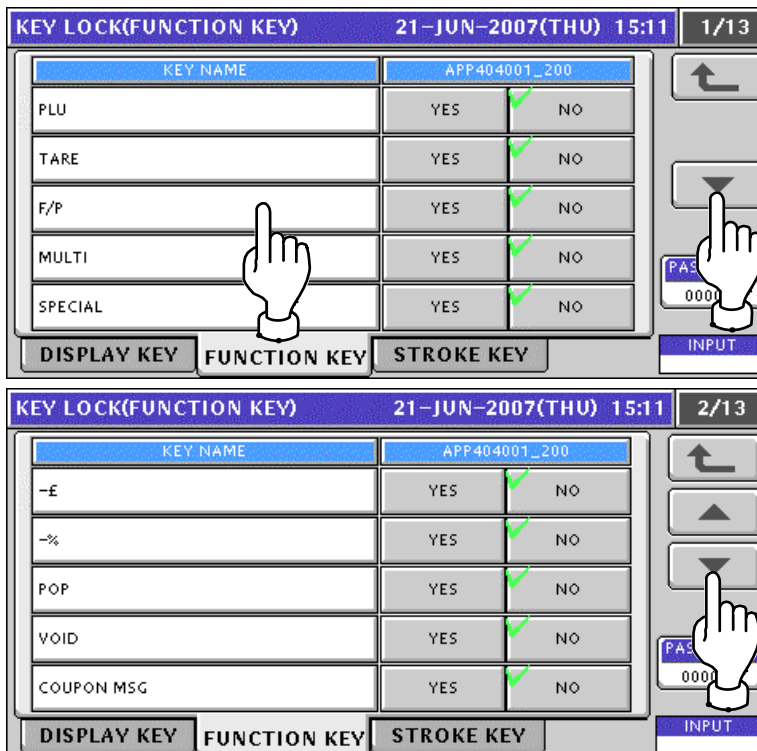

KEY LOCK(FUNCTION KEY) 21-JUN-2007(THU) 15:12 3/13

KEY NAME	APP404001_200	
SUBTOTAL DISPLAY	YES	NO
EXTRA1	YES	NO
EXTRA2	YES	NO
EXTRA3	YES	NO
FORMAT	YES	NO

DISPLAY KEY FUNCTION KEY STROKE KEY

PAS 0000 INPUT

KEY LOCK(FUNCTION KEY) 21-JUN-2007(THU) 15:12 4/13

KEY NAME	APP404001_200	
IMAGE1	YES	NO
IMAGE2	YES	NO
-E(U/P)	YES	NO
PEEL MD.	YES	NO
OPERATOR	YES	NO

DISPLAY KEY FUNCTION KEY STROKE KEY

PAS 0000 INPUT

KEY LOCK(FUNCTION KEY) 21-JUN-2007(THU) 15:12 5/13

KEY NAME	APP404001_200	
PRINT	YES	NO
FEED	YES	NO
U/P	YES	NO
P DATE	YES	NO
S DATE	YES	NO

DISPLAY KEY FUNCTION KEY STROKE KEY

PAS 0000 INPUT

KEY LOCK(FUNCTION KEY) 21-JUN-2007(THU) 15:12 6/13

KEY NAME	APP404001_200	
OPEN DRAWER	YES	NO
BAR Y/N	YES	NO
TOTAL DISPLAY	YES	NO
CALCULATOR	YES	NO
IMAGE3	YES	NO

DISPLAY KEY FUNCTION KEY STROKE KEY

PAS 0000 INPUT

KEY LOCK(FUNCTION KEY) 21-JUN-2007(THU) 15:12 7/13

KEY NAME	APP404001_200	
FREE1	YES	NO
FREE2	YES	NO
FREE3	YES	NO
FREE4	YES	NO
FREE5	YES	NO

DISPLAY KEY FUNCTION KEY STROKE KEY

PAS 0000 INPUT

KEY LOCK(FUNCTION KEY)			21-JUN-2007(THU) 15:12	8/13
KEY NAME	APP404001_200			
FREE6	YES	☒ NO		
FREE7	YES	☒ NO		
FREE8	YES	☒ NO		
FREE9	YES	☒ NO		
FREE10	YES	☒ NO		
DISPLAY KEY	FUNCTION KEY	STROKE KEY	INPUT	

KEY LOCK(FUNCTION KEY)			21-JUN-2007(THU) 15:12	9/13
KEY NAME	APP404001_200			
FREE11	YES	☒ NO		
FREE12	YES	☒ NO		
FREE13	YES	☒ NO		
FREE14	YES	☒ NO		
FREE15	YES	☒ NO		
DISPLAY KEY	FUNCTION KEY	STROKE KEY	INPUT	

KEY LOCK(FUNCTION KEY)			21-JUN-2007(THU) 15:12	10/13
KEY NAME	APP404001_200			
GROUP SELECT	YES	☒ NO		
RECEIPT COPY	YES	☒ NO		
CATEGORY SELECT	YES	☒ NO		
2nd LABEL ONLY PRINT	YES	☒ NO		
CASSETTE	YES	☒ NO		
DISPLAY KEY	FUNCTION KEY	STROKE KEY	INPUT	

KEY LOCK(FUNCTION KEY)			21-JUN-2007(THU) 15:12	11/13
KEY NAME	APP404001_200			
FIX UPR	YES	☒ NO		
ERROR LOG	YES	☒ NO		
KEY LOCK	YES	☒ NO		
AUTO PRINT MODE	YES	☒ NO		
PLU No.	YES	☒ NO		
DISPLAY KEY	FUNCTION KEY	STROKE KEY	INPUT	

KEY LOCK(FUNCTION KEY)			21-JUN-2007(THU) 15:12	12/13
KEY NAME	APP404001_200			
1/2	YES	☒ NO		
TOTAL ADD	YES	☒ NO		
TRACE	YES	☒ NO		
FUNCTION GROUP	YES	☒ NO		
OPERATOR GROUP	YES	☒ NO		
DISPLAY KEY	FUNCTION KEY	STROKE KEY	INPUT	

KEY LOCK(FUNCTION KEY)		21-JUN-2007(THU) 15:12		13/13
KEY NAME	APP404001_200			 PASS 000000
SUBTOTAL GROUP	YES	☒	NO	
RECEIPT TRACE	YES	☒	NO	
	YES	☐	NO	
	YES	☐	NO	
DISPLAY KEY FUNCTION KEY STROKE KEY				

- 4 Press the [STROKE KEY] tab to display the Key Lock (Stroke Key) screen.

KEY LOCK(STROKE KEY)		21-JUN-2007(THU) 15:12		1/1
KEY NAME	APP404001_200			 PASSWORD 000000
TARE	YES	☒	NO	
	YES	☐	NO	
	YES	☐	NO	
	YES	☐	NO	
DISPLAY KEY FUNCTION KEY STROKE KEY				

5. Enter a 6-digit password using the numeric keys and press the [PASSWORD] display field on the screen.

EXAMPLE Password "999999"

9	9	9	9	9	9
---	---	---	---	---	---

KEY LOCK(DISPLAY KEY)		21-JUN-2007(THU) 15:12		1/1
KEY NAME	APP404001_200			 PASSWORD 999999
PLU NAME AREA	YES	☒	NO	
TARE	YES	☒	NO	
WEIGHT/PRICE	YES	☒	NO	
PCS	YES	☒	NO	
DISPLAY KEY FUNCTION KEY STROKE KEY				

6. Press a desired mode by pressing the corresponding tab, and press to select desired buttons to set whether or not to use the password.

EXAMPLE Set to apply the password to "Multi" in Function Key Mode.


KEY LOCK(FUNCTION KEY)		21-JUN-2007(THU) 15:13		1/13
KEY NAME	APP404001_200			 PASSWORD 999999
PLU	YES	☒	NO	
TARE	YES	☒	NO	
F/P	YES	☒	NO	
MULTI	☒	YES	NO	
DISPLAY KEY FUNCTION KEY STROKE KEY				

11.6 DATA STORAGE SETTING

1. Press the "Data Storage" field on the Setup Menu Select screen.




2. The Data Storage (Total Add) screen appears.
Press the [▼] or [▲] button to change the pages.

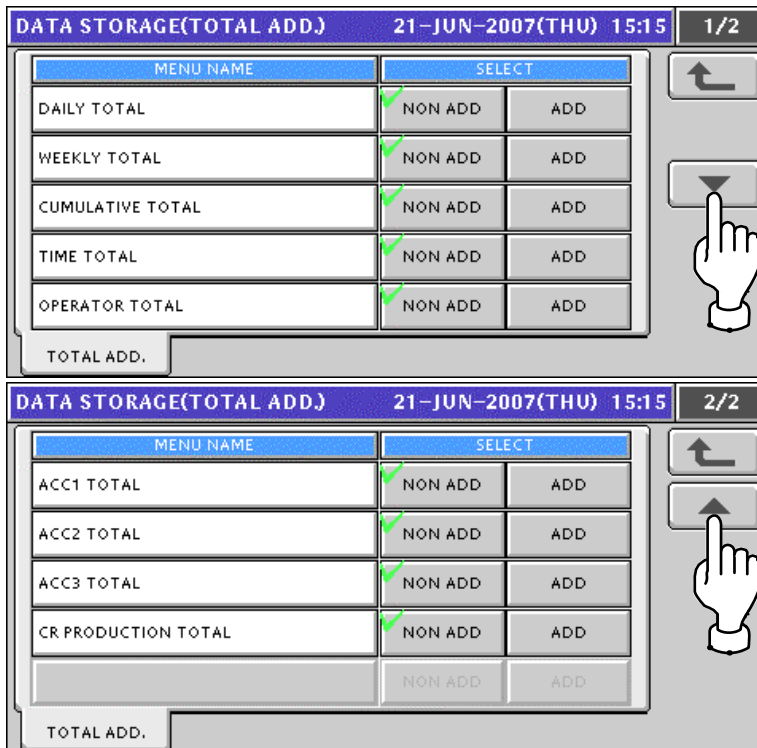


3. Press desired buttons to set whether or not to use the total addition.

EXAMPLE Set to use the operator total addition.

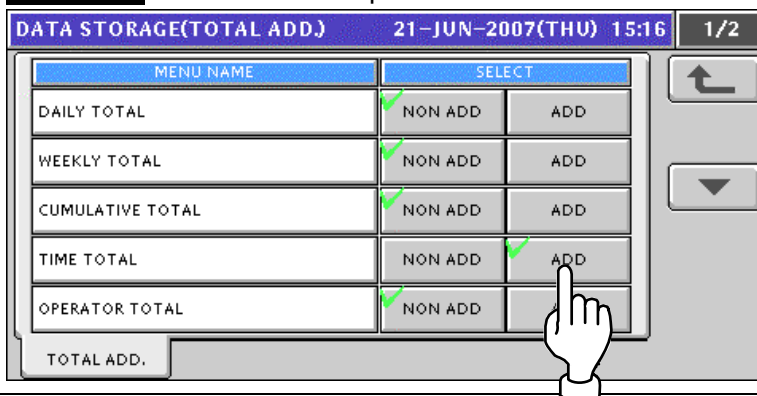


11.7 PRESET REPORT SETTING

1. Press the "Preset Report" field on the Setup Menu Select screen.

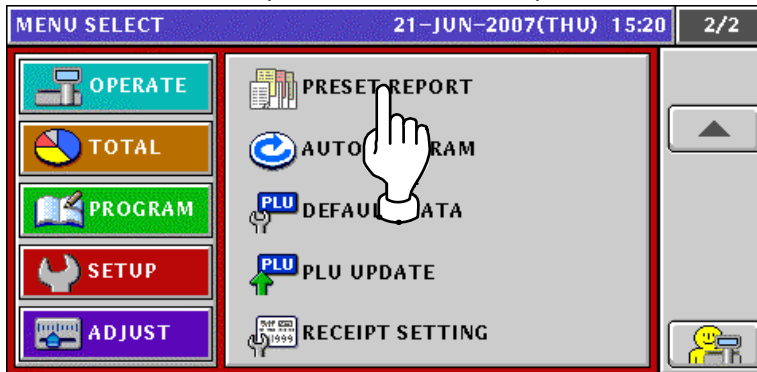

2. The Preset Report (Daily) screen appears.
Press the [▼] or [▲] button to change the pages.

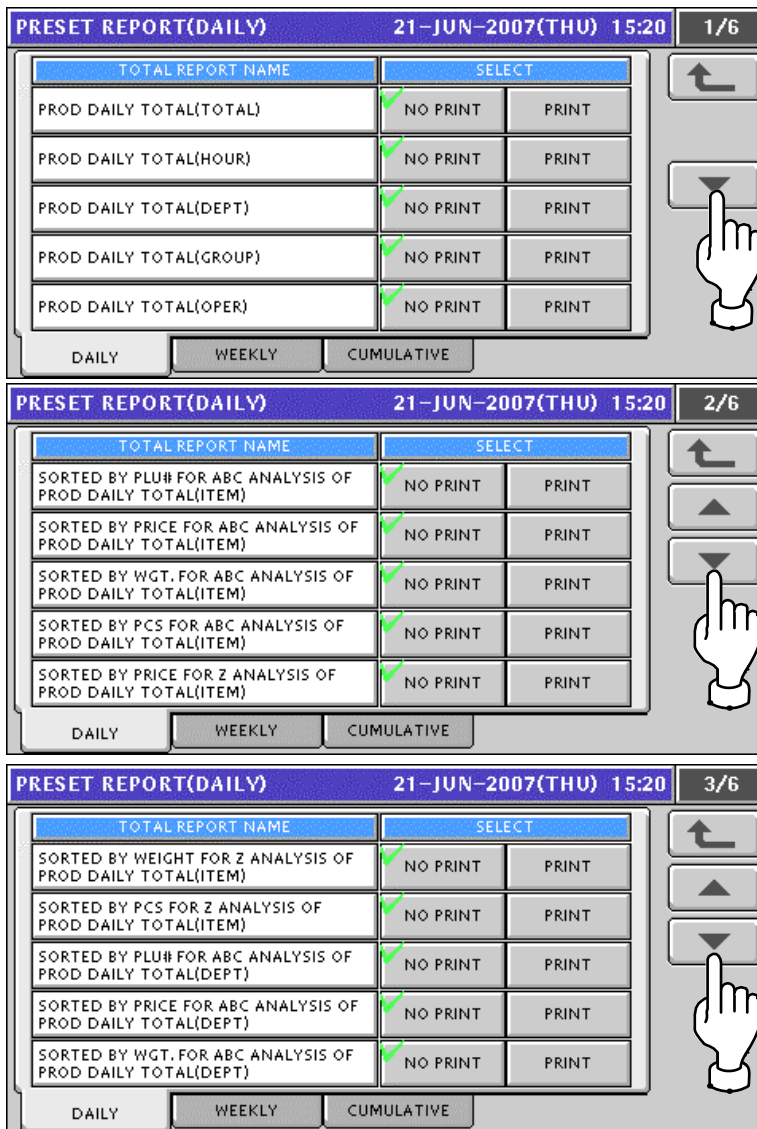

PRESET REPORT(DAILY) 21-JUN-2007(THU) 15:20 4/6

TOTAL REPORT NAME	SELECT	
SORTED BY PCS FOR ABC ANALYSIS OF PROD DAILY TOTAL(DEPT)	✓ NO PRINT	PRINT
SORTED BY PRICE FOR Z ANALYSIS OF PROD DAILY TOTAL(DEPT)	✓ NO PRINT	PRINT
SORTED BY WEIGHT FOR Z ANALYSIS OF PROD DAILY TOTAL(DEPT)	✓ NO PRINT	PRINT
SORTED BY PCS FOR Z ANALYSIS OF PROD DAILY TOTAL(DEPT)	✓ NO PRINT	PRINT
SORTED BY PLU# FOR ABC ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT

DAILY WEEKLY CUMULATIVE

PRESET REPORT(DAILY) 21-JUN-2007(THU) 15:20 5/6

TOTAL REPORT NAME	SELECT	
SORTED BY PRICE FOR ABC ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT
SORTED BY WGT. FOR ABC ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT
SORTED BY PCS FOR ABC ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT
SORTED BY PRICE FOR Z ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT
SORTED BY WEIGHT FOR Z ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT

DAILY WEEKLY CUMULATIVE

PRESET REPORT(DAILY) 21-JUN-2007(THU) 15:20 6/6

TOTAL REPORT NAME	SELECT	
SORTED BY PCS FOR Z ANALYSIS OF PROD DAILY TOTAL(GROUP)	✓ NO PRINT	PRINT
DAILY TOTAL(ACC1)	✓ NO PRINT	PRINT
DAILY TOTAL(ACC2)	✓ NO PRINT	PRINT
DAILY TOTAL(ACC3)	✓ NO PRINT	PRINT
	NO PRINT	PRINT

DAILY WEEKLY CUMULATIVE

3. Press the [WEEKLY] tab to display the Preset Report (Weekly) screen.

PRESET REPORT(WEEKLY) 21-JUN-2007(THU) 15:20 1/1

TOTAL REPORT NAME	SELECT	
PROD WEEKLY TOTAL(WEEK)	✓ NO PRINT	PRINT
PROD HOURLY ANALYSIS(WEEK)	✓ NO PRINT	PRINT
	NO PRINT	PRINT
	NO PRINT	PRINT
	NO PRINT	PRINT

DAILY WEEKLY CUMULATIVE

4. Press the [CUMULATIVE] tab to display the Preset Report (Cumulative) screen..
Press the [▼] or [▲] button to change the pages.

PRESET REPORT(CUMULATIVE) 21-JUN-2007(THU) 15:20 1/6

TOTAL REPORT NAME	SELECT	
PROD CUMULATIVE TOTAL(TOTAL)	☒ NO PRINT	☐ PRINT
PROD CUMULATIVE TOTAL(HOUR)	☒ NO PRINT	☐ PRINT
PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	☐ PRINT
PROD CUMULATIVE TOTAL(OPER)	☒ NO PRINT	☐ PRINT

DAILY WEEKLY **CUMULATIVE**

21-JUN-2007(THU) 15:20 2/6

TOTAL REPORT NAME	SELECT	
SORTED BY PLU# FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT
SORTED BY PRICE FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT
SORTED BY WGH. FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT
SORTED BY PCS FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT
SORTED BY PRICE FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT

DAILY WEEKLY **CUMULATIVE**

21-JUN-2007(THU) 15:20 3/6

TOTAL REPORT NAME	SELECT	
SORTED BY WEIGHT FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT
SORTED BY PCS FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(ITEM)	☒ NO PRINT	☐ PRINT
SORTED BY PLU# FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
SORTED BY PRICE FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
SORTED BY WGT. FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT

DAILY WEEKLY **CUMULATIVE**

21-JUN-2007(THU) 15:20 4/6

TOTAL REPORT NAME	SELECT	
SORTED BY PCS FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
SORTED BY PRICE FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
SORTED BY WEIGHT FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
SORTED BY PCS FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
SORTED BY PLU# FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	☐ PRINT

DAILY WEEKLY **CUMULATIVE**

PRESET REPORT(CUMULATIVE)21-JUN-2007(THU) 15:205/6

TOTAL REPORT NAME	SELECT	
SORTED BY PRICE FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	PRINT
SORTED BY WGT. FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	PRINT
SORTED BY PCS FOR ABC ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	PRINT
SORTED BY PRICE FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	PRINT
SORTED BY WEIGHT FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	PRINT

DAILYWEEKLYCUMULATIVE

PRESET REPORT(CUMULATIVE)21-JUN-2007(THU) 15:206/6

TOTAL REPORT NAME	SELECT	
SORTED BY PCS FOR Z ANALYSIS OF PROD CUMULATIVE TOTAL(GROUP)	☒ NO PRINT	PRINT
	NO PRINT	PRINT
	NO PRINT	PRINT
	NO PRINT	PRINT
	NO PRINT	PRINT

DAILYWEEKLYCUMULATIVE

5. Press a desired mode by pressing the corresponding tab, and press to select desired buttons to set whether or not to print the totals

EXAMPLE Set to print the Production Daily Total (Total).


PRESET REPORT(DAILY)21-JUN-2007(THU) 15:211/6

TOTAL REPORT NAME	SELECT	
PROD DAILY TOTAL(TOTAL)	☐ NO PRINT	☒ PRINT
PROD DAILY TOTAL(HOUR)	☒ NO PRINT	☐ PRINT
PROD DAILY TOTAL(DEPT)	☒ NO PRINT	☐ PRINT
PROD DAILY TOTAL(GROUP)	☒ NO PRINT	☐ PRINT
PROD DAILY TOTAL(OPER)	☒ NO PRINT	☐ PRINT

DAILYWEEKLYCUMULATIVE

11.8 AUTO PROGRAM SETTING

1. Press the "Auto Program" field on the Setup Menu Select screen.

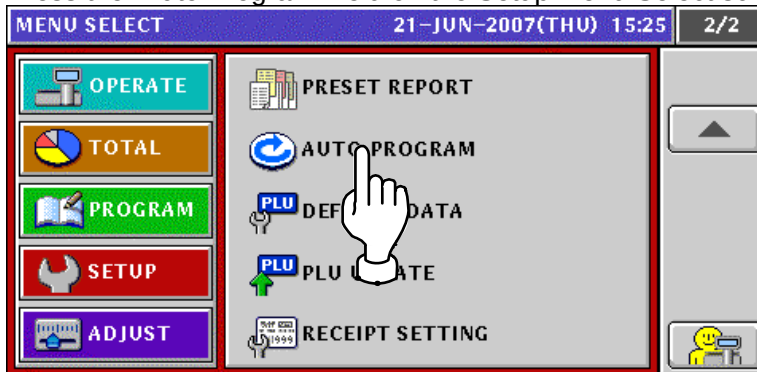

2. The Item Auto Overwrite screen appears.
Press the [▼] or [▲] button to change the pages.

Note: Display items may vary depending on the country setting.

ITEM AUTO OVERWRITE			21-JUN-2007(THU) 15:25	1/7
ITEM MASTER LIST	SELECT			
UNIT PRICE:FIX PRICE	YES	☒	NO	
MARKDOWN MODE:M/D AMOUNT	YES	☒	NO	
UNIT TYPE:QTY	YES	☒	NO	
FIXED WEIGHT	YES	☒	NO	
PACK DATE/TIME	YES	☒	NO	
SB DATE/TIME	YES	☒	NO	
2nd LABEL PRINT	YES	☒	NO	

ITEM AUTO OVERWRITE			21-JUN-2007(THU) 15:25	2/7
ITEM MASTER LIST	SELECT			
TARE	YES	☒	NO	
EXTRA MESSAGE1	YES	☒	NO	
EXTRA MESSAGE2	YES	☒	NO	
EXTRA MESSAGE3	YES	☒	NO	
NUTRITION No.	YES	☒	NO	
COUPON MESSAGE	YES	☒	NO	
POP MESSAGE	YES	☒	NO	

ITEM AUTO OVERWRITE			21-JUN-2007(THU) 15:25	3/7
ITEM MASTER LIST	SELECT			
FREE1	YES	☒	NO	
FREE2	YES	☒	NO	
FREE3	YES	☒	NO	
FREE4	YES	☒	NO	
FREE5	YES	☒	NO	
FREE6	YES	☒	NO	
FREE7	YES	☒	NO	

ITEM AUTO OVERWRITE		21-JUN-2007(THU) 15:25	4/7
ITEM MASTER LIST	SELECT		
FREE8	YES	☒ NO	
FREE9	YES	☒ NO	
FREE10	YES	☒ NO	
FREE11	YES	☒ NO	
FREE12	YES	☒ NO	
FREE13	YES	☒ NO	
FREE14	YES	☒ NO	

ITEM AUTO OVERWRITE		21-JUN-2007(THU) 15:25	5/7
ITEM MASTER LIST	SELECT		
FREE15	YES	☒ NO	
IMAGE1	YES	☒ NO	
IMAGE2	YES	☒ NO	
IMAGE3	YES	☒ NO	
SH(SAFE HANDLING) IMAGE	YES	☐ NO	
SH IMAGE FLAG	YES	☐ NO	
FIRST LABEL FORMAT No.	YES	☐ NO	

ITEM AUTO OVERWRITE		21-JUN-2007(THU) 15:25	6/7
ITEM MASTER LIST	SELECT		
SECOND LABEL FORMAT No.	YES	☐ NO	
DISPLAY IMAGE	YES	☐ NO	
TARGET	YES	☒ NO	
SERVICE FEE	YES	☐ NO	
	YES	☐ NO	
	YES	☐ NO	
UB DATE	YES	☒ NO	


ITEM AUTO OVERWRITE		21-JUN-2007(THU) 15:25	7/7
ITEM MASTER LIST	SELECT		
2nd TARE	YES	☒ NO	
P. TARE	YES	☐ NO	
F. TARE	YES	☐ NO	
	YES	☐ NO	
	YES	☐ NO	
	YES	☐ NO	

3. Press to select desired buttons to set whether or not to overwrite the items automatically.



ITEM AUTO OVERWRITE		21-JUN-2007(THU) 15:26	1/7
ITEM MASTER LIST	SELECT		
UNIT PRICE:FIX PRICE	YES	☒ NO	
MARKDOWN MODE:M/D AMOUNT	☒ YES	☐ NO	
UNIT TYPE:QTY	☐ YES	☒ NO	
FIXED WEIGHT	☐ YES	☒ NO	
PACK DATE/TIME	☐ YES	☒ NO	
SB DATE/TIME	YES	☒ NO	
2nd LABEL PRINT	YES	☒ NO	

11.9 DEFAULT DATA SETTING


1. Press the "Default Data" field on the Setup Menu Select screen.

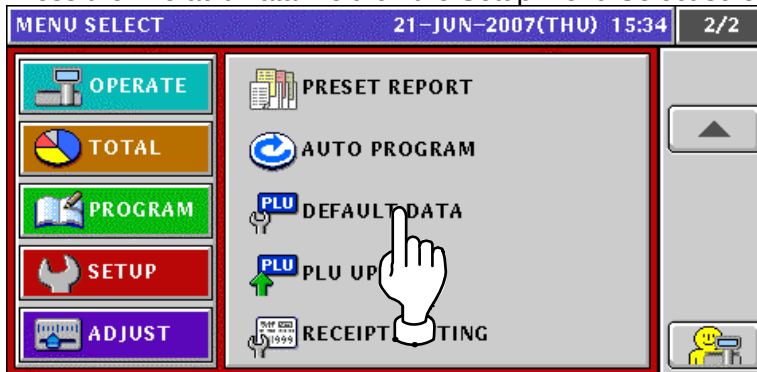

2. The Item Initial Data (Sales 1) screen appears.

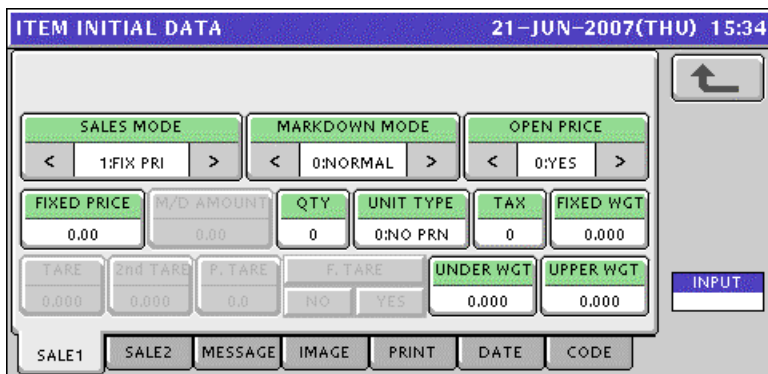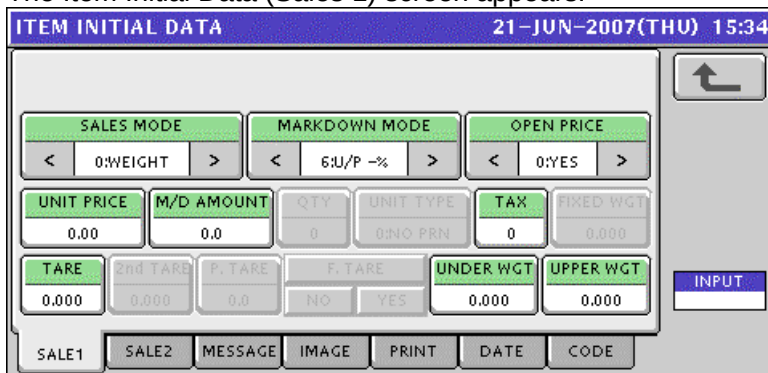

ITEM	DESCRIPTION
SALES MODE	Press the [<] or [>] button to select a desired Sales Mode.
	0: Weighing product
	1: Fixed price product
	2: Weighing fixed price product
MARKDOWN MODE	3: Fixed unit price
	Press the [<] or [>] button to select a desired Markdown Mode.
	1: Special price
	2: Amount discount for total price
	3: Percent discount for total price
	4: Special unit price
	5: Amount discount for unit price
	6: Percent discount for unit price

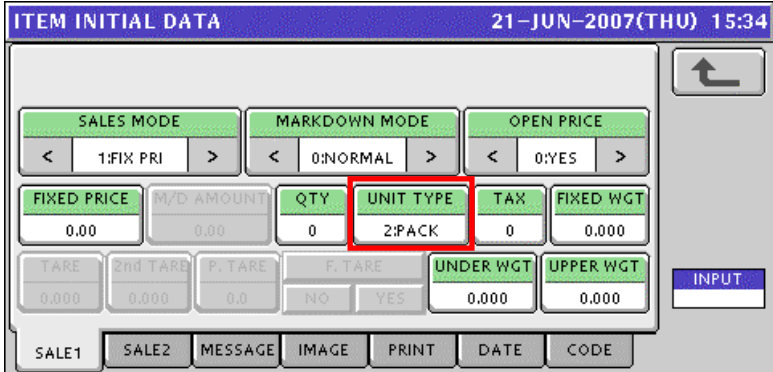OPEN PRICE	Press the [<] or [>] button to select whether or not to allow open prices system. 0: Yes 1: No
UNIT PRICE	Enter a unit price and press this field.
M/D AMOUNT	Enter a markdown amount or percentage and press this field.
QTY	Enter a quantity and press this field.
UNIT TYPE	Press this field to display the Fix Price Mark List screen. Then, select a desired price mark by pressing the corresponding field. EXAMPLE "Pack Packs"  ITEM INITIAL DATA 21-JUN-2007(THU) 15:34 
FIXED PRICE	Enter a fixed price and press this field.
TAX	Enter a tax number and press this field.
FIXED WEIGHT	Enter a fixed weight and press this field.
TARE	Enter a tare weight and press this field.
UNDER WEIGHT	Enter a lower weight limit and press this field.
UPPER WEIGHT	Enter an upper weight limit and press this field.

3. Press the “SALE 2” tab to display the Item Initial Data (Sales 2) screen.

ITEM INITIAL DATA 21-JUN-2007(THU) 15:35

POINT FLAG POINT TYPE POINTS

< 0:OFF > < 0:WGT > 0

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

INPUT

ITEM	DESCRIPTION
POINT FLAG	Press the [<] or [>] button to select whether or not to use a point flag. 0: Off 1: On
POINT TYPE	Press the [<] or [>] button to select a desired point type. 0: Weight 1: Fixed weight
POINTS	Enter a point data and press this field.

4-1 Press the “MESSAGE” tab to display the Item Initial Data (Message) screen.

ITEM INITIAL DATA(MESSAGE) 21-JUN-2007(THU) 15:35 1/6

NUTRITION(USA) 0 NONE

EXTRA MESSAGE1 0 NONE

EXTRA MESSAGE2 0 NONE

EXTRA MESSAGE3 0 NONE

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

INPUT

4-2 Press a desired field to display the corresponding list screen.

EXAMPLE “Extra Message 1”

ITEM INITIAL DATA(MESSAGE) 21-JUN-2007(THU) 15:35 1/6

NUTRITION(USA) 0 NONE

EXTRA MESSAGE1 0 NONE

EXTRA MESSAGE2 0 NONE

EXTRA MESSAGE3 0 NONE

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE

INPUT

4-3 Select a desired message by pressing the corresponding field.

EXTRA MSG1 LIST		21-JUN-2007(THU) 15:35	1/1
0	NONE		
1	EXTRA MESSAGE AA		
2	EXTRA MESSAGE BB		
FIND PLU SEARCH DISP. LINE 1		INPUT	

4-4 The selected message has been registered.

ITEM INITIAL DATA(MESSAGE)		21-JUN-2007(THU) 15:35	1/6
NUTRITION(USA)	0	NONE	  INPUT
EXTRA MESSAGE1	2	EXTRA MESSAGE BB	
EXTRA MESSAGE2	0	NONE	
EXTRA MESSAGE3	0	NONE	
SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE			

5-1 Press the "IMAGE" tab to display the Item Initial Data (Image) screen.

ITEM INITIAL DATA(IMAGE)		21-JUN-2007(THU) 15:36	
IMAGE1	0	IMAGE2	0
IMAGE3	0	DISP IMG	0
SH IMAGE	0	SAFE HANDLING IMAGE	
		☒ NO PRINT ☐ PRINT	
SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE		INPUT	

5-2 Press to select a desired image field.

ITEM INITIAL DATA(IMAGE)		21-JUN-2007(THU) 15:36	
IMAGE1	0	IMAGE2	0
IMAGE3	0	DISP IMG	0
SH IMAGE	0	SAFE HANDLING IMAGE	
		☒ NO PRINT ☐ PRINT	
SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE		INPUT	

- 5-3** The Image List screen appears. Then, select a desired image by pressing the corresponding field.

IMAGE1 LIST		21-JUN-2007(THU) 15:36		1/4
No.	IMAGE	No.	IMAGE	
0	NO IMAGE	5		↑ ↓ DETAIL SET
1		6		
2		8		
3		9		
4		10		

- 5-4** The selected image has been registered.

ITEM INITIAL DATA(IMAGE)		21-JUN-2007(THU) 15:36	
IMAGE1		IMAGE2	
IMAGE3		DISP IMG	
SH IMAGE		SAFE HANDLING IMAGE	
		NO PRINT	PRINT
SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE		INPUT	

- 5-5** Press the Display Image field.

ITEM INITIAL DATA(IMAGE)		21-JUN-2007(THU) 15:36	
IMAGE1		IMAGE2	
IMAGE3		DISP IMG	
SH IMAGE		SAFE HANDLING IMAGE	
		NO PRINT	PRINT
SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE		INPUT	

- 5-6** The Display Image List screen appears. Then, select a desired image by pressing the corresponding field.

DISPLAY IMAGE LIST		21-JUN-2007(THU) 15:36		1/4
No.	IMAGE	No.	IMAGE	
0	NO IMAGE	6		↑ ↓ DETAIL SET
1		7		
2		8		
3		9		
5		10		

5-7 The selected image has been registered.

ITEM INITIAL DATA(IMAGE) 21-JUN-2007(THU) 15:36

IMAGE1 8		IMAGE2 0	
IMAGE3 0		DISP IMG 5	
SH IMAGE 0		SAFE HANDLING IMAGE ✓ NO PRINT PRINT	

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE INPUT

5-8 Select whether or not to print safe handling message.

ITEM INITIAL DATA(IMAGE) 21-JUN-2007(THU) 15:36

IMAGE1 8		IMAGE2 0	
IMAGE3 0		DISP IMG 5	
SH IMAGE 0		SAFE HANDLING IMAGE NO PRINT PRINT ✓	

SALE1 SALE2 MESSAGE IMAGE PRINT DATE CODE INPUT

6. Press the "PRINT" tab to display the Item Initial Data (Print) screen.

ITEM INITIAL DATA(PRINT) 21-JUN-2007(THU) 15:37

FIRST LABEL FORMAT NO. 0	SECOND LABEL FORMAT NO. 80
FIRST LABEL PRINT < 1:YES >	SECOND LABEL PRINT < 2:NO >

SALE1 SALE2 MESSAGE IMAGE **PRINT** DATE CODE INPUT

ITEM	DESCRIPTION
FIRST LABEL FORMAT NO.	Enter a desired format number and press this field.
SECOND LABEL FORMAT NO.	Enter a desired format number and press this field.
FIRST LABEL PRINT	Press the [<] or [>] button to select whether or not to print first labels. 1: Yes 2: No
SECOND LABEL PRINT	Press the [<] or [>] button to select whether or not to print first labels. 1: Yes 2: No

7. Press the “DATE” tab to display the Item Initial Data (Date) screen.

ITEM	DESCRIPTION
PACK DATE PRINT	Press to select whether or not to print pack date.
PACK TIME PRINT	Press the [<] or [>] button to select a desired printing method. 0: No print 1: Designated time 2: System clock time
PACK TIME DATA	Enter a desired pack time and press this field.
SB DATE PRINT	Press to select whether or not to print sell-by date.
SB TIME PRINT	Press the [<] or [>] button to select a desired printing method. 0: No print 1: Designated time 2: Relative time
SB TIME DATA	Enter a number of “Time After” for sell-by time and press this field.
SHELF LIFE (DAYS)	Enter a number of days for shelf life and press this field.
UB DATE PRINT	Press to select whether or not to print use-by date.
UB DATE DATA	Enter a number of days for use-by date and press this field.


8. Press the “DATE” tab to display the Item Initial Data (Date) screen.

ITEM	DESCRIPTION
ITEM CODE	Enter an item code and press this field.
REGI CODE	Enter a register code and press this field.
POS FLAG	Enter a POS flag number and press this field.
BARCODE	Enter a barcode and press this field.
POS REFERENCE	Press the [<] or [>] button to select a desired reference method. 0: Refer 1: PLU file

BARCODE TYPE	The Barcode Type screen appears when this field is pressed. Press to select a desired type. <table><tr><td colspan="2">BARCODE TYPE</td><td>21-JUN-2007(THU) 15:45</td><td>1/1</td></tr><tr><td>00</td><td>REFER</td><td>07</td><td>RSS-14 STO</td></tr><tr><td>01</td><td>NON PLU 13</td><td>08</td><td>RSS-14 LIM</td></tr><tr><td>02</td><td>NON PLU 8</td><td>09</td><td>RSS-14 EXP</td></tr><tr><td>03</td><td>PLU 13</td><td>10</td><td>ITF</td></tr><tr><td>04</td><td>PLU 8</td><td>11</td><td>Not Available</td></tr><tr><td>05</td><td>RSS-14</td><td></td><td></td></tr><tr><td>06</td><td>RSS-14 ST</td><td></td><td></td></tr></table>	BARCODE TYPE		21-JUN-2007(THU) 15:45	1/1	00	REFER	07	RSS-14 STO	01	NON PLU 13	08	RSS-14 LIM	02	NON PLU 8	09	RSS-14 EXP	03	PLU 13	10	ITF	04	PLU 8	11	Not Available	05	RSS-14			06	RSS-14 ST																																																																		
BARCODE TYPE		21-JUN-2007(THU) 15:45	1/1																																																																																														
00	REFER	07	RSS-14 STO																																																																																														
01	NON PLU 13	08	RSS-14 LIM																																																																																														
02	NON PLU 8	09	RSS-14 EXP																																																																																														
03	PLU 13	10	ITF																																																																																														
04	PLU 8	11	Not Available																																																																																														
05	RSS-14																																																																																																
06	RSS-14 ST																																																																																																
POS FORMAT	The Barcode Format screen appears when this field is pressed. Press to select a desired format. <table><tr><td colspan="2">BARCODE FORMAT</td><td>21-JUN-2007(THU) 15:45</td><td>1/3</td></tr><tr><td>00</td><td>REFER</td><td>07</td><td>FFCCCCCWWWW(C/D)</td></tr><tr><td>01</td><td>FFCCCCC(C/P)PPPP(C/D)</td><td>08</td><td>FCCCCCWWWW(C/D)</td></tr><tr><td>02</td><td>FFCCCCC(C/P)PPPP(C/D)</td><td>09</td><td>FCCCCC(C/D)</td></tr><tr><td>03</td><td>FFCCCCC(C/P)PPPP(C/D)</td><td>0A</td><td>FFCCCCC(C/D) *</td></tr><tr><td>04</td><td>FFCCCCC(C/P)PPPP(C/D)</td><td>0B</td><td>FFCCCCC(C/D) *</td></tr><tr><td>05</td><td>FFCCCCC(C/P)PPPP(C/D)</td><td>0C</td><td>FFCCCC(C/W)WWWW(C/D)</td></tr><tr><td>06</td><td>FFCCCC(C/P)PPPP(C/D)</td><td>0D</td><td>Not Available</td></tr></table> <table><tr><td colspan="2">BARCODE FORMAT</td><td>21-JUN-2007(THU) 15:45</td><td>2/3</td></tr><tr><td>0E</td><td>Not Available</td><td>15</td><td>FFCCCCPPPP(C/D)</td></tr><tr><td>0F</td><td>FFCCCC(0)PPPP(C/D)</td><td>16</td><td>FCCWWWWPPPP(C/D)</td></tr><tr><td>10</td><td>FFCCCCCWWWW(C/D)</td><td>17</td><td>FFCCCCQPPPP(C/D)</td></tr><tr><td>11</td><td>FFCCCCPPPP(/10)(C/D)</td><td>18</td><td>FIIIIIIPPP(C/D)</td></tr><tr><td>12</td><td>FFCCCCC(C/P)PPPP(/10)(C/D)</td><td>19</td><td>FFIIIIIPPP(C/D)</td></tr><tr><td>13</td><td>FFCCCCC(C/W)WWWW(C/D)</td><td>1A</td><td>FCCCCPPPPPP(C/D)</td></tr><tr><td>14</td><td>FCCCCPPPPPP(C/D)</td><td>1B</td><td>FIIIIIIPPP(/10)(C/D)</td></tr></table> <table><tr><td colspan="2">BARCODE FORMAT</td><td>21-JUN-2007(THU) 15:45</td><td>3/3</td></tr><tr><td>1C</td><td>FIIIIIIPPP(/10)(C/D)</td><td></td><td></td></tr><tr><td>1D</td><td>FCCCCC(C/P)PPPP(/10)(C/D)</td><td></td><td></td></tr><tr><td>1E</td><td>FFCCCCC(C/P)PPPP(/10)(C/D)</td><td></td><td></td></tr><tr><td>1F</td><td>FFCCCCC(C/P)PPPP(/10)(C/D)</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>	BARCODE FORMAT		21-JUN-2007(THU) 15:45	1/3	00	REFER	07	FFCCCCCWWWW(C/D)	01	FFCCCCC(C/P)PPPP(C/D)	08	FCCCCCWWWW(C/D)	02	FFCCCCC(C/P)PPPP(C/D)	09	FCCCCC(C/D)	03	FFCCCCC(C/P)PPPP(C/D)	0A	FFCCCCC(C/D) *	04	FFCCCCC(C/P)PPPP(C/D)	0B	FFCCCCC(C/D) *	05	FFCCCCC(C/P)PPPP(C/D)	0C	FFCCCC(C/W)WWWW(C/D)	06	FFCCCC(C/P)PPPP(C/D)	0D	Not Available	BARCODE FORMAT		21-JUN-2007(THU) 15:45	2/3	0E	Not Available	15	FFCCCCPPPP(C/D)	0F	FFCCCC(0)PPPP(C/D)	16	FCCWWWWPPPP(C/D)	10	FFCCCCCWWWW(C/D)	17	FFCCCCQPPPP(C/D)	11	FFCCCCPPPP(/10)(C/D)	18	FIIIIIIPPP(C/D)	12	FFCCCCC(C/P)PPPP(/10)(C/D)	19	FFIIIIIPPP(C/D)	13	FFCCCCC(C/W)WWWW(C/D)	1A	FCCCCPPPPPP(C/D)	14	FCCCCPPPPPP(C/D)	1B	FIIIIIIPPP(/10)(C/D)	BARCODE FORMAT		21-JUN-2007(THU) 15:45	3/3	1C	FIIIIIIPPP(/10)(C/D)			1D	FCCCCC(C/P)PPPP(/10)(C/D)			1E	FFCCCCC(C/P)PPPP(/10)(C/D)			1F	FFCCCCC(C/P)PPPP(/10)(C/D)														
BARCODE FORMAT		21-JUN-2007(THU) 15:45	1/3																																																																																														
00	REFER	07	FFCCCCCWWWW(C/D)																																																																																														
01	FFCCCCC(C/P)PPPP(C/D)	08	FCCCCCWWWW(C/D)																																																																																														
02	FFCCCCC(C/P)PPPP(C/D)	09	FCCCCC(C/D)																																																																																														
03	FFCCCCC(C/P)PPPP(C/D)	0A	FFCCCCC(C/D) *																																																																																														
04	FFCCCCC(C/P)PPPP(C/D)	0B	FFCCCCC(C/D) *																																																																																														
05	FFCCCCC(C/P)PPPP(C/D)	0C	FFCCCC(C/W)WWWW(C/D)																																																																																														
06	FFCCCC(C/P)PPPP(C/D)	0D	Not Available																																																																																														
BARCODE FORMAT		21-JUN-2007(THU) 15:45	2/3																																																																																														
0E	Not Available	15	FFCCCCPPPP(C/D)																																																																																														
0F	FFCCCC(0)PPPP(C/D)	16	FCCWWWWPPPP(C/D)																																																																																														
10	FFCCCCCWWWW(C/D)	17	FFCCCCQPPPP(C/D)																																																																																														
11	FFCCCCPPPP(/10)(C/D)	18	FIIIIIIPPP(C/D)																																																																																														
12	FFCCCCC(C/P)PPPP(/10)(C/D)	19	FFIIIIIPPP(C/D)																																																																																														
13	FFCCCCC(C/W)WWWW(C/D)	1A	FCCCCPPPPPP(C/D)																																																																																														
14	FCCCCPPPPPP(C/D)	1B	FIIIIIIPPP(/10)(C/D)																																																																																														
BARCODE FORMAT		21-JUN-2007(THU) 15:45	3/3																																																																																														
1C	FIIIIIIPPP(/10)(C/D)																																																																																																
1D	FCCCCC(C/P)PPPP(/10)(C/D)																																																																																																
1E	FFCCCCC(C/P)PPPP(/10)(C/D)																																																																																																
1F	FFCCCCC(C/P)PPPP(/10)(C/D)																																																																																																
TRACE ENABLE	Press to select whether or not to enable traceability function.																																																																																																
DEPARTMENT NO.	Enter a department number and press this field.																																																																																																
GROUP NO.	Enter a group number and press this field.																																																																																																

11.10 PLU UPDATE SETTING

1. Press the "PLU Update" field on the Setup Menu Select screen.

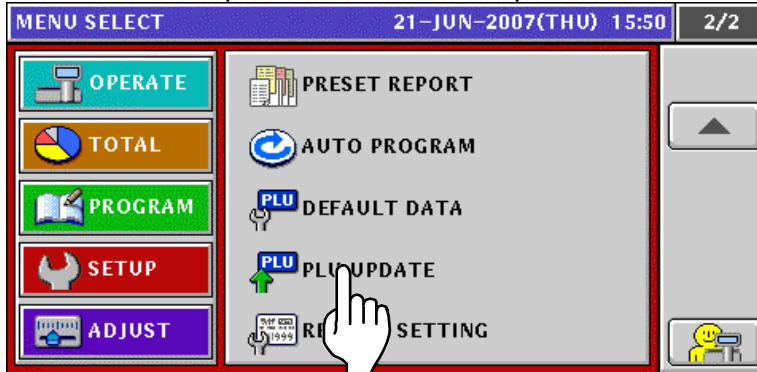

2. The PLU Update screen appears.
Press the [▼] or [▲] button to change the pages.

Note: Display items may vary depending on the country setting.

The first screenshot shows the 'PLU UPDATE' screen with a header bar displaying '21-JUN-2007(THU) 15:50' and '1/14'. It includes fields for 'START No.' (1) and 'END No.' (99999999), a 'CONDITION' section with 'NO' and 'YES' buttons, and a table with columns 'No.', 'LIST NAME', 'REPLACE CONDITION', and 'CHANGE CONTENTS'. The table lists items 1 through 5. A hand icon is pointing to the 'CHANGE CONTENTS' column. Below the table is an 'INPUT' field and an 'EXECUTE' button.

The second screenshot shows the 'PLU UPDATE' screen with a header bar displaying '21-JUN-2007(THU) 15:50' and '2/14'. It includes fields for 'START No.' (1) and 'END No.' (99999999), a 'CONDITION' section with 'NO' and 'YES' buttons, and a table with columns 'No.', 'LIST NAME', 'REPLACE CONDITION', and 'CHANGE CONTENTS'. The table lists items 6 through 10. A hand icon is pointing to the 'CHANGE CONTENTS' column. Below the table is an 'INPUT' field and an 'EXECUTE' button.

The third screenshot shows the 'PLU UPDATE' screen with a header bar displaying '21-JUN-2007(THU) 15:50' and '3/14'. It includes fields for 'START No.' (1) and 'END No.' (99999999), a 'CONDITION' section with 'NO' and 'YES' buttons, and a table with columns 'No.', 'LIST NAME', 'REPLACE CONDITION', and 'CHANGE CONTENTS'. The table lists items 11 through 15. A hand icon is pointing to the 'CHANGE CONTENTS' column. Below the table is an 'INPUT' field and an 'EXECUTE' button.

PLU UPDATE				21-JUN-2007(THU) 15:50	4/14
START No.		END No.		CONDITION	
1		99999999		☒ NO ☐ YES	
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
16	POINT TYPE				
17	POINTS				
18	FIRST LABEL PRINT				
19	SECOND LABEL PRINT				
20	1st LABEL FORAMT No.				
INPUT				EXECUTE	

PLU UPDATE				21-JUN-2007(THU) 15:50	5/14
START No.		END No.		CONDITION	
1		99999999		☒ NO ☐ YES	
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
21	2nd LABEL FORAMT No.				
22	COOKING INSTRUCTION				
23	FREE1				
24	FREE2				
25	FREE3				
INPUT				EXECUTE	

PLU UPDATE				21-JUN-2007(THU) 15:50	6/14
START No.		END No.		CONDITION	
1		99999999		☒ NO ☐ YES	
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
26	FREE4				
27	FREE5				
28	FREE6				
29	FREE7				
30	FREE8				
INPUT				EXECUTE	

PLU UPDATE				21-JUN-2007(THU) 15:50	7/14
START No.		END No.		CONDITION	
1		99999999		☒ NO ☐ YES	
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
31	FREE9				
32	FREE10				
33	FREE11				
34	FREE12				
35	FREE13				
INPUT				EXECUTE	

PLU UPDATE				21-JUN-2007(THU) 15:51	8/14
START No.		END No.		CONDITION	
1		99999999		☒ NO ☐ YES	
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
36	FREE14				
37	FREE15				
38	DISPLAY IMAGE				
39	OPEN PRICE				
40	TRACE ENABLE				
INPUT				EXECUTE	

PLU UPDATE				21-JUN-2007(THU) 15:51	9/14
START No.	END No.	CONDITION		☒ NO ☐ YES	↑ ↓ BA D EXECUTE
1	99999999				
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
41	TRACE SCHEME No.				
42	REGI CODE				
43	SALES MODE				
44	UNIT PRICE				
45	FIX PRICE				
INPUT					

PLU UPDATE				21-JUN-2007(THU) 15:51	10/14
START No.	END No.	CONDITION		☒ NO ☐ YES	↑ ↓ BA D EXECUTE
1	99999999				
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
46	MARKDOWN MODE				
47	M/D AMOUNT				
48	FIXED WEIGHT				
49	QTY				
50	UNIT TYPE				
INPUT					

PLU UPDATE				21-JUN-2007(THU) 15:51	11/14
START No.	END No.	CONDITION		☒ NO ☐ YES	↑ ↓ BA D EXECUTE
1	99999999				
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
51	UPPER WGT				
52	UNDER WGT				
53	TARE				
54	2nd TARE				
55	P. TARE				
INPUT					

PLU UPDATE				21-JUN-2007(THU) 15:51	12/14
START No.	END No.	CONDITION		☒ NO ☐ YES	↑ ↓ BA D EXECUTE
1	99999999				
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
56	BARCODE TYPE				
57	POS REFERENCE				
58	POS FLAG				
59	BARCODE				
60	POS FORMAT				
INPUT					

PLU UPDATE				21-JUN-2007(THU) 15:51	13/14
START No.	END No.	CONDITION		☒ NO ☐ YES	↑ ↓ BA D EXECUTE
1	99999999				
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
61	EXTRA MESSAGE1				
62	EXTRA MESSAGE2				
63	EXTRA MESSAGE3				
64	POP MESSAGE				
65	COUPON MESSAGE				
INPUT					

PLU UPDATE 21-JUN-2007(THU) 15:51 14/14

START No. 1 END No. 99999999

CONDITION ☒ NO ☐ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
66	IMAGE1		
67	IMAGE2		
68	IMAGE3		

INPUT

EXECUTE

BATCH DELETE

3. Enter the start and end numbers and press these fields to specify the target PLUs.

PLU UPDATE 21-JUN-2007(THU) 15:51 1/14

START No. 100 END No. 99999999

CONDITION ☒ NO ☐ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE		
2	PACK DATE PRINT		
3	PACK TIME PRINT		
4	PACK TIME DATA		
5	SB DATE PRINT		

INPUT

EXECUTE

BATCH DELETE

4. Select desired items by pressing the corresponding fields.

PLU UPDATE 21-JUN-2007(THU) 15:52 1/14

START No. 100 END No. 9999

CONDITION ☐ NO ☒ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE	0	0
2	PACK DATE PRINT		
3	PACK TIME PRINT	2:CLOCK	2:CLOCK
4	PACK TIME DATA		
5	SB DATE PRINT	1:YES	1:YES

INPUT

EXECUTE

BATCH DELETE

PLU UPDATE 21-JUN-2007(THU) 15:52 2/14

START No. 100 END No. 9999

CONDITION ☐ NO ☒ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
6	SB TIME PRINT	2:RELATIVE	2:RELATIVE
7	SHELF LIFE(days)	THE DAY(1Day)	THE DAY(1Day)
8	SB TIME DATA	0 HOUR(s) AFTER	0 HOUR(s) AFTER
9	UB DATE PRINT	1:YES	1:YES
10	UB DATE DATA	THE DAY(0Day)	THE DAY(0Day)

INPUT

EXECUTE

BATCH DELETE

5. To release the selection, press the selected field again.

PLU UPDATE 21-JUN-2007(THU) 15:52 1/14

START No. 100 END No. 9999

CONDITION NO ☒ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE	0	0
2	PACK DATE PRINT		
3	PACK TIME PRINT	2:CLOCK	2:CLOCK
4	PACK TIME DATA		
5	SB DATE PRINT	1:YES	1:YES

INPUT

BATCH DELETE EXECUTE

PLU UPDATE 21-JUN-2007(THU) 15:52 1/14

START No. 100 END No. 9999

CONDITION NO ☒ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE	0	0
2	PACK DATE PRINT		
3	PACK TIME PRINT	2:CLOCK	2:CLOCK
4	PACK TIME DATA		
5	SB DATE PRINT	1:YES	1:YES

INPUT

BATCH DELETE EXECUTE

To release all the selections, press the [BATCH DELETE] button.

PLU UPDATE 21-JUN-2007(THU) 15:52 1/14

START No. 100 END No. 9999

CONDITION NO ☒ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE	0	0
2	PACK DATE PRINT		
3	PACK TIME PRINT	2:CLOCK	2:CLOCK
4	PACK TIME DATA		
5	SB DATE PRINT	1:YES	1:YES

INPUT

BATCH DELETE EXECUTE

PLU UPDATE 21-JUN-2007(THU) 15:52 1/14

START No. 100 END No. 9999

CONDITION NO ☒ YES

No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS
1	ITEM CODE	0	0
2	PACK DATE PRINT		
3	PACK TIME PRINT	2:CLOCK	2:CLOCK
4	PACK TIME DATA		
5	SB DATE PRINT	1:YES	1:YES

INPUT

BATCH DELETE EXECUTE

6. Press the [EXECUTE] button to update the selected items.

PLU UPDATE				21-JUN-2007(THU) 15:52	2/14
START No.		END No.		CONDITION	
100		9999		NO YES	
No.	LIST NAME	REPLACE CONDITION	CHANGE CONTENTS		
6	SB TIME PRINT	2:RELATIVE	2:RELATIVE		
7	SHELF LIFE(days)	THE DAY(1Day)	THE DAY(1Day)		
8	SB TIME DATA	0 HOUR(s) AFTER	0 HOUR(s) AFTER		
9	UB DATE PRINT	1:YES	1:YES		
10	UB DATE DATA	THE DAY(0Day)	THE DAY(0Day)		
				INPUT	EXECUTE

7. Press the [EXEC] button for execution.

PLU UPDATE 21-JUN-2007(THU) 15:52 2/14

21-JUN-2007(THU) 15:52

ALL REUPDATE CHECK


IT IS OK TO RENEW ALL DATA FOR PRODUCT?

14003 - 0000

EXEC STOP

11.11 RECEIPT SETTING

1. Press the "PLU Update" field on the Setup Menu Select screen.

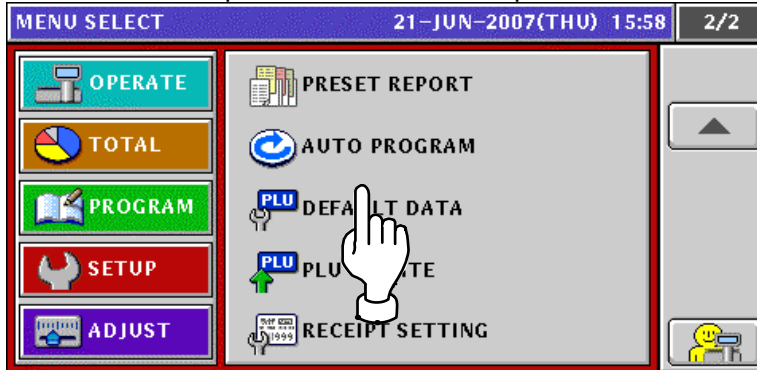

2. The Receipt Setting screen appears.
To edit the header and footer titles, press the corresponding field.



3. The Receipt Title Edit screen appears.



4. Edit the text according to the procedure explained in Appendix "Text Editing".



5. The edited text has been registered.

ESC

RECEIPT SETTING		21-JUN-2007(THU) 15:58
HEADER TITLE	PURCHASE RECEIPT	
FOOTER TITLE	Welcome again.	
HEADER LOGO	8 	
FOOTER LOGO	11 	
INPUT		

6. To edit the header and footer logo images, press the corresponding field.

RECEIPT SETTING		21-JUN-2007(THU) 15:58
HEADER TITLE	PURCHASE RECEIPT	
FOOTER TITLE	Welcome again.	
HEADER LOGO	8 	
FOOTER LOGO	11 	
INPUT		

7. The Image List screen appears.

HEADER IMAGE LIST		21-JUN-2007(THU) 15:59	1/4
No.	IMAGE	No.	IMAGE
0	NO IMAGE	5	
1		6	
2		8	
3		9	
4		10	
		DETAIL SET	

8. Select a desired image by pressing the corresponding field, and press the [SET] button.

HEADER IMAGE LIST		21-JUN-2007(THU) 16:00	2/4
No.	IMAGE	No.	IMAGE
11		16	
12		17	
13		18	
14		19	
15		20	
		DETAIL SET	

9. The edited logo image has been registered.

RECEIPT SETTING21-JUN-2007(THU) 16:00

HEADER TITLEPURCHASE RECEIPT

FOOTER TITLEHAVE A GOOD DAY!

HEADER LOGO13



FOOTER LOGO11


Thank You

INPUT

TEXT EDITING

A.1 OPERATION PANEL AND KEY FUNCTIONS

■ Operation Panel

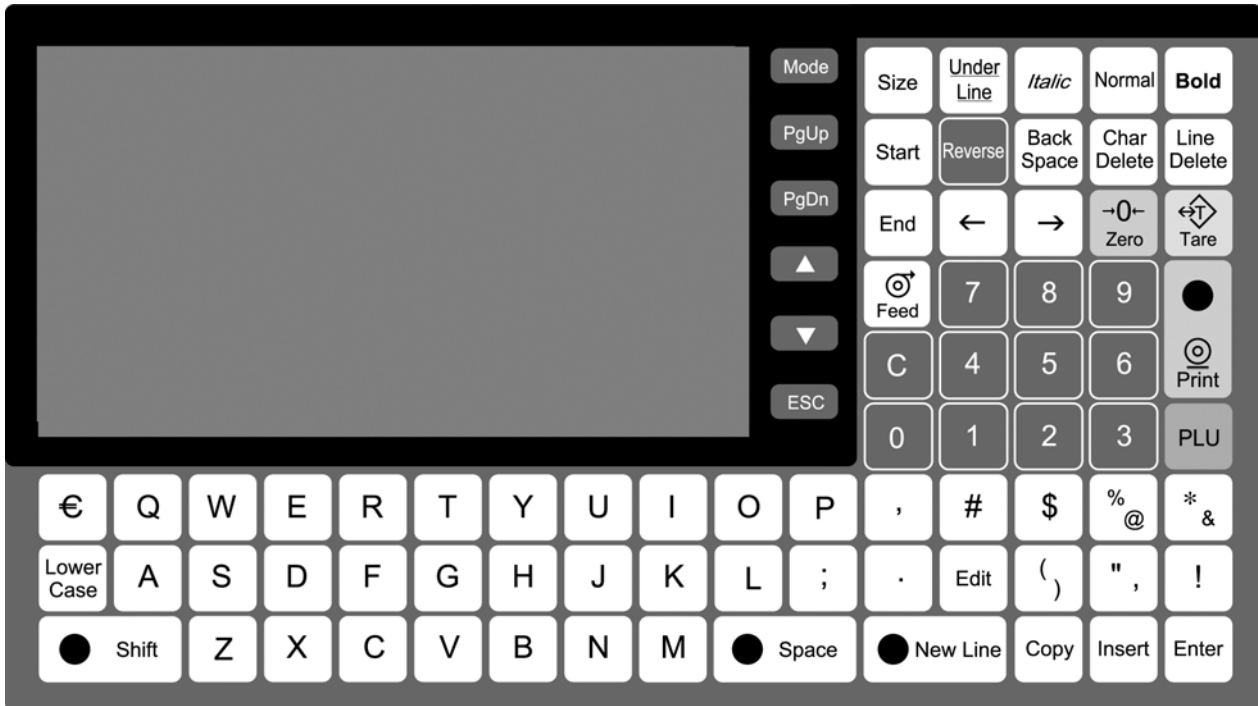


■ Text Editing Keys

	Used to delete a character by moving the cursor back by one character.		Used to select a font size for a text displayed on the screen.
	Used to delete a character at the place where the cursor is positioned.		Used to insert a character, or select characters followed by depressions of the [→] or [←] key.
	Used to delete a line text.		Used to move the cursor to right. Also used to select characters for changing the style.
	Used to specify a normal character style.		Used to move the cursor to left. Also used to select characters for changing the style.
	Used to specify a bold character style.		Used to select either lower-case or upper-case character mode for a text to be entered.


	Used to specify an Italic character style.		Used to copy the original data to the current data.
	Used to specify an underlined character style.		Used to finalize editing a text.
	Used to specify a revered character.		Used to begin a new character line.
	Used to enter a space at the place where the cursor is positioned.		Used to select either a lower-case or upper-case mode for a character to be entered.

A.2 NORMAL CHARACTER EDITING


1. Confirm that the text edit screen is displayed.
Select a desired character size by using the [Size] key on the key sheet.

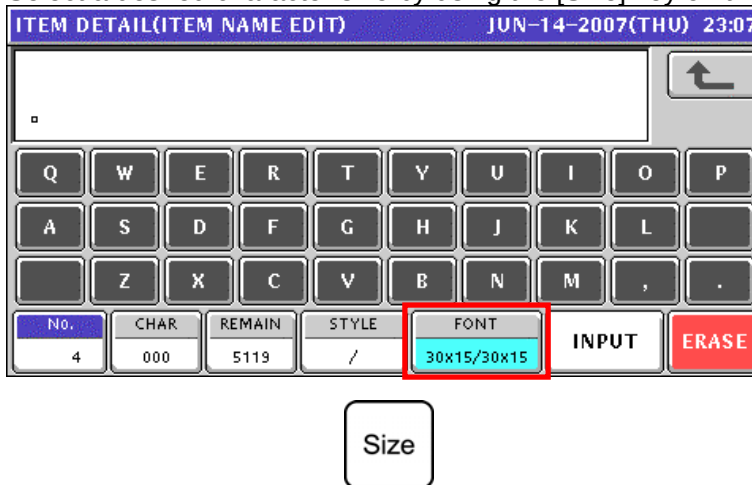


The selected size is displayed in the "FONT" display field.

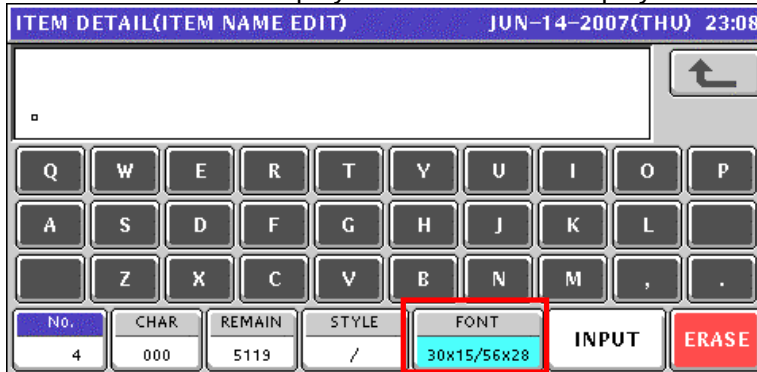

2. Press the [Lower Case] key on the key sheet to select whether to use upper-case characters or lower-case characters.

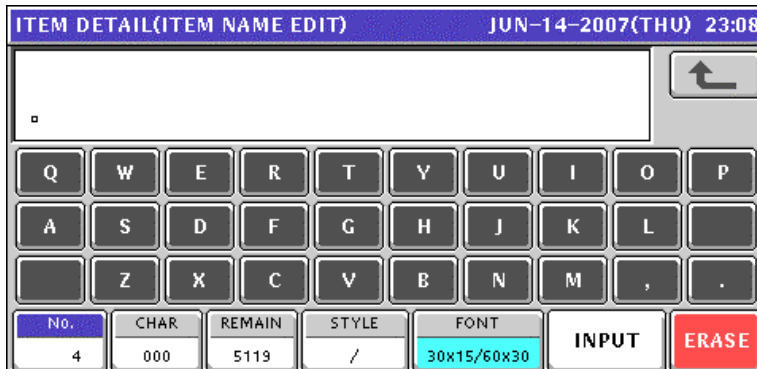


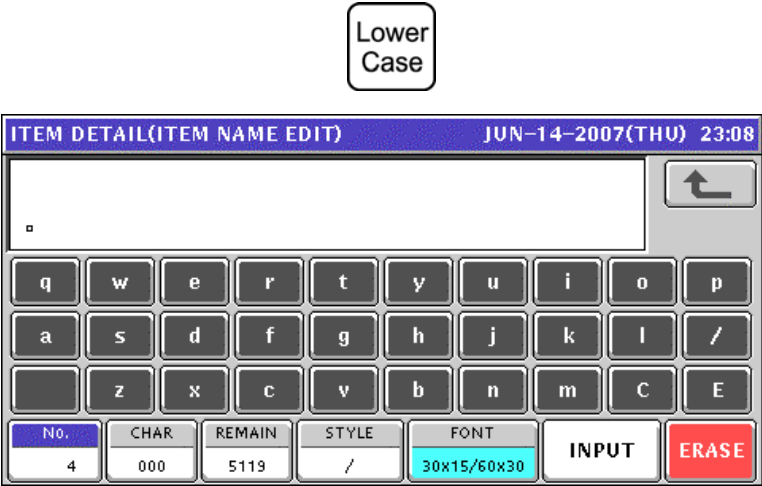

3. Enter desired characters using alpha-numeric keys on the key sheet or the screen.



Upper-case characters

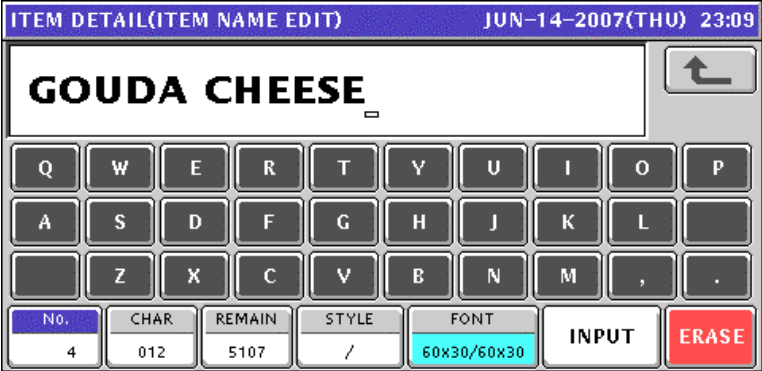


Lower-case characters



4. To change to a new line, press the [New Line] key on the key sheet.




Enter desired characters.

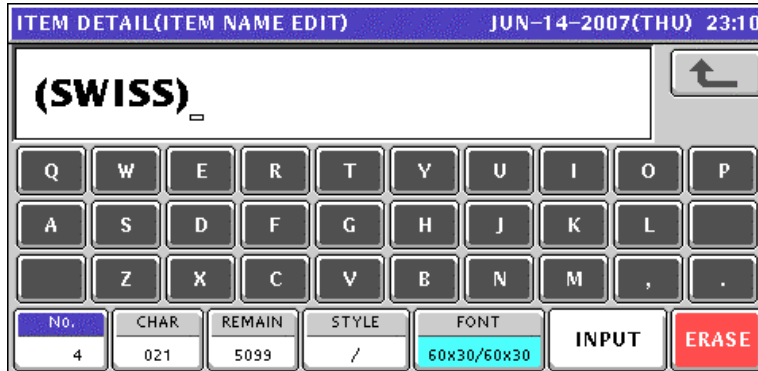

5. To finalize the editing, press the [ESC] key on the key sheet.




The confirmation screen appears. Then, press the [SAVE] button to save the data.

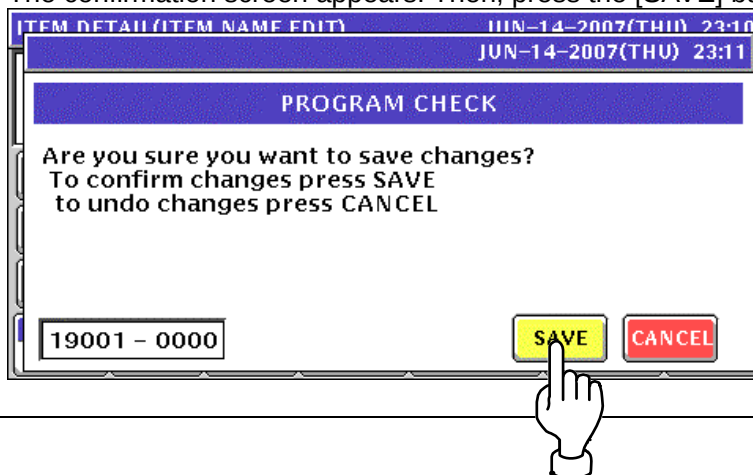

A.3 SPECIAL CHARACTER EDITING

1. Confirm that the text edit screen is displayed.

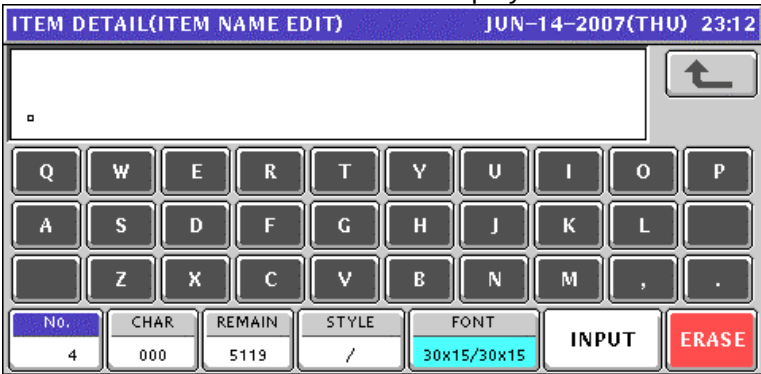


2. To select a desired character style using the following keys.



The selected style is displayed in the “STYLE” display field.

EXAMPLE

Select reversed characters.

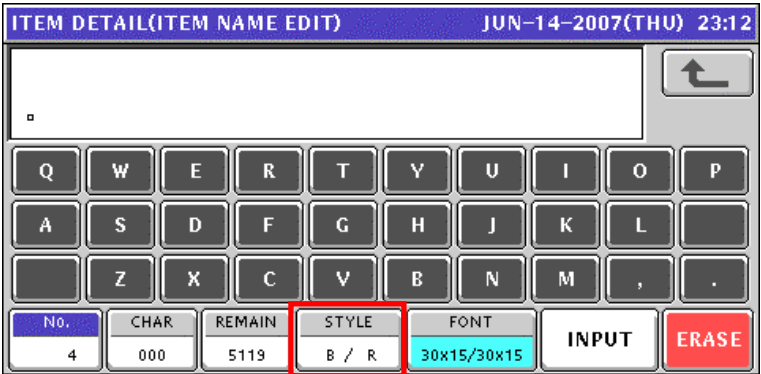


3. Enter desired characters using alpha-numeric keys on the key sheet or the screen.



4. Press the [ESC] key on the key sheet.



The confirmation screen appears. Then, press the [SAVE] button to save the data.

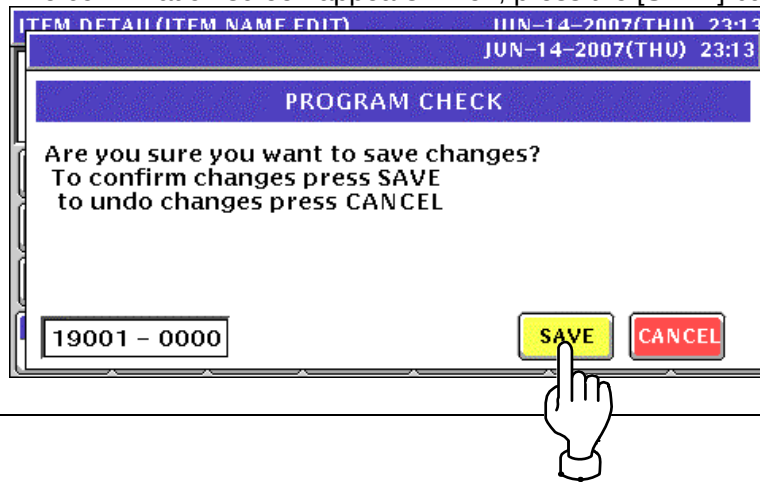

A.4 LINE DELETION

1. Confirm that the text edit screen for a desired PLU is displayed.

The screenshot shows the 'ITEM DETAIL (ITEM NAME EDIT)' screen. At the top, it displays 'JUN-14-2007(THU) 23:18'. The main text area contains 'GOUDA CHEESE'. Below the text area is a numeric keypad with letters Q through Z and punctuation. At the bottom, there are several status fields: 'No.' (4), 'CHAR' (012), 'REMAIN' (5107), 'STYLE' (/), 'FONT' (30x15/30x15), 'INPUT', and 'ERASE'.

2. To delete the character line, press the [Line Delete] key on the key sheet.



The screenshot shows the same 'ITEM DETAIL (ITEM NAME EDIT)' screen, but the text area is now empty except for a cursor. The status fields at the bottom are: 'No.' (4), 'CHAR' (000), 'REMAIN' (5119), 'STYLE' (/), 'FONT' (30x15/30x15), 'INPUT', and 'ERASE'.

3. Press the [ESC] key on the key sheet.



The confirmation screen appears. Then, press the [SAVE] button to save the data.


The screenshot shows a 'PROGRAM CHECK' screen. It asks 'Are you sure you want to save changes?' and provides instructions: 'To confirm changes press SAVE' and 'to undo changes press CANCEL'. At the bottom, there is a field showing '19001 - 0000' and two buttons: 'SAVE' (yellow) and 'CANCEL' (red). A hand icon is pointing at the 'SAVE' button.

A.5 CHARACTER DELETION

1. To Make a correction for a misspelled word, move the cursor to a place where misspelling is made by using the [→] or [←] key.

EXAMPLE "GAUDA" → "GOUDA"

ITEM DETAIL(ITEM NAME EDIT)					JUN-14-2007(THU) 23:21	
GAUDA CHEESE						↩
Q	W	E	R	T	Y	U
A	S	D	F	G	H	J
	Z	X	C	V	B	N
No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
4	012	5107	/	30x15/30x15		



ITEM DETAIL(ITEM NAME EDIT)					JUN-14-2007(THU) 23:21	
GAUDA CHEESE						↩
Q	W	E	R	T	Y	U
A	S	D	F	G	H	J
	Z	X	C	V	B	N
No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
4	012	5107	/	30x15/30x15		

2. Press the [Character Delete] key on the key sheet to delete the misspelled character.

Char
Delete

ITEM DETAIL(ITEM NAME EDIT)					JUN-14-2007(THU) 23:21	
GUDA CHEESE						↩
Q	W	E	R	T	Y	U
A	S	D	F	G	H	J
	Z	X	C	V	B	N
No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
4	011	5108	/	30x15/30x15		

3. Enter the correct character using the alpha-numeric keys.



No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
4	012	5107	/	30x15/30x15		

4. Press the [ESC] key on the key sheet.



The confirmation screen appears. Then, press the [SAVE] button to save the data.

No.	CHAR	REMAIN	STYLE	FONT	INPUT	ERASE
4	012	5107	/	30x15/30x15		

A.6 CHARACTER BACKSPACING

1. To delete a wrong character that was just entered, press the [Back Space] key on the key sheet to move the cursor back by one character.

EXAMPLE "E" → "A"

ITEM DETAIL(ITEM NAME EDIT)					JUN-14-2007(THU) 23:22				
GOUDE ⏮									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN	STYLE	FONT	INPUT		ERASE		
4	005	5114	/	30x15/30x15					

Back
Space

ITEM DETAIL(ITEM NAME EDIT)					JUN-14-2007(THU) 23:23				
GOUD ⏮									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN	STYLE	FONT	INPUT		ERASE		
4	004	5115	/	30x15/30x15					

2. Enter a correct character.

A

ITEM DETAIL(ITEM NAME EDIT)					JUN-14-2007(THU) 23:23				
GOUDA ⏮									
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	
	Z	X	C	V	B	N	M	,	.
No.	CHAR	REMAIN	STYLE	FONT	INPUT		ERASE		
4	005	5114	/	30x15/30x15					


3. Complete the text.



4. Press the [ESC] key on the key sheet.



The confirmation screen appears. Then, press the [SAVE] button to save the data.

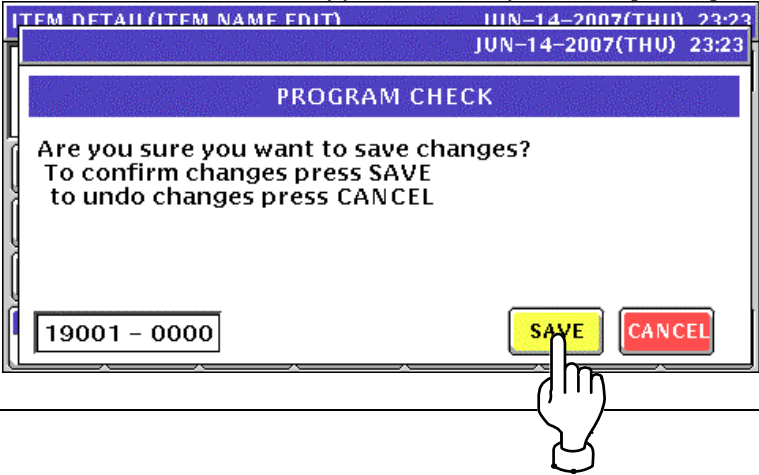



Design and specifications are subject to change without notice.

44 SANNO-CHO, SHOGOIN, SAKYO-KU
KYOTO, 606-8392 JAPAN
PHONE: 81-75-771-4141
FACSIMILE: 81-75-751-1634
URL: <http://www.ishidajapan.com>
