

USER MANUAL


DIGITAL LEVEL

DWL - 80 Pro (0.05° resolution)
DWL - 80 G (0.1° resolution)



Product of Singapore

Digi-Pas® Digital Level

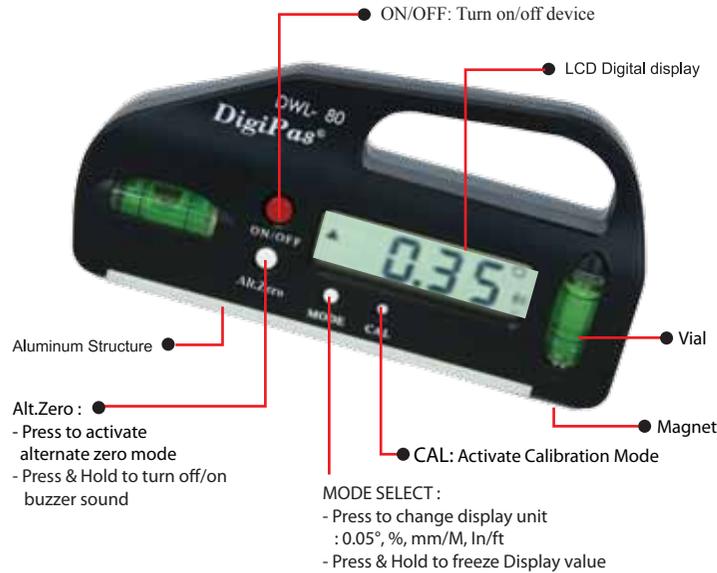

Aluminum Structure

Alt.Zero :

- Press to activate alternate zero mode
- Press & Hold to turn off/on buzzer sound

ON/OFF: Turn on/off device

LCD Digital display

Vial

Magnet

CAL: Activate Calibration Mode

MODE SELECT :

- Press to change display unit : 0.05°, %, mm/M, In/ft
- Press & Hold to freeze Display value

Product of Singapore

© Registered Design

TECHNICAL SPECIFICATION

Dimension	: 107 x 55 x 18
Weight	: 100 Grams
Operating Temp	: 0° ~ +50°(Celsius)
Storage Temp	: -10° ~ +60°(Celsius)
Battery	: 2 x CR2032 (3V)

CLEANING

* Do not submerge device in water while cleaning . Wiping or cleaning on device surface is sufficient

Applications



CAUTION

Digi-Pas device is calibrated in the factory for maximum accuracy. User can re-calibrate when necessary.

Refer to www.digipas.com for video demonstration on how to calibrate the device.

BATTERY COMPARTMENT



For first time usage, remove the plastic strip to connect the battery.



Remove Screw to remove battery from the compartment


CALIBRATION INSTRUCTIONS

- (a). Push Once on the CAL button, "CAL 1" blinks.
- (b). Place DWL80G/Pro on a flat & clean surface (e.g. Table)
- (c). Place DWL80G/Pro vertically (-90°). Press MODE button, display counts down, "CAL 4" blinks.
- (d). Place DWL80G/Pro reverse vertically (+90°). Press MODE button, display counts down.

CALIBRATION DONE.

NOTE: Ensure Digi-Pas device is kept still during calibration.

CALIBRATION PICTURE

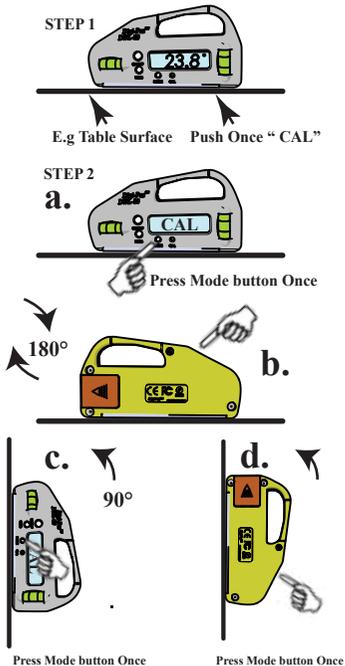

WARRANTY

The **Digi-Pas®** Digital level is warranted to the original purchaser to be free from defects in workmanship and material. JSB Tech will, at its option, repair or replace any defective part which may malfunction under normal and proper use within a period of 1 (one) year from the date of shipment. The foregoing warranty shall not apply to defects resulting from misuse, abuse or transfer by the Buyer, Buyer-supplied software or interfacing, unauthorized modification or operation outside of environmental specifications for the product. JSB Tech does not warrant that the operation of the instrument software, or firmware, will be uninterrupted or error free. The exclusive remedy under any and all warrants and guarantees, expressed herein, and we shall not be liable for damages from loss or delay of equipments uses, consequential, or incidental damage. No other warranty is expressed or implied. JSB Tech specifically disclaims the implied warranties of merchantability and fitness for a particular purpose.



Manufactured by
JSB TECH Pte Ltd

Email: info@digipas.com
www.digipas.com
JIM-2-00082-99