




XERO XBS-08

Intelligence Bluetooth Stereo Headset


XBS-08 User Manual (version 1.0)

A. XBS-08 Overview

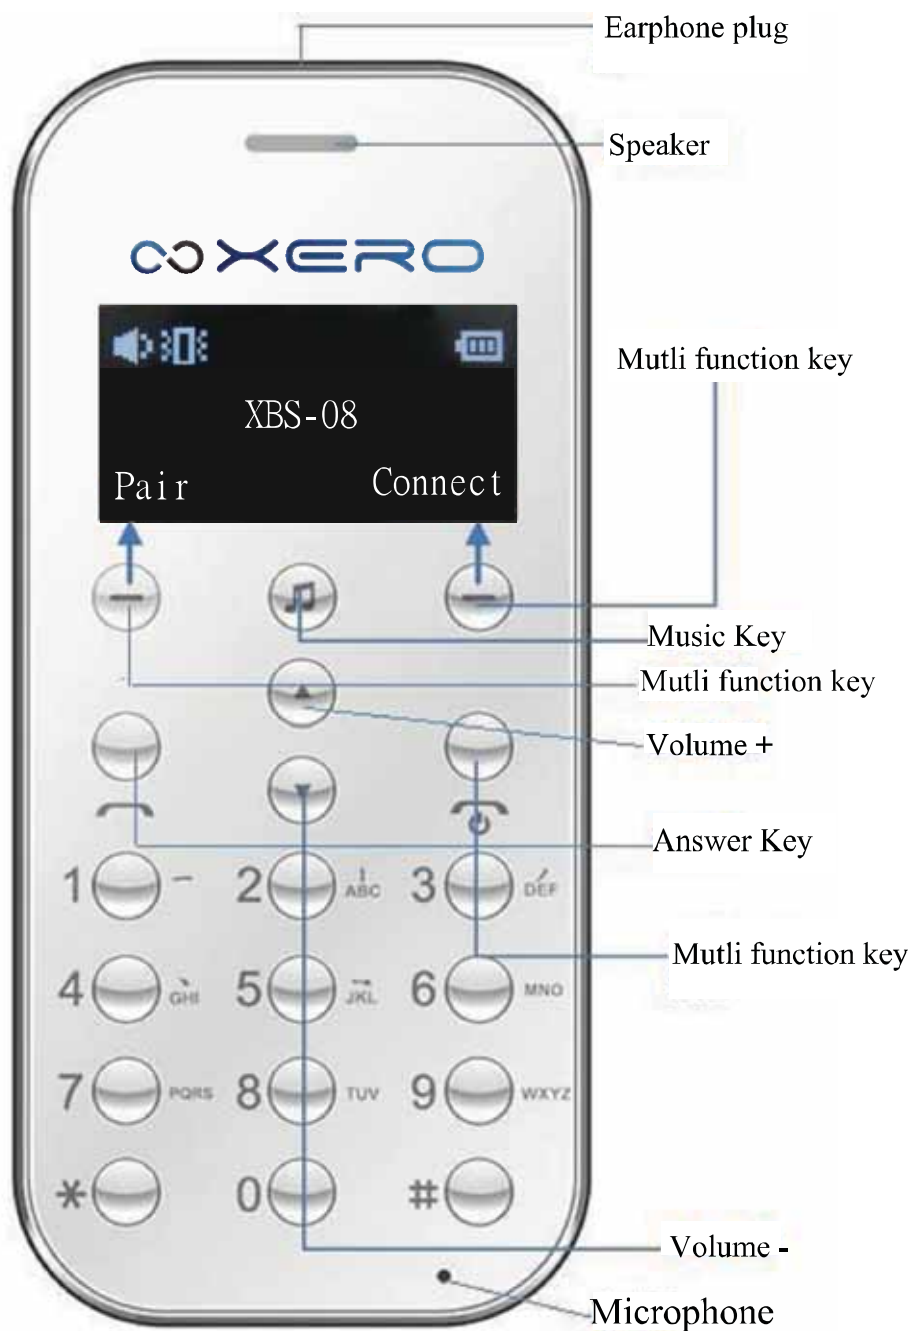

B. Operation Instructions


(1) **Power ON:** Press the MFB button (On/Off), until the screen as follows;

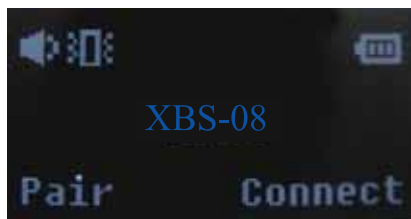

Then stop the pressing;

(2) **Power Off:** In the standby state, press the MFB button (On/Off) until the screen is dark, and then releases the pressing;


(3) **Pairing:** After the XBS-08 is on, press the left pairing button into the pairing process, and then the screen will be as follows;

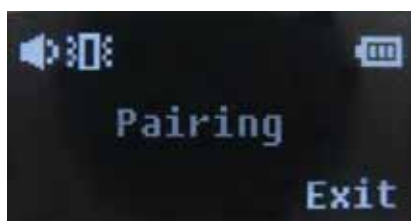

Activate the Bluetooth feature on your Mobile phone/Device, and set the Phone/Device to search for Bluetooth devices. Details see the user guide of your phone/device for instructions.

Select the headset XBS-08 from the list of found devices.

(4) **Re-connection XBS-08:** After it is on, press the right connection button, the device will connect with last Mobile Phone/Device

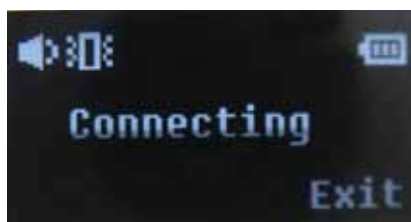

Enter the pass code “0000” to pair and connect the headset to your phone. In some phones you may need to make the connection separately after pairing. See the user guide of your phone for details. You only need to pair the headset with your phone once.

When connected with XBS-08 and show as below:




Mobile Phone/Device name (eg: W302c) which is connected with XBS-08,

(5) **Menu display:** Press the menu, the display will show as follows:




Now you can press + or – to turn the menu

(6) **Contacts function:** Select the contacts list in the menu, and then confirm, the screen will show as follows:

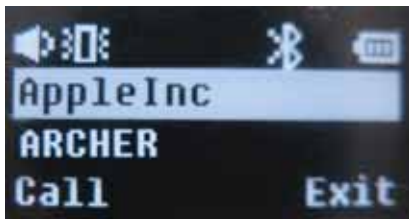


Contact 1 (Ads), and contact 2 (Akd) is the contents which already download from your Mobile/Device, you can press + or – to select the name, you can enter the initial letter of contacts to choose that you want;

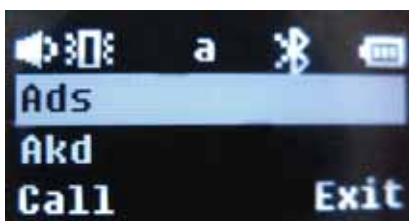

Choose the contacts, press the “call” then you will call the choosing contact


(7) **Synchronize Phonebook contacts:** Sync the contacts, choose Sync in the menu, then press OK, and press Sync to confirm, then XBS-08 will copy the contacts from Mobile/Device to XBS-08, which will take several minutes.

(8) **Calling history:** Select Call log in the menu, then press OK, the screen will show as follows:

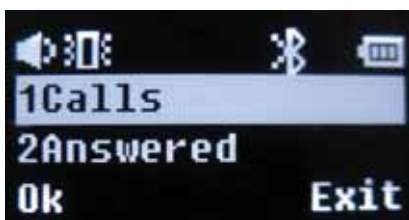

You can check call made, call answered & calls missed history, you also can dial from this history

(9) **Clear the Phonebook contacts list:** Press Menu and select Delete then press OK, which will take several minutes.

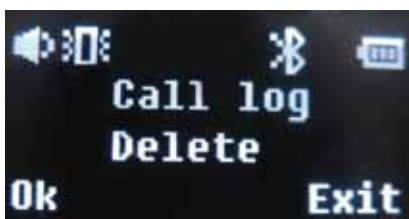


(10) **Change Device name:** You can re-name the XBS-08 device name as you want from menu;




Enter new name then press OK to confirm.

(11) **Pass code setting:** In the Menu, select New pass code then press OK;

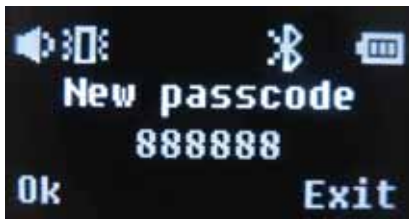


Enter your new pass code and then press OK to confirm.

(12) **Ring On/Off setting:** In the Menu, select Rings then press OK;

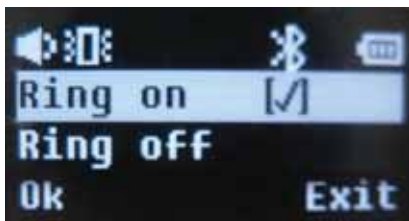

Select Ring on / off then press OK to confirm.

(13) **Vibration On/Off setting:** In the Menu, select Vibration then press OK;

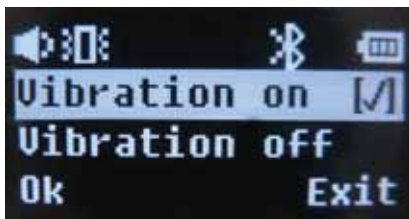


Select vibration on / off then press OK to confirm.

(14) **Backlight setting:** In the Menu, select Backlight then press OK;



Select off time then press OK to confirm.

(15) **Keyboard light On/Off setting:** In the Menu, select Key light then press OK;

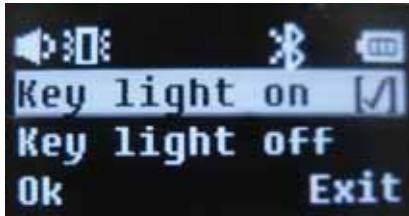


Select Key light on / off then press OK to confirm.

(16) **Key lock setting:** In the Menu, select Key lock then press OK;



Select Key lock time then press OK to confirm.

(17) **Make call:** Enter telephone numbers by keyboard and then press call to make the calls;

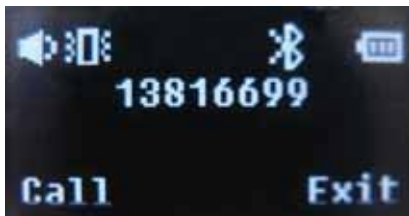

(18) **Answer Call:** Press Answer to pickup coming call.

(19) **End the call:** Press Hang up to end the call

(20) **Music Play:** Press Music key then show as below;



Press 1 key to play previous song;

Press 2 key for playing or pause;

Press 3 key for next song;

Press + / - to control volume.

(21) **Key lock release:** After the XBS-08 keyboard is locked, you can press the unlock key then press * button to release lock.

(22) **Low power alarm:** When the battery power is very low, XBS-08 have a ring reminder, and battery sign will be blank, and blinking

C. Charging the headset

This device has an internal, rechargeable battery which must be fully charged before used for the first time. It takes you about 3 hours to charge the battery full for the first time. During charging, the battery indicator shows charging signal. When the battery is fully charged, the Battery indicator shows Full. For the later on charging, it takes about 90 minutes.

You can charge XBS-08 Bluetooth headset either by using the USB charging cable, AC travel charger (Optional) or the car charger (Optional).

- USB charging cable


Plug the charger lead of USB charging cable into the charging port of XBS-08 Bluetooth headset. And then plug the other end of the USB charging cable into the computer's USB port. When charging is complete, remove the USB charging cable and remove the charger lead from your headset (Please refer to Fig.1, Fig.2.)

- Car charger

Plug the car charger into the cigarette lighter socket. And then plug the charger lead into the charging port of XBS-08 Bluetooth headset. When charging is complete, remove the car charger and remove the charger lead from your headset (Please refer to Fig.3.)

- Travel charger

Plug the travel charger into 110-240V wall socket. And then plug the charge lead into the charging port on XBS-08 Bluetooth headset for charging. When charging is complete, remove the travel charger and remove the charger lead from your headset (Please refer to Fig.4.)

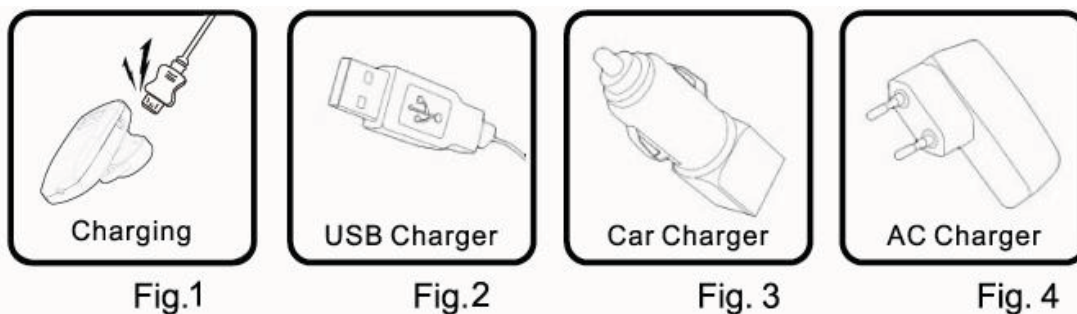

The fully charged battery has power for up to *6 hours of talking time or up to *100 hours of standby time. However, the talk and standby times may vary when used with different mobile phones, products or devices that use a Bluetooth connection, usage settings, usage styles, and environments.

When the battery power is very low, XBS-08 have a ring reminder, and battery sign will be blank, and blinking. This meant that the headset needs to be charged as soon as possible.

*The maximum operating range depends on the usage frequency and environmental factors

D. Battery information

Your device is powered by a rechargeable battery. The full performance of a new battery is achieved only after two or three complete charge and discharge cycles. The battery can be charged and discharged hundreds of times, but it will eventually wear out. Recharge your battery only with compatible chargers designated for this device.

Unplug the charger from the electrical plug and the device when not in use. Do not leave a fully charged battery connected to a charger, since overcharging may shorten its lifetime. If left unused, a fully charged battery will lose its charge over time. Never use any charger that is damaged.

Leaving the device in hot or cold places, such as in a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery. Always try to keep the battery between 15°C and 25°C (59°F and 77°F). A device with a hot or cold battery may not work temporarily, even when the battery is fully charged. Battery performance is

particularly limited in temperatures well below freezing.

Do not dispose of batteries in a fire as they may explode. Batteries may also explode if damaged. Dispose of batteries according to local regulations. Please recycle when possible. Do not dispose as household waste.

E. Care and Maintenance

XBS-08 is a product of superior design and craftsmanship and should be treated with care. The suggestions below will help you protect your warranty coverage.

- Keep all accessories and enhancements out of the reach of children.
- Keep the device dry. Precipitation, humidity, and all types of liquids or moisture can contain minerals that will corrode electronic circuits. If your device does get wet, allow it to dry completely.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
- Do not store the device in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the device in cold areas. When the device returns to its normal temperature, moisture can form inside the device and damage electronic circuit boards.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device.
- Do not paint the device. Paint can clog the moving parts and prevent proper operation.

All of the above suggestions apply equally to your device, battery, charger, or any enhancement. If any device is not working properly, take it to the nearest authorized service facility.

For Chinese User Manual, please visit www.xerohk.com