

MINI668 Digital security manual

Preface

Thank you for purchasing MINI668 high-definition digital security recorders. This product is fine, perfect, unique user-friendly design is convenient and practical. The user manual details how to use and install the product, and provide you with detailed information, including the use, operation, installation considerations and technical specifications. Please read carefully before use and fully understand this manual, please keep this manual, we hope that this product can meet your needs and long service to you!

Product Overview


This product is a market demand for high-end launch of digital video security products, the product has the industry's leading digital video / voice control, motion detection trigger video recording, web camera, high-speed USB data transfer, USB charging and other functions, And a number of inventions and patents.

Indicator

Camera

Indicator

Camera

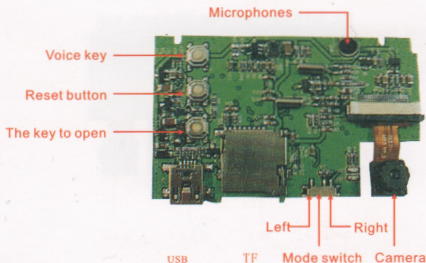

Steps

1 Insert the TF card.

2. Turn the power off, press the key for 2 seconds to open the boot, the blue indicator light for long.

3 manual recording mode in standby mode, press the power button, the blue indicator light flashes three times exterminate start recording. Press power button again, the blue lights flash or two long light into standby mode. Press power button to shutdown.

4. Motion detection recording mode In the boot state. Slide the mode switch on the right, to go out into the yellow light blinks twice a motion detection recording standby mode, if you capture moving objects, the yellow light blinks three times and saved automatically into the video recording, if not the object moves, the system automatically pending motion detection mode, to detect 5. Voice recording mode In standby mode, power mode switch on the left, press the voice button, yellow, blue LED lights flash twice to the same time while the two lights go out, that is, into the voice standby mode. When the detected sound, yellow, blue lights flash three times to the same time while off automatically and save the video recording.

6. Off in any state, press the power button to shutdown, before shutdown will be saved as image files.

If the machine is in unexpected situations, according to the reset button to reset the restart.

8. Charge

A. MINI 668 or computer by connecting the charger to charge, charge condition indication: long bright blue light flashing yellow light that is being charged, after the blue light yellow light at the same time full of light.

PC camera function

MINI668 can be used as a webcam, using the included CD before you install the driver software, use: in the boot state, when the blue light, the access to the computer, this time there will be a standard PC video equipment. Note: Be sure to access the computer in the boot state, or it may enter the U disk mode or charge mode.

Note:

Power supply during use, the surface may be warming, is a normal phenomenon, for portable power, please Remove the power from the outlet.

Note: Images may be slightly different in kind, if the packaging is subject to change without notice.

Parameters

Photo Resolution	200 million as table
Video Resolution	HD 1280X720
Frames	30fps
Perspective	72
Minimum illumination	1LUX
Battery capacity	1000MA
Continuous recording time	400 minutes
Power	The following 0.5W
Storage temperature	-10 --- 70
Operating Temperature	-10 --- 60
Operating Humidity	15-85% RH
Memory Card Type	Micro SD card (TF card)
Memory card capacity	Maximum support for 32GB
Player	Media player / KM player, etc.
USB interface	USB1.1
Operating System	2000/XP/Vista 32
Size	88MM * 88MM * 10.5MM

Note Specifications may be due to upgrades, updates and other reasons, make changes, to prevail in kind. Note: This product warranty for one year (non-human damage)