

Operating Instructions

COM-CENTER START

- Attach AC power cord to each Com-Center, then plug into the nearest wall outlet.
- If wall outlet is not available insert charged battery.
- **Position Pressbox Com-Centers so that the radio signals have a clear "line-of-sight" to the sideline headsets.**
- Plug interconnect cable into phone jacks located on the back of each Com-Center, then place 4 to 5 feet apart.



- Turn Com-Centers "ON"
(switch LOCATED on back of units).
- **At start-up, system is Offense / Defense.**
- **Press either CONFERENCE button to switch in-and-out of staff conference.**

Note: If rechargeable battery and AC power cord are used simultaneously, the battery will receive a trickle charge while system is in use.

WIRELESS HEADSET START

- Insert battery into headset.
- Headset will automatically turn ON.



Note: Slide battery into compartment bottom first, then press top to snap into place. Push latch up to eject.

Blue LED Indications:

- Blue LED flashes as headset searches for signal.
- LED turns SOLID BLUE automatically when headset senses the signal from the Com-Center.
- Solid blue LED means headset is communicating.



Note: When the wireless headset LED is flashing, it means the headset is searching for the signal. When the Com-Center is ON the headset LED will automatically change to solid blue (indicating communication).


ALL WIRELESS

HEADSET CONTROLS

Power Button

The power button is used to simply turn the headset on and off.

- OFF by pressing & holding until LED goes out.
- ON by quick clicking, LED Illuminates.

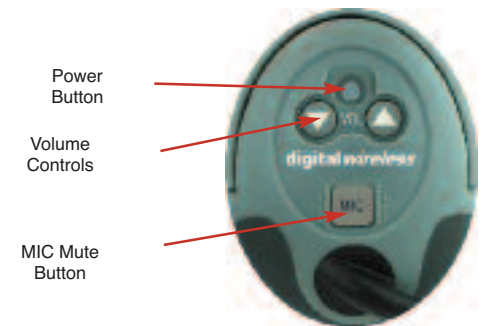

Volume

- Volume control buttons adjust to any of five settings.

MIC Mute - grey button

- Click MIC button to mute microphone, audible tone confirms change.

Channel Switch - red button

- Included with switching headsets.
Change channels by quick-clicking channel button. Do not hold down.



- Repetitive beep indicates headset battery low.

BATTERY CHARGING

- System includes 2 Com-Center rechargeable batteries.
- Plug charger AC adapter into charging base and into wall outlet.

IMPORTANT: There are two AC adapters supplied with this system. The Com-Center adapter will fit ONLY the Com-Center.

The Charger adapter will fit ONLY the Charger.

- Batteries should snap into charging slot securely.
- Charge time 2 - 4 hours.

LED Indicators:

- GREEN: Fully charged
- RED: Charging
- RED Flashing: Battery Faulty
- NO LIGHT: Battery improperly inserted



BATTERY FACTS

- COMSTAR high capacity Lithium batteries provide up to 10 hours of operation.
- Lithium batteries do not develop a memory.
Do not drain batteries after use.

IMPORTANT TIPS

Microphone Placement

- COMSTAR headsets include a special noise cancelling microphone. For optimum performance place directly in front of, and approximately 1 - 2" from the user's mouth.



Com-Center Placement

- Line of sight: for optimum range, position the Com-Center so that the radio signals have a clear path to the wireless headsets.

Rain Game / Storage

- Place the Com-Center in a protected dry location during use.
- Before storing, wipe down all equipment and leave out in a well ventilated room to fully dry.
- Do not store in individual drawstring bags or carrying case while wet.



Duplex Wireless System

CAUTION

Compartment on bottom of Com-Center houses switches for factory programming. Call Porta Phone for more information: 1-800-233-1113.



145 Dean Knauss Drive
Narragansett, RI 02882
Tel: 1-800-399-5994
In RI: 401-782-4966
Fax: 401-789-7300
www.eartec.com

ALL WIRELESS