



Q22  
User Manual

# ***User manual***

---

## INTRODUCTION

Thank you for purchasing this Micromax mobile phone. To obtain the best performance of your phone, please read this user manual carefully.

# **User manual**

---

## Table of Contents


|   |   |           |
|---|---|-----------|
| 1 | Safety.....                                       | <b>4</b>  |
|   | 1.1 Safety Precautions.....                       | 4         |
| 2 | Introduction.....                                 | <b>6</b>  |
|   | 2.1 Phone and Accessories.....                    | 6         |
|   | 2.2 Your Phone.....                               | 6         |
|   | 2.3 Description of Icons.....                     | 6         |
|   | 2.4 About SIM Card and the Battery.....           | 7         |
|   | 2.5 To switch ON and OFF.....                     | 7         |
|   | 2.6 USB Cable Functions.....                      | 8         |
| 3 | Phonebook.....                                    | <b>8</b>  |
|   | 3.1 To Add a Contact.....                         | 8         |
|   | 3.2 To View a Contact.....                        | 8         |
|   | 3.3 Send a Message to a contact.....              | 8         |
|   | 3.4 To Call a contact.....                        | 8         |
|   | 3.5 To Edit a Contact.....                        | 8         |
|   | 3.6 To Delete a Contact.....                      | 8         |
|   | 3.7 To Copy a contact.....                        | 8         |
|   | 3.8 To Move a contact.....                        | 9         |
|   | 3.9 To Send a contact.....                        | 9         |
|   | 3.10 Add to Blacklist.....                        | 9         |
|   | 3.11 Add to whitelist.....                        | 9         |
|   | 3.12 Caller groups.....                           | 9         |
|   | 3.13 Phonebook Settings.....                      | 9         |
| 4 | Calling.....                                      | <b>9</b>  |
|   | 4.1 Call divert.....                              | 9         |
|   | 4.2 Call waiting.....                             | 10        |
|   | 4.3 Call Barring.....                             | 10        |
|   | 4.4 Conference Call.....                          | 10        |
| 5 | Call Logs.....                                    | <b>11</b> |
|   | 5.1 Missed calls/dialed calls/received calls..... | 11        |
|   | 5.2 Delete call logs.....                         | 11        |
|   | 5.3 SIM1-2 call timers.....                       | 11        |
|   | 5.4 SIM1-2 call cost.....                         | 11        |
| 6 | Messages.....                                     | <b>11</b> |
|   | 6.1 Write SMS.....                                | 11        |
|   | 6.2 Inbox.....                                    | 11        |
|   | 6.3 Drafts.....                                   | 12        |
|   | 6.4 Outbox.....                                   | 12        |
|   | 6.5 Sent Messages.....                            | 13        |
|   | 6.6 Delete Messages.....                          | 13        |
|   | 6.7 MMS.....                                      | 13        |
|   | 6.8 Message settings.....                         | 13        |

# User manual

|      |  |           |
|------|--|-----------|
| 6.9  | Broadcast Message.....                             | 13        |
| 7    | Settings .....                                     | <b>14</b> |
| 7.1  | Customized Phone & Call Settings .....             | 14        |
| 7.2  | Profile Setup .....                                | 14        |
| 7.3  | Security Settings.....                             | 15        |
| 8    | Entertainment &Multimedia.....                     | <b>16</b> |
| 8.1  | Camera .....                                       | 16        |
| 8.2  | Audio Player.....                                  | 16        |
| 8.3  | FM Radio.....                                      | 16        |
| 8.4  | Image Viewer .....                                 | 17        |
| 8.5  | Video Recorder .....                               | 17        |
| 8.6  | Video Player.....                                  | 17        |
| 9    | Bluetooth .....                                    | <b>18</b> |
| 9.1  | To Activate/Deactivate Bluetooth Connectivity..... | 18        |
| 9.2  | Visibility .....                                   | 18        |
| 9.3  | To Search/Inquire Audio Device.....                | 18        |
| 9.4  | To Search My (new) device.....                     | 18        |
| 9.5  | My Name .....                                      | 18        |
| 9.6  | Advanced .....                                     | 18        |
| 10   | Organizer & Applications .....                     | <b>19</b> |
| 11   | File Manager .....                                 | <b>19</b> |
| 12   | WAP Services .....                                 | <b>19</b> |
| 12.1 | WAP Browser .....                                  | 19        |
| 12.2 | WAP Setup .....                                    | 20        |
| 13   | STK .....  | <b>20</b> |
| 13.1 | STK Services .....                                 | 20        |
| 14   | Maintenance.....                                   | <b>21</b> |
| 15   | Taking Care of your Device .....                   | <b>21</b> |
| 16   | After Services .....                               | <b>21</b> |

## 1 Safety

### 1.1 Safety Precautions

 Please read through the following briefings carefully, and act in accordance with these rules, so as to prevent causing any danger or violating any law.












#### Safe driving

- 1) Do not use the phone while driving. When you have to use the phone, please use the personal hands-free kit.
- 2) Please put the phone safely in the phone stand. Do not put it onto any passenger seat or any place from which it may fall down in case of vehicular collision or

## ***User manual***

---

emergency braking.


-  Turn off during a flight: Flight is influenced by interference caused by the phone. It is illegal to use a phone on the airplane. Please turn off your phone during a flight.
-  Turn off the phone when within an area where blasting takes place: Be sure to strictly observe the related laws by turning off the phone when you are within, or in the vicinity of, an area where blasting takes place.
-  Turn off the phone when any dangerous goods are in vicinity: Please turn off your phone when you are close to a gas station or in the vicinity of any place where fuel and chemical preparations, or any other dangerous goods are stored.
-  In hospital: Please obey the related rules or bylaws of the hospital when using your phone in a hospital. Be sure to turn off your phone when near any medical equipment. Your use of any wireless transmission equipment, inclusive of the phone, will interfere with any medical equipment that is not protected fully, and other electronic equipment items, too. Should you have any question in this regard, please consult a related physician or medical equipment supplier.
-  Interference: Each and every phone's performance may be affected due to radio interference.
-  Professional service: The phone must be installed or repaired by no other personnel than professionals. You are likely to suffer a huge risk when you install or repair this phone by yourself, which also goes against the warranty rules.
-  Fittings and battery: You shall use the fittings and battery acknowledged by the phone manufacturer only. Using unauthorized accessories may tamper the warranty of the device.
-  Proper use: Please use the phone in the normal way. Do not touch the antenna unnecessarily after the phone is turned on.
-  Emergency call: You may enter a telephone number (112, etc.) to ask for emergency help after making sure that the phone has been turned on and is in the service status. Press the Send Key to call out.

**Disclaimer:** Micromax will not bear any responsibility for any incompliance with the above mentioned guidelines or improper usage of the mobile phone. Micromax keeps the right to make modifications to any of the content here in this user guide without public announcement in advance. The content of this manual may vary from the actual content displayed in the mobile phone. In such a case, the latter shall govern.

### 2.1 Phone and Accessories

Open the packing box of the phone and check that you have the Phone, Standard Charger, Standard Battery, USB Cable, Earphone, Service Guide and Warranty Card.



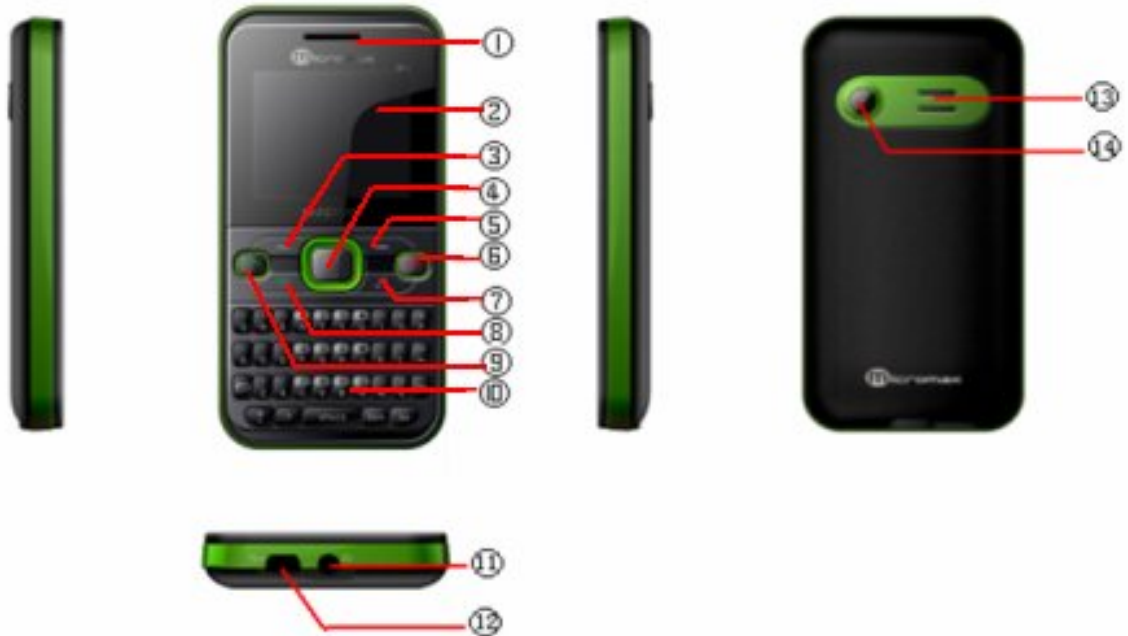










### 2.2 Your Phone



1. Receiver
2. Display screen
3. Left soft key
4. Navigation key
5. Right soft key
6. End key
7. MP3 shortcut key
8. Dial key of SIM card 2
9. Dial key of SIM card 1
10. Alphanumeric keyboard
11. Earphone jack
12. USB socket, external charger 2 in 1jack
13. Loudspeaker
14. Camera

## 2.3 Description of Icons

The table below lists the icons that may appear on the status bar according to the current priority of the phone.

| Icon  | Description               |
|---|---------------------------|
|  | Battery indicator         |
|  | Signal strength indicator |
|  | SMS                       |
|  | Multimedia message        |
|  | GPRS connected            |
|  | Earphone in               |
|  | Missed call               |
|  | Bluetooth                 |
|  | Alarm bell (ON)           |
|  | Vibration and ring        |
|  | Ring after vibration      |
|  | Vibration                 |
|  | Missed call               |

## 2.4 About SIM Card and the Battery

Please store the cards out of childrens reach.

The card and the contacts are vulnerable to damage due to scratching or bending. Therefore, be careful when using, inserting or removing the cards.

Be sure to switch off the phone before you insert or remove the battery or the card, otherwise, the phone may get damaged.

Insert the plug of the charger into the interface of the phone, and insert the charger into the power socket carefully.

Tips:

Please charge the battery before you use the newly purchased phone. We suggest you charge the battery for 4 hours continuously for the first time.

Charging when the phone is in the ON mode will not influence the normal dialing and answering, but this needs to consume power, thus the time of charging will increase.

We suggest you recharge the battery when the power is used up so as to prolong the life of the battery.

## 2.5 To switch ON and OFF

To switch ON: Long press the End key when the phone is in the OFF mode.

If the phone lock has been activated, you need to enter the 4-digit password to unlock. (The preset unlock code is 0000.)

If the SIM card has been inserted in the phone, and the related PIN code protection is activated, you need to enter the 4-8 digit password to unlock.

Warning: If you enter three wrong PIN codes in a row, the SIM card will be locked and you need to enter the PUK code to unlock. Both the PIN code and PUK code are provided by the

network operator.

To switch OFF: In the standby mode, long press End key.

### **2.6 USB Cable Functions**

On connecting the USB cable you can view the:

Webcam: Allows you to use your phone as a webcam

Mass storage

COM port

## **3 Phonebook**

You can store names and phone numbers in the memory of the phone or SIM card.

Menu > Phonebook

### **3.1 To Add a Contact**

In idle, enter phone numbers.

Options > Save > Select the location for saving

Or: Menu > Phonebook > Add new contact > Select the location for saving

### **3.2 To View a Contact**

Menu>Phonebook>Options>View

In the contact list of the Phonebook, select the required name card:

### **3.3 Send a Message to a contact**

Menu>Phonebook>Options>Send message

Allows you to send a message to the contact

### **3.4 To Call a contact**

Menu>Phonebook>Options>Call

### **3.5 To Edit a Contact**

Menu>Phonebook>Options>Edit

In the contact list of the phonebook, select the name card to be modified:

### **3.6 To Delete a Contact**

Menu > Phonebook > Options> Delete contact

Allows you to delete the contact.

### **3.7 To Copy a contact**

Menu>Phonebook>Options>Copy

You can copy all entries stored in the SIM card to the phone memory and vice-versa



### **3.8 To Move a contact**

Menu>Phonebook>Options>Move

Allows you to move a contact from the SIM to the phone memory and vice-versa.

### **3.9 To Send a contact**

Menu>Phonebook>Options>Send a contact

Allows you to send the contact via text message, mms, email and Bluetooth.

### **3.10 Add to Blacklist**

Menu>Phonebook>Options>Add to blacklist

Allows you the contact number in Blacklist.

### **3.11 Add to whitelist**

Menu>Phonebook>Options>Add to whitelist

Allows you the contact number in the white list.

### **3.12 Caller groups**

Menu > Phonebook > Options>Caller groups

Allows you to add a contact in caller groups under- friends, family, VIP, business, others.

### **3.13 Phonebook Settings**

Menu >Phonebook> Phonebook Settings

Preferred storage- View the preferred storage in SIM1, phone or both.

Speed dial: Specify speed dial numbers to frequently used phone numbers.

My number: Edit or send your number

Extra numbers: View SIM 1-2 owner number/service dialing number/SOS number

Memory status: View used SIM/Phone memory

Copy contacts: Copy contacts from SIM to phone and vice-versa

Move contacts: Contacts from SIM to phone and vice-versa

Delete all contacts: Delete all the contacts from the phonebook.

## **4 Calling**

### **4.1 Call divert**

Menu > Settings > Call settings > SIM1-2 call settings>Call divert

With the Call Divert function (needs network support), you may divert incoming calls to another mobile phone or a direct line telephone, but not to any extensions of a fixed telephone.

### **4.2 Call waiting**

Menu > Settings > Call settings > SIM1-2 call settings>Call Waiting

This function allows you to put the current call on hold and then answer a second one.

If, during a call, a new call comes in, you will hear a special alert sound and the screen will display the number of the new incoming call, which indicates that a third-party call is coming in.

### **4.3 Call Barring**

Menu > Settings > Call settings > SIM1-2 call settings>Call Barring

The function is a GSM network service and can restrict outgoing and incoming calls selectively. If you need to change the settings of Restrict Calls, please contact your network operator to obtain the password for opening this service.

### **4.4 Conference Call**

The phone supports Three-party Calling. A Three-party Calling, also called a multiparty call or a conference call, is a service based on call waiting.

The function needs the support from the local network. In some districts, you can use the function only after you apply with the local network operator. To find out more, please get in touch with your network operator.

### 5.1 Missed calls/dialed calls/received calls

Menu>Call Logs>SIM1-2 call logs

View: View the desired entry

Call: Call the desired entry

Send Message: To write SMS to send to the number.

Save to Phonebook: To save the number to the Phonebook

Add to Blacklist: Add a number you wish to avoid/ignore under blacklist

Add to whitelist: Add a number to the whitelist.

Edit before call: To edit the number to dial or save to the phonebook.

Delete: To delete the entry.

### 5.2 Delete call logs

Menu>Call Logs>SIM1-2 call history>Delete SIM1-2 call logs

You may select to delete Missed, Dialed, Received or All calls.

### 5.3 SIM1-2 call timers

Menu>Call Logs>SIM1-2 call history>SIM 1-2 call timers

View SIM 1-2 call timers

### 5.4 SIM1-2 call cost

Menu>Call Logs>SIM1-2 call history>SIM 1-2 call cost

View SIM 1-2 call cost.

### 6.1 Write SMS

Menu > Messages > Write SMS/MMS

Write the content of the SMS

Send to: Add contact number

Input Method: select Multitap abc/Numeric/Insert Symbol

Advanced: Insert contact number/insert contact name / Insert bookmark.

Save: Save the mms/sms

Details: View the details of the MMS/SMS

### 6.2 Inbox

Menu > Messages > Inbox

To read a message, move to the entry and press OK

When reading a SMS, you can select Options >

View: Allows you to view the SMS received.

Reply: Reply to the message received.

Call sender: Call on the number from which the SMS was received.

Forward: Forward the entry to others.

Delete: Delete the message.

Delete all: Delete all the messages from the Inbox.

Advanced

- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM: Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all: Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

### **6.3 Drafts**

Menu > Messages > Drafts

View: Allows you to view the SMS received.

Send: Send the message saved in drafts

Edit: Allows you to edit the SMS received.

Delete: Delete the message.

Delete all: Delete all the messages from the Inbox.

Advanced

- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM: Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all: Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

### **6.4 Outbox**

Menu > Messages > Outbox

SMS that have been sent and saved are stored in Outbox.

To read a message, move to the entry and press OK

When reading an SMS, you can select Options >

View: View the message saved in outbox

Resend: Select how to send.

Edit: Edit the message.

Delete: Delete the message.

Delete all: Delete all the messages from the Inbox.

Advanced

- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM: Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all: Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

### **6.5 Sent Messages**

Menu > Messages > Sent messages

View: View sent messages.

Forward: Forward the sent messages

Delete: Delete a message in the sent items folder

Delete All: Delete all messages in the sent items folder

Advanced

- Copy to phone/SIM: Copy the SMS stored in SIM/phone to the phone/SIM.
- Move to phone/SIM: Move the SMS stored in SIM/phone to the phone/SIM.
- Copy all: Copy all the messages stored in SIM to the phone memory, or copy all the messages stored in the phone memory to SIM.
- Move all: Move all the messages stored in SIM to the phone memory, or move all the messages stored in the phone memory to SIM.

### **6.6 Delete Messages**

Menu>Messages>Delete messages

Delete messages from the following folders:

Inbox, Drafts, Outbox, Sent messages, Archive, All messages

### **6.7 MMS**

Menu>Messages>MMS

Allows you to compose and send multimedia messages to other contacts.

### **6.8 Message settings**

Menu>Messages>Messages settings

#### SMS Settings

Menu>Messages>Message settings>SMS settings

- Profile settings-
- Voicemail server
- Common settings- Set to receive Delivery reports, Reply path, Save Sent message.
- Memory status
- Preferred storage

#### MMS Settings

Menu>Messages>Message settings>MMS settings

- Profiles- Select a profile from the available network profiles.
- Common setting

### **6.9 Broadcast Message**

Menu > Messages > Broadcast Message

The phone supports Broadcast Message. It is supported by GSM network. Broadcast messages are single-way messages sent to the users of the network operators by the

## User manual

message service center. For the contents and channel setup of broadcast messages, consult your network operator.

## 7 Settings

### 7.1 Customized Phone & Call Settings

| Functions                          | Description  |
|------------------------------------|--|
| Set time and date                  | Menu > Settings > Phone settings > Time and date   |
| Schedule power on/off              | Menu > Settings > Phone settings > Schedule power on/off<br>To disable and enable status; to activate/deactivate, switch on/off, and time in turn.   |
| Select language                    | Menu > Settings > Phone settings > Language  |
| Preferred Input                    | Menu > Settings > Phone settings > Preferred input   |
| Set Display setup                  | Menu > Settings > Phone settings > Display Setup > Wallpaper/Screen saver/Show date and time/LCD backlight/Show owner number/Standby theme.  |
| Specify the Shortcut key           | Menu > Settings > Phone settings > Shortcut key  |
| Set Call waiting                   | Menu > Settings > Call settings > SIM1-2 call settings>Call waiting  |
| Set call Divert                    | Menu > Settings > Call settings > SIM1-2 call settings> Call Divert<br>Tip: You can select Cancel all divert to cancel all the divert settings.  |
| Set Call Barring                   | Menu > Settings > Call settings > SIM1-2 call settings> Call Barring. Restrict Calls is a GSM network service. Please contact your network operator to obtain the password for opening this service.   |
| Set the Blacklist                  | Menu > Settings > Call settings > Advance settings>Blacklist   |
| Select network                     | Menu > Settings > Network settings > SIM 1-2 network settings<br>New Search: The phone will select a new network automatically.<br>Select Network: The phone will search and display the list of known networks for you to select the desired one, after which, the phone will try to log in the selected network. If the selected network is registered successfully, it will prompt so.<br>Select preferred network: To switch search methods. |
| Set information of GPRS Connection | Menu > Connectivity> Data account>GPRS/GSM Data  |
| Restore factory default            | Menu > Settings > Restore factory settings<br>Tip: You need to enter the phone password when you want to restore factory default. The preset phone password is 0000. Please bear your password in mind. In case you forget it, contact the local dealer or an authorized service center.   |



### 7.2 Profile Setup

| Functions | Description |
|-----------|-------------|
|-----------|-------------|

## **User manual**

|   |   |
|---|---|
| Activate the profile mode                   | Menu > Settings> User profiles > Desired mode>Options > Activate              |
| Activate 'vibration mode' in idle condition | Long press the \$ key on your keypad to activate the vibration mode           |
| Set the ringtone for incoming calls         | Menu > Settings > User profiles > Customize> Tone setup> SIM1-2 Incoming call |
| Set the ringtone for messages               | Menu > Settings > User profiles > Customize> Tone setup> SIM1-2 message tone  |
| Set the ringtone for keypad tone            | Menu > Settings > User profiles > Customize> Tone setup> Keypad tone          |
| Adjust the volume of Ring Tone / Key Tone   | Menu > User profiles >Customize> Volume                                       |
| Set Alert Type of ringing                   | Menu>User profiles> Customize >Alert type                                     |
| Set the ring type                           | Menu > User profiles > Customize> Ring type                                   |
| Set the Extra Tone                          | Menu > User profiles > Customize> Extra tone                                  |
| Set the answer mode                         | Menu > User profiles > Customize> Answer mode                                 |

### 7.3 Security Settings

| Functions        | Description   |
|------------------|---|
| PIN code request | Menu > Settings > Security settings> SIM1-2 security settings>SIM 1-2 lock<br>Warning: If you enter three wrong PIN codes in a row, you need to enter the PUK code to unlock. PIN code and PUK code are provided by the network operator.   |
| Phone lock       | Menu > Settings > Security settings > Phone lock<br>The preset password is 0000   |
| Auto keypad lock | Menu > Settings > Security settings> Auto keypad lock > Select the time for the auto keylock.<br>Note: Long press the  key on your keypad to lock the phone and the 'left side key and  |
| Change password  | Menu > Settings > Security Center> SIM1Security setup > Change password   |

## 8 Entertainment & Multimedia

### 8.1 Camera

Menu > Camera:

When the camera is activated, the phone enters the view finding status.

On the view finding screen, press Ok Key to capture.

Before you begin the video shooting, you can set the following to modify camera settings.

Select Options >

Photos: View the images clicked.

Camera settings: Set EV, Banding, delay timer, shutter sound, contrast and cont. shot,

Image settings: Set the size and quality of photos.

White balance: Set White Balance.

Scene mode: Set scene mode.

Effect settings: Set the special effects of photos, such as Grayscale, Sepia, Sepia Green and Colour Invert.

Storage: Select phone or memory card.

Restore default: Restore default settings.

### 8.2 Audio Player

Menu > Multimedia>Audio player

Please ensure to insert the memory card. Choose from the below options to

- Play-
- Detail
- Add to ringtones
- Refresh list
- Setting

### 8.3 FM Radio

Menu > FM radio

Options > Channel list

View the channel list

OK > Edit

Options > Manual list

Edit/set the frequency manually.

Options > Auto search

Edit the channel list automatically

Play on the background play

Options > Settings



Set the function On or Off.

Listen in by Loud Speaker

Options > Settings

Set the speaker On or Off.

### **8.4 Image Viewer**

Menu > Multimedia> Image viewer

Or on the view finding screen, select Options > Photos

On the Image viewer list screen, select Options>

Check: Press the upper and lower navigation key to scan the photos.

Send: Send the photos to other places through MMS or Bluetooth

Set as: Set the photos as wallpaper/screen saver/power-on animation/ power-on animation/shutdown animation/incoming picture.

Rename: Change the photo's name.

Delete: Delete the currently selected photo.

Sort by: Sort according to name, type, time and size, or you may select "no order" to arrange at random.

Delete all files: Delete all photos stored in the album.

### **8.5 Video Recorder**

Menu > Multimedia> Video recorder

Press the center button to start & pause recording. Before recording, you can set the following as needed. Select Options >

Video Recorder settings: Set the white balance, exposure compensation, night shooting mode, glitter avoidance and related parameters of the video camera.

Video settings: Set video settings as per your requirement

White balance: Set white balance

Video settings: Set the Video Quality, File size limit, Rec time limit, and record audio.

Effect settings: Set the special effects, such as Grayscale, Sepia, and Sepia Green etc.

Restore default: Restore default settings.

### **8.6 Video Player**

Menu > Multimedia > Video player

Or, on the view finding screen, select Options > To player

The phone will automatically read the entries with the format supported by the phone under the folder Videos of the File manager and display a list of entries. If there is no entry, the list is blank.

On the video player list screen, select Options >

Play: Enter the play screen of the highlighted file. Select Ok Key to begin/pause playing; press Navigation key (Up/Down) to adjust the speed, press Navigation key (Left/Right) to adjust the progress.

Send: Send the video by MMS or Bluetooth.

Rename: Rename the highlighted file.  
Delete: Delete the highlighted file.  
Delete all files: Delete all the files from the list.  
Sort by: Sort the files in the list.  
Profile: Choose and activate a desired profile.  
Storage: Select phone or memory card.

## **9 Bluetooth**

Tip:

You can connect wirelessly to other compatible device with Bluetooth technology. Compatible devices may include computers, mobile phones. You can use Bluetooth connectivity to send images, music and sound clips, video clips, and notes.

Since devices with Bluetooth wireless technology communicate using radio waves, your device and the other devices need to be within a range of 10 meters from each other, but the connection may be subject to interference or could face obstruction from stuff such as wall or from other electronic devices. Use the wireless technology of Bluetooth to be able to consume battery quantity of electric charge. If you are restricted by something when using Bluetooth technology, consult your local Micromax support/service station.

### **9.1 To Activate/Deactivate Bluetooth Connectivity**

Menu > Connectivity > Bluetooth > Power ( On/Off )

### **9.2 Visibility**

Menu > Connectivity> Bluetooth > Visibility  
Switch ON/OFF the visibility of your device

### **9.3 To Search/Inquire Audio Device**

Menu > Connectivity> Bluetooth > Inquiry audio device  
Tip: Please activate the Bluetooth first.

### **9.4 To Search My (new) device**

Menu > Connectivity> Bluetooth > My device > Inquiry new device  
Tip: Please activate the Bluetooth first.

### **9.5 My Name**

Menu > Connectivity> Bluetooth > My name  
Choose a display name for your Bluetooth connectivity. The same will be shown to others when you connect via Bluetooth.

### **9.6 Advanced**

Menu > Connectivity> Bluetooth > Advanced  
View and edit functions from the list below:

## ***User manual***

---

Audio Path- Forward to Bluetooth headset or leave the audio in the phone

Storage-Choose to store in the phone or SIM memory

Sharing permission- Choose from Full control or Read only.

My address- View the Bluetooth address

### **10 Organizer & Applications**

| Functions         | Description                     |
|-------------------|---------------------------------|
| View the calendar | Menu > Organizer > Calendar     |
| Alarm             | Menu > Organizer > Alarm > Edit |
| Calculator        | Menu > Application > Calculator |

### **11 File Manager**

When an USB cable is connected, you can use the phone as a USB mass storage.

| Functions    | Description   |
|--------------|---|
| View folders | Menu > File manager> Options > Open   |
| Format       | Menu > File manager > Options > Format<br>Tip: The Format function will delete the data you have created and saved. Please back up important data and keep them properly. |

### **12 WAP Services**

#### **12.1 WAP Browser**

Menu > Connectivity > WAP

You need to make the relevant settings in WAP Setup before you use the WAP browser to surf the web.

When the WAP browser is activated, if a homepage is set in WAP Setup, the phone will link the website indicated by the homepage; otherwise, you may enter a website and the phone will connect to it.

When surfing the web, select Options >

Refresh: To refresh the web page.

Homepage: To link the homepage.

Input URL: input a website address.

Add Bookmark: Add to bookmark.

Set Homepage: set the URL as homepage.

Forward/Backward: To turn to the next /previous page.

Advance: Show URL info, Bookmark, Save item.

Exit: To exit the browser.

### 12.2 WAP Setup

WAP settings are required for surfing the web with WAP. Follow the steps below to set up a WAP account:

- Connectivity > Data Account > GPRS > Add account > Add account name/ APN/ Username & password > Save.

Then go to:

- Menu >Connectivity > WAP >Settings > Profiles > Add new > Account Name/ Homepage/ Data Account (select the previously created data account) > Select connection type (HTTP/WAP- Inside HTTP & WAP enter the correct proxy address & port > Done > Save the account >Go to the created account & activate.

Menu > Connectivity> WAP> Settings>Profile

You can set the following:

Account: To select from the GPRS connection list.

Connection type: To set WAP or HTTP connection mode.

Home page: To set the address of the homepage. The phone has a default and you can modify it.

### 13.1 STK Services

If your SIM card supports STK, you may use the corresponding value-added services.

Menu > Connectivity

### **14 Maintenance**

Use a dry soft cloth to wipe general dirt.

Do not use a hard cloth, benzene or thinner to wipe the phone, otherwise, the surface of the phone will be scratched or could even result in the fading of colour.

### **15 Taking Care of your Device**

- Your device is a product of superior design and craftsmanship and should be handled with care: The following suggestions will help you protect your phone:
- Always keep the small parts of the phone away from children.
- Keep the device dry. Precipitation, humidity, and all types of liquids or moisture can contain minerals that will rust electronic circuits. If your device does get wet, remove the battery, and allow the device to dry completely before replacing it.
- Do not use or store the device in dusty, dirty areas. Its moving parts and electronic components can be damaged.
- Do not store the device in high or cold temperature. High temperatures can shorten the life of electronic devices and damage batteries.
- Do not attempt to open the device other than as instructed in this guide.
- Do not drop, knock, or shake the device. Rough handling can break internal circuit boards and fine mechanics.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the device. Only use a soft, clean, dry cloth to clean the surface of the device.
- Do not paint the device. Paint can clog the moving parts and prevent proper operation.
- Use chargers indoors

### **16 After Services**

For details, see the After Service Guide supplied with the phone.