

E-LINK TECHNOLOGY CO., LTD.

Add: E Block, Shifeng Industrial Park, Longhua, Shenzhen-518109, China
 Tel: +86-755-33232871,33232872, Fax: +86-755-33230758, E-mail: sales@e-linktech.com
www.e-linktech.com, www.ifanspace.com

Battery Case for iPhone 4/4S

(Model: EL-IP4-06)



Specifications & User Manual

Product specifications:

ITEMS	SPECIFICATION	REMARK
Model	EL-IP4-06	
Input Voltage	5.0V/1.0A(Max)	Charge
Output Voltage	5.0±0.25V/1A	
Nominal Capacity	1450mAh	
Adaptable for	iPhone 4/4S	
Cell Type	Li-polymer / 1700mAh	
Standby Time	Up to 300h	
Talk Time	Up to 7h	
Internet Surfing Time	Up to 6h	
Audio Play Time	Up to 40h	
Video Play Time	Up to 10h	
Dimensions	15mm (T) x 62mm (W) x 127mm (L)	
Color	White/Black Back + Changeable Frames of optional color	
Weight	55g	
Communicate	Synching with iTunes	

E-Link Technology Co., Limited




Add: E-Block, Shifeng Industrial Park, Longhua, Shenzhen-518109, China

Tel: +86-755-33232871 / 33232872, Fax: +86-755-33230758, E-mail: sales@e-linktech.com


Features:

- Matching iPhone 4/4S style design. Thin and Cool.
- Capacity: 1700mAh(Li-Po) built-in battery, which nearly doubles the battery life time for your iPhone 4/4S;
- Cut outs for all the iPhone 4/4S features, use your iphone without removing it from the case.
- Strong & durable engineering material protect your iphone 4/4S from bumps & scratching..
- Protective IC circuit efficiently avoid short-circuit, over-charged and malfunction even under extreme conditions.
- Changeable Frames of different colors, dress up your iPhone on every single day.

Illustration:

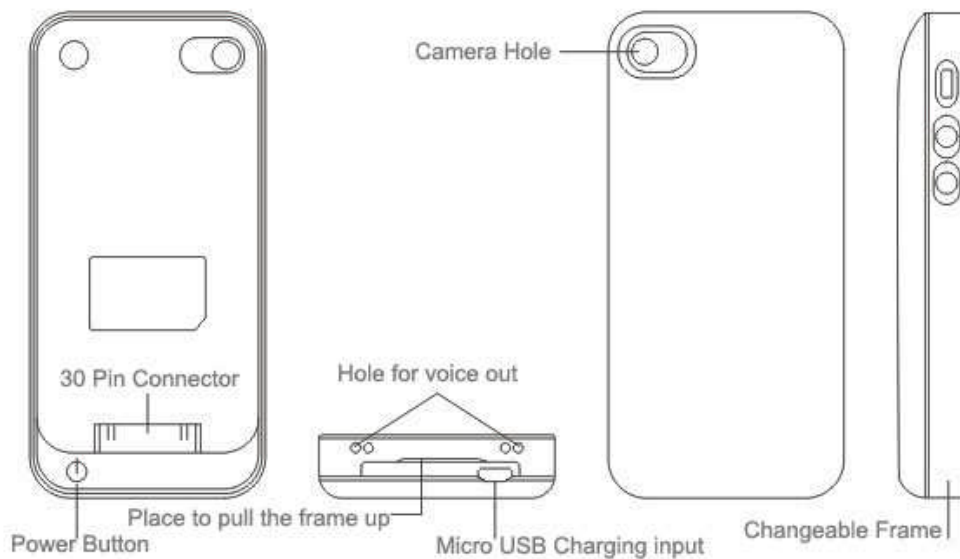

Installation:

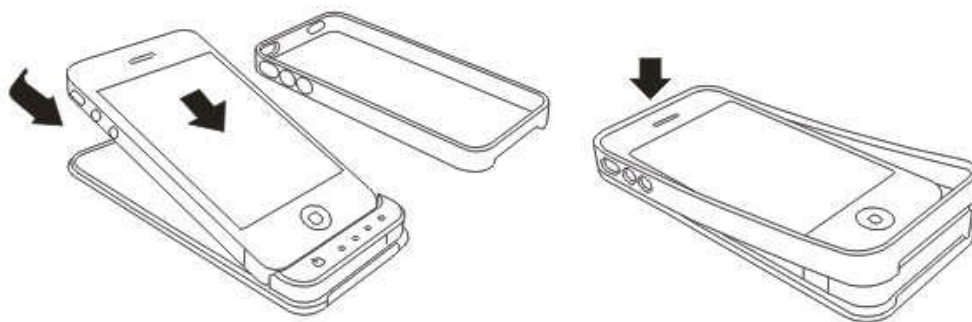

- Installing: Place the iPhone into the back cover of our battery case, then install the frame from top to bottom.
- Uninstalling: Gently pull the bottom frame up by fingernail.

E-Link Technology Co., Limited

Add: E-Block, Shifeng Industrial Park, Longhua, Shenzhen-518109, China

Tel: +86-755-33232871 / 33232872, Fax: +86-755-33230758, E-mail: sales@e-linktech.com



Notes:

- When the iPhone battery is fully drained in your iFans battery case, the iPhone charging icon will revert to its normal usage.
- The battery case includes a USB cable. Use the provided USB cable to charge your battery case.

Charging your Battery Case and iPhone 4/4S:

- Connect your battery case (iPhone already installed) to the USB power cable
- Connect the USB power cable to any USB power source such as computer to start charging.
- Charge until the LED indicators read full.

Charging your iPhone 4/4S with Battery Case:

- Press the power button (about 3s) to charge your iPhone in condition of no external USB power sources
- Press again the power button (about 3s) to turn off the battery case when iPhone is fully charged, which can significantly save the capacity of built-in battery so as to charge the iPhone next time.

LED indicators:

MODE	CHARGING			
	LED1	LED2	LED3	LED4
Power < 25%	BLINKING	OFF	OFF	OFF
25% ≤ Power < 50%	ON	BLINKING	OFF	OFF
50% ≤ Power < 75%	ON	ON	BLINKING	OFF
75% < Power	ON	ON	ON	BLINKING
FULL	ON	ON	ON	ON
MODE	DISCHARGING			
	LED1	LED2	LED3	LED4
75% ≤ Power ≤ 100%	ON	ON	ON	ON
50% ≤ Power ≤ 75%	ON	ON	ON	OFF
25% ≤ Power ≤ 50%	ON	ON	OFF	OFF
Power ≤ 25%	ON	OFF	OFF	OFF
Empty	OFF	OFF	OFF	OFF

Package Contents:

- iFans Power Pack
- USB power cable
- User Manual

*** 2 Changeable Frames included.**

Warning:

1. To extend storage, please fully charge IFANS power pack before first use.
2. Be cautious of excessive drops, abrasions or other impacts to IFANS power pack. Please stop using immediately if any abnormal phenomenon occurred.
3. Do not expose IFANS power pack to wet or damp conditions, please keep it dry.
4. Do not use near heat emitting appliances.
5. You are suggested to use included USB cable to charge IFANS power pack, others might cause compatibility problem.

E-Link Technology Co., Limited



Add: E-Block, Shifeng Industrial Park, Longhua, Shenzhen-518109, China

Tel: +86-755-33232871 / 33232872, Fax: +86-755-33230758, E-mail: sales@e-linktech.com

6. Do not attempt to replace any spare parts of IFANS power pack.
7. It is normal phenomenon that IFANS power pack gets a little warm when charging due to high output.
8. Never dispose of the IFANS power pack in dustbin, please bring used batteries to your local battery recycling center.
9. Do not connect the IFANS power pack to iPhone 4 if there has been occasions of prolonged non use.

One year limited warranty.