



User Manual

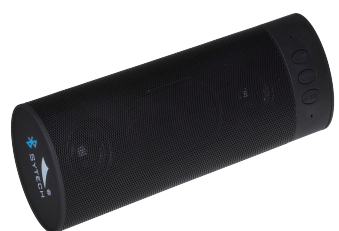


BLUETOOTH SPEAKER
MODEL: SY-X201B

Thank you for purchasing the new Bluetooth Speaker SY-X201B. We are sure this product will satisfy your needs. Welcome to Sytech!

In the box

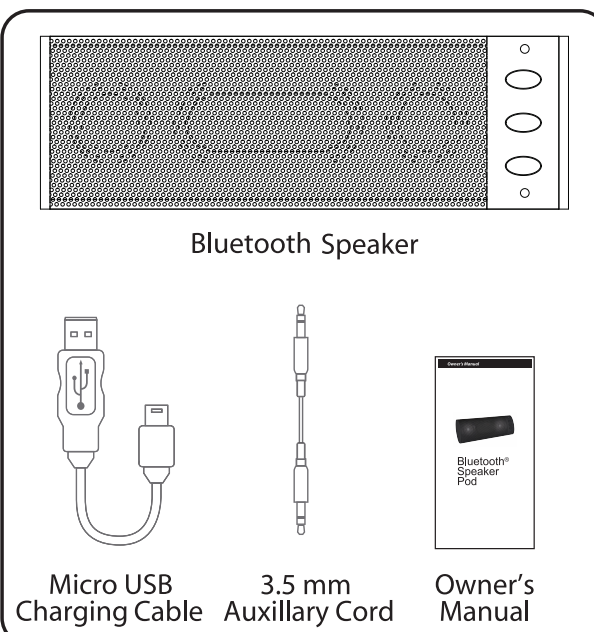

Location of controls

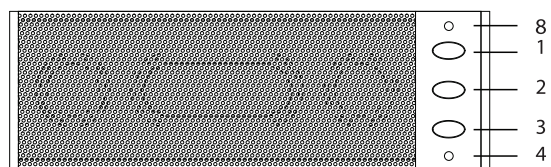


- [**▶▶ VOL+**] button
quickpress = next song & volume up in talking mode
press & hold = volume up
- [**▶|| MODE**] button
quickpress = Play/Pause/Answer Call/End Call
- [**◀◀ VOL-**] button
quickpress = previous song & volume down in talking mode
press & hold = volume down
- LED light
- [**POWER OFF/ON**] switch
- 3.5 mm auxillary cord jack
- DCSV** charging jack
- Microphone

Charging the Bluetooth Speaker

- Connect the small end of the Micro USB charging cord into the **DCSV** port on the side of the speaker.
- Connect the other end of the Micro USB cable to your computer's USB port.
- The **RED LED** indicator light turns on.
- The **RED LED** indicator light shuts off when the speaker is fully charged (approximately 4 hours).


NOTE: When the battery is running low, the **RED** indicator light starts to flash.

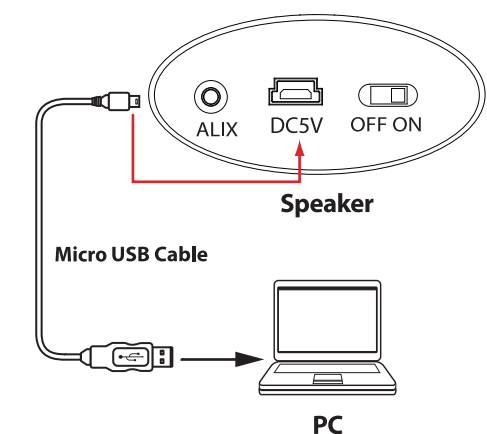


NOTE: Make sure you charge your speaker for **8 hours** before using it for the first time.

Pairing the speaker with a Bluetooth enabled phone


- Make sure the **Bluetooth Speaker** is turned off.
- Keep your **Bluetooth Speaker** and mobile phone within **3** feet of each other during the pairing process.
- Slide the [**POWER OFF/ON**] switch to the **ON** position, the LED light will flash **BLUE** 6 times quickly.
- Quickpress the [**▶|| MODE**] button, the LED will flash **BLUE**. The speaker is now in pairing mode.

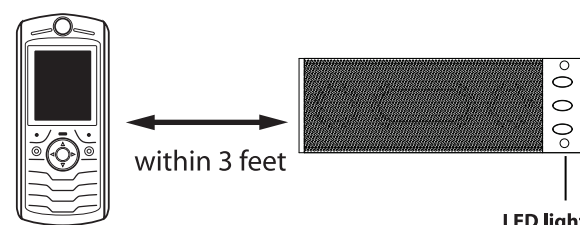


NOTE: To enter the **Pairing Mode**, you must turn **ON** the speaker, then quickpress the [**▶|| MODE**] button after the **BLUE** light flashes 6 times quickly.

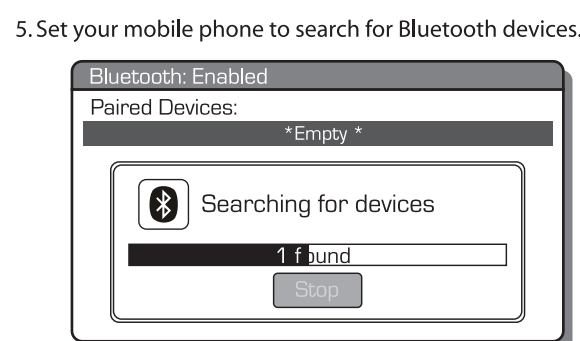

- When the phone finds the headset, confirm by selecting SY-X201B from the list.

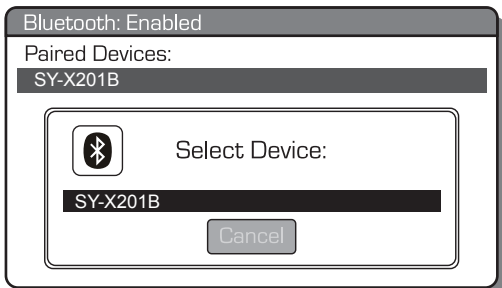


- Enter passcode "0000" when prompted by the phone.

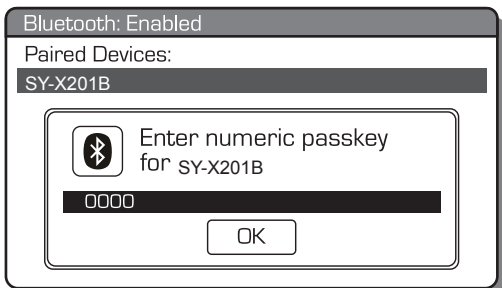


OR depending on which model mobile phone you are trying to connect the speaker to, it may not be necessary to enter a passcode.

- Your mobile phone will confirm that the pairing was completed, and prompt you to accept the connection. Please respond **YES** to connect the speaker to your mobile phone. If the pairing was successful, the speaker's indicator light flashes **BLUE** every few seconds.

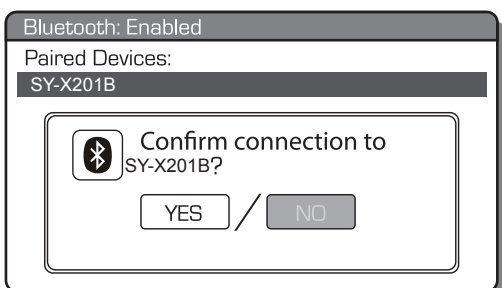

- When attempting to reconnect the speaker to your mobile phone, you may see the message below, and your mobile phone will prompt you to accept the connection request to the SY-X201B speaker, and an option not to ask this again. Please accept the connection, and if you select "Don't ask this again", your phone will automatically accept future connection requests from your **Bluetooth Speaker**.

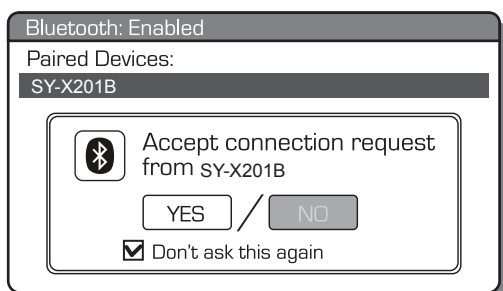

NOTE: The screenshots above are typical of many Bluetooth enabled phones in the market today, and are used to assist in the explanation of the pairing process. Your mobile phone's interface and interaction with the **Bluetooth Speaker** may slightly differ from the illustrations above.

Using your Bluetooth Speaker

Powering ON/OFF

- To turn **ON**, slide the [**POWER ON/OFF**] switch to the **ON** position, the LED flashes **BLUE** 6 times quickly then once every few seconds.

- To turn **OFF**, slide the [**POWER ON/OFF**] switch to the **OFF** position. The LED will turn **RED** and the speaker will power **OFF**.

Answering/Ending a call

- To answer a call, quickpress the [**▶|| MODE**] button.
- To end a call, quickpress the [**▶|| MODE**] button.


Adjusting the volume

Quickpress the [**▶▶ VOL+**] or [**◀◀ VOL-**] button to adjust the volume to the desired level.

NOTE: You may also adjust the volume from your mobile phone's volume control.

To make a call

Dial the number and press the send button on your mobile phone, the call is automatically transferred to the headset.

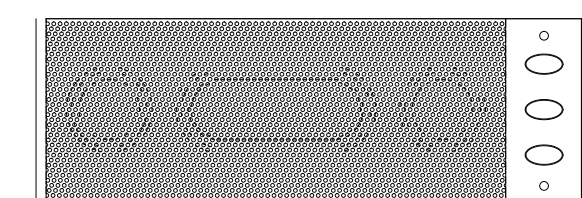

Redialing the last number called (Dependent on your phone supporting this feature)

Quickpress the [**▶|| MODE**] button twice. The last number called will be redialed.

Rejecting calls


To reject an incoming call, long press the [**▶|| MODE**] button for 3 seconds.

Stereo Bluetooth

This speaker allows you to listen to (in full stereo) and control the music on your Bluetooth enabled mobile phone, computer or mp3 player and supports the following Bluetooth profiles:

- A2DP - Advanced Audio Distribution Profile**
- AVRCP - Audio/Video Remote Control Profile**
- HSP - Headset Profile**
- HFP - Handsfree Profile**

To use the speaker to listen/control music, your Bluetooth enabled device must support the A2DP and AVRCP profiles. Please refer to the user guide of your Bluetooth enabled device for more information.



Playing music

To enjoy wireless music on your Bluetooth Speaker, make sure you are connected to a Bluetooth enabled media device. Once connected, you can press **PLAY** on your Bluetooth device or you can press the [**▶|| MODE**] button on the SY-X201B Bluetooth Speaker. Once playback has begun, you can control the music or answer phone calls from the control buttons of the Bluetooth Speaker (Not all mobile phones support the control of music using Bluetooth).

NOTE: Most media enabled smart phones will display "connected to phone audio and media" when connecting to the Bluetooth Speaker. This means you can make phone calls and enjoy your music.

Adjusting the volume

Press and hold the [**▶▶ VOL+**] or [**◀◀ VOL-**] button to adjust the volume to the desired level.


NOTE: You may also adjust the volume from your mobile phone's volume control.

Play/Pause

Press the [**▶|| MODE**] button to pause the music. To resume music playback, press the [**▶|| MODE**] button again.

Skipping or searching songs (Dependent on your phone supporting this feature)

Press the [**◀◀ VOL-**] button to go to the previous song. Press the [**▶▶ VOL+**] button to go to the next song.

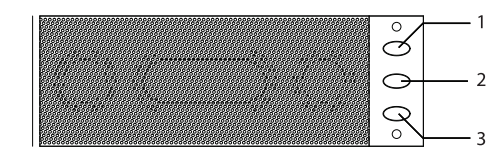

- [**▶▶ VOL+**] button
quickpress = next song
press & hold = volume up
- [**▶|| MODE**] button
quickpress = Play/Pause/Answer Call/End Call
- [**◀◀ VOL-**] button
quickpress = previous song
press & hold = volume down

Using as a wired speaker

The SY-X201B can be used as a wired speaker by using the included 3.5mm Auxiliary Cord.

- Plug one end of the Auxiliary cord into the **AUX** jack on the side of the speaker.
- Plug the other end of the Auxiliary Cord into the headphone jack of any media device which has a 3.5mm headphone jack (This is standard headphone-out jack).

- Use your media device's music controls to control the music. Only volume can be controlled when connecting to a device using the Auxiliary Cord

Note:

In order for Bluetooth devices to communicate with one another properly, they must utilize the same Bluetooth profile. To determine the profiles supported by your device (mobile phone, computer or mp3 player), please refer to the device's user guide.

Certain Bluetooth features including those listed may not be supported by all compatible Bluetooth-enabled devices and/or the functionality of such features may be limited in certain devices.

Troubleshooting tips

- I can pair the Bluetooth Speaker with my Bluetooth device, but I cannot hear any music?

- Make sure your Bluetooth device supports A2DP profile.

- I cannot get the Bluetooth Speaker into Pairing Mode.

- Make sure the **Bluetooth** Speaker is turned off before beginning the pairing process.

- Slide the [**POWER ON/OFF**] switch to the **ON** position, wait for the LED to flash **BLUE** 6 times quickly, then quick press the [**▶|| MODE**] button. The **RED** and **BLUE** lights will flash alternately, this will signal that the headphones are in **Pairing Mode**, and ready to connect to your mobile phone.

- My mobile phone is not able to pair with the Bluetooth Speaker.

- Make sure that you fully charged the speaker before pairing.
- Keep your **Bluetooth** Speaker and mobile phone within **3** feet of each other during the pairing process.
- Check that your phone's Bluetooth feature is turned **ON**.
- Try repeating the pairing process, see "Pairing the speaker with a Bluetooth enabled device."

- The volume level in Hands free mode is too low.

- While using the speaker in Hands free mode, press the **VOL+** or **VOL-** button repeatedly. Do not keep the button pressed, as this method is used to increase the volume level in Music mode.

Product maintenance

Power off this product when not in use.
DO NOT expose this product to water or other liquids.
DO NOT use abrasive cleaning solvents to clean the **Bluetooth Speaker**. If you will not use the **Bluetooth Speaker** for long periods, be sure store it in a dry place, free from extreme temperature, humidity and dust.

Specifications

OVC 2.0 EDR Bluetooth chip Bluetooth version backward compatible with V2.0, V1.2 and V1.1 standards support the A2DP, AVRCP, EDR
Applicable models suitable for all Bluetooth-enabled mobile phone (Note: the various device models compatibility)
Distance 10 m
Frequency 2402MHz ~ 2480MHz ISM Band
About 3 hours of working time
About 40 to 50 hours of standby time
3 hours charging time
Data transmission rate of 2.1Mbps
Input sensitivity 300mV
Signal to noise ratio 84dB
Frequency Range 80Hz ~ 20KHz
Sound output 2.0 amplifier output
The power supply built-in replaceable lithium battery 3.7V / 500MA
Output power of 2 × 3W
The standard preparation of the audio adapter cable USB charging cable bracket ring
Dimensions 220 * 72 * 45mm

DECLARATION OF CONFORMITY

Manufacturer Name: Satyatrade S. L.
Address: Pol. Ind. La Raya. C/ Guadalquivir, 2.
Camarma de Esteruelas, 28816 Madrid
Tel: 902 430 967
Fax: 91 8864285
NIF: B83254763
Manufacturing country: China
Sytech® SY-X201B complies with the following directives:
EC Directive: 2004/108/EC, 92/31/EEC, and R/TTE 1999/5/EC
ROHS standard: 2011/65/EC Restriction of Hazardous Substance
Signed: Ajeet Nebhwani Utamchandani
Sole Administrator

