

August International Ltd  
United Kingdom  
Tel: +44 (0) 845 250 0586  
[www.augustint.com](http://www.augustint.com)



# AUGUST<sup>®</sup>

## User Manual

SE50



EN

**Bluetooth Boombox with FM Radio**

FR

**Boombox Bluetooth avec Radio FM**

DE

**Bluetooth Boombox mit FM Radio**

IT

**Boombox Bluetooth con Radio FM**

ES

**Boombox Bluetooth con Radio FM**

# User Manual

Thank you for purchasing the August SE50 Bluetooth Boombox with FM Radio. This user manual is designed to familiarize you with all the features of this device. Please take the time to read this user manual carefully, even if you are already familiar with a similar product.

## Safety

To ensure the safety of you and others, please read the Safety Instructions before using this device.

Please do not disassemble the SE50, it can be unsafe and will invalidate the manufacturer's warranty.

## Disposal







Please ensure the product and accessories are disposed of in compliance with the WEEE (Waste Electrical and Electronic Equipment) Directive and any other regulations applicable to your country. Always check with the environment agency and any other relevant authorities for current disposal regulations.

## Customer Service:

You can contact us by phone on: +44 (0)845 250 0586 or by email at: [service@augustint.com](mailto:service@augustint.com) should you require further technical support or customer service.



## 1. Safety Instructions

### ■ Storage and Use

	Keep this device away from extreme temperatures.		Keep the device away from wet or damp environments.
	Never expose the device to moisture, dust, oil or smoke.		Avoid dropping or exposing to impacts.
	When carrying this device as part of your luggage please ensure it is securely stored to avoid impact damage.		Never strike or scratch this device with any sharp object.

### ■ Maintenance

Please unplug all leads before cleaning this device.

	Wipe the device and buttons with a soft cloth.		Never wipe this device with an abrasive cloth or apply detergent, alcohol or chemical based cleaning products.
--	--	---	--

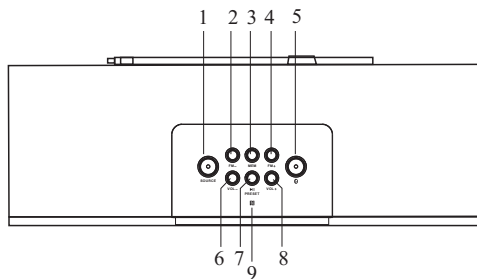
## 2. Main Features

- Play Music Wirelessly from Bluetooth Devices
- FM Radio with 10 Channel Presets
- Powerful 2 x 15W Stereo Hi-Fi Speakers
- Standard 3.5mm Audio-In Socket
- Bluetooth NFC Pairing
- 24 Hours Clock Function

## 3. Accessories

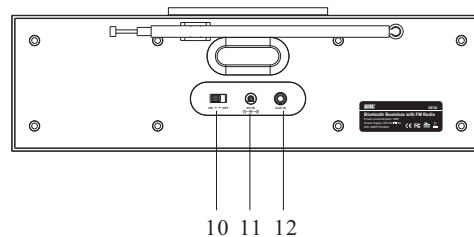


## 4. Part Names and Functions Top



1. Select source (Bluetooth / FM radio / Audio-In)
2. FM- (short press) / Previous available station (press and hold)
3. Store current radio station
4. FM+ (short press) / Next available station (press and hold)
5. Bluetooth connection
6. Decrease volume
7. Play / Pause / Select stored radio channels
8. Increase volume
9. NFC

## Back:




10. Power switch
11. Power socket: DC 15V
12. Audio-In socket

## 5. Bluetooth Mode

When switched on, the SE50 enters Bluetooth mode automatically. You can also use the SOURCE button to select Bluetooth mode.


### 5.1 Pairing

#### 5.1.1 Pairing with a Mobile Phone

1. To enter pairing mode, press and hold  until the Bluetooth icon flashes on the LCD screen.
2. Scan for available Bluetooth devices on your mobile phone (see your mobile phone user manual for instructions if needed).
3. Select “SE50” from the available devices.
4. Once successfully paired, the SE50 speaker will beep and the Bluetooth icon will flash slowly.

**Note:** The SE50 will automatically reconnect to the last paired Bluetooth device if it is in range, if this device is not available it will enter pairing mode automatically.

#### 5.1.2 Connect to a Windows PC

1. To enter pairing mode, press and hold  until the Bluetooth icon flashes on the LCD screen to enter pairing mode.
2. Enable Bluetooth on your PC.
3. Select “Devices and Printers” from the Control Panel and click “Add a Device”.
4. Select “SE50” from the available devices to install drivers.
5. If the SE50 is not automatically set as your output device, select “Sound” from the control panel then highlight the SE50 and select “Set Default”.

**Note:** For Windows XP and Vista, a third-party Bluetooth driver is needed (not included).


**Note:** The SE50 will automatically reconnect to the last paired Bluetooth device if it is in range, if this device is not available it will enter pairing mode automatically.

#### 5.1.3 NFC Pairing

1. Enable NFC and Bluetooth mode on your source device.
2. Touch the NFC area of your source device against the NFC area on the SE50.
3. Confirm the pairing on your source device if prompted.

### 5.2 Music Control

The SE50 is able to control the music playing on either a mobile phone or a computer with a Bluetooth connection.

Use the “VOL-” or “VOL+” buttons to adjust the volume and press  to pause or resume playback.

## 6. FM Radio Mode

Press SOURCE to select FM radio mode. In FM radio mode, an FM icon and the current frequency will be displayed on the screen.

Short press the “FM-” or “FM+” buttons to adjust the frequency in 0.1MHz steps. Press and hold either button to move to the previous or next channel.

SE50 can store 10 channels. Press “PRESET” to cycle through your stored channels.

To save a channel to the stored channel list, press “MEM” then use “FM-” or “FM+” to select a channel number then press “MEM” again to confirm.

Press “VOL-” or “VOL+” buttons to adjust the volume.

## 7. Audio-In Mode

To use the SE50 as a wired speaker, use a 3.5mm audio cable to connect the SE50 with your source device. Press “SOURCE” to select AUX mode, an AUX icon will be displayed on the LCD screen.

Press “VOL-” or “VOL+” buttons to adjust the volume.

## 8. Clock Setup


To set the correct time on the clock, press and hold the “MEM” button until the hour begins to flash. Use “FM+” and “FM-” to adjust the hour up and down. Once the correct hour is set, press “MEM” again to adjust the minutes. Once the time is correct, press “MEM” to finish.

## 9. Specifications

LCD Display	1.4 inch
Bluetooth Specification	Bluetooth V2.1
Speakers	2 x 15 Watts
Frequency Response	80Hz – 20KHz
Separation	40dB(1KHz)
S/N	70dB
FM Radio Frequency	87.5 – 108.0MHz
Power Adaptor	Input: AC 100~240V 50/60Hz Output: DC 15V 2A
Dimensions	300 x 95 x 100mm
Weight	1238g

## 10. Troubleshooting

The problems listed below do not necessarily signify a fault with the device. Please check this list before requesting a repair.

Problem	Possible Cause	Solution
No power	Power adaptor plug loose	Check power adaptor plug connection.
Cannot be found via Bluetooth	SE50 is not in Bluetooth pairing mode	In Bluetooth mode, press and hold the  button to enter pairing mode.
No radio	No signal	Try repositioning the device or adjusting the antenna angle.
No sound	The volume is too low or the playback is paused	Try to increase the volume of the SE50 and your source device or resume playback on your source device.

## 11. Warranty

This product is guaranteed for twelve months from the date of the original purchase. In the unlikely event of any defect arising due to faulty materials or workmanship, the unit will be either replaced or repaired free of charge (where possible) during this period. An alternative product will be offered in case the product is no longer available or repairable.

This warranty is subject to the following conditions:

- The warranty is only valid within the country where the product is purchased.
- The product must be correctly installed and operated in accordance to the instructions given in this user manual.
- The product must be used solely for domestic purposes.
- The warranty only covers the main unit, and does not cover the accessories.
- The warranty does not cover the damage caused by misuse, negligence, accident and natural disaster.
- The warranty will be rendered invalid if the product is resold or has been damaged by inexpert repairs. The manufactures disclaim any liability for incidental or consequential damages.
- Please consult our customer adviser before returning any product; we are not responsible for any unexpected product returns.
- Any faulty product must be kept and returned in the original packaging with all the accessories and the original copy of the purchase receipt.

The warranty is in addition to, and does not diminish, your statutory or legal rights.

### Customer Service:

Telephone: +44 (0) 845 250 0586  
Email: service@augustint.com

This product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The declaration of conformity may be consulted at August International Ltd, Unit 5 Swains Mill, Crane Mead, Ware SG12 9PY, England.



### Industry Canada Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept interference, including interference that may cause undesired operation of the device.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**No Unauthorized Modifications:** Do not make any changes or modifications to this product without the prior express written approval of August International Ltd. Any changes or modifications made without express written approval could void the user's authority to operate this product.



For details of further relevant technical standards, please contact us at the address above.