



interVideo
InstantON™

Ver. 01

Date : Jun 14, 2005

InterVideo InstantON

User Manual

Content

1. Install/Repair/Remove	5
1.1. Install InterVideo InstantON	5
1.1.1. Run the InstantON Install file under Windows	5
1.1.2. Welcome Page, press “Next” button to continue or “Cancel” to abort Installation.....	6
1.1.3. Setup Status.....	6
1.1.4. Complete Installation, press “Finish” to complete the Installation processes.	7
1.1.5. Shut down the Windows system and then Launch InterVideo InstantON. Be ready for a whole new world of entertainment	7
1.2. Repair InterVideo InstantON	7
1.2.1. Welcome Page, press “Next” button to continue or “Cancel” to abort Installation.....	8
1.2.2. Choose “Repair” option and click “Next”	8
1.2.3. Setup Status.....	8
1.2.4. Complete Installation, press “Finish” to complete the Installation processes.	9
1.2.5. Shut down the Windows system and then Launch InterVideo InstantON. Be ready for a whole new world of entertainment	9
1.3. Remove InterVideo InstantON.....	9
2. General Input & Setup	11
2.1. Remote	11
2.2. General Setup Menu.....	12
2.2.1. Changing the Language	13
2.2.2. Setting the Sleep Timer	14
2.2.3. Version information.....	14
2.2.4. Resetting to the Default.....	14
3. Instruction Menu	15
4. Playing Music	25
4.1. Index to Parts and Controls.....	25
4.1.1. Music Control Panel	25
4.1.2. Remote	26
4.1.3. Keyboard Hot Keys.....	28
4.2. Functions & Operations	29
4.2.1. Opening the Music Mode.....	29
4.2.2. Information.....	29
4.2.3. Playing an Audio CD	30
4.2.4. Browsing the Folders and Tracks.....	31
4.2.5. Managing the Playlist.....	31

4.2.6.	MP3s	32
5.	Playing DVDs	16
5.1.	Index to Parts and Controls.....	16
5.1.1.	Remote	16
5.1.2.	Keyboard Hot Keys.....	18
5.2.	Functions & Operations	18
5.2.1.	Opening the DVD Mode	18
5.2.2.	Playing a DVD or Video CD.....	19
5.2.3.	Using the DVD Menu	19
5.2.4.	Searching a Title and Chapter	20
5.3.	Using the Setup Menus	20
5.3.1.	Information.....	21
5.3.2.	Color Adjustment (Picture Properties).....	21
5.3.3.	Display Setting.....	22
5.3.4.	Audio.....	22
5.3.5.	Subtitles.....	23
5.3.6.	Changing Angles	23
5.3.7.	Audio Output	24
6.	Viewing Photo.....	34
6.1.	Index to Parts and Controls.....	34
6.1.1.	Photo View Thumbnail mode Control Panel	34
6.1.2.	Remote	34
6.1.3.	Keyboard Hot Keys.....	35
6.2.	Functions & Operations	36
6.2.1.	Opening the PhotoView Mode	36
6.2.2.	Thumbnail Mode – To Previous Folder	36
6.2.3.	Thumbnail Mode – To Image Source.....	36
6.2.4.	Thumbnail Mode – To Main Menu.....	37
6.2.5.	Thumbnail -- Information	37
6.2.6.	Viewing photo	38
6.2.7.	Slide Show – Rotate.....	38
6.2.8.	Slide Show – Speed	38
6.2.9.	Slide Show – Slide Show Preference.....	39
6.2.10.	Slide Show – Repeat All	39
6.2.11.	Using the Setup Menu.....	39
7.	Viewing Video Files	40
7.1.	Index to Parts and Controls.....	40
7.1.1.	Photo View Thumbnail mode Control Panel	40


7.1.2.	Remote	41
7.1.3.	Keyboard Hot Keys.....	43
7.2.	Functions & Operations	43
7.2.1.	Opening the Video Mode	43
7.2.2.	Thumbnail Mode – To Previous Folder	44
7.2.3.	Thumbnail Mode – To Video Source	44
7.2.4.	Thumbnail Mode – To Main Menu.....	44
7.2.5.	Thumbnail -- Information	45
7.2.6.	Viewing Video Files.....	45
7.2.7.	Playback – Information.....	46
7.2.8.	Using the Setup Menu.....	46

1. Install/Repair/Remove


- General requirements: Windows Operation System (XP, 2000, NT, ME or 98, compatible for latest versions)
- The paragraph here will cover the following topics:
 - ✓ Installation: Install InterVideo InstantON
 - ✓ Repair: Recover InterVideo InstantON.
 - ✓ Remove: Remove InterVideo InstantON from Windows O.S..
- System Hareware requirement
 - ✓ CPU: Pentium Processor 800MHz above
 - ✓ RAM: at least 128MB
 - ✓ ODD: DVD ROM, Combo or DVD R/W
 - ✓ Space: 200MB or more.

1.1. Install InterVideo InstantON


1.1.1. Run the InstantON Install file under Windows

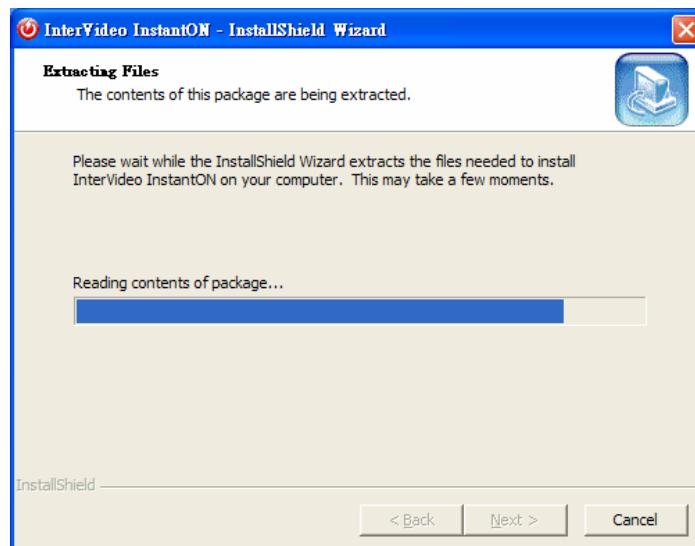


1.1.2.Welcome Page, press “Next” button to continue or “Cancel” to abort Installation

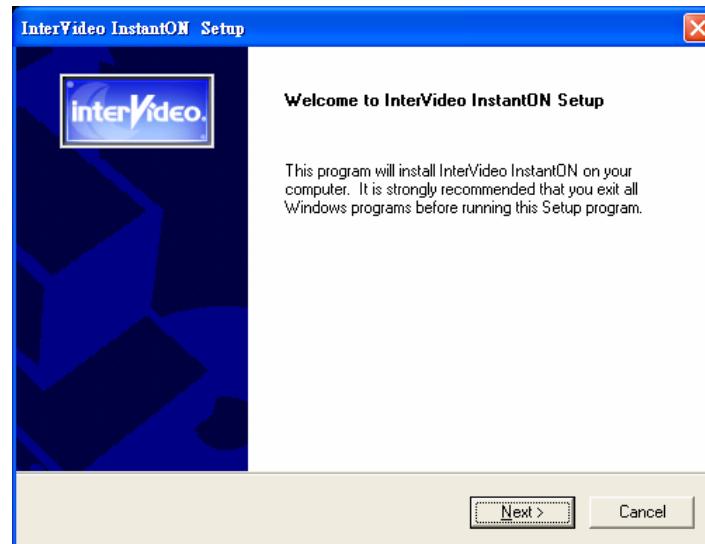

1.1.3.Setup Status

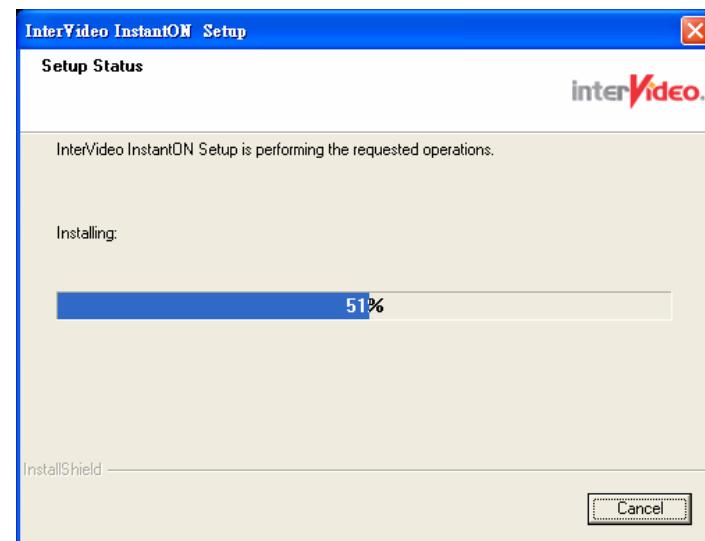

1.1.4. Complete Installation, press “Finish” to complete the Installation processes.

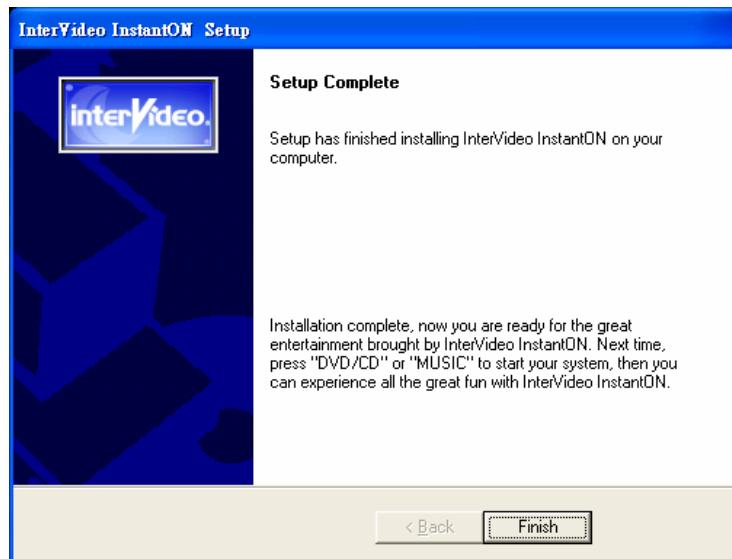


1.1.5. Shut down the Windows system and then Launch InterVideo InstantON. Be ready for a whole new world of entertainment

- To press computer Hot Key “ ” or “ ” to launch InterVideo InstantOn.
- The default language of InstantON will be set the same as Language of Windows O.S. while InstantON is installed.
- If the file name is other than the InstantON default language, the display of the file name might be abnormal. If you want to display the correct file name, please re-install InstantON.

1.2. Repair InterVideo InstantON

IF the InterVideo InstantON was damaged, it's very easy to repair the InstantON by the following processes.


1.2.1.Welcome Page, press “Next” button to continue or “Cancel” to abort Installation

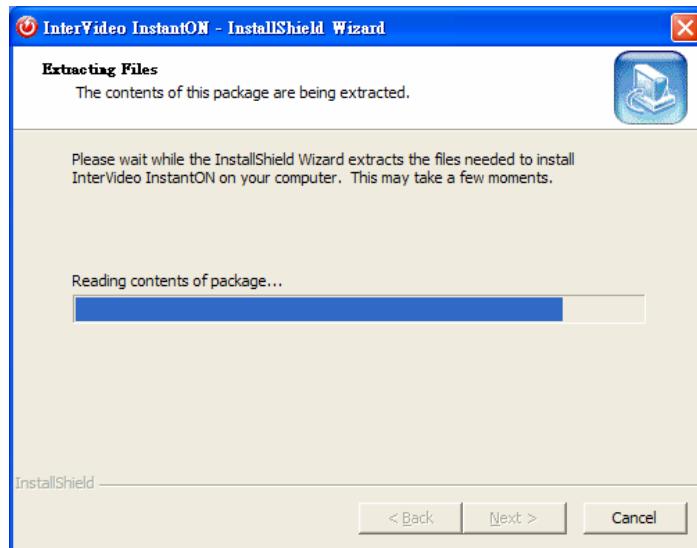


1.2.2.Choose “Repair” option and click “Next”



1.2.3.Setup Status.

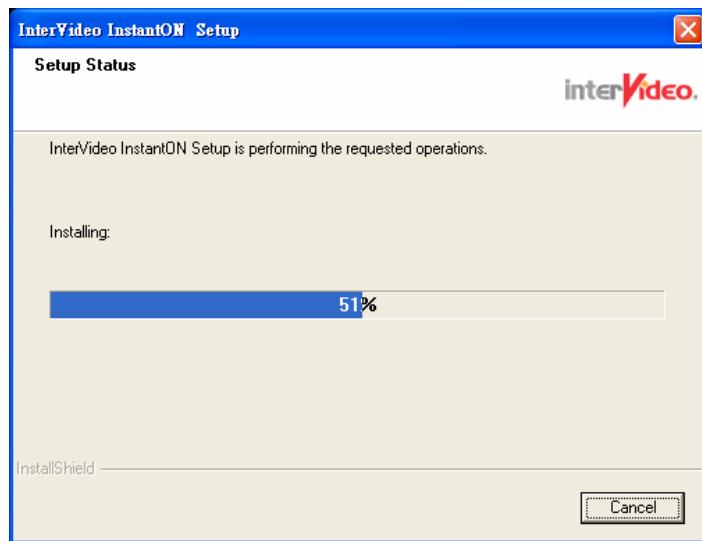


1.2.4. Complete Installation, press “Finish” to complete the Installation processes.

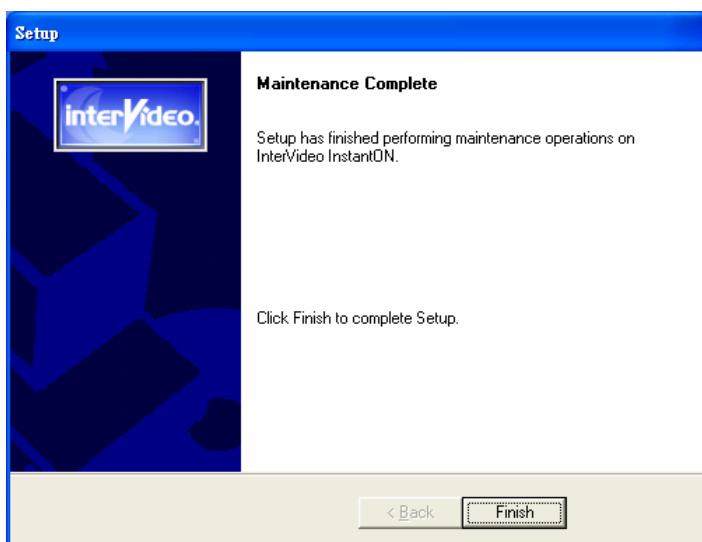

1.2.5. Shut down the Windows system and then Launch InterVideo InstantON. Be ready for a whole new world of entertainment


1.3. Remove InterVideo InstantON

IF you want to remove the InterVideo InstantON, just follow “Repair” steps .
But on step 2, need to choose “Remove” option and click “Next”

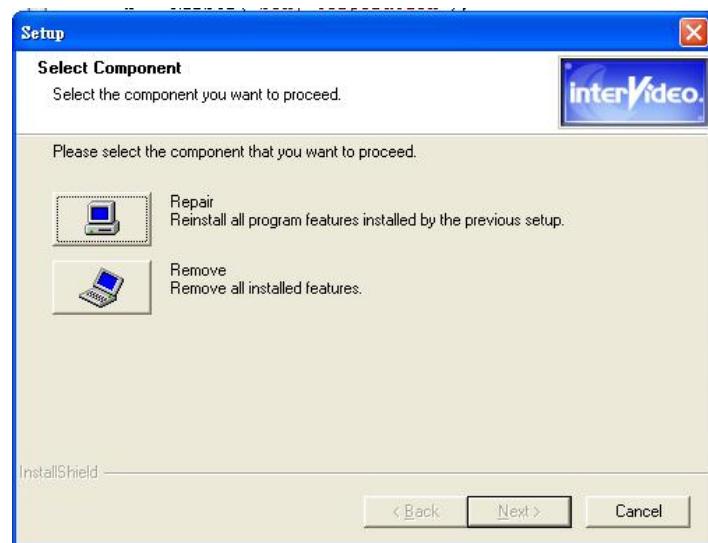

2.General Input & Setup

2.1. Remote

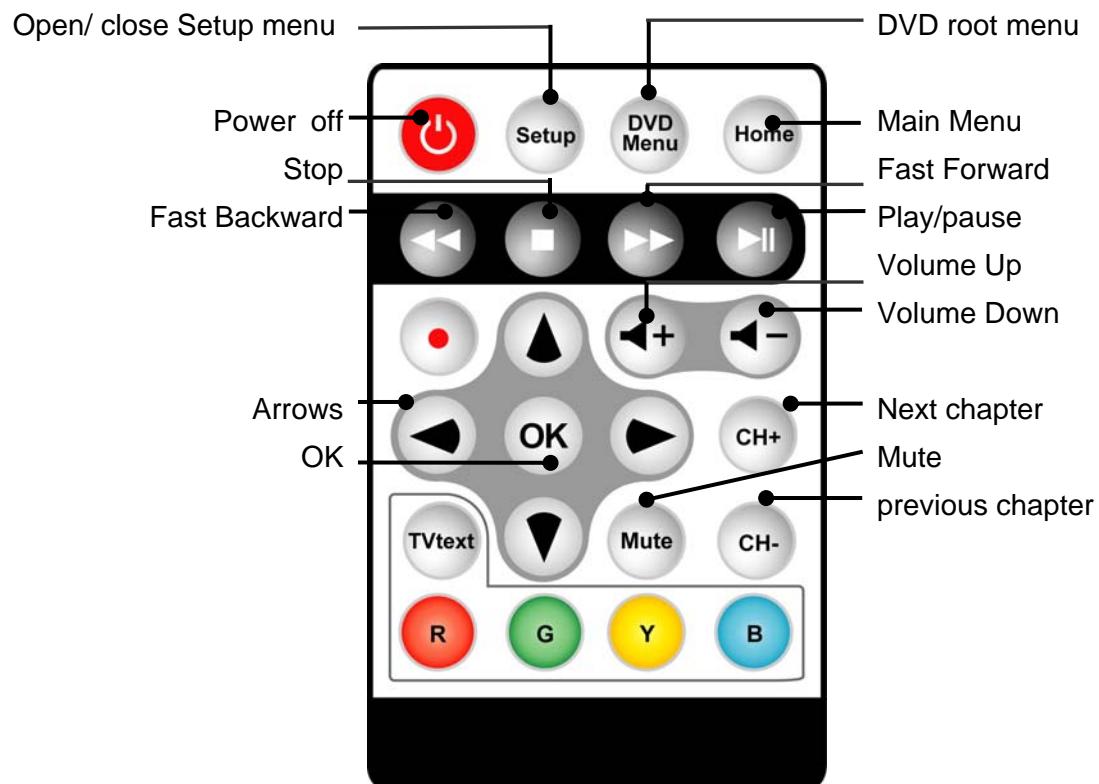

2.2. General Setup Menu

The general Setup menu lets you make various adjustments to items such as the menu language. You can also set the sleep timer and update the InstantON software.

1. Press the  button.
2. Press the **▲** or **▼** arrow button to select **General Setup**, and then press 
3. Press the **▲** or **▼** arrow button to select a menu item, and then press the **▶** arrow button.
4. Press the **▲** or **▼** arrow button to select the settings you want to set, and then press the 
5. Press the  button to close the menu window.



Navigating the Menus

To Do This ...	Press
Display the menu	
Move through the menus	Arrows ◀ ▶ ▲ ▼
Move through the menu options	Arrows ▲ ▼
Select an option to change	
Change an option's settings	Arrows ◀ ▶
Confirm selection	
Exit the menu	

The menu gives you access to the following features:

First Layer	Second Layer	Details
Language Select	English Traditional Chinese Simplified Chinese Japanese Korean Finnish Dutch Danish French German Greek Hebrew Italian Norwegian Brazil/Portuguese Spanish Swedish Polish Russian Turkish Slovenian Czech French Canadian Hungarian Portuguese	OSD and menu language
Date and time	Date ____ / __ / ___ Time __ : __	
Sleep timer	Disable 30 min. later 1 hour later	Disable the Sleep timer feature.
Version information		Show the current InstantON version.
Reset to default	Yes No	

2.2.1. Changing the Language

To set or change the language of Setup menus or onscreen displays:

1. Turn on the system.
2. Press the **button**.
3. Press the **▲** or **▼** arrow button to select **General Setup**, and then press **OK** button.
4. Press the **▲** or **▼** arrow button to select **Menu Language**, and then press the **▶** arrow button.
5. Press the **▲** or **▼** arrow button to select the settings you want to set, and then press the **OK** button.



6. Press the  button to close the menu window.

2.2.2. Setting the Sleep Timer

1. Turn on the system.
2. Press the  button.
3. Press the Δ or ∇ arrow button to select **General Setup**, and then press **OK** button.
4. Press the Δ or ∇ arrow button to select **Sleep Timer**, and then press the \triangleright arrow button.
5. Press the Δ or ∇ arrow button to select the settings you want to set, and then press the **OK** button.
6. Press the  button to close the menu window.



2.2.3. Version information

1. Turn on the system.
2. Press the  button.
3. Press the Δ or ∇ arrow button to select **Version information**, and then press \triangleright arrow button.
4. The screen displays the current version information.
5. Press the  button to close the menu window.




2.2.4. Resetting to the Default

You can easily remove all your custom settings to their default values Just follow these steps:

1. Turn on the system.
2. Press the  button.

3. Press the ▲ or ▼ arrow button to select **General Setup**, and then press **OK** button.
4. Press the ▲ or ▼ arrow button to select **Reset to Default**, and then press the ► arrow button.
5. Press the ▲ or ▼ arrow button to select the settings you want to set, and then press the **OK** button.

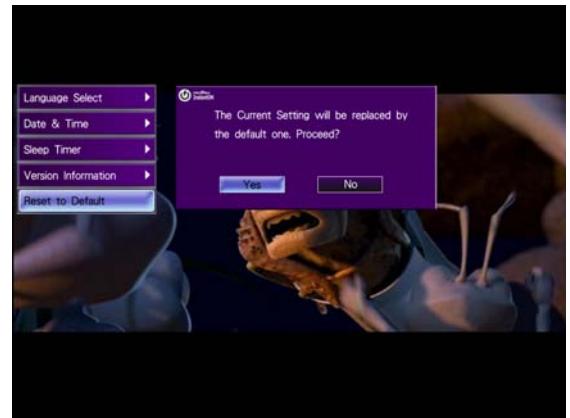

6. Press the  button to close the menu window.

Default Settings:

Menu Language	English
Sleep Timer	OFF
Information Display	OFF
Audio Output	Analog speaker (2CH) only on DVD mode

3. Instruction Menu

Under each mode, the Instruction menu could let you easily get the functions mapping to keys on Keyboard.

1. Press the  F1 button to call up Instruction Menu.
2. If the Instruction menu already shown, press the  F1 button to Close Instruction Menu.
3. There's no instruction menu under Photo – Slideshow mode.




4. Playing DVDs

4.1. Index to Parts and Controls

4.1.1. Remote

1. DVD menu
2. Arrows $\leftarrow \rightarrow \uparrow \downarrow$
3. OK
4. Play/pause $\blacktriangleright \text{II}$
5. Previous chapter
6. Next chapter
7. Fast backward \blackleftarrow
8. Fast forward \blackrightarrow
9. Stop ■
10. Volume +/-
11. Setup
12. Mute
13. Home
14. Close

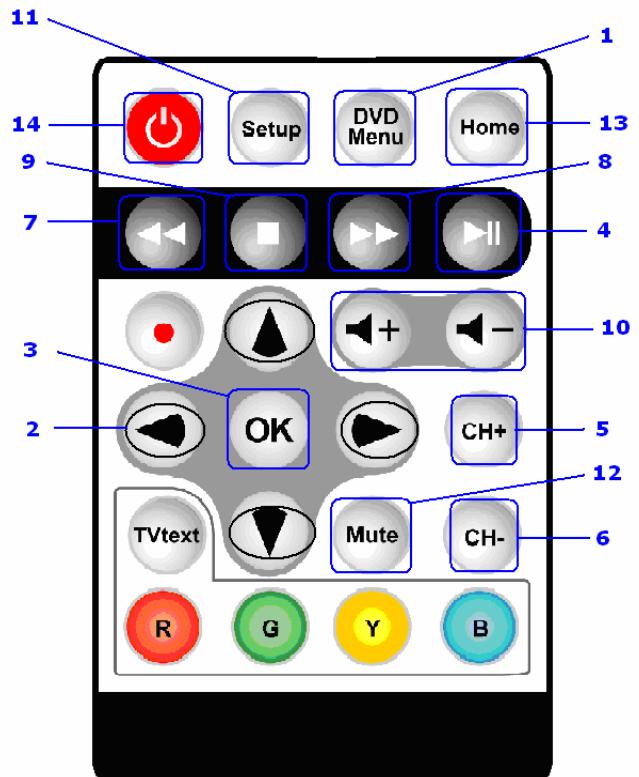

NO.	Item	Action	OSD	Details
1	DVD Menu	Opens the DVD root menu	Plays DVD, VCD, or SVCD (5 sec., shown in the upper-left corner)	Depending on the disc type, the system enters the playback status automatically. Not allowed in stopped status
2	Menu	Enables the Setup menu		
3	Exit	Disables the Setup menu		
4	OK	Enters the selection	Selects the highlighted menu item (both DVD menus and Setup menu)	
5	$\blacktriangleright \text{II}$	Plays/pauses the movie, entering the playback status	\blacktriangleright In upper-left corner (5 sec.). The II mark is always shown.	
6	Previous chapter \blackleftarrow	Goes to the previous chapter. If the first/last chapter is reached, it stays in	Displays chapter number in upper-left corner for 5 sec.	

		the first/last chapter.		
7	Next chapter ▶▶	Goes to the next/chapter		
8	Fast backward ◀◀	2X, 4X, 8X, 20X, 30X backward	▶▶ 2X, ▶▶ 4X, ▶▶ 8X, ▶▶ 20X, ▶▶ 30X for fast forward. in the upper-left corner.	If the speed is already 30X, and the user presses the key again, it returns to normal speed.
9	Fast forward ▶▶	2X, 4X, 8X, 20X, 30X forward	▶▶ 2X, ▶▶ 4X, ▶▶ 8X, ▶▶ 20X, ▶▶ 30X for fast forward. in the upper-left corner.	If the speed is already 30X and the presses the key again, it returns to normal speed.
10	Stop ■	Stops playing	■ In upper-left corner (5 sec.)	Clear the screen and go to the logo page.
11	Vol +/-	Increases/decreases the volume	Unsigned indication bar (at bottom)	<ol style="list-style-type: none"> 1. 16 steps 2. Displays 5 sec. after the user's last press. 3. If the user presses Vol +/- in the muted state, that state is disabled. The volume will increase/decrease from the original level before muting. (the Mute symbol will disappear)
12	Mute	Silence		<ol style="list-style-type: none"> 1. In the normal state, pressing enables the Mute function. 2. In the muted state, pressing disables the Mute function.
13	Home	Call up Main Menu		Will stop DVD playback
14	Close	Close InstantON		Will shutdown computer

4.1.2. Keyboard Hot Keys

Key	Usage	Notes	Keyboard Mapping
Setup	Calls the Setup menu	Very important key, since there is only full screen video mode for DVD	“O,” “o”
Play	In “Pause,” “Stop” state, press it to play the movie.	In playing state, DVD Playback will pause if the key is pressed.	“Space”
Stop	Stops the DVD playback	Not allow in “Stop” status.	“End”
Pause	Pauses the DVD playback	Not allow in “Stop” status.	“Space”
Eject/load		Eject/Load disc tray. Not allow with slim type.	“E,” “e”
Fast forward ►►	2X, 4X, 8X, 20X, 30X forward		“F,” “f”
Fast backward ◀◀	2X, 4X, 8X, 20X, 30X backward		“R,” “r”
Next	Goes to next chapter	If the VCD content is multifile which means the content of VCD containing couple of VCD format files, PgUp/PgDn will control the previous/next file.	“Page Down”
Previous	Goes to previous chapter		“Page Up”
Volume +		Increase Volume	“Shift” + “↑”
Volume -		Decrease Volume	“Shift” + “↓”
Mute		Silence	“M,” “m”
OK	Selection for menu items		Enter ↴
Arrows ◀ ▶ ▲ ▼	Navigate the UI and menus	If the VCD content is unifile, which means a VCD file format but including several intervals, the left/right arrows will control the previous/next interval.	↑↓←→
Subtitle		Multi-subtitle DVD switch	“S” “s”
Audio		Multi-audio DVD switch	“A” “a”
Angel		Multi-Angel DVD switch	“G” “g”

4.2. Functions & Operations

4.2.1. Opening the DVD Mode

Select the Music Image to enter the Music mode in Main Menu.

1. Turn on the system.
2. Press the ◀ or ▶ arrow button to select DVD, and then press **OK** button.



4.2.2. Playing a DVD or Video CD

- ❑ To Play a DVD or Video CD:
 1. Opening the DVD Mode.
 2. Insert a DVD disc in the optical drive.
 3. The unit begins to read the disc. The monitor shows the DVD menu and title menu.
 4. Press the  button ( “End”) to stop playback.

- ❑ Additional Operations

To	Operation
Play	Press 
Stop	Press 
Pause	Press 
Resume play after pause	Press 
Go to the next chapter	Press 
Go back to the previous chapter	Press 
Fast backward	Press 
Fast forward	Press 

4.2.3. Using the DVD Menu

A DVD is divided into long sections of a picture or a music feature called “titles.”

When you play a DVD that contains several titles, you can select the title you want using the **DVD MENU** button.

When you play DVDs that allow you to select items such as the language for the subtitles and the

language for the sound, select these items using the  button.

1. Press the  button during playback.
2. Press the     arrow buttons to select the item you want to play or change.

3. Press the OK button.

4.2.4. Searching a Title and Chapter

You can search a DVD by title or chapter. Because titles are assigned unique numbers on the disc, you can select the one you want by entering its number.

1. Press the Previous/Next button or a number button to select a chapter during playback.
2. Press the **OK** button.

4.3. Using the Setup Menus

Angles, audio and subtitles are not included, since it is content-dependent. Most DVD discs with those features will have their own menus.

Navigating the Menus

To Do This ...	Press
Display the menu	
Move through the menus	Arrows ▲ ▼ ▶ ▷
Move through the menu options	Arrows ▲ ▼
Select an option to change	OK
Change an option settings	Arrows ▲ ▼
Select (confirm) changed settings	OK
Exit the menu	

The menu gives you access to the following features:

First Layer	Second Layer	Details
General Setup		
Information		Enables/disables the information display. If no information is displayed, select the item to enable the display. If there is information displayed, select the item to disable the display.
Picture properties	Hue Contrast Brightness Saturation	

	Reset to default	
Display Setting	Auto	Display the original DVD aspect ratio
	4:3	
	16:9	
Audio	Audio 01, 02, 03 . . .	If the DVD doesn't have many Audios, the second layer won't display
Subtitle	None	If the DVD doesn't have many Subtitles, the second layer won't display.
	Subtitle 01, 02, 03 . . .	
Angle	Angle 01, 02, 03 . . .	If the DVD doesn't have many Angles, the second layer won't display.
Audio output	Analog speakers	
	S/PDIF	
Close Caption	Yes	
	No	

4.3.1.Information

1. Press  during playback.
2. Press the ▲ or ▼ arrow button to select **Information**, and then press the **OK** button.
3. Press the ▲ or ▼ arrow button to select Yes or No, and then press the **OK** button.
4. Press the  button to close the menu window.



4.3.2.Color Adjustment (Picture Properties)

The setup menu for picture properties

First Layer	Second Layer	Details
Hue	Signed indicator bar	Turns from green to red. Each has 32 steps.
Contrast	Signed indicator bar	The default is 0. Negative and positive signs on each side. Each has 16 steps.
Brightness	Signed indicator bar	The default is 0. Negative (dark) and positive (bright) signs on each side. Each has 32 steps.

Saturation	Signed indicator bar	The default is 0. Negative and positive signs on each side. Each has 32 steps.
Reset to default		Return the color, contrast, brightness and saturation settings to zero.

1. Press  during playback.
2. Press the ▲ or ▼ arrow button to select **Picture Properties**, and then press the **OK** button.
3. Press the ▲ or ▼ arrow button to select a menu item, and then press the ► arrow button.
4. Press the ▲ or ▼ arrow button to set the value.



5. Press the  button to close the menu window.

4.3.3. Display Setting

1. Press  during playback.
2. Press the ▲ or ▼ arrow button to select **Display Setting**, and then press the ► arrow button.
3. Press the ▲ or ▼ arrow button to select the settings you want to set, and then press the **OK** button.
4. Press the  button to close the menu window.



4.3.4. Audio

You can choose the language you want to use when playing a multi-language DVD.

1. Press  during playback.
2. Press the ▲ or ▼ arrow button to select **Audio**, and then press the Arrow ► button.

3. Press the **▲** or **▼** arrow button to select the settings you want to set, and then press the **OK** button.
4. Press the  button to close the menu window.
5. InstantON doesn't support DTS decode, if DTS audio option is chosen and Audio output setting is "Analog Speaker", then the result will be no sound.

4.3.5. Subtitles

When playing a multi-subtitle DVD, you can select one subtitle to show it on the screen.

1. Press  during playback.
2. Press the **▲** or **▼** arrow button to select **Subtitle**, and then press the **▶** arrow button.
3. Press the **▲** or **▼** arrow button to select the language, and then press the **OK** button.
4. Press the  button to close the menu window.

4.3.6. Changing Angles

If various angles (multiple angles) for a scene are recorded on the DVD video, this means you can change the viewing angle.

1. Press  during playback.
2. Press the **▲** or **▼** arrow button to select **Angle**, and then press the **▶** arrow button.
3. Press the **▲** or **▼** arrow button to select the settings you want to set, and then press the **OK** button.
4. Press the  button to close the menu window.

4.3.7. Audio Output

1. Press  during playback.
2. Press the ▲ or ▼ arrow button to select **Audio output**, and then press the ► arrow button.
3. Press the ▲ or ▼ arrow button to select the settings you want to set, and then press the **OK** button.
4. Press the  button to close the menu window.
5. If the S/P DIF was chosen, the on-machine speakers will automatically mute.



5. Playing Music


5.1. Index to Parts and Controls

5.1.1. Music Control Panel



5.1.2. Remote

1. Arrows ▲ ▼ ▶ ▷
2. OK
3. Play ►
4. Next
5. Previous
6. Fast forward ►►
7. Fast backward ◀◀
8. Stop ■
9. Volume +/-
10. Setup Menu
11. Main Menu
12. Mute
13. Close

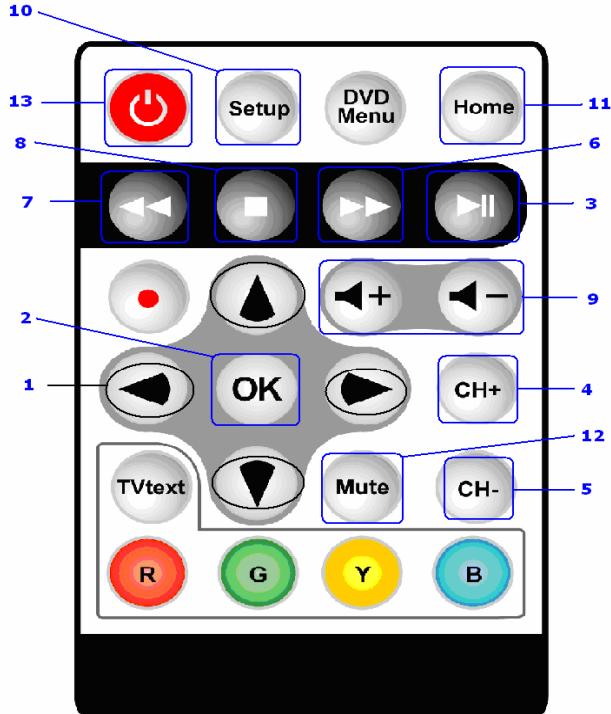

NO.	Item	Action	Details
1	Arrows ▲ ▼ ▶ ▷		<p>Navigate the current page and jump from column to column, including folder buttons and list items (via moving highlight).</p> <ul style="list-style-type: none"> ■ Go to Next/Previous Page: <ul style="list-style-type: none"> ○ When the moving highlight is on the first item of the column, pressing “Up” arrow returns to the previous page. ○ When the moving highlight is on the last item of the column, pressing the “Down” arrow proceeds to the next page. ■ Enable/Disable Side Menus: <ul style="list-style-type: none"> ○ When the moving highlight is in the left column, pressing the “Left” arrow enables the left side menu. In the left side menu, pressing the “Right”

			<p>arrow disables the left side menu.</p> <ul style="list-style-type: none"> ○ When the moving highlight is in the right column, pressing “Right Arrow” enables the right side menu. In the right side menu, pressing the “Left” arrow disables the left side menu. <p>■ Navigate the menus.</p>
2	OK		<p>Cursor highlight on</p> <ul style="list-style-type: none"> ■ Folder buttons: expand the pop-up menu. ■ Menu: Select a menu item. ■ Left column: The item is appended into Current Play Item List. If it is a playlist file, all songs on the list will be appended. ■ Right column: The item is selected. If the item is already selected, pressing “OK” deselects the item.
3	Play/pause ►/		Play or pause.
4	Next		Play the next song.
5	Previous		Play the previous song.
6	Fast forward ►►		Fast-forward the current play item.
7	Fast backward ◀◀		Fast-backward the current play item.
8	Stop ■		Stop.
9	Volume +/-		Increase or decrease the volume.
10	Setup Menu	Enable/disable setup menu	<ul style="list-style-type: none"> ■ General setup menu ■ Information
11	Main Menu	Call up Main Menu	Call up Main Menu immediately
12	Mute		Silence

5.1.3. Keyboard Hot Keys

Function-key mapping for Music mode

Keys	Usage	Notes	Keyboard Mapping
Setup	To call the Setup menu	A very important key, since there is only full-screen video mode for DVD	“O,” “o”
Play ►			“Space”
Stop ■			“End”
Pause II			“Space”
Eject		Eject disc tray	“E,” “e”
Fast forward ►►	2X, 4X, 8X, 20X, 30X forward		“F,” “f”
Fast backward <<	2X, 4X, 8X, 20X, 30X backward		“R,” “r”
Next ►	Go to next track/song		“Page Down”
Previous <	Go to previous track/song		“Page Up”
Volume +		Increase volume	“Shift” + “↑”
Volume -		Decrease volume	“Shift” + “↓”
Mute		Silence	“M,” “m”
OK	Selection for menu items		Enter ↴
Arrows ▲ ▼ ▶ ▷	Navigate the UI and menus		↑↓←→
Repeat all		Repeat all songs	“Shift” + “R”
Shuffle	Music mode	Shuffle all songs	“Shift” + “S”
--	Call up / Close Instruction menu		“F1”

5.2. Functions & Operations

5.2.1. Opening the Music Mode

Select the Music Image to enter the Music mode in Main Menu.

1. Turn on the system.
2. Press the **◀** or **▶** arrow button to select **Music**, and then press **OK** button.



5.2.2. Information

1. Press during playback.
2. Press the **▲** or **▼** arrow button to select **Information**, and then press the **OK** button.
3. Press the **▲** or **▼** arrow button to select Yes or No, and then press the **OK** button.
4. Press the button to close the Setup menu window.



5.2.3. Playing an Audio CD

□ To Play an Audio CD:

1. Insert an audio CD in the optical drive.
2. Press the  button ( "Space") to begin playing the first track of the audio CD.
3. Press the  button ( "Page Down") to skip to the next track.
4. Press the  button ( "End") to stop playing the audio track.



□ Additional Operations

To	Operation
Play	Press 
Stop	Press 
Pause	Press 
Resume play after pause	Press 
Go to next track	Press 
Go back to previous track	Press 
Fast backward	Press 
Fast forward	Press 

5.2.4.Browsing the Folders and Tracks

1. Press the **◀ ▶ ▲ ▼** arrow buttons to browse the folders and tracks.
2. To move to the upper-level folder, press the **◀** arrow button. The “To parent folder” submenu appears, so press the **OK** button.
3. If you want to display a folder, press the **◀ ▶ ▲ ▼** arrow buttons to select it and then press the **OK** button.



About Playlists

Playlists are custom lists indicating the media files to play and the order in which to play them. You can create lists that mix different media stored in different folders. You can browse folders on a CD-ROM or your hard drive.

Adding a song to a playlist does not remove it from the library. Instead it places a pointer (or reference) to the file in the playlist.

5.2.5.Managing the Playlist

□ Adding a Selection to the Playlist

1. Insert an Audio or mp3 CD-ROM to the optical drive or browse the folders of your hard driver.
2. Press the **▲** or **▼** arrow button to select a folder, and then press the **OK** button.
3. A list of the tracks contained in the folder appears. Press the **▲** or **▼** arrow button to select a track, and then press the **OK** button to add it to the playlist.
4. To add more tracks to the playlist, repeat steps 2 and 3.



□ Removing Selections from the Playlist

The tracks you've added to a playlist can be removed, too.

1. Press the **◀ ▶ ▲ ▼** arrow buttons to select a track in the current playlist, and then press the **OK** button to select it.
2. To select more tracks, repeat step 1.
3. Press the **▶** arrow button to enter the track submenu.
4. Press the **▲** or **▼** arrow button to select **Clear Selections**, and then press the **OK** button.



□ Removing All Selections from the Playlist

1. Press the **◀ ▶ ▲ ▼** arrow buttons to select any track in the current playlist.
2. Press the **▶** arrow button to enter the track submenu.
3. Press the **▲** or **▼** arrow button to select **Clear All**, and then press the **OK** button.



5.2.6. MP3s

□ Playing MP3s

1. Insert an mp3 CD-ROM to the optical drive or browse the folders of your hard driver.
2. Press the **▲** or **▼** arrow button to select a folder, and then press the **OK** button.
3. A list of the tracks contained in the folder appears. Press the **▲** or **▼** arrow button to select a track, and then press the **OK** button to add it to the playlist.
4. To add more tracks to the playlist, repeat steps 2 and 3.
5. Press the **◀ ▶ ▲ ▼** arrow buttons to select a track in the current playlist.



6. Press the  button (“Space”) to start playing the track.
7. Press the  button (“Page Down”) to skip to the next track.
8. Press the  button (“End”) to stop playing the audio track.



6. Viewing Photo


6.1. Index to Parts and Controls

6.1.1. Photo View Thumbnail mode Control Panel



6.1.2. Remote

1. Setup Menu
2. Main Menu
3. OK
4. Arrows $\leftarrow \rightarrow \uparrow \downarrow$
5. Next
6. Previous
7. Play/Pause
8. Stop
9. Close

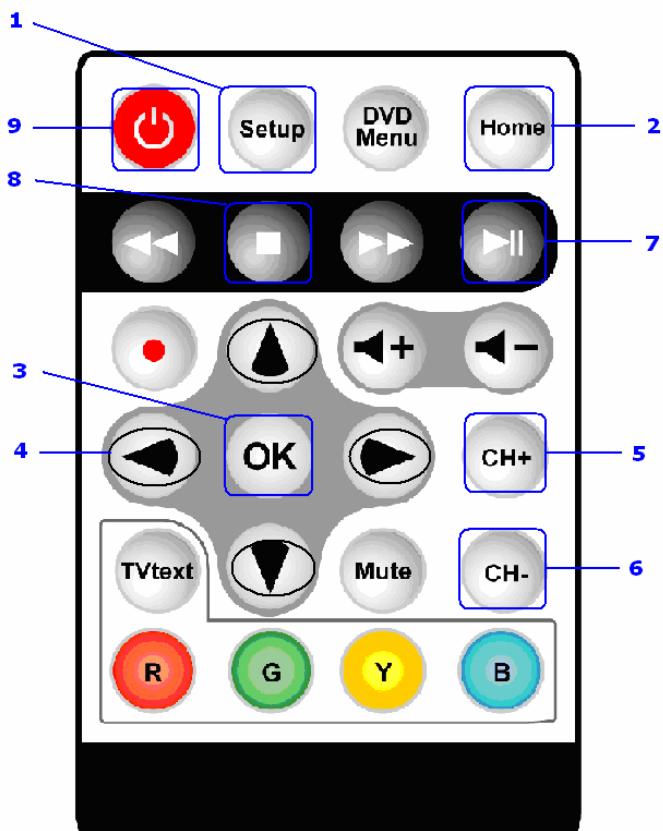

NO.	Item	Action	Details
1	Setup Menu	Call up Setup Menu	
2	Main Menu	Call up Main menu	
3	OK	Enter folder or show current highlight image only	if current folder had pictures, it will go inside the folder, if highlight is an image, will show the image only, "Stop" command could back to thumbnail mode.
4	Arrows 	Navigate the UI and menus	
5	Next	Go to next image	Only at slide show mode
6	Previous	Go to previous image	
7	Play/Pause	Get into slide show mode	
8	Stop	Stop slide show	Will back to thumbnail mode when pressed
9	Close	Close InstantON	System will shutdown

6.1.3. Keyboard Hot Keys

Keys	Usage	Notes	Mapping to Keyboard
Setup	To call the setup menu		"O"
Main Menu	Switch to DVD mode		"Home"
Play▶		In thumbnail mode: Entering slide show mode and start to play from selected image.	"Space"
Stop■		Back to "Thumbnail mode"	"End"
Pause II		In slide show mode	"Space"
Next	Slide Show Mode	Display next image	"Page Down"
Previous	Slide Show Mode	Display previous image	"Page Up"
OK	Selection for menu items		Enter 
Arrows 	Navigate the UI and menus		↑ ↓ ←→

6.2. Functions & Operations

6.2.1. Opening the PhotoView Mode

Select the PHOTOVIEW Image to enter the Photo mode in Main Menu.

1. Turn on the system.
2. Press the ▲ or ▼ arrow button to select PHOTOVIEW , and then press OK button.



6.2.2. Thumbnail Mode – To Previous Folder

- While trace down to a folder, you could get Back to previous folder .
1. When highlight pictures are on the left side.
 2. Press ▶ arrow key on remote.
 3. When see the “To Previous Folder” highlight option, and then press the OK button to confirm the setting.



6.2.3. Thumbnail Mode – To Image Source

- While trace down to a folder, you could get Back to Image Source.
1. When highlight pictures are on the left side.
 2. Press ▶ arrow key on remote.
 3. When see the “Image Source” highlight option, and then press the OK button to confirm the setting.



6.2.4.Thumbnail Mode – To Main Menu

- ❑ While trace down to a folder, you could get Back to Main Menu .
- 1. When highlight pictures are on the left side.
- 2. Press ► arrow key on remote.
- 3. When see the “Home” highlight option, and then press the OK button to confirm the setting.



6.2.5.Thumbnail -- Information

- ❑ While trace down to a folder, you could Display the information .
- 1. When highlight pictures are on the left side.
- 2. Press ► arrow key on remote.
- 3. When see the “Information” highlight option, and then press the OK button to confirm the setting



6.2.6.Viewing photo

Press the OK button to get into slide show mode .


❑ Additional Operations

To	Operation
Go to the next/previous favorite picture	Press the CH+, CH-
Stop Slide show	Press Stop

6.2.7.Slide Show – Rotate

❑ Rotate a picture .


4. Press the  button.
5. Press the ▲ or ▼ arrow button to select **Rotate**, and then press the ► arrow button.
6. Press the ▲ or ▼ arrow button to highlight option, and then press the OK button to confirm the setting.
7. Press the  button to close the menu window.

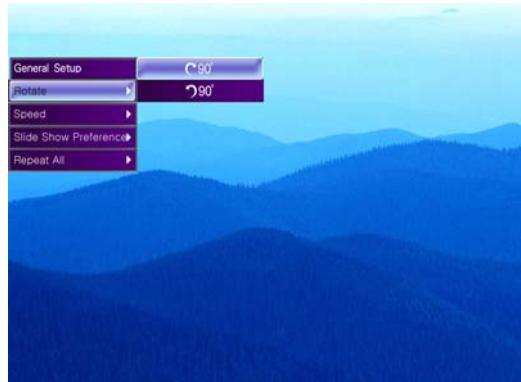

6.2.8.Slide Show – Speed

❑ Set the speed of slide show

1. Press the  button.
2. Press the ▲ or ▼ arrow button to select **Speed**, and then press the ► arrow button.
3. Press the ▲ or ▼ arrow button to highlight option, and then press the OK button to confirm the setting.
4. Press the  button to close the menu window.

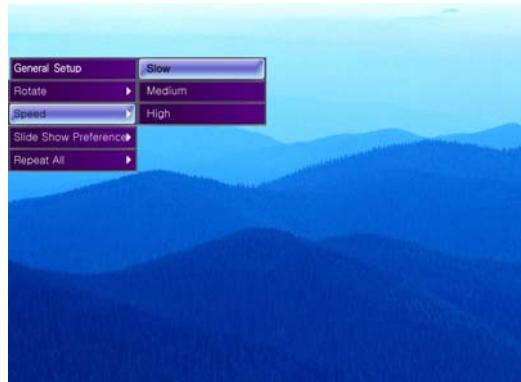


6.2.9. Slide Show – Slide Show Preference

Set the picture display



1. Press the **Setup** button.
2. Press the **▲** or **▼** arrow button to select the preference of slide show mode, and then press the **▶** arrow button.
3. Press the **▲** or **▼** arrow button to highlight option, and then press the OK button to confirm the setting.
4. Press the **Setup** button to close the menu window.

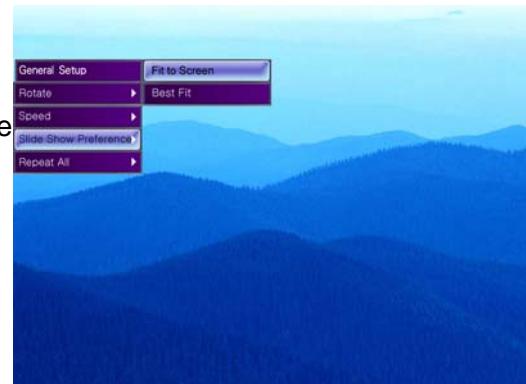


6.2.10. Slide Show – Repeat All

Repeat all pictures



1. Press the **Setup** button.
2. Press the **▲** or **▼** arrow button to select the preference of slide show mode, and then press the **▶** arrow button.
3. Press the **▲** or **▼** arrow button to highlight option, and then press the OK button to confirm the setting.
4. Press the **Setup** button to close the menu window.

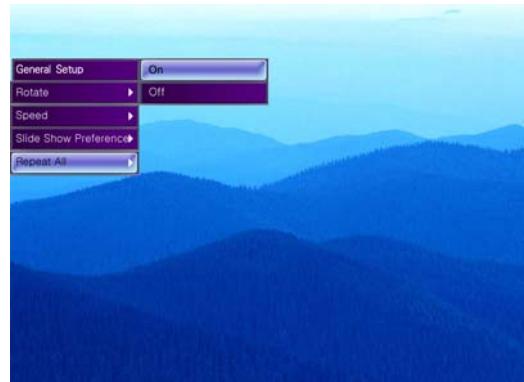

6.2.11. Using the Setup Menu

Navigating the Menus

To Do This ...	Press
Display the menu	
Move through the menus	Arrows ◀ ▶ ▲ ▼
Move through the menu options	Arrows ▲ ▼
Select an option to change	OK
Change an option's settings	Arrows ◀ ▶
Select (confirm) changed settings	OK

Exit the menu

Setup


The menu gives you access to the following features:

First Layer	Second Layer	Details
General Setup		
Information		Only on Thumbnail mode. Display the sleep timer and battery gauge.

7. Viewing Video Files


7.1. Index to Parts and Controls

7.1.1. Photo View Thumbnail mode Control Panel

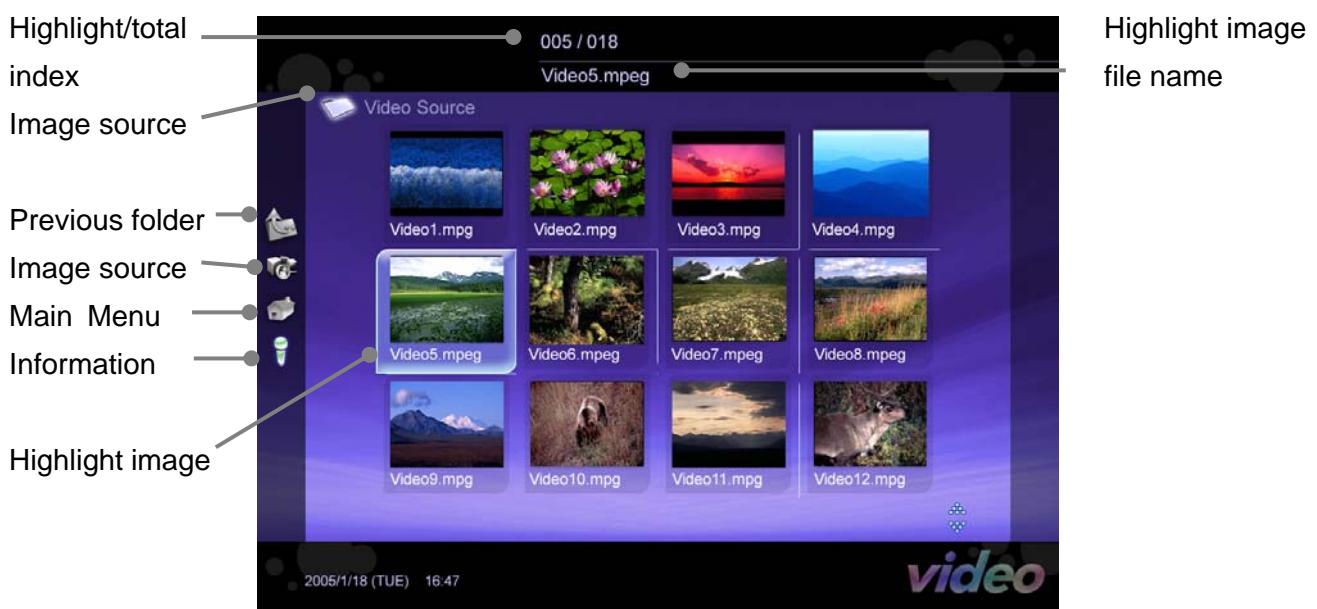

7.1.2. Remote

1. Arrows $\leftarrow \rightarrow \uparrow \downarrow$
2. OK
3. Play/pause $\blacktriangleright \text{II}$
4. Previous chapter
5. Next chapter
6. Fast backward \blackleftarrow
7. Fast forward \blackrightarrow
8. Stop ■
9. Volume +/-
10. Setup
11. Mute
12. Home
13. Close

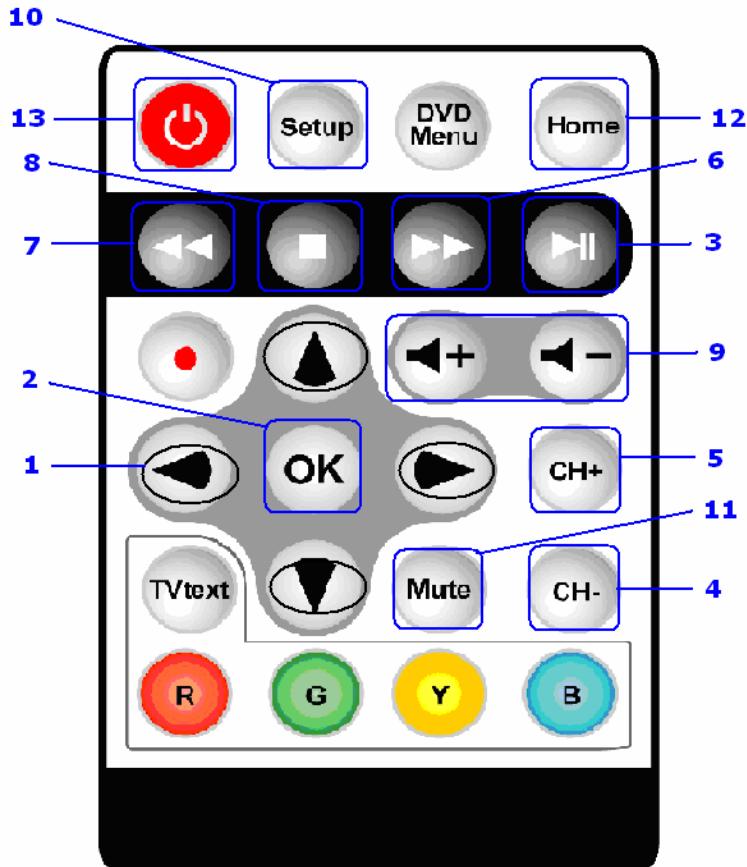

NO.	Item	Action	OSD	Details
1	Menu	Enables the Setup menu		
2	Exit	Disables the Setup menu		
3	OK	Enters the selection	Selects the highlighted menu item (Setup menu)	
4	$\blacktriangleright \text{II}$	Plays/pauses the movie, entering the playback status	\blacktriangleright In upper-left corner (5 sec.). The II mark is always shown.	
5	Previous chapter CH+	Goes to the previous video file. If the first Video file in current folder is reached, it stays in the first chapter.		
6	Next chapter CH-	Goes to the next video file. If the last Video file in current folder is reached, it stays at the last chapter.		
7	Fast backward \blackleftarrow	2X, 4X, 8X, 20X, 30X backward	\blacktriangleright 2X, \blacktriangleright 4X, \blacktriangleright 8X, \blacktriangleright 20X, \blacktriangleright 30X for fast forward. in the upper-left corner.	If the speed is already 30X, and the user presses the key again, it returns to normal speed.
8	Fast forward	2X, 4X, 8X, 20X, 30X forward	\blacktriangleright 2X, \blacktriangleright 4X, \blacktriangleright 8X, \blacktriangleright 20X, \blacktriangleright 30X for fast	If the speed is already 30X and

	▶▶		forward. in the upper-left corner.	the presses the key again, it returns to normal speed.
9	Stop ■	Stops playing	■ In upper-left corner (5 sec.)	Clear the screen and go to the logo page.
10	Vol +/-	Increases/decreases the volume	Unsigned indication bar (at bottom)	<ol style="list-style-type: none"> 1. 16 steps 2. Displays 5 sec. after the user's last press. 3. If the user presses Vol +/- in the muted state, that state is disabled. The volume will increase/decrease from the original level before muting. (the Mute symbol will disappear)
11	Mute	Silence		<ol style="list-style-type: none"> 1. In the normal state, pressing enables the Mute function. 2. In the muted state, pressing disables the Mute function.
12	Home	Call up Main Menu		Will stop Video playback
13	Close	Close InstantON		System will shutdown

7.1.3. Keyboard Hot Keys

Key	Usage	Notes	Keyboard Mapping
Setup	Calls the Setup menu	Very important key, since there is only full screen video mode for DVD	“O,” “o”
Play	In “Pause,” “Stop” state, press it to play the movie.	In playing state, DVD Playback will pause if the key is pressed.	“Space”
Stop	Stops the DVD playback	Not allow in “Stop” status.	“End”
Pause	Pauses the DVD playback	Not allow in “Stop” status.	“Space”
Eject		Eject/Load disc tray. Not allow with slim type.	“E,” “e”
Fast forward ►►	2X, 4X, 8X, 20X, 30X forward		“F,” “f”
Fast backward ◀◀	2X, 4X, 8X, 20X, 30X backward		“R,” “r”
Next	Goes to next video file in current folder		“Page Down”
Previous	Goes to previous video file in current folder		“Page Up”
Volume +		Increase Volume	“Shift” + “↑”
Volume -		Decrease Volume	“Shift” + “↓”
Mute		Silence	“M,” “m”
OK	Selection for menu items		Enter ↴
Arrows ▲ ▼ ▶ ▷	Navigate the UI and menus		↑↓←→
F1	Call up/Close Instruction Menu	Instruction Menu will display the functions mapping to keyboard keys	“F1”

7.2. Functions & Operations

7.2.1. Opening the Video Mode

Select the VIDEOCLIP Image to enter the Video mode in Main Menu.

1. Turn on the system.
2. Press the ▲ or ▼ arrow button to select VIDEOCLIP, and then press OK button.



7.2.2.Thumbnail Mode – To Previous Folder

- ❑ While trace down to a folder, you could get Back to previous folder .
- 1. When highlight pictures are on the left side.
- 2. Press ▶ arrow key on remote.
- 3. When see the “To Previous Folder” highlight option, and then press the OK button to confirm the setting.



7.2.3.Thumbnail Mode – To Video Source

- ❑ While trace down to a folder, you could get Back to Image Source.
- 1. When highlight pictures are on the left side.
- 2. Press ▶ arrow key on remote.
- 3. When see the “Video Source” highlight option, and then press the OK button to confirm the setting.



7.2.4.Thumbnail Mode – To Main Menu

- ❑ Get Back to Main Menu.
- 1. When highlight pictures are on the left side.
- 2. Press ▶ arrow key on remote.
- 3. When see the “Home” highlight option, and then press the OK button to confirm the setting.



7.2.5.Thumbnail -- Information

- Display the information .
- 1. When highlight pictures are on the left side.
- 2. Press ▶ arrow key on remote.
- 3. When see the “Information” highlight option, and then press the OK button to confirm the setting



7.2.6.Viewing Video Files

Press remote “OK” or (“Enter” or “Space”) to playback the highlight Video file

- Additional Operations

To	Operation
Go to the next/previous Video file	Press the ,
Stop	Press Stop

7.2.7.Playback – Information

- Set the speed of slide show

1. Press the  button.
2. Press the ▲ or ▼ arrow button to select **Information**, and then press the OK button.
3. Press the  button to close the menu window.



7.2.8.Using the Setup Menu

- Navigating the Menus

To Do This ...	Press
Display the menu	
Move through the menus	Arrows ▲ ▼ ▶ ▷ ▸ ▵
Move through the menu options	Arrows ▲ ▼
Select an option to change	OK
Change an option's settings	Arrows ▲ ▼ ▶ ▷ ▸ ▵
Select (confirm) changed settings	OK
Exit the menu	

The menu gives you access to the following features:

First Layer	Second Layer	Details
General Setup		
Information		Display the sleep timer
Picture Property		