


MONOPRICE®

# BATTERY BACKUP

for iPhone®, iPod®, and other USB Mobile Devices

15600mAh  
2.1A

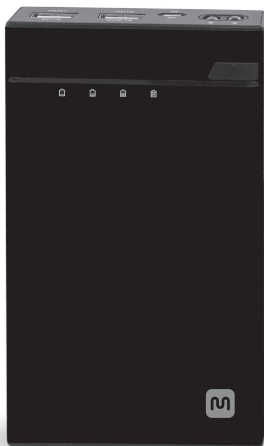

PID: 11931 | **USER'S MANUAL**

# **SAFETY WARNINGS AND GUIDELINES**

Thank you for purchasing this battery backup. Please read this manual thoroughly, paying extra attention to these safety warnings. Keep this manual in a safe place for future reference.

1. Do not expose this device to water or moisture of any kind.  
Do not place items containing liquids on or near this device.
2. Do not expose this device to excessively high temperatures.  
Do not place it in, on, or near heat sources, such as a fireplace, stove, radiator, etc. Do not leave it in direct sunlight.
3. Do not attempt to open, repair, or modify this device.
4. Keep out of reach of children.
5. This device contains a Lithium-ion battery and should be disposed in accordance with local laws and regulations for the disposal of electronic devices and batteries.
6. Do not use solvents or chemical cleaners on this device.  
Clean only using a soft, dry cloth. For stubborn dirt or stains, dampen the cloth with warm water.
7. Charge the battery before first use and at least once every three months.

## PACKAGE CONTENTS

- 1x 15600mAh backup battery/charger
- 1x Micro USB charging cable
- 1x User's manual

## SPECIFICATIONS

**Battery Capacity:** 15600mAh

**Input:** 5 VDC, 1.8A

**Output 1:** 5VDC, 1.0A

**Output 2:** 5 VDC, 2.1A

**Charge Cycles:** > 500


**Dimensions:** 3.0" x 0.8" x 5.5" (75 x 21 x 140 mm)

**Operating Temperature:** +32 ~ +131°F (0 ~ +55°C)

**Protection:** Over charge, over discharge, over current, and short circuit protection


## OVERVIEW

- a. Charge level LEDs
- b. Power switch
- c. LED flashlight
- d. Micro USB input
- e. USB output 2
- f. USB output 1



## CHARGING

Using the included micro USB cable, plug the backup battery into a 5 VDC USB charging source, such as a wall charger, computer port, etc.

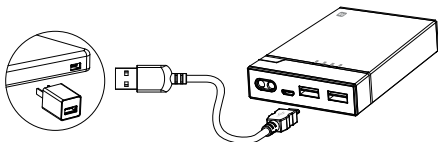

For fastest charging, use a source that is capable of producing at least 2.0 amps of charging power. The nominal charging time using a 2.0A source is about 11 hours.

During charging, the four charge level indicators will show the current charge level.




*Note that the battery should be charged before use.*

## OPERATION

To check the current charge level, press the power button. The LEDs will illuminate to indicate the charge level.

To charge a device, simply plug it into the backup battery/charger. It will detect the device and will start charging.



Alternatively, press the power button to turn the backup battery/charger on and then plug the device you want to charge into it. The backup battery will power off after 30 seconds if it is not connected to a device for charging.

Press and hold the power button for about 2 seconds to turn the flashlight on/off.

*Note that it is normal for the battery to become warm to the touch when it is charging another device or is being charged.*