


2.4GHz Wireless Type Camera User Manual

ITEM NO.: 15-2400BT(B/W Type), 15-2400CT(Color Type)

1. Panel view

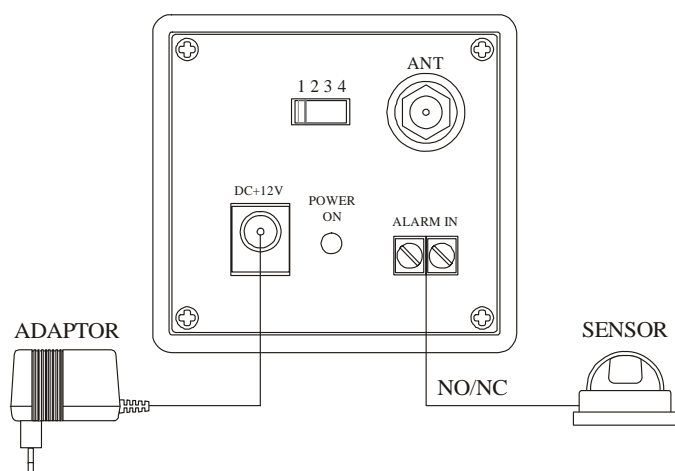

1 2 3 4: Channel selection

ANT: Connect antenna

ALARM IN: Connect alarm sensor NO/ NC type

POWER ON: Power indication

DC+12V: Power input DC+12V

2. Caution for Installation

- 2.1 Avoid places where there is direct sunlight.
- 2.2 Be careful, never let any water in this equipment.
- 2.3 Do not directly touch the CCD element. If necessary, use a soft cloth moistened with alcohol to wipe off the dust.
- 2.4 When the camera installs in dust or wet environment, please puts into the camera housing.
- 2.5 Be extra careful not to shake the camera.
- 2.6 Avoid places where temperatures exceed 50 °C or more.
- 2.7 Avoid places where there is frequent vibrations or shocks.
- 2.8 When any abnormalities occur, make sure to unplug the unit and contact your local dealer.

3. Packing

- | | | |
|----------------------------|----|------------------|
| 3.1 Camera | ×1 | |
| 3.2 Antenna | ×1 | |
| 3.3 Bracket | ×1 | |
| 3.4 User Manual | ×1 | |
| 3.5 Adaptor | ×1 | |
| 3.6 C/CS Mount Lens: 8.0mm | ×1 | (15-2400CT Only) |

4. Specification

CHANNEL	CH1	CH2	CH3	CH4
FREQUENCY	2413 MHZ	2432 MHZ	2451 MHZ	2470 MHZ
TRANSMITTER OUTPUT POWER	10mW			
IMPEDANCE OUTPUT	50 Ohms Typical			
POWER	DC12V adapter.			
CURRENT (MAX)	300mA (COLOR); 280 mA (B/W)			
VIDEO OUTPUT	1Vp-p composite video (75 ohms)			
AUDIO OUTPUT	2 Vp-p max			
DIMENSIONS	mm 94×52 58 (B/W); 103× 51× 55 (COLOR)			
OPERATING TEMPERATURE	-10 TO 50°C			
WEIGHT	370g (Color)/ 375g (B/W)			