
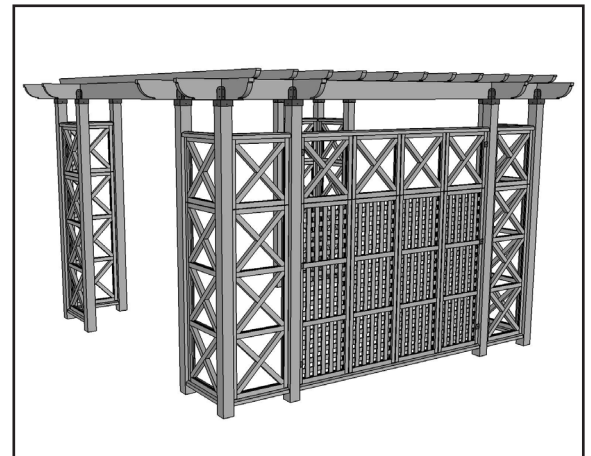
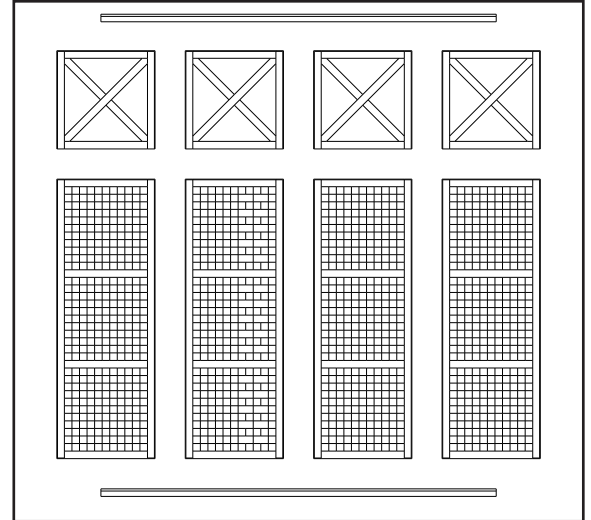


INSTALLATION MANUAL -YM11515 4 HIGH LATTICE - X PRIVACY PANEL

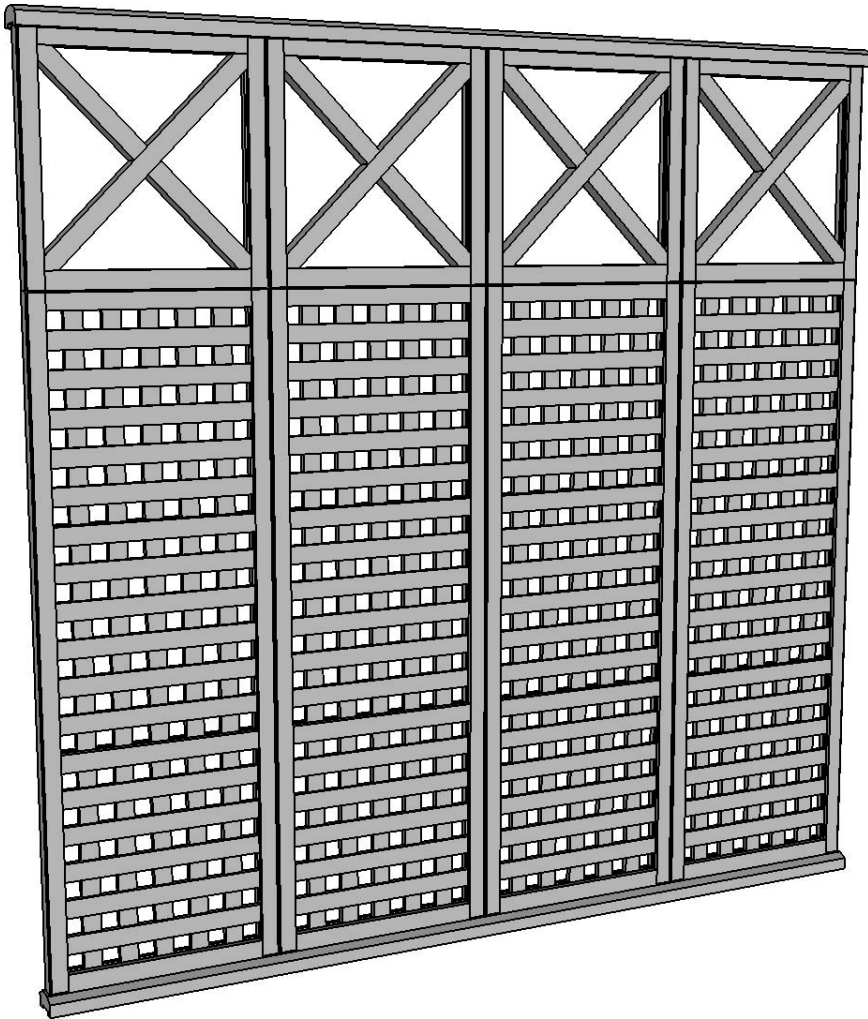


YARDISTRY

Yardistry Ltd.

Mount Forest, ON Canada N0G 2L1

Toll Free Customer Support: 1.888.509.4382

info@yardistrystructures.com

www.yardistrystructures.com

Revised 04/13/2011

!IMPORTANT SAFETY NOTICE!

- Yardistry components are intended for privacy, decorative and ornamental use only. **Product is NOT INTENDED for the following:**
 - A safety barrier to prevent unsupervised access to pools, hot tubs, spas, or ponds.
 - Safety railings for elevated platforms or decks.
 - As load bearing support for a building, structure, heavy objects or swings. - Used in structures that trap wind, rain or snow that would create extra load on the product.
- **Permanent structures may require a building permit.** As the purchaser and or installer of this product you are advised to consult local planning, zoning, and building inspection departments for guidance on applicable building codes and or zoning requirements.
- **Wood is NOT flame retardant and will burn.** Grills, fire pits and chimneys are a fire hazard if placed too close to a Yardistry structure. Consult user's manual of the grill, fire pit or chimney for safe distances from combustible materials.
- **During installation, follow all safety warnings provided with your tools and use OSHA approved safety glasses.**
- **Some structures may require two or more people to install safely. Check for underground utilities before digging or driving stakes into the ground!**

General Information: Wood components are manufactured with Cedar (C. Lanceolata) which is protected with factory applied water-based stain. Knots, small checks (cracks) and weathering are naturally occurring and do not affect the strength of the product. Annual application of a water-based water repellent sealant or stain will help reduce weathering and checks.

Warranty: Yardistry Limited products are backed by a 5 year limited lifetime warranty from the date of original retail purchase for manufacturing defects and if installed as per manufacturer's installation instructions.

Patents Pending

Tools Required

- | | | |
|------------------------------|--|------------------|
| • Tape Measure | • #2 Phillips or Robertson Bits or Screwdriver | • Safety Glasses |
| • Carpenters Level | • 1/8" Drill Bit | • Adult Helpers |
| • Carpenters Square | • Pencil | |
| • Standard or Cordless Drill | • 8' Step Ladder | |

Keys To Assemble Success

This identifies information that requires special attention. Improper assembly could lead to an unsafe or dangerous condition.



Use Help



Measure Distance



Use Help



Check that assembly is square before tightening bolts.

Use a measuring tape to assure proper location.

Where this is shown, 2 or 3 people are required to safely complete the step. To avoid injury or damage to the assembly make sure to get help!

Square Assembly



Check that set or assembly is properly level before proceeding.

Use Level



Pre-drill 1/8" & 3/16" Bit




Pre-drill a pilot hole before fastening screw or lag to prevent splitting of wood.

Tighten Bolts




This indicates time to tighten bolts, but not too tight! Do not crush the wood. This may create splinters and cause structural damage.

MATERIAL LIST



R (2) Top and Bottom Rail

PX1

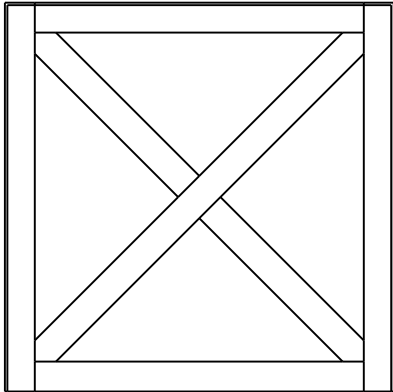

(4) One High X Topper

S4



#8 x 2 1/4" Wood Screw

S5




#10 x 1" Pan Head Screw

S7




#8 x 1 1/2" Wood Screw

PL3

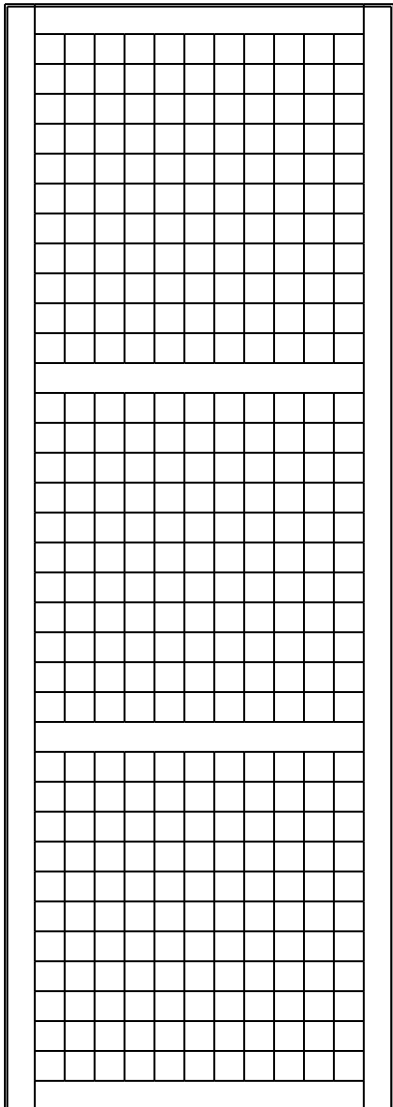


(4) Three High Lattice Panel



(6) Panel Clips

STEP 1- ASSEMBLE PANELS

1. Remove the upper metal connectors on both sides of PL3 - Three High Lattice Panel. Reattach the metal connectors to PL3 by securing the bottom two holes of the metal connectors to the top two holes on PL3 so that the metal connectors stick out from the top. Slide PX1 – One High X Topper between the two protruding metal connectors on the top of PL3. Attach the metal connectors to PX1. (Fig. 1A) ***Ensure Panels are oriented correctly! (Fig. 1B)**
2. Secure panels with a S4 - 2 1/4" Wood Screw the location indicated by the large arrow in the direction of the arrow.
3. Repeat until four panel assemblies are created.

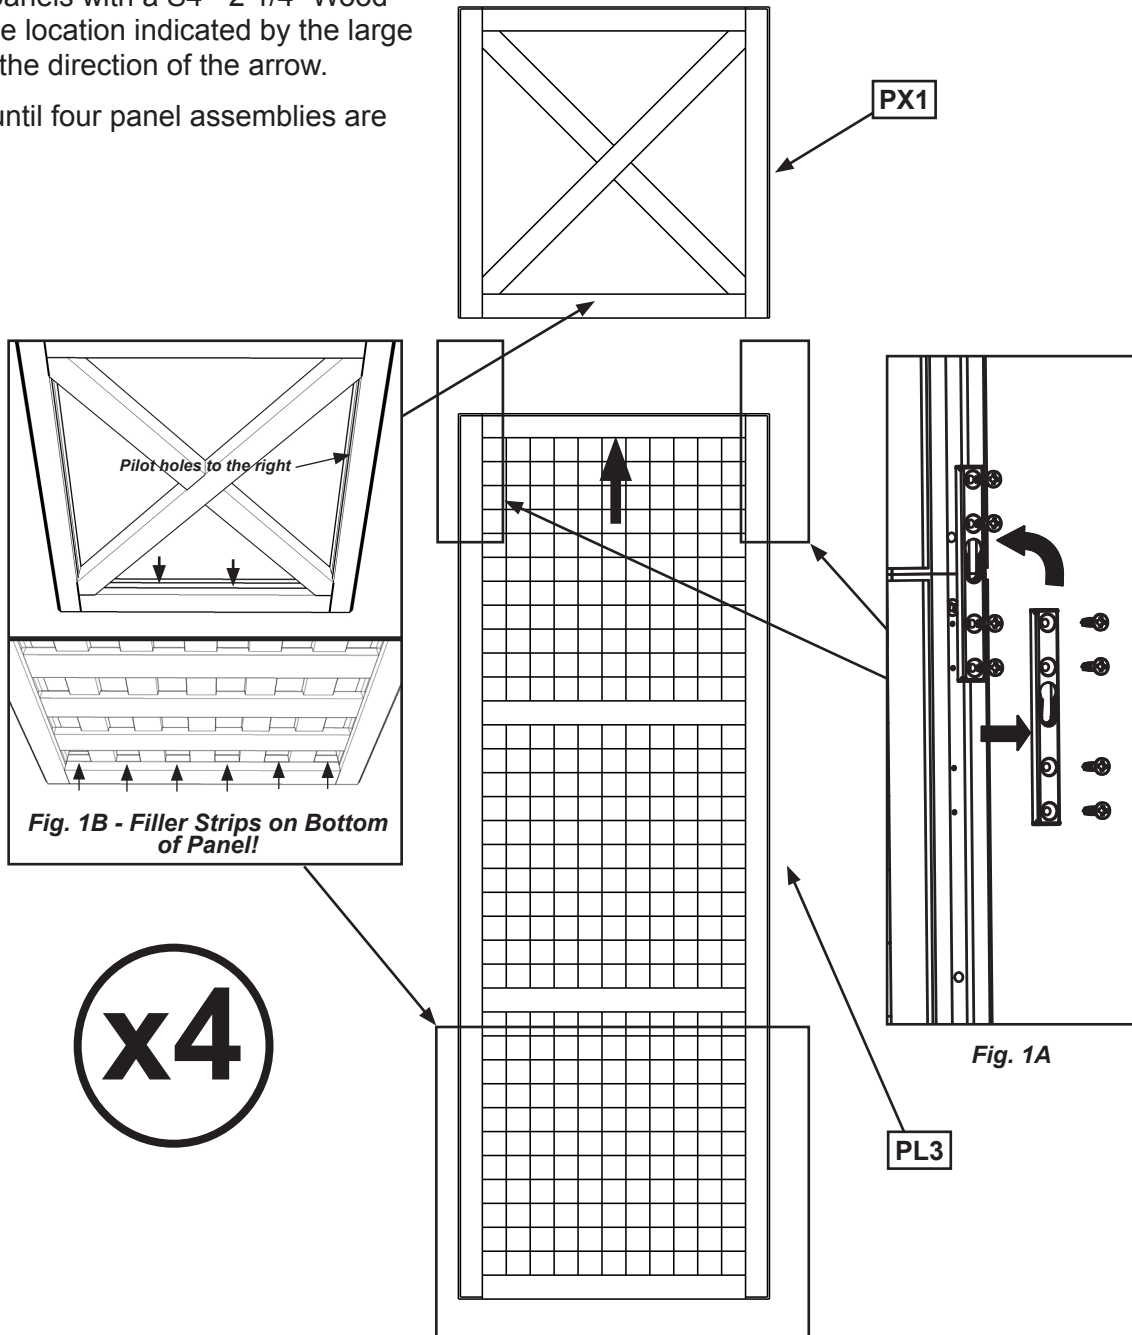

4X PX1 ONE HIGH X TOPPER


4X S4 #8- 2 1/4" WOOD SCREWS

4X PL3 THREE HIGH LATTICE PANEL

STEP 2- ASSEMBLE WALL



Fig. 1

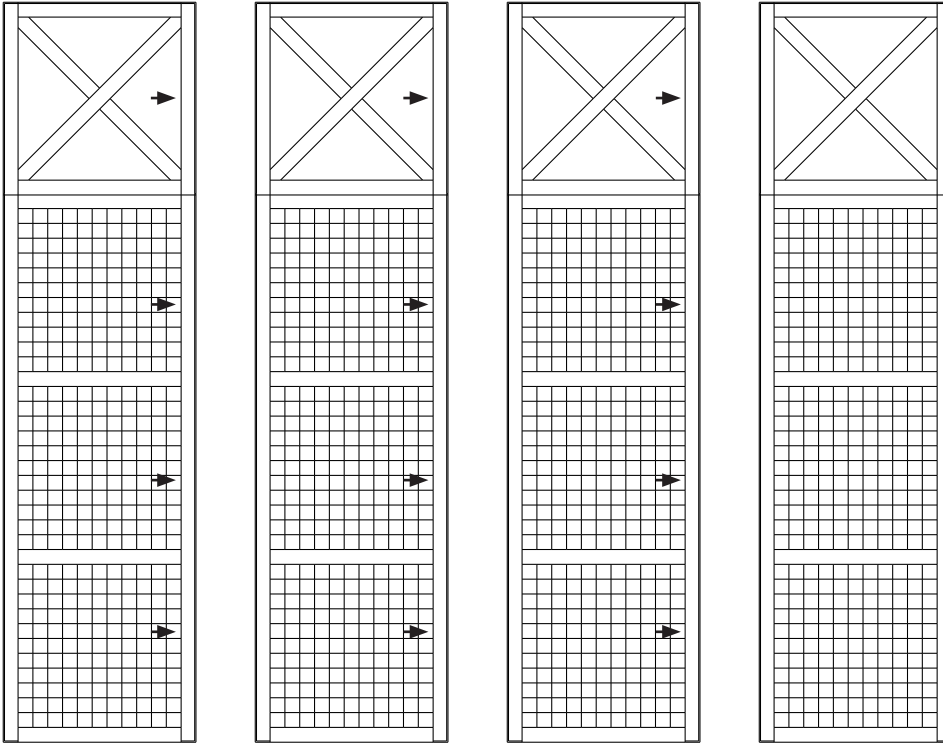

1. Assemble panels together in configuration shown. (Fig.1) Insert male connector into female. Slide down until flush with adjacent panel as shown. (Fig. 1A)
2. Secure Panels with S4 - 2 1/4" screws provided in pre-drilled holes as indicated by arrows, in the direction of the arrow. (Fig.1)

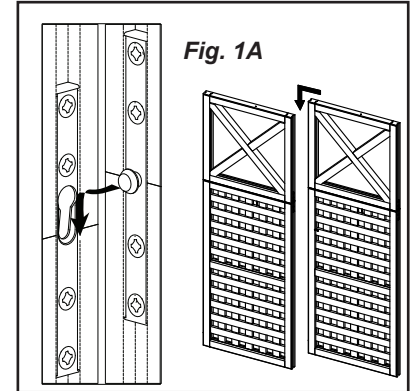



Fig. 2

3. Secure R-Top and Bottom Rails to Panel Assembly with S4 - 2 1/4" Wood Screws locations indicated by arrows in the direction of the arrow. (Fig. 2)

***R- Top and Bottom Rails will overhang 1/4" on either side of panel.**

*** R- Top and Bottom Rails may need to be cut to 6' 6 1/2" (2m)**


(It is recommended to use a Mitre Box or Mitre Saw)

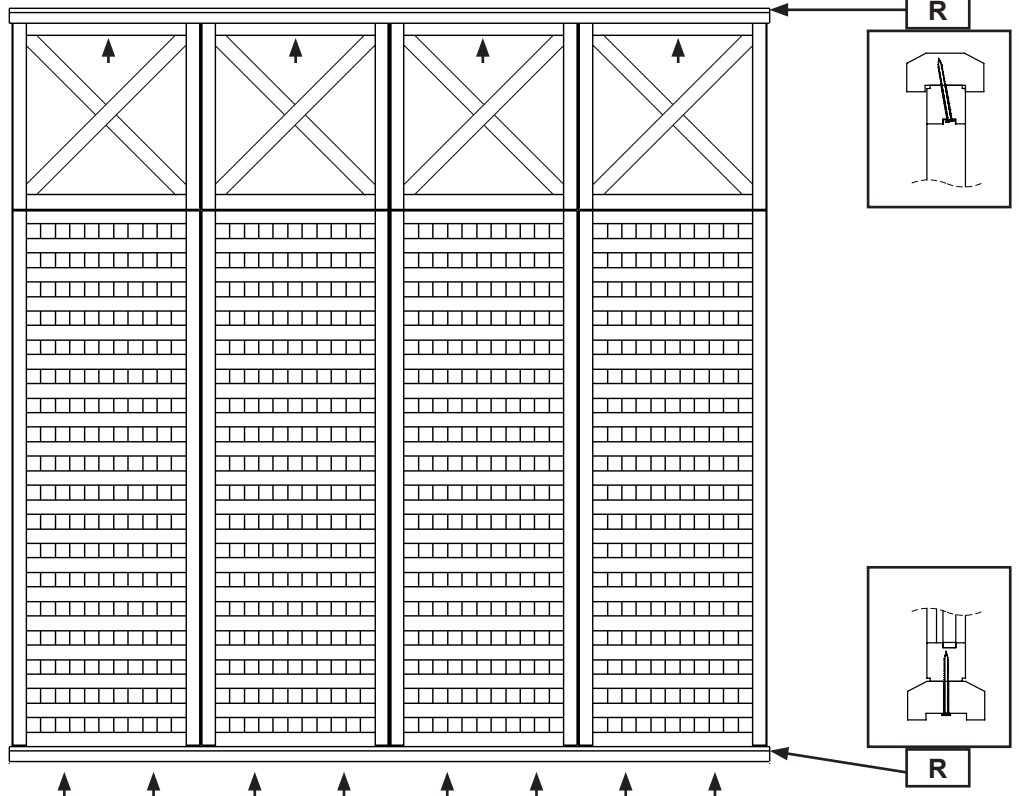



2X R TOP & BOTTOM RAIL

24X S4 #8- 2 1/4" WOOD SCREWS


STEP 3- INSTALLING PANEL CLIPS



1. Position Panel Clips in locations indicated in Figures 1 and 1A. **Ensure Panel Clips are oriented in the same direction facing outside the Pergola!**
2. Panel Clips should be placed in the centre of the post or the leading edge of the clip should be 1 3/8" or 3.5cm away from the side of the post as shown in Fig. 2.
3. With Panel Clips in place, mark screw holes with a pencil and pre-drill holes with a 1/8" drill bit. (Not provided)
4. Secure Panel Clips in locations indicated in figure 1 and 1A with S7- #8 x 1 1/2" wood screws.

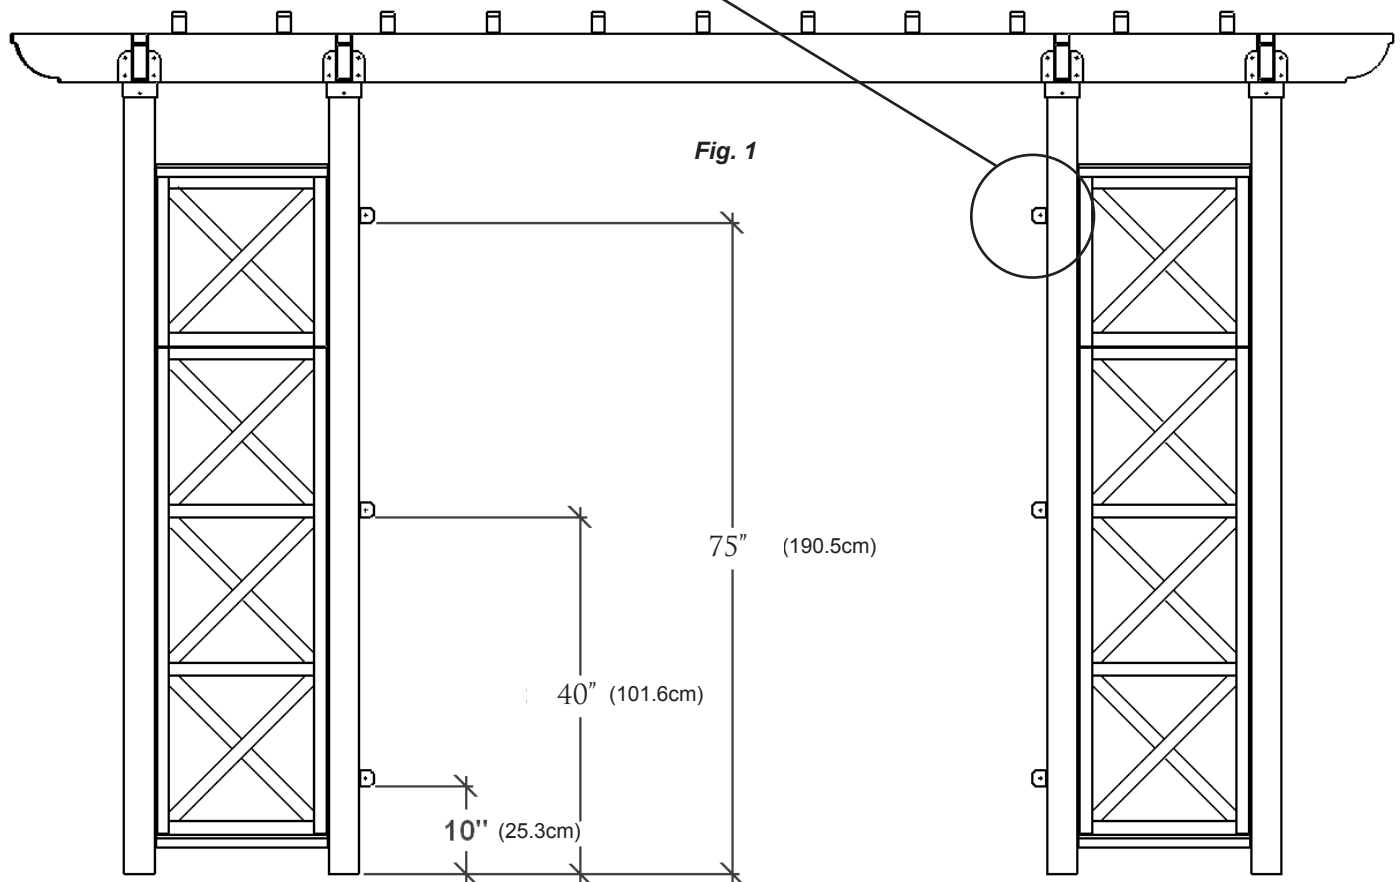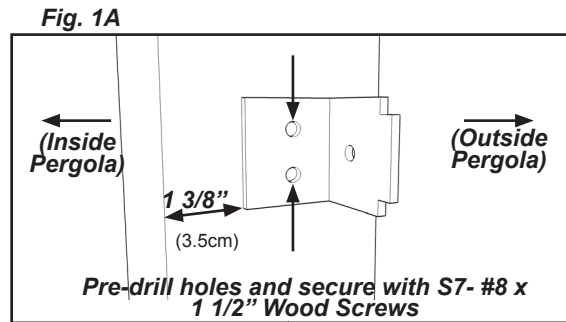

6X - PANEL CLIPS

12X  #8 X 1 1/2" WOOD SCREW

STEP 4- INSTALLING WALL INTO PERGOLA



1. With the help of an adult, place the Wall on Panel Clips as shown (Fig.1) allowing a 4" gap between the bottom of the post and the bottom edge of the bottom rail on the panel assembly.
2. With a 1/8" drill bit, predrill holes as shown in figure 2.
3. Fasten the Wall to the post and Panel Clips with a S5- 1" Pan Head Screw provided in location of arrows. (Fig. 1)

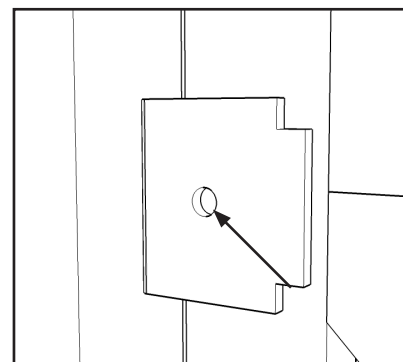


Fig. 2. Predrill Holes and Fasten with S5- 1" Pan Head Screw

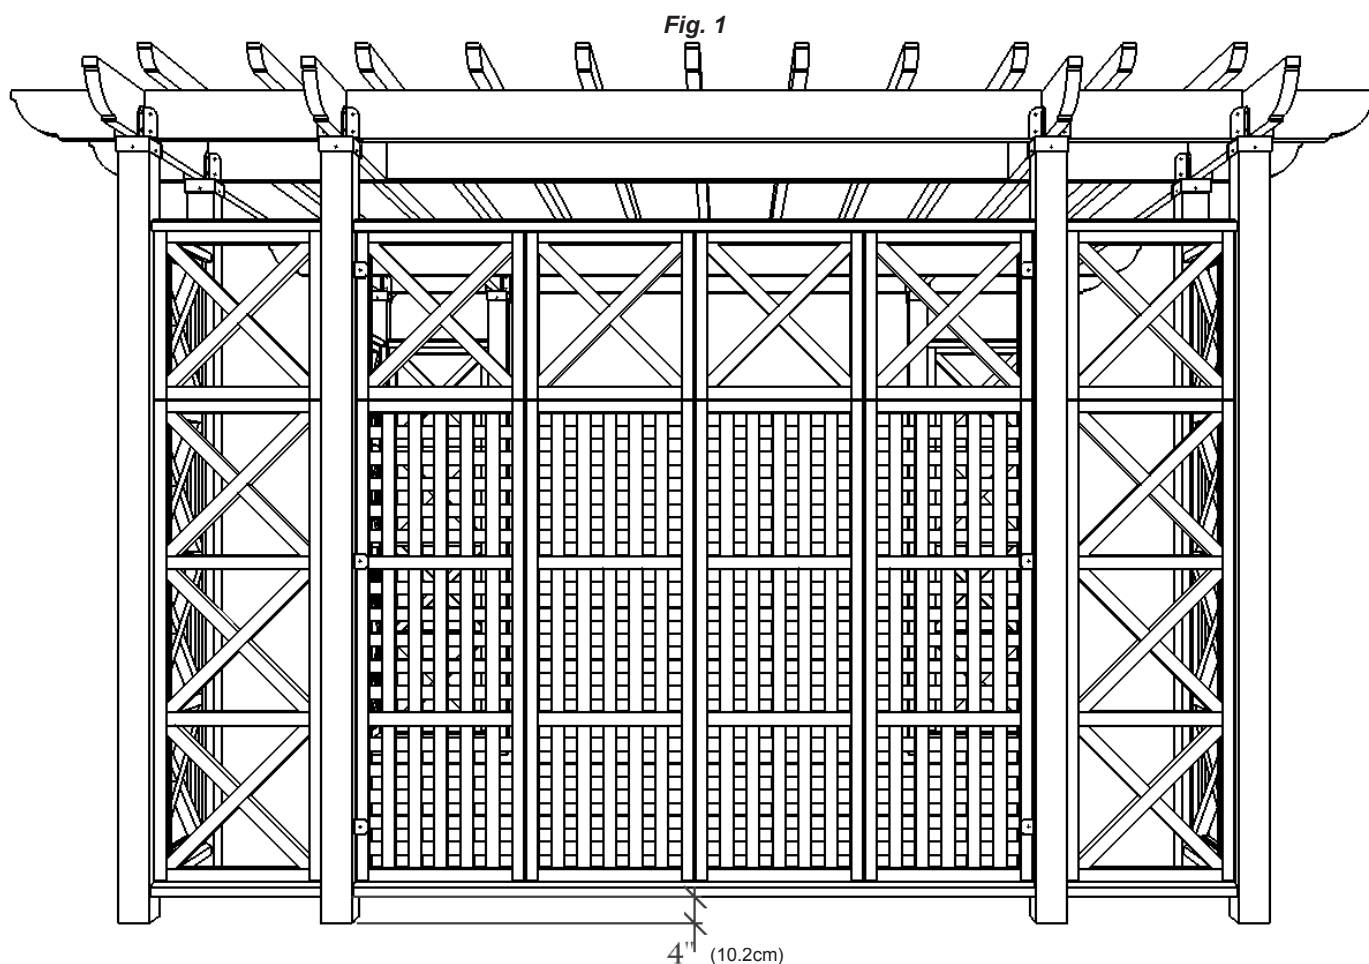



Fig. 1

4" (10.2cm)

6X  #10 x 1" PAN SCREWS