


SU-3000

Gang 8 Programmer

Introduction

SU-3000 is a high-speed and modular gang programmer for production. Quickly supporting new devices, particular for wireless, PDA and cell phone industries. SU-3000 supports stand-alone programming mode and PC-Based programming mode.

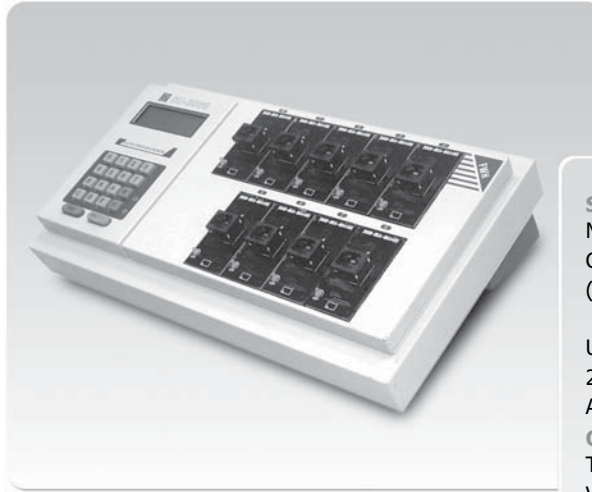

Standard Accessories

Main unit.....x1
CD.....x1
(Driver and user manual are included)
User manual.....x1
25-pin printer cable.....x1
AC power cord.....x1

Optional Accessories

TSOP, TSSOP, BGA, uBGA, VSOP, SOP, SSOP, PLCC, etc.

Features

- Program 64Mb FLASH Memory within 60 seconds.
- Modular design.
- Just change cartridges or adaptors to support different IC package types.
- Stand-alone mode with 18-key keypads and 20x4 LCD display.
- Auto-switching power: 100V~240V AC input.
- Each module has protection function for safe, stable and fast programming.
- Support low voltage 1.8 V~5V "green" ICs.
- Auto detect function : wrong device insertion, bad pin connection, etc.
- Auto search FLASH/EPROM brand and serial number, effective reduce programming time.

Specification

User RAM	4M bits
Button/Switch	18-Key
User Interface	20x4 character LCD
Input/Output	Parallel port (printer port)
Power	100V AC~240V AC
Frequency Range	50/60Hz
Power Consumption	65W(Max)
Dimension	39cm x 22.6cm x 10.9cm
Weight	4.0Kg
Module Dimension	26.5cm x 17.2cm x 2cm
Module Weight	1Kg
Operating Altitude	up to 5000m
Operating Humidity	90% (non-condensing)
Temperature	+5°C ~ +45°C

File Type Supported

- Binary 、intel HEX 、TEK HEX 、Motorola HEX 。

PC System Requirement

Operating System	Windows 98/ME/2000/XP
Processor	Pentium III and above
Memory	128MB RAM and above
Hard Disk	30MB and above
Communication	Printer Port

شرکت الکترونیک افزار آزما



تلفن: ۸۸۸۷۸۸۸۸ فکس: ۸۸۸۷۸۸۸۹ www.afzarazma.com