


Bluetooth handsfree car kit User Manual

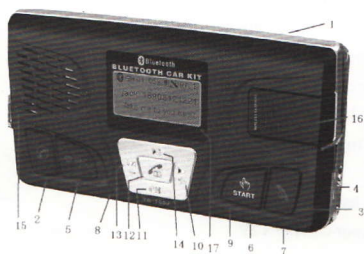

Thank you for purchasing Bluetooth handsfree car kit! In order to make you can use and understand proficiently, Please carefully read the manual before using for safety

Basic Function Keys:

1. solar panels (back)
2. Switch Listen
3. Hang up
4. TF card slot
5. Training voice
6. 3.5mm headphone jack
7. Charging Input/Output jack
8. Microphone
9. Start to speak instruction
10. Next/VOL+
11. Frequency adjustment
12. Menu/Answer
13. Last/VOL-
14. Play/Pause
15. Speaker
16. Wireless earphone
17. OLED screen

Using the Bluetooth handsfree car kit:

1. Turning on/off

- a.) Turn on: Device is under off mode. Press and hold on "Hand up" key for 5 seconds until OLED screen light on with beep tone.
- b.) Turn off: Device is under standby mode. Press and hold on "Hand up" key for 3 seconds until OLED screen light off with beep tone.

2. Adding voice command

IMPORTANT: For the first time, you need to add voice command so that you can use voice command operation.

- a.) Short press "Training voice" key to enter into adding voice command menu, choose "Play", "Start phonebook", "Answer", "transfer to phone", "Frequency-", "Frequency+", "Frequency setting", "Volume-", "Volume+", "Next song", "Previous song", "Pause" by "ast/next" key, then press "Answer" key to start speaking. Pls speak voice command according to prompt from screen. Usually, two times of training can be successful. Follow above steps, pls end all voice commands in turn training options.
- b.) Press and hold "Answer" key to enter into menu, then choose "training voice" and press "Answer" key to enter

into adding voice command menu. Choose "Play", "Start phonebook", "Answer", "transfer to phone", "Frequency-", "Frequency+", "Frequency setting", "Volume-", "Volume+", "Next song", "Previous song", "Pause" by "last/next" key, then press "Answer" key to start speaking. Pls speak voice command according to prompt from screen. Usually, two times of training can be successful. Follow above steps, pls end all voice commands in turn training option c.) Press and hold "Answer" key to enter into menu, choose "phonebook" by "last/next" key, then press "Answer" key to confirm. Press and hold "training voice" key until screen shows "please speak", this moment you can speak the voice command of phone numbers according to prompt from screen. Usually, two times of training can be successful. Follow above steps, pls end all voice commands in turn training options. Please note: you can add up to 128 phone number's voice commands

3. How to operate voice control

- a.) Voice dialing: short press "Start to speak instruction" key, then screen shows "please speak". This moment, you should speak "Start phonebook", then speak name in the phonebook, it will dial out automatically.
- b.) Voice answering: When incoming a call, short press "Start to speak instruction" key, then speak "Answer" after "lease speak" show on screen, it will answer the call automatically.
- c.) Reject: When incoming a call, short press "Start to speak instruction" key, then speak "Hangup" after "please speak" show on screen, it will reject automatically.
- d.) When device is playing music, short press "Start to speak instruction" key, then speak "Play", "Pause", "Next song", "Previous song", "Volume+", "Volume-" etc to control music after "please speak" show on screen.
- e.) Frequency adjustment: Under situation of inserting headset, short press "Switch Listen" key to transfer state FM transmitter, then press "CH/Frequency adjustment" key and press "Start to speak instruction" key, then speak "Volume-" or "Volume+" after "please speak" show on screen.

4. Pairing

- a.) Device is under off mode. Press and hold on "Hang Up" key for 7 seconds until OLED screen shows "Pairing mode". With the device turned on, go into the Bluetooth options on your mobile phone and activate the search option (Please refer to your phone's manual for assistance).

When your phone detects the Bluetooth device as "HHH", it will prompt you to enter a pass code, enter "0000" as a pass code on your mobile phone and confirm.

- b.) Device is under on mode. Press and hold on "Answer" key to enter into menu, choose "Pairing mode" by "last/next" key, then short press "Answer" key to confirm. With the device turned on, go into the Bluetooth options on your mobile phone and activate the search option (Please refer to your phone's manual for assistance).

When your phone detects the Bluetooth device as "HHH", it will prompt you to enter a pass code, enter "0000" as a pass code on your mobile phone and confirm.

Pls note: Once your mobile phone and device has been paired under the situation of mobile phone Settings allow bluetooth automatic connection, they should automatically pair whenever they are in range of each other. If not under Settings allow

bluetooth automatic connection, mobile phone prompts whether connect or not.

5. Making/Answering call

- a.) Dialing through call list: Short press "Answer" key to enter into call list. Choose the phone number you want to dial by "last/next" key, then press "Answer" key to call.
 - b.) Voice dialing: Short press "start to speak instruction" key, screen shows "please speak" This moment, you should speak "start phonebook", then speak name in the phonebook, it will dial out automatically.
 - c.) Dialing through phonebook: Press and hold on "Answer" key to enter into menu, choose "Phonebook", then short press "Answer" key to confirm. Choose phone number by "last/next" key and press "Answer" key to dial out.
 - d.) To answer a call, wait for screen to show caller ID and speak phone number, then short press "Answer" to accept the call or answer the call via your mobile phone in the normal way.
 - e.) To answer a call, wait for screen to show caller ID and speak phone number, then short press "Start to speak instruction" key, please speak "Answer" or "Hang up".
- Pls note: Press "Switch Listen" key to switch sound between mobile phone and device in process of telephone call. Press "Next/VOL+" and "Last/VOL-" to adjust your desired volume level in process of telephone call. Press "angup" key to reject a call.

6. How to charge

- a.) If battery is low, OLED Screen will show "low battery" with tone, please charge the battery in time.
 - b.) Plug small interface of car charger into Bluetooth device, then plug the other interface into the cigarette lighter hole.
 - c.) Plug small interface of USB cable into bluetooth device, then plug the other interface into USB of computer or other 5V 500mA charger.
 - d.) Green light under "Answer" key keep lighting on when charging. Once battery is full, green light off, it takes about 4.5 hours.
- IMPORTANT: If you do not use device too long and it can not be turned on, please charge before first using, since built-in battery has 30% electric quantity from factory.

Specification

1. with solar panels, built-in lithium battery can charge.
 2. USB Charging Block with input / output function, you can connect the charger to charge the Bluetooth device can also switch cable pairs charging other devices such as mobile phones
- a.) Device
Bluetooth: Version 2.0
Working distance range: 10 meters.
Battery: Built-in rechargeable Li-ion, 3.7V, 1100mAh installed
Limited voltage: 3.0~4.2V
Power consumption: 1W
Working temperature: -20~70°C
Bluetooth frequency range: 2402 ~ 2480 MHz
Degree of distortion: <0.1%
SNR: >90dB
Frequency response: 30Hz-15KHz

Maximum transmitting power response: 5dBm

Input voltage: 5V

Standby current: 5mA

solar panels output voltage: 5V

solar panels standby current: 5mA

Working current: 80mA

Standby Time: 220 hours

Talking time: 15 hours

b.) Car Charger

Rated input voltage: 12V

Limited input voltage: 7V~28V

Output voltage: 5V

Output current: 1.5A

Attention

- a.) Using method might be different in operation, because of differentiation of mobile phone. For the first time, Please clear paring log sheet, delete voice command and delete phonebook.
- b.) Please be free from extreme temperature, humidity and dust.
- c.) Please do not drop off the device as this will cause scratching and damage.
- d.) Do not dismantle unauthorizedly, if you have any queries, please contact dealer.

Trouble shooting

- a.) Power off: Please charge, maybe battery power is low
- b.) Can not hear caller's sound: Please check volume. Press "Switch Listen" to check whether sound switched over mobile phone. Maybe signal of mobile phone is not good.
- c.) Pairing fail: Please check whether there are more bluetooth devices which are same name and the pass code is correct or not. Maybe the Bluetooth device is not compatible with your mobile phone. If above cases are not, please repeat step Pairing.
- d.) Talking and standby time is short: Using battery after 300-500 times, battery useful time is dramatic decline.

Statement

- a.) Functions and specifications are not identical, this manual book is only for reference, subject to the real product.
- b.) If performance and feature of device will be changed, with out prior notice.
- c.) Our company has this manual interpretation. Don't assume this manual errors or omissions caused by any event of responsibility.

Warranty term

- a.) Device sold in a month, the date of non-artificial damage by check if goods without fault, performance, packing remain intact, can replace the same type of products.
- b.) Since the date of device sold, warranty is 1 year, accessories are not included.
- c.) Limited warranty service under normal use.
- d.) All the artificial damage, dismantling device, unpacking, improper using will be not repaired.
- e.) If need to repair, please contact local dealer directly.