

**F080**  
**User Guide**

## Table of Contents

1. Security .....	4	5.6. Templates .....	13
2. Getting Started .....	7	5.7. SIM message .....	13
2.1. Batteries .....	7	5.8. Voicemail .....	13
2.1.1. Installing and uninstalling the battery .....	7	5.9. Broadcast message .....	13
2.1.2. Charging the battery .....	8	5.10. Setting .....	13
2.1.3. Using the battery .....	8	5.11. Memory status .....	13
2.1.4. Battery level indicator .....	8	6. Call History .....	13
2.2. Connecting to the Network .....	8	7. Phonebook .....	13
2.2.1. SIM card .....	8	7.1. Phonebooks of SIM card and your phone .....	13
2.2.2. Installing and uninstalling the SIM card .....	8	7.2. Contact list .....	14
2.2.3. Unlocking the SIM card .....	9	7.3. Contact .....	14
2.2.4. Connecting to the network .....	9	7.4. Group and Blacklist .....	14
2.2.5. Standby screen and Icons .....	9	8. File Manager .....	14
2.3. Text Input Method .....	10	8.1. KingMovie .....	14
3. Call Function .....	10	9. Multimedia .....	14
3.1. Phone power on/off .....	10	9.1. Camera .....	15
3.2. Dialing .....	10	9.2. Camcorder .....	15
3.2.1. Direct dial .....	10	9.3. Music Player .....	16
3.2.2. Dialing from the Phonebook .....	11	9.4. Video Viewer .....	16
3.2.3. Unanswered call .....	11	9.5. Photo Album .....	16
3.3. Answering a call .....	11	9.6. FM radio .....	17
3.4. During a phone call .....	11	9.7. Voice memo .....	17
3.5. Emergency service .....	12	10. Profile .....	17
4. Main Menu .....	12	11. Organizer .....	18
5. Message .....	12	11.1. Calendar .....	18
5.1. Writing messages .....	12	11.2. Alarm .....	18
5.1.1. SMS 12 .....		11.3. Calculator .....	18
5.1.2. MMS12 .....		11.4. Stopwatch .....	18
5.2. Inbox .....	12	11.5. Countdown timer .....	18
5.3. Draft .....	12	12. Game .....	18
5.4. Outbox .....	13	13. Applications .....	18
5.5. Sent box .....	13	13.1. World clock .....	18
		13.2. eBook .....	18
		14. Settings .....	19

14.1.	General settings.....	19
14.1.1.	Personal settings.....	19
14.1.2.	Time and date .....	19
14.1.3.	Power on/off .....	19
14.1.4.	Information .....	20
14.1.5.	Security .....	20
14.1.6.	Restore to factory default .....	20
14.2.	Phone settings.....	20
14.2.1.	Call settings.....	20
14.2.2.	Call divert.....	20
14.2.3.	Call barring.....	20
14.2.4.	Network settings.....	21
14.2.5.	Switch mode .....	21
14.2.6.	Default SIM .....	21
14.2.7.	Speed dial .....	21
14.3.	Connection settings.....	21
15.	Service.....	<b>21</b>
15.1.	WAP browser.....	21
15.2.	Bluetooth .....	21
15.3.	Missed event center .....	<b>Error! Bookmark not defined.</b>
16.	USB mode .....	<b>21</b>
17.	Appendix.....	<b>21</b>
17.1.	FAQ.....	21
17.2.	Error Message .....	21
17.3.	Accessory.....	22
17.4.	Care and maintenance .....	22

## General Information

Thank you for using our GSM/GPRS mobile phone. This user guide provides general information and operation instructions.

The color screen phone is designed for the 2.5G GSM/GPRS 900/1800 network environment with dual SIM technology. Various networking and entertainment services beyond basic call function are guaranteed through solid connecting quality, providing enjoyable experience to the user.

With the dual-band, dual-SIM feature, the user is allowed to apply two mobile phone numbers selectively for calls and high speed data accesses.

The package includes a chargeable battery, a charger and other accessories. Please refer to the Accessory section for details.

### Note:

- Use only accessories approved by the phone manufacturer to ensure safety. Failing to comply with this will violate the terms and conditions of the warranty.
- The phone set has been manufactured in strict compliance with various national standards and requirements set by the authorities. If the contents and displays described in this user guide do not match the actual operation of the phone set, please follow the contents and displays of your phone set. We reserve the rights to change any mechanisms of the phone without notice.
- This user guide is subject to change without notice.

In this guide, different typing format indicates different operation:

Operation	Description	Example
Display	Normal font	0-9
Key	Bold with outline	<b>0-9</b>

## 1. Security

### Emergency call

If any emergency arises, dial 112 (or other emergency call number) for emergency help.

### Note:

- Due to the nature of cellular networking, the success of emergency call is not guaranteed.

### For your safety

- Switch off the phone in hospitals and aircraft. Obey any restrictions. Wireless devices can affect the medical treatment and cause interference in aircraft.
- Some medical devices such as hearing aids and pacemaker may be sensitive to external radio frequency emissions. Consult the device manufacturers or your doctor before using the phone around the medical devices.
- Pay special attention to the ring tone volume and vibration settings if you have a heart problem.
- In areas with potentially explosive atmosphere, such as gas stations, fuel or chemical transfer or storage facilities, obey all signs and instructions.
- Your phone will emit radio frequency even in the standby mode. Turn off your phone when so instructed.
- Always obey all the local laws and regulations. Do not use your phone while driving. Use Hands-free operation, if available, and give full attention to driving and to the road. Pull off the road and park before making or answering a call if driving conditions so require.
- If your phone is lost or stolen, notify your service provider immediately to stop the SIM card from being used.
- When you contact your service provider, they will need your IMEI number. It is printed on the back of your phone set (you can find it when you remove your battery), or call \*#06# to look up your IMEI number. Copy this number and save it for future need.
- To prevent your phone from misuse, lock your SIM card or phone, and

change passwords when necessary.

- Do not remove the battery without turning off the phone. Failure to follow this instruction may result in data loss.
- When you leave your vehicle, take the phone with you or place it in the glove compartment to avoid theft.
- Keep the phone, battery or charger out of reach of children.

#### **Notes on phone usage**

- Your phone will give off electromagnetic waves. Do not place it near storage medium such as floppy disk.
- Using the phone near television, land phone, radio and office automatic devices may cause interference and affect the function of the mobile phone.
- Keep the phone dry; all kinds of liquid can erode electronic circuit.
- Keep the phone away from extreme temperatures.
- Keep the phone away from fire or a lighted cigarette.
- Do not paint the phone.
- Do not drop the phone or violently crush or shake the phone.
- Do not keep the phone near magcards and other object with magnetism. The phone's magnetism may clear the information stored on floppy disk, pre-paid phone card and credit card.
- Keep the phone away from hot places where the temperature may exceed 60°C, such as dashboard, windowsill, or areas exposed to direct sunlight.
- Do not disassemble or modify your phone. This can damage the phone, cause leakage and break the internal circuit.
- Use only damp cloth or non-static cloth to clean your phone.
- Do not use alcohol, thinner, benzene or other chemicals or abrasive cleaner to clean your phone.
- The phone will become warm under normal use and while in battery charging.
- Do not leave the phone with battery uninstalled or with the battery empty for a long period of time. This may cause data loss.
- The metal parts of the phone may irritate your skin depending on your

health condition.

- Do not put the phone in the back pocket. Sitting on it may damage the phone. Do not put the phone at the bottom of a bag. You may crush it.
- When the vibrate mode is on, place the phone carefully to prevent it from being dropped from a height or being moved to a heat source due to the vibrating.
- Use only the stylus approved by the phone manufacturer.
- Using stylus of unauthorized source will violate the terms and conditions of the warranty and may damage the touch screen.
- Handle the stylus with care. Place it back to its proper storing place when not in use. Keep it away from children.
- Do not press the touch screen with needles, pen point or other sharp objects; it can damage the LCD and violate the terms and conditions of the warranty.

#### **Notes on battery usage**

- Do not short-circuit your battery. It can damage battery, and cause leakage, over heat, fire or explosion.
- Disposing battery in a fire can cause fire or explosion. Old batteries should be returned to your dealer or be disposed according to local regulations. Do not treat the battery as household waste.
- Keep metal objects (such as coins or key rings) away from the battery to avoid short circuit.
- Do not remove the battery without turning off the phone.
- Do not hold the battery in your mouth. The liquid of the battery can be toxic.
- Embedded battery shall be replaced by authorized dealers. Use only batteries approved by the phone manufacturer; otherwise, it may cause explosion.
- Damage resulting from using un-authorized batteries and chargers will not be covered by the warranty.
- Avoid contact with any leaked liquid of the battery. If it touches your skin, wash your skin with fresh water and go to the hospital immediately.

### **Traffic safety**

- Do not use your phone when driving a vehicle. Give full attention to driving and to the road. Provided there is an emergency, stop your vehicle in a safe place and then use your phone. Please obey all the local traffic laws and regulations.
- Normally the electronic systems in the vehicle should not be affected by the RF (Radio Frequency) signals from your wireless phone. However if you suspect any damage is resulting from the RF of your phone, contact your car dealer. Stop using your phone in the car until a qualified technician clears the problem.
- Only qualified technician can install your phone in your vehicle.
- If your vehicle is equipped with an air bag, do not place the phone above the air bag, or in the air bag deployment area. If in-vehicle wireless equipment is improperly stored or installed and the air bag inflates, serious injury could result.
- Turn off your phone when in the gas station or any place where using wireless equipment is prohibited. Do not place or transport your phone with inflammables or explosives; the internal sparkle may cause fire.

### **Airplane safety**

- Power off your phone before boarding; the use of a wireless phone in an airplane will be dangerous to the operation of the airplane and disrupt the wireless telephone network and may be illegal. Failure to observe these instructions may lead to law suit or denial of GSM cellular network service or both.
- Should there be an emergency situation, contact crew member.

### **Equipments from other manufacturers**

- Using equipments, cables or accessories from un-authorized manufacturers can cause the warranty to be annulled and may affect the normal usage of the phone. Be sure to use authorized cables.

### **Maintenance**

- Do not repair your phone, battery and charger by yourselves. Have your

phone and parts repaired by authorized maintenance centers. If any maintenance services are needed, consult your network service provider for details.

### **Non-ionizing radiation**

- Connect wireless equipment to antenna using nonradiative cable (such as coaxial cable). Do not place the antenna close to the human body, unless there is metal shielding such as metal roof between them. Use only antenna designed for use with your phone. Using un-authorized antenna, modifying the antenna, or attaching supplementary can damage the phone or violate the related regulations, leading to performance downgrade.

### **Effective use**

- To achieve optimal performance with least power consumption, do not lay your hand over the area where the embedded antenna lies when making or answering phone calls. Otherwise it will affect the call quality and cause the phone to work at a higher power consumption level, thereby reducing the battery call time and standby time.

### **RF Power**


- The phone is a low power wireless transceiver device. When powered on, it will transmit and receive RF signals intermittently. The transmission power is controlled by networking system.

## **2. Phone Registration**

In order to register the details of the customer, the software embedded in the phone has the facility to send an sms automatically to MIRC Electronics Ltd upon insertion of the SIM card. It is in the interest of the user to register its details with the company for any future services , as may be needed. The user agrees to pay the SMS charges in respect of the automated SMS sent to

the company upon insertion of the SIM card

### Description of keypad keys

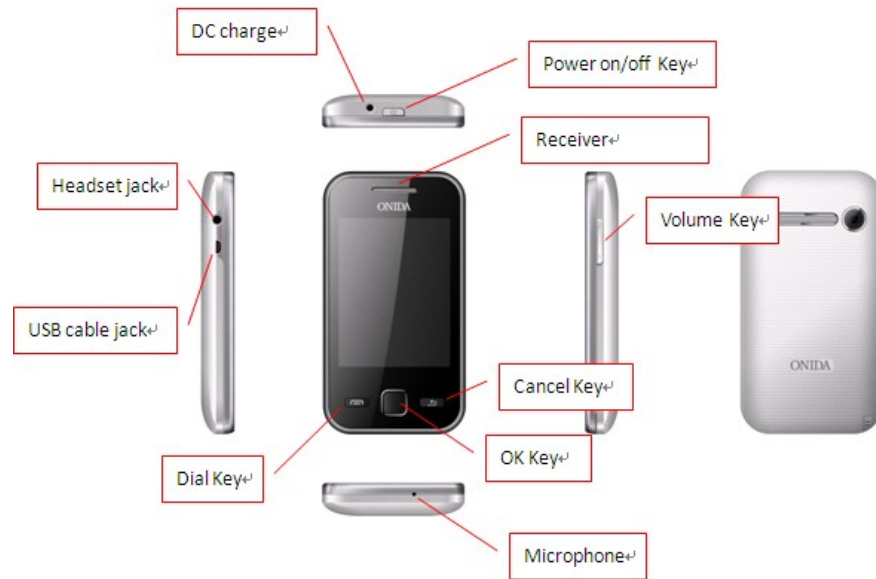

**Dial key:** Use it answer and dial a phone call on SIM 1/SIM 2.

**Cancel Key:** End or reject a call.

**OK key:** Press this key in idle mode to enter the main menu. The OK Key to enter the menu that has been selected.

**Power on/off Key:** Press and hold the key to switch on/off the phone, In other circumstances, press the key to on/off the screen lock

**Volume Key:** Increase and to reduce the volume function

## 3. Getting Started


### 3.1. Batteries

The battery is included in the package. It is not fully charged out of factory


but it may still be able to power on your phone. Please completely use up the power of the battery and then charge it for at least 12 hours with your phone turned off. You battery will reach its optimal state after three cycles of charge and discharge.

#### 3.1.1. Installing and uninstalling the battery

To install the battery, remove the back cover from the phone by pressing firmly on the cover and slide it down. Align the golden contacts of the battery to the contacts in the phone, and then gently snap down the battery into place. Re-assemble the back cover.

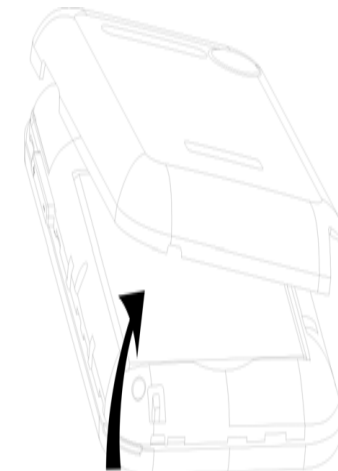

To uninstall the battery, flip the battery out from the bottom of the battery.

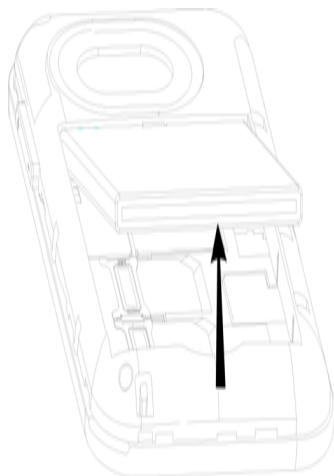

### 3.1.2. Charging the battery

Plug the charger into the socket on the side of your phone. Connect the charger to an AC wall socket. The blinking of the battery level icon indicates the battery is being charged. When the blinking stops, it indicates the charging is finished.

During charging, the phone and charger will feel warm to the touch. This is normal.

#### **Warning:**

- The operating ambient temperature range of the charger is 0°C-50°C. Do not use the charger when the temperature exceeds this limit.
- Use only chargers approved by the phone manufacturer to ensure safety. Failing to comply with this will violate the terms and conditions of the warranty.

### 3.1.3. Using the battery

The waiting time and calling time capacities specified by the phone manufacturer are obtained under ideal operating environment. The actual values will vary with the network condition, operating environment and operation method.

Please comply with the local regulations on battery disposal (such as recycling). Do not dispose it as household waste.

### 3.1.4. Battery level indicator

When the phone is on, the battery level indicator is located at the upper right corner of the screen.

## 3.2. Connecting to the Network

### 3.2.1. SIM card

Please insert available Subscriber Identity Module (SIM) card into your phone before using it. SIM card is supplied by your network carrier.

All the information related to network connection is recorded on the SIM card, so is the contact information such as names, phone numbers and SMSs that you set to store on the SIM. You can take out the SIM card from the phone and insert it into another GSM phone to use it. Most new phones will recognize the SIM card automatically.

Do not touch the golden contacts of the SIM card; place it away from electricity and magnetism to avoid damage. You will not be able to use the phone if the SIM card is damaged.


#### **Note:**

- Before inserting and taking out the SIM card, always make sure that the phone is switched off and disconnected from any external power source; otherwise both the phone and the SIM card may be damaged.

### 3.2.2. Installing and uninstalling the SIM card

The SIM card usually comes attached to a special card. The metal contacts of SIM card can be easily damaged by scratching, so take it out carefully before assembling it into the phone.



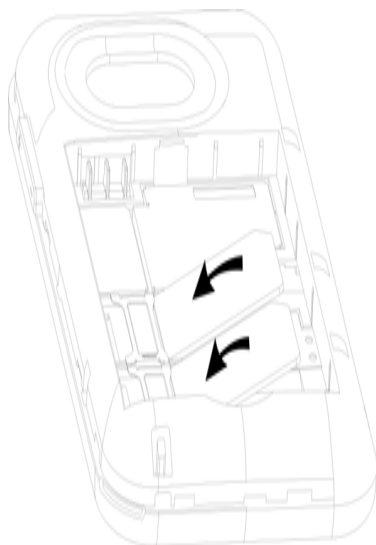

Switch off the phone, remove the back cover, battery and other external power source. Fit the SIM card into the SIM card slot. Align the angled corner of the SIM card with the slot. Slide in the SIM card, make sure it is in place, install the battery, and restore the back cover.

Likewise, to remove the SIM card, switch off the phone, remove the battery and then take out the SIM card.

### 3.2.3. Unlocking the SIM card

#### PIN code

Your Personal Identification Number (PIN) code protects the SIM card against unauthorized use. Your PIN code is usually supplied with the SIM card. If this security function is enabled, you need to enter the PIN code every time you turn on the phone. You can also disable this function.

To unlock the SIM card, press and hold the power button to turn on the phone. Enter the PIN code. After three consecutive incorrect PIN code

entries, the code is blocked, and you need the PUK code to unblock it.

#### PUK code

This code is required to unblock a locked PIN code. If the code is not supplied with the SIM card, contact your service provider. After ten consecutive incorrect PUK code entries, the SIM card will become invalid. Please contact your service provider to buy a new SIM card. The PUK code cannot be edited. If it is lost, please contact your service provider.

### 3.2.4. Connecting to the network

After the SIM card is unlocked, your phone will automatically search for the registered network or other available local network. Once connected, the name of the network carrier will appear on the top of the screen.

Your phone is now in Standby mode, ready for making and receiving calls.

### 3.2.5. Standby screen and Icons







This phone provides a Standby screen. Through the instruction and various icons on the screen, you can have the operating information needed.

#### Status Icon



#### Description

Signal indicator for Card 1  
Signal indicator for Card 2  
GPRS for Card 1, GPRS for Card 2, GPRS for Card 1 and Card 2  
Card 1/Card2 Roaming  
Call diverted  
Message full  
Background message sending  
Using headset  
Mute  
Vibrate mode  
Countdown on  
Background playing / pausing

	FM radio playing
	Battery Level Indicator, Battery charging
	Memory card installed
	Bluetooth on
	Bluetooth transmitting
	Modem connecting
00:56 AM	Current Time

### 3.3. Text Input Method

This phone provides various text input methods that allow you to use less key strokes to input and search for text:

- Intelligent English input method
- English input method
- Digit input method

## 4. Call Function

After the setup described in the previous sections is completed, you are ready to make and receive calls using the basic information provided in this section.

#### Note:

- When you are using headset, please plug/unplug the headset gently to avoid damaging the headset jack.

### 4.1. Phone power on/off

#### Power on

Press and hold **power** to turn on the phone. If PIN code is required, please refer to the previous section in this guide.

#### Power off

In Standby mode, press **power** key to enter the Power-off screen.

There are two power-off states for you to choose from: one is power off with

Vodafone / Vodafone Network carrier of Card 1/ Card 2

#### Note:

- “Press” in this manual means press and then immediately release a button; “press and hold” means press a button for at least one second before releasing it.

alarm clock on and the other is power off with alarm clock off.

In the Standby mode, press **power** keys to lock the phone screen. To unlock the screen, Slide to Unlock

### 4.2. Dialing

When the network carrier is shown on the screen, your phone has entered the Standby mode and you may make or receive calls. If you have installed two SIM cards, the two network carriers will both appear on the screen.

The upper left icons on the screen indicate the signal intensity of the two SIM cards (strongest when full). The call quality is easily impaired by stumbling blocks. To improve signal intensity, keep clear of blocks by moving about.

To make phone calls, you may dial the number from the Dial screen or from your phonebook.

#### 4.2.1. Direct dial

Press the function key with respect to the dial icon on the Standby screen, or press any number key to enter the Dial screen.

#### Domestic call

Press the number keys (add area code when calling long distance), and then

press the hardware keys with dial icon of SIM 1 or SIM 2 to make the phone call.



**Note:**

- In single card mode, both SIM 1 dial key and SIM 2 dial key will dial out to the one card.
- In dual card mode, SIM 1 dial key and SIM 2 dial key will dial out to card 1 and card 2 respectively.

The screen will show the name and/or phone number of the person you are calling. After the call goes through, the screen will show a time meter in addition to the phone number and/or the name of the person you are calling.

After keying in the phone number, you may also enter the options menu for various operations: **Call**, **Save** and **Send**.

**International call**

To make international calls, key in the symbol “+” by tapping and holding , followed by the desired country code and the phone number. For example, to make a call to France, tap and hold  until “+” appears then enter “33” (the country code for France) and the phone number.

**4.2.2. Dialing from the Phonebook**

Enter Phonebook from the Main Menu. You may use alphabet for quick search of the names.

**4.2.3. Unanswered call**

If you have set up Auto Re-dial, your phone will automatically re-dial the last unanswered number that you called.

**4.3. Answering a call**

When there is an incoming call, the phone will notify you through vibration, ringing, vibration plus ringing, etc, according to your setting. The name and phone number of the caller is shown on the screen if the network supports

the service. You may answer or reject the call.

If call waiting is on when you are on the phone and there is another incoming call, your phone will notify you with a short tone. You may answer or reject that second call. If you choose to answer the second call, the current call will be on hold.

**4.4. During a phone call**

When you are on the phone, the following functions can be used:

**Note:**

- The functions vary with the SIM card.

**Speakerphone:** Make or receive calls hands-free.

**Mute:** The microphone is turned off and the person you are calling will not hear your voice.

**Hold:** The current call is on hold and both you and the person you are calling will not hear each other. When the call is on hold, you may pick it up again or end the call through the Options menu.

**End:** End the current call.

**Volume:** Adjust the volume of the speaker or headset.

**Touch Tone:** Turn on/off the touch tone.

**Record:** Record the phone conversation.

**Phonebook:** Enter the phonebook and do the related operations. This function is convenient for searching phone numbers during a phone call.

**Message:** Enter the message screen and do the related functions.

You may enter Dial or Phonebook screen to make a new phone call while the current phone call is still ongoing.

**Note:**

- In the dual card mode, if one card is in use, the other card will be under no-service state.

## 4.5. Emergency service

In any GSM network system, if you are in a region covered by the network, you should be able to use the emergency service even without a SIM card.

## 5. Main Menu

On the Standby screen, press **OK** or tap the icon to enter the Main Menu. You can then access the various functions and operations.

## 6. Message

This chapter introduces the messaging services provided by the GSM network. Some services may not be supported by the local network.

### 6.1. Writing messages

#### 6.1.1. SMS

Enter the SMS editor screen. You may use keypad, virtual keypad input English, digits and punctuation marks. After writing the text message, you have the following options:

**Send:** Send the message.

**New Recipient:** Add new recipient.

**Save:** Save to Draft box.

**Insert:** Insert pictures, voice, video, template, vCard or vCalendar.

**Convert to MMS:** Convert this SMS to MMS.

**Send Options:** Enter the SMS setup screen to set up service center number, send mode, expiration date, SMS send format, sent log, and direct reply options.

**Input Method:** Insert symbols, copy or paste contents, switch input method or language.

#### 6.1.2. MMS

The MMS function allows you to send text and multimedia such as pictures, voice and video to the other phone. Additionally, you can send the MMS message using CC and BCC functions.

After creating the message, you have the following options:

**Send:** Send the message.

**New Recipient:** Add new recipient.

**Insert:** Insert pictures, voice, video, template, vCard or vCalendar.

**Insert page:** Insert a new page before or after the current page.

**Preview:** Preview the current MMS.

**Convert to SMS:** Convert this MMS to SMS.

**Save:** Save to Draft box.

**Page setup:** Set the playback time and text positions.

If the MMS is multi-page, the Options menu will provide the following options:

**Delete page, Go to and Move to.** If there is a subject in the MMS contents, you will have **Subject** and **Delete** options in the Options menu.

### 6.2. Inbox

The Inbox lists the received SMS and MMS. You have the following options:

**Read, write SMS/MMS, Reply, Delete, Copy to phone/SIM, Mark and Details.**

After you select to read a message, you have the following options: Reply, Forward, Delete, Call Sender, IP Dial, Copy to phone/SIM, and Details.

The Mark function allows you to select messages for further operation, such as delete all marked messages.

### 6.3. Draft

Saved messages and unsent message are saved here. Options are **Read, write message, Delete, Copy to phone/SIM, Mark** and Details.

After you select to read a message, you will enter the message editor.

#### 6.4. Outbox

Outgoing messages are listed here. Your options include: **Read, Delete, Delete all, Move to, Mark** and **Details**.

After you select to read a message, you have the following options: Forward, Delete, and Details.

#### 6.5. Sent box

Sent messages are saved here. Your options include: **Read, write message, Delete, Copy to phone/SIM, Mark** and **Details**.

After you select to read a message, you have the following options: Forward, Delete, Call Receiver, IP Dial, Save Receiver, Save to phone/SIM, and Details.

#### 6.6. Templates

You can preset frequently used sentences here to avoid repeated input when writing a message.

#### 6.7. SIM message

This function allows you to look up the messages stored in the SIM card.

#### 6.8. Voicemail

Voicemail messages are stored on the network. You can listen to your voicemail messages by calling your network voicemail phone number. You will be asked to enter your mailbox number when you use it for the first time.

#### 6.9. Broadcast message

This function allows you to look up the broadcast messages.

#### 6.10. Setting

You can adjust the various settings of the message functions including **SMS,**

**MMS, Broadcast** and **Voicemail**.

#### 6.11. Memory status

This screen shows the storage status of SMS and the free space of your SIM card and your phone.

### 7. Call History

Call history function logs all recent calls including missed calls, dialed calls and answered calls. Options are:

**View:** View the call log.

**Dial:** Dial the selected number.

**IP dial:** Dial the selected number with IP number

**Send:** Send SMS or MMS to the selected number.

**Save:** Save the selected number to SIM or phone.

**Delete:** Delete selected entry.

**Delete all:** Delete all entries, all entries of Card 1 or all entries of Card 2.

**Call time:** Last Call Time, Total Sent, Total Received, Total Timing Reset (phone password is required).

**Call cost:** Calculate the call cost according to the call time.

**Note:**

➤ Refer to the Settings chapter for the phone password setup.

### 8. Phonebook

This chapter describes the functions of the phonebook. You can use Pinyin or Chinese Surname Index methods for quick search of your contacts.

#### 8.1. Phonebooks of SIM card and your phone

There are two separate phonebooks, one stored on the SIM card and the other in the phone.

Each entry in your SIM card's phonebook consists of a phone number and a

name. When you change to another phone, the contact information can be transferred to your new phone with the SIM card. The total number of entries allowed in a SIM card varies with different SIM cards.

The contacts stored in the phone can include name, cell phone number, home, office numbers, others, group, photo, ring tone, company name, division name, title, address, email address, website and notebook. This information will not be transferred with the SIM card to your new phone.

## 8.2. Contact list

The contact list is arranged in alphabetical order. You have the following options: **View**, **Dial**, **IP calling**, **Send**, **New**, **Delete**, **Mark**, **Copy to SIM card/phone**, **Assign to group**, **vCard**, and **Memory Details**.

**View:** View the contact information.

**Dial:** Dial the current number.

**IP calling:** Dial the current number with IP number.

**Send:** Send SMS or MMS to the current number.

**New:** Create a new contact.

**Delete:** Delete selected entry.

**Mark:** Activate Mark/Unmark mode to mark the selected contact for further operation.

**Copy to SIM card/phone:** Copy the selected entry to SIM card or phone.

**Note:**

- If the entry stored in the phone has multiple information, when copying it to SIM card, the information will be separated into multiple entries.
- In the dual card mode, the copy function will only apply to the default card.

**Assign to Group:** Contacts saved on the phone can be assigned to some specific groups or Blacklists.

**vCard:** Send or export by vCard format.

**Memory Details:** Display the storage status.

## 8.3. Contact

From the contact list you can select a contact and do the following: **Dial**, **IP calling**, **Send**, **Edit**, **Delete**, **Set up head shot**, **set up ring tone**, and **assign to group**.

**Edit:** Edit the contact details.

**Set up head shot:** Set up a headshot for the contact.

**Set up ring tone:** Assign an individual ring tone to the contact.

**Note:**

- **Set up head shot**, **set up ring tone**, and **assign to group** are available only to contacts stored in your phone.

## 8.4. Group and Blacklist

You may set up various groups to categorize your contacts. You may also put contacts into the Blacklist to block all their calls and messages.

# 9. File Manager

The File Manager lists all the files stored in your phone or memory card.

## 9.1. KingMovie

Must insert memory card and into a specified file format to the kingmovie file You can get through URL [www.onida.com](http://www.onida.com) to download the kmv software.)

**Note:**

- Kingmove file are to be saved in the folder Kingmove in the memory card.

# 10. Multimedia


You have **Camera**, **Camcorder**, **Music Player**, **Video Player**, **Photo Album**, **FM radio** and **Voice memo** functions in Multimedia.

## 10.1. Camera







Before using Camera, make sure you have inserted a memory card. The photos will be saved in JPEG format to your memory card.

### Note:

- Taking pictures in dim lighting may result in poor picture quality.

After entering the Camera function, the Camera Preview screen will appear with the status icons. Press **Cam** or tap  to take the picture.

Other options include:

-  Configuration
-  Browse photos
-  Switch to camcorder
-  Go back
-  Zoom In
-  Zoom Out

Camera settings include:

**Image size:** For contact head shot, Wallpaper, 320x240, 640x480, 800x600, 1024x768, 1280x1024.

**Image quality:** Normal, High, Low.

**Night mode:** On, Off.

**Effect:** Blur, Normal, Mono, Sepia, Negative, Sketch, Oil painting, Emboss, Mosaic, Zipper.

**Continues:** 4, 6, 9, Off.

**Countdown:** 5 seconds, 10 seconds, 15 seconds, Off.

**White balance:** Auto, Cloud, Daylight, Fluorescent, Incandescence.


**Banding:** 50Hz, 60Hz.

**Sound:** On, Off.







**EV:** -2, -1, 0, 1, 2.

## 10.2. Camcorder

Before using Camcorder, make sure you have inserted a memory card. The video will be saved in 3GP format to your memory card.

After entering the Camcorder function, the Camcorder Preview screen will appear with status icons. Press **Cam** or tap  to start recording videos.

Other options include:

-  Configuration
-  Browse videos
-  Switch to camera
-  Go back
-  Zoom In
-  Zoom Out

Camcorder settings include:

**Video size:** CIF (352x288), QVGA(320x240), SUB\_QCIF(128x96), QCIF (176x144).

**Video quality:** Normal, High, Low.

**Night mode:** On, Off.

**Effect:** Normal, Mono, Sepia, Negative, Sketch, Oil painting, Emboss, Mosaic, Zipper, Blur.

**White balance:** Auto, Cloud, Daylight, Fluorescent, Incandescence.

**Banding:** 50Hz, 60Hz.

**Sound:** On, Off.

**File Size Limit:** No limit, for MMS.

**Recording Time Limit:** No limit, 15 sec, 30 sec, 60 sec.

**EV:** -2, -1, 0, 1, 2.

Recorded videos will be saved automatically. You can preview or delete them via the related operations.

### 10.3. Music Player


Upon entering the Music Player, Playlist will be displayed. Through All Music you can look up all the music files. With the New and Edit options, you can further create your own playlists.

In the All Music screen, you have the following options: **Play, Update playlist, Repeat, Shuffle, Equalizer, 3D surround, Show lyrics, Rearrange playlist, Song info, and Details.**

Options included in Playlist screen are: **Play, New playlist, Delete, Repeat, Shuffle, Equalizer, Show lyrics, Rearrange playlist, Song info, and Details.**

After you have selected music from the Playlist, you will enter the Music Player screen. Here you can look up the album, name of the song, artist, play time, number in the playlist, etc.

You can use the following icons on the touch screen:

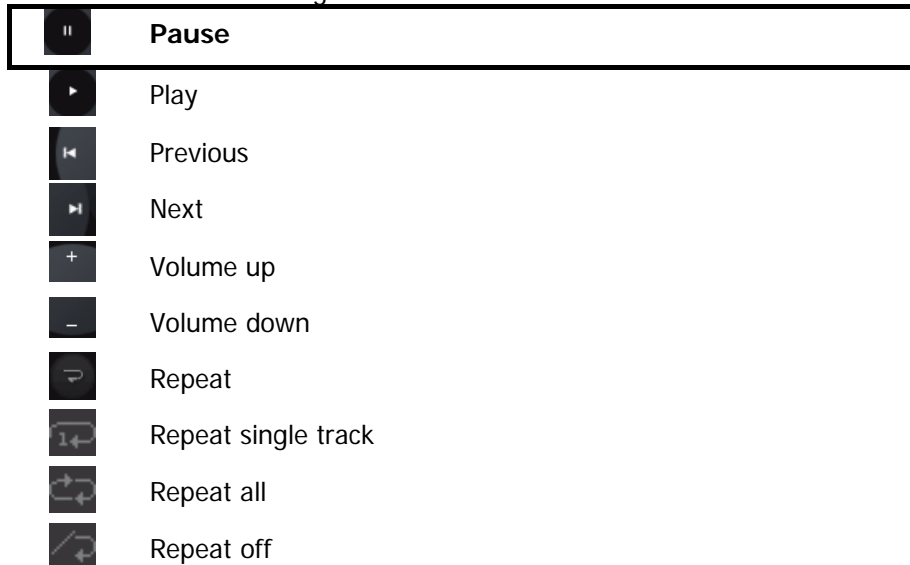

Shuffle



Show lyrics

The following operations can also be done by selecting the corresponding menu item: **Play/Pause, Stop, Repeat, Shuffle, Equalizer, Show lyrics, Song info, and Details.**

#### Note:

- When you press the hang-up key or exit from the music player, the music will continue playing in background. To stop the music, press the stop icon in the Options menu.

### 10.4. Video Viewer

Upon entering the Video Player, Video file list will be displayed. Several functions are available by Options menu: **Play, Stop, Full screen, Send, Delete, and Details.**

In the Play screen, you can use the following icons on the touch screen:



Full screen



Previous



Pause



Play



Next



Volume down



Volume up



Full screen off

### 10.5. Photo Album

Upon entering the Photo Album, the photos are listed as thumbnails. Several functions are available by Options menu:











**View:** Preview the selected image.  
**Set as:** Set as wallpaper or contact head shot.  
**Send:** Send by MMS or Bluetooth.  
**Rename:** Rename the selected image.  
**Delete:** Delete the selected image.  
**Delete all:** Delete all images.  
**Mark:** Mark the selected image or all images.  
**Slideshow:** Display by slideshow.  
**Details:** Look up the name, file type, size, date, and stored place, etc.

In the Options menu, you can do the following: **Set contact head shot**, **Trim contact head shot**, **Send by MMS or Bluetooth**, **Zoom in/out photo**, **Delete**, and **Details**.

## 10.6. FM radio

Make sure the headset, which is used as the antenna, is plugged in before using the FM radio.

The icons on the touch screen provide the following functions:

	<b>Power</b>
	Search backward
	Search forward
	Volume up
	Volume down
	Add to my channel
	Background play
	Recording

The following functions are available via the Options menu:

**My channel:** Edit My channel. You can set up to 20 favorite channels. In My channel menu, you have the following options: Play, Edit, Delete, and Delete all.



**Add to my channel:** Add current channel to My channel.

**Manual input:** Switch to your desired channel by manual input of the radio frequency.

**Background play:** On, Off.

**Speakerphone:** On, Off.

## 10.7. Voice memo

Enter the Voice memo function, tap  to start recording, and tap  to stop. The memo can be played back immediately or using Options menu to do the following functions:

**Play:** Play the recording.

**New:** Start a new recording.

**Delete:** Delete the recording.

**View:** Look up the list of recordings.

The following functions are available via the Options menu:

**Play:** Play the recording.

**New:** Start a new recording.

**Set as:** Set as ring tone, individual contact ring tone, or alarm sound.

**Send:** Send by MMS or Bluetooth.

**Rename:** Rename the recording.

**Delete:** Delete the recording.

**Details:** Look up the list of recordings.

## 11. Profile

Six Profiles are available: General Mode, Meeting Mode, Outdoor Mode, Silent Mode, Personal Mode, and Headset Mode. You can select any of these Profiles or customize your own profile by adjusting the parameters of the Profile. Restore to default settings by using the Restore option.

## 12. Organizer

The organizer includes the following functions: Calendar, Alarm, Calculator and Stopwatch.

### 12.1. Calendar

In addition to the western calendar, a lunar calendar is also provided. You can add, edit and look up events on different dates. Options are:

**View:** View events of a selected date.

**Add new event:** The editor will be displayed. You can add an appointment or an all-day event. Available input fields are: Heading, Location, Repeat, Start date, Start time, End date, End time, Alarm, and Description. The display and reminder will be executed according to your setting.

**View mode:** Weekly or monthly.

**Event list:** List the events of the selected month. You may edit, delete or send the event.

**Go to date:** Go to a particular date directly.

**Setting:** Set the preset view mode and the start day of a week.

**Delete all:** You can delete all the events prior to a certain date, or delete all events.

**Search event:** Search event by inputting the keyword.

**Memory details:** You can look up the total number of event entries and free space.

### 12.2. Alarm

You can set up to 6 alarm clocks. The Alarm Clock settings include: Title, Time, Status, Frequency and Ringtone. The frequency settings are: Once, Daily, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday and Sunday.

Alarm Dialog will be displayed when the alarm goes off. You can stop the alarm or snooze for 5 minutes.

### 12.3. Calculator

A basic calculator is provided.

### 12.4. Stopwatch

Stopwatch provides 20 sets of entries with both total and lap timer functions.

### 12.5. Countdown timer

Countdown timer is provided.

## 13. Game

There have local game such as Tetris and Sokoban game and with some popular games.

### Note:

- You need to install the corresponding package to your T flash card to use this function.

## 14. Applications

The applications provided include eBook, Dictionary, etc.

### 14.1. World clock

World clock is provided with a world map. You can tap on the left or right of the current time zone to switch to the next time zone. The local time of the city on the map is displayed.

### 14.2. eBook

The eBook function lists the eBooks in TXT format stored in your memory card. On the bottom of the screen, the size and the number of rows of the selected eBook are displayed. Slide the scree to scroll up or down the list, and press OK to open the selected eBook.

Tap Option to open the Option menu:

**View:** Open the eBook.

**Delete:** Delete the current eBook.

**Delete all:** Delete all eBooks.

**Scroll style:** There are four options, one row at a time, three rows at a time, six rows at a time and one page at a time.

**Language code:** Auto, Simplified Chinese (GB2312), UCS2 and UTF8.

**Information:** Display the name, size and format of the selected eBook.

After you open an eBook, you can Slide the scree to scroll up or down the page. You can also Tap Option or press to open the menu for the following functions:

**Full screen:** You can also press OK to toggle Full screen and normal browsing mode.

**My bookmark:** You can add a bookmark to the current page, or go to the page marked previously and continue reading from there. In the bookmark list, tap Option for the following operations: rename, replace, delete and delete all.

**Scroll format:** There are four options, one row at a time, three rows at a time, six rows at a time and one page at a time.

**Coding format:** Auto, GB2312 and UCS2.

**File info:** Display the name, size and format of the selected eBook.

## 15. Settings

Enter Settings from the Main Menu. There are General, Phone and Connection Settings.

**Note:**

- If only one SIM card is installed, your phone will automatically hide the dual card related settings.

### 15.1. General settings

#### 15.1.1. Personal settings

Personal settings include Display and display language.

##### Display settings

**Touch screen calibration:** When your touch control and your screen are not aligned, use this option to sync the touch control positions with the icons.

**Screensaber** Set status on/off,duiation and screen display.

**Backlight:** Set the brightness of backlight and time.

**Wallpaper** Set the wallpaper.

**Operator name:**Set the SIM operator name on/off.

**Date/Time** Set display on/off.

##### Display Language

Set editor language, default input method and keyboard language.

This phone provides several languages including English and Hindi.

The editor settings vary with different languages. When the language is set to English, you have the options to set the default input method: Intelligent English ,Digit input method and English alphabet. When the language is set to another language, the input methods may be intelligent input method, keypad method, etc.

#### 15.1.2. Time and date

You can set the time, date, time zone, date format and summer saving timer.

#### 15.1.3. Power on/off

##### Auto power on/off

You can set the time and condition for the phone to automatically power on/off itself.

**Slide to off:**Set on/off.

#### 15.1.4. Information

You can look up your phone ID, built-in messages and software version.

#### 15.1.5. Security

You can set Phone lock, SIM lock, and Auto keypad lock here.

**Pin number:** Change PIN1 and PIN2 passwords. You need to have the default Pin numbers from the network carrier.

**Phone lock:** Turn the phone lock on/off and edit your phone password. The default is 0000.

**SIM lock:** Allow you to check the SIM card lock status and change password.

**Auto keypad lock:** You can lock your phone manually, or select auto lock for the phone to lock its screen and keypad automatically after some idle time in the Standby mode.

**Mobile Tracker:** Open mobile phone anti steal function, Set up binding mobile phone number, replacement of the new SIM card, ,phone will send information to your automatically bind mobile number ,tip your cell phone stolen. Allow you to check the SIM card lock status and change password. The default is 0000.

#### 15.1.6. Restore to factory default

Restore your phone to the factory or default settings through this option. You need to input your phone password (default is 0000) for this operation. All data will be deleted when your phone is restored to its factory settings.

### 15.2. Phone settings

Phone settings include call settings, call divert, call barring, network settings, and fast dial.

#### 15.2.1. Call settings

##### Call waiting

You can turn the call waiting on/off and look up the current status. When the

call waiting is turned off and your phone is busy, all other incoming calls will hear the busy ring tone.

**Caller Identity:** Set by Network, on/off.

##### Any key answer

You can set whether or not to use any key to answer the phone.

##### Minute Reminder

You can set the duration of the call for the phone to remind you when the time is reached.

##### Auto redial

You can set whether or not to auto redial the number last called that was unanswered.

##### Auto answer

Set the auto answer on or off.

##### Cost setting

Set the currency, unit cost and quota.

##### Auto call record

Set the function on/off.

#### 15.2.2. Call divert

Set the divert methods for the following different types of calls: all, voicemail, data, fax. The divert methods are: divert all, when busy, when no answer, when no service, when power-off, cancel all divert.

#### 15.2.3. Call barring

Set the block methods for the following different types of calls: all, voicemail, data, fax and SMS. Block options are: all outgoing, international outgoing, international outgoing while abroad, all incoming, incoming while abroad,

cancel all barring, change password.

#### **15.2.4. Network settings**

You can set your priority network, carrier, and airplane mode.

#### **15.2.5. Switch mode**

You can set the mode with Dual mode, Enable SIM1 Only, Enable SIM2 Only, Disable SIM and Airplane mode.

#### **15.2.6. Default SIM**

Set the default SIM1 or SIM2.

#### **15.2.7. Speed dial**

Set fast dial numbers. When the number is set, you can simply press the single number key and then the dial key for a fast dial.

### **15.3. Connection settings**

You can set Modem account, WAP account, and MMS settings.

## **16. Service**

### **16.1. WAP browser**

You may browse WAP websites. Make sure you have enabled GPRS network.

### **16.2. Bluetooth**

You may do functions for your Bluetooth settings such as: Turn on/off, Paired devices, Search devices, Settings.

## **17. USB mode**

While your phone is connected by USB, you may use your phone as storage device, Modem, Webcam and PC sync tool.

**Storage device:** You can use your computer to access and manage files on your phone.

**Modem:** Set your phone as a modem.

**Webcam:** Set your phone as a webcam.

For Modem, please find the software on your external memory card. Connect your phone to your PC and select your phone as Modem. Use the wizard of your PC operating system to guide you through installation. You can find Modem in your PC's Device Manager and check if the driver is successfully installed.

#### **Note:**

- While using the above functions, the phone application will be disabled.
- When your phone is connected by USB but there is no further setting, the phone will switch into charging mode.

## **18. Appendix**

### **18.1. FAQ**

#### **The phone cannot be turned on**

When the battery is very low, the phone may not be turned on properly. Please charge the battery.

#### **Cannot make certain calls**

Check if Call Barring is set. If it is set, you may not be able to make calls or only certain calls are allowed.

#### **My call is picked up by another phone**

Check if call divert is set. If it is set, your incoming calls may be diverted to other numbers or devices.

### **18.2. Error Message**

#### **Please insert SIM card**

Make sure you have inserted SIM card. If you have installed it but it cannot

be detected, please try clean the golden contacts of the SIM card by using a dry cloth. If it still is not working, please contact your network carrier.

### **No service**

If you are in an area not covered by your network, or if a physical obstacle is present, such as in an enclosed area, the message “No service” will be displayed on your Standby screen and you will not be able to make or receive calls. You can try move closer to a window for better reception.

### **For emergency only**

When you are outside your network but inside other network, you can only make emergency call.

### **No Valid SIM card**

Your SIM card is locked or it has an error. Please insert the right SIM card or contact your service provider.

### **Enter PUK code**

After three consecutive incorrect PIN code entries, the code is blocked, and you need the PUK code to unblock it. Contact your service provider to secure the 8-digit PUK code. After ten consecutive incorrect PUK code entries, the SIM card cannot be used any more. Please contact your service provider to buy a new SIM card.

## **18.3. Accessory**

**1 each of handset, battery, charger, headset, user manual, data cable.**

## **18.4. Care and maintenance**

Thank you for choosing our phone. Should you encounter any problem with the phone, please contact our dealer or qualified service provider.

If your phone requires maintenance, send it to a local maintenance center

near you. Hand your phone to your dealer along with the relevant invoice if there is no local maintenance center.

Your phone is a finely designed and crafted product. Please use it with care. The following instructions will help you comply with the terms and conditions of the warranty and prolong the life of this product:

- Keep the phone and all its parts and accessories out of the reach of children.
- Keep the phone dry; all kinds of liquid will erode the electronic circuit.
- Do not use or store the phone in a dusty place to avoid damaging the removable parts.
- Keep the phone away from hot places. High temperature can shorten the life of electronic device, damage batteries, and warp or melt certain plastic parts.
- Do not place your phone in an extremely cold place, as the interior of your phone can become damped and the circuitry damaged when the temperature rises (to room temperature).
- Do not attempt to open or disassemble the phone. Non-expert handling may damage it.
- Do not drop, crush or shake the phone to avoid damaging the internal circuit board.
- Do not use harsh chemicals, cleaning solvents or strong detergents to clean the phone.
- Do not paint the phone or the paint may obstruct the removable parts and affect operation.
- Use only the supplied or an approved replacement antenna. Unauthorized antennas, modifications, or attachments could damage the phone. In addition, use of unauthorized antennas may result in non-compliance with the local regulatory requirements in your country.

The above instructions apply to your phone, battery, charger and other accessories. If any of them does not work properly, please send it to a qualified service provider.

## Service Center List

Central Gujarat Ahmedabad Adonis Electronics Pvt.Ltd 10/B,  
Harishchandra Park, Opp. Roopal Park, Nr. PRERNA School, Nr. Ankur Circle,  
LIC Road, Naranpura, Ahmedabad Near Ankur Circle 380013  
mch.baroda@adonis.co.in 9925200106 8980005880  
079/32942148

Central Gujarat Navragpura The Mobile CareB/1, Samrat  
Complex, Choice Restaurant Lane, Near Swastik Cross Road, CG.Road,  
Navrangpura, Ahmedabad Near Choice Restaurant, C.G.Road 380009  
themobilecare@gmail.com 9925200106 8980005880  
079/30028232

Central Gujarat Maninagar Drashti Technologies Shop no. 1 Satyam  
Tower, opp. Maninagar Railway Station, Maninagar, Ahmedabad  
Maninagar Railway Station 380008 bhavin1680@gmail.com  
9925200106 8980005880 9909424505

Central Gujarat Virangam Viram Mobile Golpitha nu Naka, Mandal  
Road , Virangam VIRAMGAM 382150 virammobile@gmail.com  
9925200106 8980005880 9998656144

Central Gujarat Junagadh Jignesh Mobile 45,PRISM COMPLEX,OPP  
BUS STATION,JUNAGADH. JUNAGADH 362001  
<jk\_gorakhia@yahoo.co.in>, 9925200106 8980005880  
9913528775

Central Gujarat Bhavnagar Adonis Electronics Pvt.Ltd. B/14, Raturaj  
Complex, Opposite AV School Ground, Crescent Road, Bhavnagar.  
Opposite AV School 364001 bhavnagar.service@adonis.co.in  
9925200106 8980005880 0278/2522523

Central Gujarat Mehsana OM CARE b/55krishna shopping  
centre,mehsana mehsana 384001 omcare@yahoo.com 9925200106  
8980005880 2762240601

Central Gujarat Himmatnagar NAVKAR MOBILE AND XEROX  
DG/5 DURGA COMPLEX,HIMATNAGAR 383001  
bunttyshah\_shah@yahoo.com 9925200106 8980005880  
9375127575

Central Gujarat Bapunagar We Care Mobile Point A/40, 1st Floor,

Saktidhara Complex,Opps Janta Ice/cream Parler,Near Dinesh Chember,  
Tollnaka,Bapunagar, Ahmedabad/382350 Gujarat BAPUNAGAR  
382350 wecaremobilepoint@rediffmail.com 9925200106  
8980005880 09374108520 / 9925455990

Central Gujarat Modasa Icon Mobile Bajpai Complex, Nr. Char  
Rasta, Modasa Nr. Char Rasta 383315 milan.icon@gmail.com  
9925200106 8980005880 9898250643 / 9898314848

Central Gujarat Surendranagar UMIYA ELECTRONICS AND MOBILE  
SERVICE HANDLOOM HOUSE SURENDRA NAGAR 363 001  
niteen\_1977 <niteen\_1977@yahoo.com>, 9925200106  
8980005880 9376999021

Central Gujarat Sarkhej NANDANI COMMUNICATION PUNJAB  
HOUSE SARKHEJ 382210 krunalmodi\_1982  
<krunalmodi\_1982@yahoo.in>, 9925200106 8980005880  
9377121244

Central Gujarat Jamnagar A. S. COMPUTERS 107,CROSS ROAD  
COMPLEX , OPP. DKV COLLEGE OPP. DKV COLLEGE 361008  
amrut\_as@yahoo.com 9925200106 9925236939  
0288/2751639

Central Gujarat Rajkot Adonis Electronics Pvt.Ltd 5,Nalanda  
society,"brinda",Kalawad road,Near kotcha chowk,Rajkot 360005  
rajkot.store@adonis.co.in 9925200106 9925236939  
2813204919

Central Gujarat Rajkot Aum Tele Service AUM  
TELESERVICE,KALANDI COMPLEX,NEAR AMRAAPALI FATAK,CHUDASAMA  
PLOT MASIN ROAD,RAJKOT Nr. Race Course Road 360001  
aum\_tvs@yahoo.com 9925200106 9925236939 9228190777 /  
9228301100

Central Gujarat Godhra Pavan Mobile Shop Panjra Pole RD,  
Dhankawad, Godhra Behind S.T Depot 389001  
pavanmobile29@yahoo.com 9925200106 9925200108  
9898493886

Central Gujarat Surat Adonis Electronics Pvt.Ltd 7/,8 & 9A, Mirambika  
Complex , Nr. Civil Hospital, Near Interwood Showroom, Opposite



Gandhibaug,Chowk, Surat. Opposite GandhiBaug395004  
 surat.crc@adonis.co.in 9925200106 9925200108  
 0261/2465633 / 34 / 2473747

Central Gujarat Baroda Adonis Electronics Pvt.Ltd Plot No.3,  
 Ground Floor, Bhavanipura Society, Opposite Bhavanipura Garba Ground,  
 Near Jain Mandir, delux chardasta Nizampura, Baroda,Delux Opposite  
 Uma Co/operative Bank 390002 mch.baroda@adonis.co.in  
 9925200106 9925200108 0265/3988900

Central Gujarat Vapi Balaji Sales & Services Shop No:10,  
 Bhagyalakshmi Complex, Opposite A1 Furniture, Kopralli Road, Gunjan GIDC  
 Vapi. Opposite A1 Furniture. 396195 bsns.vapi@gmail.com  
 9925200106 9925200108 0260/3295757

Central Gujarat Valsad M/S Rajwadi Electronics M.G  
 ROAD,VALSAD, Mg.road 396001 rajwadi@yahoo.com 9925200106  
 9925200108 2632/244937/222303

Central Gujarat Dabhoi M/S HITARTH MOBILE LAL  
 BAZER,DABHOI Lal bazaar char rasta 391110  
 hitarchmobile@yahoo.co.in 9925200106 9925200108  
 9898807711

Central Gujarat Navsari BHARAT TELECOM SHREE  
 CHAMBER,NANI PANDYA KHADKI,CHANDNI CHOWK, OPP HARI  
 COLLECTION,NAVSARI OPP HARI COLLECTION 396445  
 bharat\_telecom77@yahoo.com 9925200106 9925200108  
 9879503860

Central Gujarat Anand Mahalaxmi mobile Aryasamaj shopping  
 complex,Gopal chokdi,Anand ANAND 388001  
 <jnikki5500@gmail.com>, 9925200106 9925200108  
 9537370777

Central Gujarat Bilimora sai telecom near arpan hospital,Anand  
 cinema road,Bilimora BILIMORA 396321 saitelecom\_sai@yahoo.co.in  
 9925200106 9925200108 9824593998

Central Gujarat Bardoli Jain Electronics LI/6 v.k. tower opp dhiraj  
 sons,M.G. ROAD BARDOLI 394601 <sweet\_vir420@yahoo.co.in>,  
 9925200106 9925200108 9376911255

Central Madhya Pradesh Bhopal Adonis Electronics Pvt.Ltd  
 HIG/1, Old subhash ng, Near Under Bridge 462023  
 bhopal.mobileservice@adonis.co.in, bhopal.service@adonis.co.in  
 9300050503 9302473112 0755/3240900, 9301908825

Central Madhya Pradesh Dewas Taj Electronics 4, New Market,  
 Main Road Moti Bungalow 455001 tajdws@gmail.com 9300050503  
 9302473112 9893064949 , 0727/406006

Central Madhya Pradesh Gwalior Adonis Electronics Pvt.Ltd. D/4,  
 Basant Vihar Near SKV School 474001  
 gwalior.mobileservice@adonis.co.in , gwalior.service@adonis.co.in  
 9300050503 9302473112 0751/3240900 , 9300773115

Central Madhya Pradesh Indore Adonis Electronics Pvt.Ltd  
 Oasis Building, 1st Floor, 20/22, Yeshwant Niwas Road Near Rani  
 Sati Gate 452003 indore.mobileservice@adonis.co.in;  
 indoremobile.service@gmail.com 9300050503 9302473112  
 0731 / 2530 146 / 4042027 / 3249000

Central Madhya Pradesh Ujjain Abhishek Enterprises  
 110,CENTRAL KOTWALI ROAD UJJAIN 456001  
 rhythmpalaceujjain@gmail.com 9300050503 9302473112  
 9981047060, 9993561701

Central Madhya Pradesh Itarsi F.K. Electronics Idgah, Mohalla,  
 Larkandkanj Near Convent School 461111 khanfiroz82@yahoo.com ,  
 itarsi.mobileservice@gmail.com 9300050503 9302473112  
 9301845829 , 9300980799

Central Madhya Pradesh Jabalpur Adonis Electronics Pvt.Ltd.  
 1381,Nr Sai Sadan Girls Hostel,Napier Town Home Science  
 College Rd 482001 jabalpur.mobileservice@adonis.co.in ,  
 jabalpur.service@adonis.co.in 9300050503 9302473112  
 0761/3240900 , 9302746610

Central Madhya Pradesh Ratlam Kawadia Telecom 22,  
 Shahar sarai, Opp. Fountain 457001 shripalkawadia@gmail.com  
 9300050503 9302473112 07412/403215 , 9827200023

Central Madhya Pradesh Ujjain Comp Care Computers 34,  
 Bhoj Marg, Freeganj, Freeganj, 456010 ujjaicare01@gmail.com



9300050503 9302473112 0734/2524753, 9302877779,  
9993233073  
Central Madhya Pradesh Sagar Samay Drishti Gour murti,  
Teen batti square, parkota hills, Sagar SAGAR 470002  
agrawal\_shsh@yahoo.com, samaydrishti123@gmail.com  
9300050503 9302473112 07582/243977, 9425170764,  
9926436210  
Central Madhya Pradesh Agar Malwa Gopi Printers  
Madhavganj, Agar Malwa Opp High Court 465441  
pankajkothari90@yahoo.com; jyotienterprizes@gmail.com  
9300050503 9302473112 07362/258398, 9893636131,  
9425034090  
Central Madhya Pradesh Mandisor Sky link mobiles 16, Opium  
Godown Rd, Nai Abadi Nr Nai abadi Post Office 458001  
112.gaurav@gmail.com , gauravmittal112002@yahoo.com  
9300050503 9302473112 07422/243978 , 9301074777,  
9893405466  
Central Madhya Pradesh Guna M/S Raj Mobiles Shop Khan Market,  
Sadar Bazar, Guna Sadar bazar 473001 raj180000@yahoo.in  
9300050503 9302473112 07542/404478, 9039258000  
Central Madhya Pradesh Satna M/S Welcome Enterprises  
Sation Road, Beside SBI ATM, SBI ATM 485001  
welcomemobile\_satna@yahoo.com 9300050503 9302473112  
07672/410546, 9993256546  
Central Madhya Pradesh Shivpuri M/S Hariom Mobiles A.B.Road,  
Near Panchayti Bagicha, 473551 hariom.121083@yahoo.in  
9300050503 9302473112 9893982531, 9893005301  
Central Madhya Pradesh Khandwa M/S Jai Ambay Mobile New  
Market, Apposite Gidwani Market, 450001  
jayambaymobile@yahoo.co.in 9300050503 9302473112  
07332226370, 9926668680, 9329486670  
Central Madhya Pradesh Morena M/S Prince Mobile Point  
NH/03, Near Government Bus Stand, Pal Traders Bariyal, 476001  
princemobilepoint@gmail.com 9300050503 9302473112

9329223524, 9893531164  
Central Madhya Pradesh Balaghat MAYA COMMUNICATION Opp.  
Digamber jain mandir, subhash chowke, main road, balaghat  
481001 mayacommunication108@gmail.com 9300050503  
9302473112 09752393912 / 09302123300  
Central Madhya Pradesh Betul SHRI DADAJI MOBILE SERVICE OPP.  
KHANDELWAL GENERAL STORES, BETULGANJ, BETUL 460001  
kapoorandsons@yahoo.in 9300050503 9302473112  
9098319498, 9302744313  
Central Rajasthan Ajmer Bunt Electricals House no.480a ,Near  
Sbbj Bank, Opp. Center Acadamy School, Lohagarh Road, Sastri Nagar,  
Ajmer Opp Central Academy School 305001  
ajmer.mobile@gmail.com 9829198006 8875012700  
9460601557 / 0145-2632548 / 2433662  
Central Rajasthan Alwar Nice Electronics C/O Jeevan Rekha  
Hospital, Vijay Mandir Rd, Opp Dhashara Ground, Jail Ka Chauraha Opp.  
Dushehra Ground 301001 alwar.servicecenter@gmail.com  
9829198006 8875012700  
9351372508/9351965277/0144/2731176 / 9351965277  
Central Rajasthan Behror New JMD Mobile NEAR BUS STAND,  
BEHROR 301701 newjmdpuran@yahoo.com 9829198006  
8875012700 9950919249  
Central Rajasthan Bharatpur M/s Raj Mobile Heeradash , Opp. Bus  
Stand , Bharatpur Opp. Bus Stand 321001  
raj26380@yahoo.com 9829198006 8875012700  
07542-404478, 9039258000  
Central Rajasthan Bhilwara siddharth trading company behind dharam  
kantha , opp vishal mega mart , pur rd, bhilwara opp vishal mega  
mart 311001 navkarmobile@rediffmail.com 9829198006  
9314114116 01482/242329 / 9828146329  
Central Rajasthan Bikaner Krishna Computers Station Road Opp.  
Court gate thana 334001 krishnacomputers2002@gmail.com  
9829198006 9314114116 0151/2527565 / 9950902203  
Central Rajasthan Chittorgarh M/s Geetanjali telecom pvt ltd

61,kidwai Nagar Nr/meera BED College CHITORGARHNr/Meera bed college 312001 geetanjalienterprises.in@rediffmail.com/rockstarrohit23@gmail.com 9829198006 9314114116 01472/512260 / 513350 / 9875015333

Central Rajasthan Churu Lucky Mobile Gallery Phankha Road , Near Marda School, Churu Near Marda School 300100 tejkarangahlot@yahoo.in 9829198006 8875012700 9784026256 / 9784026453

Central Rajasthan Ganganagar Gera telecom 41, D Block, Near vakilo wali diggi, Sriganganagar vakilo wali diggi 335001 gera\_000sanjay@yahoo.co.in 9829198006 9314114116 0154/3000009 / 9667174638

Central Rajasthan Gangapur Vicky Mobile Point JAIN KATLA, KACHHARI ROAD, GANGAPUR CITY 322201 rahuljan59@rediffmail.com 9829198006 8875012700 8104887548

Central Rajasthan Jaipur Adonis Electronics Pvt.Ltd A5, Yudhister Marg, C Scheme, Jaipur Opp. Dear Park 302005 mch.jaipur@adonis.co.in 9829198006 8875012700 0141/5101951/ 5116601 / 5116602 / 5116603

Central Rajasthan Jaipur AASHIRVAAD ENTERPRISES F27, RAMESH MARG, C/SCHEME, 302005 tp.aashirvaad@gmail.com 9829198006 8875012700 9783448038 / 0141- 4109038

Central Rajasthan Bansur Ramsingh Brothers NARAYANPUR ROAD,NEAR BUS STAND,THE BANSUR ALWAR 301402 301402 rmwbansur@gmail.com 9829198006 8875012700 9828058999

Central Rajasthan jhunjhunu Saini Electronics opp.traffic police station,old bus stand 333001 jhunjhunuservicecenter@gmail.com 9829198006 8875012700 9314401234

Central Rajasthan Jodhpur Adonis Electronics Pvt.Ltd Gulab Singh Building, First Floor, 11Th chopsani Road, Jodhpur Near Bombay Motors 342001 mch.jaipur@adonis.co.in , rajeev99gehlot@gmail.com 9829198006 9314114116 0291/2440413 / 2622366 / 2633449 /

9314003569

Central Rajasthan Hanumangarh ARSHIT ENTERPRISES SHOP NO 3, UNDER RAILWAY OVERBRIDGE, SRIGANGANAGAR ROAD, HANUMANGARH JUNCTION, JODHPUR 335512 mittalanil@ymail.com 9829198006 9314114116 9828133257

Central Rajasthan Karauli Ghungharu Enterprises Nr. Roadways Bus Stand, Gahlot Niktan, Karauli Nr. Bus Stand 322241 tp.karauli@gmail.com 9829198006 8875012700 9649787431 / 07464-220421 / 9610001539

Central Rajasthan Kota M/s Shiv Shakti Electronics 323 SHOPPING CENTRE NR.ONDOT COURIER, JAIN MANDIR Nr. Jain Mandir 324007 abdulhamidmansuri@gmail.com 9829198006 8875012700 9214428449/9799928449 9214428449 0744-6444493

Central Rajasthan New Bikaner Vinayaka mobile solutions Shop no.B/24,Bothra Complex, Modern Market Kem road 334001 vinayaka.bkn@gmail.com 9829198006 9314114116 9672838844

Central Rajasthan Pali M/s Mansi Mobile 2nd floor, mudont mention,suraj pole near Dr. roshanlal sonography center 306401 dineshparihariya@live.com \ pali.mansi@gmail.com 9829198006 9314114116 0293/2206036 / 8890516655

Central Rajasthan Siker new Telecare Service Shop/8, Ground Floor, Sriram Plaza, Station Road, Sikar / 332001 332001 telecare.sikar@gmail.com 9829198006 9314114116 9875044446

Central Rajasthan Simalwara Yash Mobile Parlar Nr. Kendriya Bank, Main Road, Samalwara, Dist/Dungarpur Rajasthan Nr. Kendriya Bank 314403 dhawal\_shah10@yahoo.com 9829198006 9314114116 9828195852 / 9875168260

Central Rajasthan Tonk M/s New Delhi Care centre Opp. UCO Bank, Jawahar Bazar, Tonk Opp. UCO Bank 304001 laxman\_tonk10@yahoo.in 9829198006 8875012700 7737492953, 8233366693 / 01432- 686843

Central Rajasthan Udaipur M/s Vinayak Communication Shop

No.34,1st Floor,Vinayak Complex/B,Durga Nursery,Main Road,Udaypur  
 Nr.hdfc bank 313001 bharat.khathuria@gmail.com  
 9829198006 9314114116 0294/2416086 / 9828520385  
 /8955131164  
 East Assam Guwahati Adonis Electronics Pvt.Ltd Adonis Electronics  
 Pvt. Ltd., Opp. Manikya Apartment, 39, Bhaskar Nagar, Near Aunty's  
 Shop,R.G. Baruah Road R.G. Baruah Road 781021  
 mch.guwahati@adonis.co.in 9706038227  
 9207042461/9707014362 9207042461 / 9706038227  
 East Assam Jorhat Adonis Electronics Pvt.Ltd. Adonis Electronics  
 Pvt. Ltd, 1st Floor / Jorhat Press Building/Choladhara Tiniali/ A. T.  
 Road/Jorhat A. T. Road 785001  
 bratati.c@rediffmail.com,'biswajit.rajkhowa@rediffmail.com'  
 9706038227 9207042461/9707014362  
 9435248068/03762/309008 / 9706098249  
 East Assam Dimapur Real Deal Real Deal,H.P.S, Haji Park , Dimapur ,  
 Nagaland 797112 realdealcorner@gmail.com 9706038227  
 9207042461/9707014362 094366 09614 / 09774594757 /  
 9774874470  
 East Assam Hojai B.S.cell point B.S.cell point , nr dadabhai shopping  
 complex , hojai, nagoan nr. Dadabhai shopping complex 782435  
 bscellpoint@yahoo.com 9706038227 9207042461/9707014362  
 03674/250002 / 9954366652 / 9864793977  
 East Assam Golghat Baruah's Card Mahal NEAR J.M B SANGEET  
 VIDALAYA COMPLEX, OPP UBI BANK MAIN ROAD GOLAGHAT  
 785621 bcmgolaghat@gmail.com 9706038227  
 9207042461/9707014362 9864907031  
 East Assam Dibrugarh Hello Hai mobilehello hai mobile , nr.to krishna  
 complex , ground floor dibrugarh nr.krishna complex 786001  
 hellohimobile@yahoo.com 9706038227 9207042461/9707014362  
 9954599930  
 East Assam Silchar Mobile City Mobile City, Tarapur moszid  
 complex, ist floor, silchar, Assam Tarapur Moszid complex 788003  
 cool.hussain123@rediffmail.com,'hussainlaskar039@gmail.com'

9706038227 9207042461/9707014362 9435600407 /  
 09957748772  
 East Assam shillong Krom Rapsang Krom rapsang,Ferndle  
 Complex,Keating Road,Shillong,Meghalaya Near Shiv Mandir,Rapsang  
 Building 793001 onidaservice.meghalaya@yahoo.in 9706038227  
 9207042461/9707014362 03642506370 , 09436731491  
 East Assam TEZPUR SHIVAM COMPUTER'S & MOBILE'S H.B.  
 ROAD,INFRONT OF K.B.STORE, NEAR – NATH CLOTH STORE,CHOWK  
 BAZAR COMPLEX, TEZPUR, ASSAM, INFRONT OF K.B.STORE 784001  
 bijitborah@gmail.com9706038227 9207042461/9707014362  
 09435588090 / 9401738205  
 East Assam BARPETA MOBILE MUSIC RAMKRISNA SHOPING  
 COMPLEX,DURGABARI KALIBARI ROAD KALIBARI ROAD781315  
 sujitnath.mobile2010@rediffmail.com 9706038227  
 9207042461/9707014362 9864197711 / 9859175155  
 East Assam NAOGAON GANDHI CYCLE AND MUSICAL CORNER  
 DHAKAPATTI, NAOGAON, AASAM DHAKAPATTI ROAD 782001  
 singh\_ngg@yahoo.com 9706038227 9207042461/9707014362  
 9706181712 / 9435061041/  
 East Assam TINSUKIA MAHESWAR ELECTRONICSPHUKAN MARKET,  
 OPP : WOMENS COLLEGE, R.G. ROAD, TINSUKIA, AASAM R.G ROAD  
 786125 maheshwar.tsk@rediffmail.com 9706038227  
 9207042461/9707014362 9435035698/ 9207082762  
 East Assam SIVSAGAR S.B MOBILE S.B MOBILE,HCB ROAD  
 OPPOSITE BANK OF INDIA AMALA PATTI SIVSAGAR HEMCHANDRA  
 MARK 785640 sivsagar.d.s.c@gmail.com 9706038227  
 9207042461/9707014362 9864258568 / 9706111743  
 East Assam IMPHAL DUSAN MOBILE PAONA INTERNATIONAL  
 MARKET, KEISHAM PATH,IMPHAL WEST,MANIPUR KEISHAM PATH  
 795001 dusan1@ynail.com 9706038227  
 9207042461/9707014362 9612906971  
 East Assam Rehabari REAL CHOICE REAL CHOICE,REHABARI  
 OPPOSITE SHRIKANT HOTEL HOUSE NO 26 A.K AZAD ROAD781008  
 onidaservice.guwahati@gnail.com 9706038227

9207042461/9707014362 9401263718 / 03612735422  
 East Assam TRIPURA UDAIPUR TRADERS UDAIPUR TRADERS LAKE  
 CITY SHOPING COMPLEX UDAIPUR SOUTH TRIPURA OPPOSITE R.K PUR  
 POLICE STATION 799120 babai\_saha6@yahoo.co.in 9706038227  
 9207042461/9707014362 9862050257/9436181430/  
 East Assam Agartala SREE GURU SWASTI BAZAR, ROOM NO 28,  
 H G B ROAD, AGARTALA, TRIPURA. HARI GANGA BASAK ROAD799001  
 sreeguru\_refrigeration@hotmail.com 9706038227  
 9207042461/9707014362 9774058780  
 East Chattisgarh AmbikapurM/S Chhabra Electronics Devi Ganj Road,  
 Opp. Union Bank, Ambikapur 497001 harjainderseh@gmail.com  
 9977504907 9300073112 9826624461  
 East Chattisgarh Raipur Adonis Electronics Pvt.Ltd Bhamra  
 House,Plot No/26/975,Noorani chowk ,Rajatalab,Raipur Near Santoshi  
 Mata Mandir, 492004 mch.raipur@adonis.co.in 9977504907  
 9300073112 0771/4074325,4074326  
 East Chattisgarh Bilaspur Jitu mobileM/s. Jeetu Mobiles, High Court  
 Road, Near Bihari Talkies,Bilaspur,Chhatisgarh High Court Road  
 495001 lalumobile@yahoo.com 9977504907 9300073112  
 9893335131  
 East Chattisgarh Korba Adonis Electronics Pvt.Ltd.  
 c/44,commercial complex,t.p nagar oppiste/bus stop 495677  
 premangsu.onida@gmail.com 9977504907 9300073112  
 9977504919  
 East Chattisgarh BhilaiBharti Enterprises Sector 6 , `c` market near  
 /supala bhilai 490006 bhartienterprisesgp@gmail.com  
 9977504907 9300073112 9300451776/0788/2221878  
 East Jharkhand Dhanbad Tanya Services Rey Talkies , Bank More,  
 Dhanbad bank more826001 tanya.services@gmail.com 7488295334  
 9334465110 9308149980 , 03262303632,9234411586  
 East Jharkhand Jamshedpur Prasad Electronics H No. 293, Lane No.  
 10, Kasidih, Jamshedpur Lane No.10 831001  
 prasadelectronics@reddiffmail.com 7488295334 9334465110  
 0657/2442216 , 9386553359

East Jharkhand Ranchi Adonis Electronics Pvt.Ltd 101 A, Old Ag Colony,  
 Kadru, Ranchi Old AG Colony 834002 ranchi.service@adonis.co.in  
 7488295334 9334465110 0651/2341049  
 East Bihar Arrah M/S Shayama International Lakh no/1,Near Sone  
 canal Office, Ara, Bojpur 802301  
 shyamainternational2000@gmail.com 7488295334 9525111414  
 9234535281  
 East Bihar Bhagalpur M.S. Electronics Super Market/ Patel Babu Road/  
 Bhagalpur Super Market 812002 tp.bhagalpuradonis@gmail.com  
 7488295334 9525111414 9334250356  
 East Bihar Muzaffarpur Adonis Electronics Pvt.Ltd. Near St. Mary'S  
 School, Beside Tvs Chakkar Chowk, Post Office Hpo Muzaffarpur, Ps Kazi  
 Mohammadpur, Muzaffapur St. Marry's School 842001  
 bsimuzaffarpur23@reddiffmail.com 7488295334 9525111414  
 0621/2247221 , 3202909 , 9334061211  
 East Bihar Patna Adonis Electronics Pvt.Ltd Satyshree, Boring  
 Patilputra Road, Patna Boring Road Patna 800013  
 mch.patna@adonis.co.in 7488295334 9525111414  
 0621/3252513,2261 071,3259715  
 East Bihar Bettiah M/S Pratap Communication Church Road Lal  
 Bazar Near St Marry School Bettiah 845438  
 pratapcommunication@yahoo.com 7488295334 9525111414  
 06254/241555 / 9931073296,  
 East Bihar Katihar Star VisionFCI chowk, Katihar,Pin/854105  
 854105 starvisionktr123@gmail.com 7488295334  
 9525111414 9852498200  
 East Bihar Begusarai Neha Communication Sona Jaygeshwar  
 Complex,Traffic Chowk,Begusarai 851101  
 kumarnaresh73@yahoo.com 7488295334 9525111414  
 9939084101  
 East Bihar Purnea PURNEA SHREEMA TELECOM A-Block,Vikash  
 Bazer,Purnea, Opp-Govt.Bus Stand 854301  
 shreemaatelecompurnea@gmail.com 7488295334 9525111414  
 9334952211/08092986666

East Orrisa Balasore Adonis Electronics Pvt.Ltd. Plot No 194/980,  
Opp. old SBI, Near Neelam Motors, Shrikanthpur, Balasore Near Neelam  
Motors 756001 balasore.mobileservice@adonis.co.in 9337333330  
9338167410 6782329442

East Orrisa Bhubaneswar Adonis Electronics Pvt.Ltd 10, Satya  
Nagar, Bhubaneshwar Opp. Central School 751007  
mch.bhubaneshwar@adonis.co.in 9337333330 9338167410  
6743203233

East Orrisa Bhadrak M/S BABAMANI STORE (Now for all) BY  
PASS ,DIST/BHADRAK, P/O/BHADRAK, near bypass 756100  
babamanistore@gmail.com 9337333330 9338167410  
9238686502

East Orrisa Baragarh M/S S S POINT NEAR SUDHA CLINIC,  
NH/6 ,DIST/BARGARH NEAR SUDHA CLINIC, 768028  
sspoint.2008@gmail.com 9337333330 9338167410  
9938266394

East Orrisa Rourkela OM Tele service Bisra Road, Infront of Radhika  
Agency, Rourkela ,ROURKELA /769001 infront of radhika agency  
769012 ommtelegroup969@gmail.com 9337333330  
9338167410 9583330224

East Orrisa Jagatsinghpur Channel Partner MARKET COMPLEX, MAIN  
ROAD, RAHAMA, JAGATSINGHPUR ,JAGATSINGHPUR /754103 near  
market 754103 rmohanty92@gmail.com 9337333330  
9338167410 9132611544

East Orrisa Kendrapara Bajarangi Services NEAR BUSSTAND,  
LUCKY MOBILE STORE, KENDRAPARA, ODISHA ,KENDRAPARA /754211  
Near busstand 754211 Bajarangi.services@gmail.com  
9337333330 9338167410 9337278527

East Orrisa Cuttack M/S CHANNEL 4 CHANNEL 4, BESIDE  
KEDARSON, SINGH PLAZA, DULMUNDAI, CUTTACK, 753001 BESIDE  
KEDARSON 753001 channel4.ctc@gmail.com 9337333330  
9338167410 6712326797

East Orrisa Behrampur Adonis Electronics Pvt.Ltd. Plot No 375/1,  
1st Line, Gandhi Nagar ,BEHRAMPUR /760001 OPP/SBI MAIN BRANCH

760001 behrampur.mobileservice@adonis.co.in 9337333330  
9338167410 6803295442

East Orrisa Puri M/S. SHREE JAGANNATH TELESYSTEMS SANTI  
APARTMENT , GROUND FLOOR, PURI ,PURI /752002 near cinema hall  
752002 motopuri@gmail.com 9337333330 9338167410  
9777037071

East Orrisa Angul M/S FLOWERS 150, KALINGA MARKET,  
ANGUL ,ANGUL /759122 near market 759122  
activeorissa@hotmail.com 9337333330 9338167410  
9937070525

East Orrisa Sambalpur Adonis Electronics Pvt.Ltd. VSS MARG, NEAR  
RANI LODGE, SAMBALPUR 768001 NEAR RANI LUDGE 768001  
sambalpur.mobileservice@adonis.co.in 9337333330  
9338167410 6633295442

East Kolkata Kolkata Adonis Electronics Pvt.Ltd 70 Beckbagan Row;  
1st Floor; Park Circus; Kolkata Near Methai Shop/ Opposite CESE Godown  
700017 mch.kolkatta@adonis.co.in 9163326307 9163326300  
033/32426431

East Kolkata Asansol P.M DISTRIBUTOR 1st Floor, B.B College More,  
Uashgram, G.T Road {East} Asansol Near BB College Bus Stand 713303  
puspenmoto@rediffmail.com 9163326307 9163326300  
0341/6553680

East Kolkata Barrackpur SYSTEMS & SERVICES 6/2 RASAMAY  
BISWAS ROAD, TALPUKUR, BARRACKPORE 700123  
sysser2001@yahoo.com 9163326307 9163326300  
9230529663, 9230529653

East Kolkata Behrampur Parjas Entertainment Pvt.Ltd.  
78/1/Saranamyeer Road, 1st Floor, Behind Of Swaranmayee Municipal  
Market Complex, Behrampur, Murshidabad Near Abhudaya Club  
742101 parjasent@gmail.com 9163326307 9163326300  
03482/320691, 274815, 9233322039

East Kolkata Malda Excel Services Nh 34, Rath Bari, Panta Polly,  
Opp Chamaka Hotel, Malda 732101



excel.service@rediffmail.com 9163326307 9163326300  
03512/257537

East Kolkata Siliguri Adonis Electronics Pvt.Ltd. 87/Raja Ram Mohan  
Roy Road Bylane, Opp Dolly Distributors , Hakimpara, Siliguri  
734401 service.siliguri@adonis.co.in 9163326307  
9163326300 0353/ 2525721

East Kolkata Durgapur Silica service 12, Kabiguru Sarani, City Center,  
Durgapur Near Bibisha Bus stand 713216 dgp\_silica@rediffmail.com  
9163326307 9163326300 9233620914

East Kolkata Howrah Air Voice 274 Belilious Road ,Near maidan  
(Christian para Maszid Goli) 711101  
howrah.airvoice@gmail.com 9163326307 9163326300  
9748347344, 9239407888

East Kolkata Krishna Nagar MOBILE GHAR INDIRA GANDHI  
MUNICIPAL COMMERCIAL COMPLEX, ROOM NO/21,KRISHNANAGAR,  
NADIA Near krishnagar Court 741101  
satinath.halder@yahoo.co.in 9163326307 9163326300  
9333379466, 9732517571

East Kolkata SeramporeHI CARE AGNISHA APPARTMENT  
19,MUKHERJEE PARA LANE P.O.:SERAMPORE DT:HOOGHLY Near Shib  
Mandir 712201 hi.care@rediffmail.com 9163326307  
9163326300 03326528311

East Kolkata Bankura JOYGURU ENTERPRISE NATUNGANJ,  
DURGAMIDIR, BANKURA, WEST BENGAL, 722101  
goutam.kr@rediffmail.com 9163326307 9163326300  
9233672140 9232640254

East Kolkata Burdwan A.R INFOTECH  
380,SEALDANGA,BIDHANPALLY, GHOSH PARA,BURDWAN  
713103 arinfotech.bwn@gmail.com 9163326307 9163326300  
9378297033 9333218904

East Kolkata Baruipur Aryan Network Solution Kalpukur Road,  
Baruipur,Kolkata/144 Near Pragati Sangha Club 700144  
abhijit.marik007@yahoo.co.in 9163326307 9163326300  
8100913788

North Haryana Gurgaon Adonis Electronics Pvt. Ltd.plot no /170  
bhim nagar chowk new railway road. Nr Sukhbir Kataria agriculture  
Minister haryana 122001 excellentservice@rediffmail.com,  
gurgaon.service@gmail.com 9355226007 9315124001  
0124/4202835

North Haryana Ambala Adonis Electronics Pvt.Ltd. 1101/1, Behind  
S.D.Public School, Near TCI Office, Ambala Cantt., Haryana / 133001  
Behind SD Public School 133001 ambala.service@adonis.co.in  
9355226007 9315124001 0171/4006270

North Haryana Karnal Adonis Electronics Pvt.Ltd Adonis  
Customer Relation Center, Plot No.27, Sector No/3, HSIDC, Nr Namaste  
Chowk, Karnal Nr. Namaste Chowk 132001 mch.karnal@adonis.co.in  
9355226007 9315124001 0184/2220525 / 2220725 /  
3293794,9355226007

North Haryana Panipat M/s Luxmi telecom Shop no 2,1090 Ram  
Gopal Estate,Bishan Swaroop colony ,Panipat/132103 Near Nokia  
Service Centre 132103 karambir.saagar@gmail.com 9355226007  
9315124001 0180/4015598,9896917778

North Haryana Palwal M/S GARG MOBILE POINT NEW  
COLONY ROAD OPP.ICICI BANK ,Palwal,Faridabad Opp,ICICI Bank  
121102 sunil.garg83@gmail.com 9355226007 9315124001  
01275/400454,9355010944

North Haryana Rohtak Adonis Electronics Pvt.Ltd. Shop No/07,  
Near Soham Mandir Near Soham Mandir 124001  
rohtak.service@adonis.co.in 9355226007 9315124001  
01262/250335,9215880054

North Haryana Sonipat Luxmi Telecom 107,1st Floor,PP  
Tower,Near Subhash Chowk Nr Subash Chowk 131001  
subhasaini@gmail.com 9355226007 9315124001  
9253063350

North Haryana Sirsa M/s Chugh Telecom Shop no.81,82,83, circular  
road new m.c.market,Sirsa new m.c.market125055  
chughsirsa@rediffmail.com 9355226007 9315124001  
01666/223806/09215523806

North Haryana Jind M/s.Dev Mobile Housing Board Road , Shiv Colony ,Nr.Bus stand, jind Nr.Bus stand 126102  
devmobile\_jind@rediffmail.com 9355226007 9315124001 9215188033

North Haryana Hissar M/s. Shree Balaji Communications Near neelam Cinema, Parijat Chowk , Hissar Near neelam Cinema 125001 shribalaji\_comm@rediffmail.com 9355226007 9315124001 9255414500 / 01662-226700

North Haryana Bhadrugarh M/s Baba Communication C/o GAJNAYAK MOBILE SHOP NO (G1)SHYAM JI COMPLEX Shyam Ji Complex 124507 sumit9918@yahoo.in 9355226007 9315124001 01276/220081,8053680537

North Haryana Rewari Vicky Mobile Repair Center Nr. Old tehsil and old thana, Rewari Near old thana 123401  
vocky\_mobile999@yahoo.com 9355226007 9315124001 9896010448

North Haryana Narnaul M/s Rose Mobile Care KAILASH NAGER REWARI ROAD NARNUAL kailash Nager 123001  
rose\_nnl@yahoo.com 9355226007 9315124001 9896297888

North Haryana Kurukshetra Shree Communication 1085/10 Kachcha Gher Near Municipal Committee Near Municipal Committee 136118 pinku9100@gmail.com 9355226007 9315124001 01744-235882

North Haryana Charkhidari M/S PAHEL COMMUNICATION ROHTAK CHOWCK, RS PHOGHT MARKET OPP. VIJAY NURSING HOME ,Charkhidari OPP. VIJAY NURSING HOME 127306  
pahel.com@gmail.com 9355226007 9315124001 9254683643

North Haryana Bhiwani M/S Rakhi Communication SHOP NO/01 NEAR VED BHOJNALAY OPP. OLD BUS STAND Near Old Bus Stand 125021 bhoopsngh47@gmail.com 9355226007 9315124001 01664/215517

North Haryana Barwala M/S Vipin Trading Company C/o Aabhas Mobile Care Opp. New Bus Stand opp. New Bus Stand 125121

vipinsaluja143@gmail.com, 9355226007 9315124001 9050965000

North Haryana Faridabad Adonis Electronics Pvt.Ltd. H.No.5/G/55 NIT ,Near vaid Electronics Faridabad Near Vaid Electronics, 121001  
faridabad.service@adonis.co.in 9355226007 9315124001 0129/4050637 / 9582715483

North Himachal Pradesh Shimla Adonis Electronics Pvt.Ltd. 2nd Floor, Hari Om Bhawan, Circular Road Near baljees regency 171001  
ashokshimla123@gmail.com , shimla.service@adonis.co.in , shimla.mobileservice@adonis.co.in 9646135813 9646135825 0177-2655136 / 9816046016 / 9816026946

North J & K Jammu Adonis Electronics Pvt.Ltd. 14, JDA Colony, behind shakuntala theatre Jammu Near Rehari, 180001  
Jammu.mobileservice@gmail.com, naveen.hans12@gmail.com 9646135813 9646135825 191/2562258 / 9419176807

North J & K Udhampur Indian Electronics Goal Market Udhampur (J&K) 182101 indianelectronics.raman@gmail.com 9646135813 9646135825 9858516589

North Himachal Pradesh Una Shiv Shakti Communication thaliwal thasil haroli disstt una, 174301 174301  
shivshakti765@yahoo.com 9646135813 9646135825 9316066639 / 9218769999

North Himachal Pradesh Una Shubham Agencies C/O Chandigarh Mobile Centre ,Near UCO Bank, Hamir Pur Road, UNA 174301 vijayrana867@indiatimes.com 9646135813 9646135825 9857511872

North Himachal Pradesh Srinagar M/s. Irfan Trading Corporation 1st floor ,Habib Trade Centre, Sarai Bala, Shrinagar 190001  
imran.majid7@gmail.com 9646135813 9646135825 9086577277

North Himachal Pradesh Kullu RK Time & Communication Main Bazaar, Bhunter (Kullu) 175101 rajneeshkaushal@yahoo.co.in 9646135813 9646135825 09418149449 ; 09816404649

North Himachal Pradesh Baddi M/s Monu Computers & Mobiles

Dhiman Complex,Near Micro Tuner, Jharmajari 174103  
manudhiman.dhiman7@gmail.com 9646135813 9646135825  
9816450064

North Himachal Pradesh Bilaspur Thakur Communication VPO  
Brahampukher Tehasil Sadar Distt. Bilaspur.,174001 174001  
thakur.357@rediffmail.com 9646135813 9646135825  
9817077051

North Himachal Pradesh Sunder Nagar Mobile Care NH/21Old  
Bus Stand Sunder Nagar/175002(HP) 175002  
mobilecare111@gmail.com 9646135813 9646135825  
9817077051

North Punjab Amritsar Adonis Electronics Pvt.Ltd. 152, City  
Centre, Behind Azad Hotel, Near Bus Stand, Amritsar / 143001 Near Bus  
Stand. 143001 amritsar.service@adonis.co.in ,  
amritsar.mobileservice@adonis.co.in, 9646135827 9888904201  
0183/2530349

North Punjab Bathinda Adonis Electronics Pvt.Ltd. Back side gole  
market, near telephone exchange street 151001  
bhatinda.mobileservice@gmail.com 9646135827 9888904201  
0164/5012075 / 9646135829

North Punjab Chandigarh Adonis Electronics Pvt.Ltd Sco  
85,1st Floor Ekta Market , Nr.Police Post , burail sec/45,c, chandigarh  
Nr.Police Post 160045 chandigarh.service@adonis.co.in ,  
dpk.deepika.5@gmail.com 9646135813 9646135825 0172/5067133  
/ 5067135

North Punjab Nalagarh Awasthi Communication Goal Market  
Shop No/3,Nalagarh 174101 ajay2101@yahoo.com  
9646135813 9646135825 9816021625

North Punjab Gurdaspur M/s Inderjit Telecom IST FLOOR  
UNDERGROUND MARKET , OPP.. SINDHI HOTEL, SADAR BAZAR  
GURDASPUR OPP. SINDHI HOTEL 143521  
inderjit\_traders@yahoo.co.in 9646135827 9888904201  
9256602073

North Punjab Hoshiarpur Adonis Electronics Pvt.Ltd. 177R,

model town opp gurudwara kalgidhar, nr punjab gramin bank nr.  
Govt.college 146001 hoshiarpur.service@adonis.co.in 9646135827  
9888904201 01882/245508

North Punjab Ludhiana Adonis Electronics Pvt.Ltd 3761/1 ,  
basement of bindra complex, jwadhi rd, model town ext.nr.trikona park  
nr.gurudwara singh sabha 141001 priyanka.dogra88@gmail.com  
& ludhiana.mobileervice@adonis.co.in 9646135827 9888904201  
9888904201

North Punjab Pathankot M/s Ganpati mobile world sh  
no/23,dhangu road. opp pushp cinema 145001  
ganpatimobileworld@rediffmail.com, ganpatimobileworld@gmail.com  
9646135827 9888904201 9216936101

North Punjab Sangrur M/s GURU KIRPA ENTERPRISES NEW  
SINGLA MEDICAL HALL, dhuri gate,sangrur 148001  
sonu.sangrur@rediffmail.com 9646135827 9888904201  
9417818064; 9914402000

North Punjab Ropar LAMBA MOBILE REPAIR Sh No  
10,Kalgidhar Mkt, Nr indian bank,ropar 140001  
singhlambabhupinder@yahoo.com 9646135827 9888904201  
9872347165

North Punjab Patiala Adonis Electronics Pvt.Ltd. SCF/21,sst  
shoping complex opp,singh sabha gurdawara 147001  
patiala.service@adonis.co.in 9646135827 9888904201  
1755015422

North Punjab Jallandhar Adonis Electronics Pvt.Ltd. 163, Ranjit  
Nagar, Ground Floor Behind International Hotel, Jallandhar - 144 001 Opp.  
Ranjit park. 144001 jallandhar.mobileservice@gmail.com ,  
ritbhagat@gmail.com 9646135827 9888904201 0181-3245432

South Andhra Pradesh Kakinada maha Lakkshmi Cell  
Point&Electronics D.NO.27/4/12/1, Temple Street,Beside Old Kazana  
Jewellers,Kakinada. Beside Old Kazana Jewellers 533002  
mahalaxmi\_suresh@yahoo.com 9866998085 9397939997  
9290892501 , 9848814150

South Andhra Pradesh Vijayawada Adonis Electronics Pvt.Ltd



Saptagiri College Road, Vijaywada Saptagiri college road 520002  
mch.vijayawada@adonis.co.in 9866998085 9397939997  
0866/2438681 / 6536040

South Andhra Pradesh Visakhapatnam NOOKAMBIKA ELECTRONICS  
D.No.49/14/16/2.Lilitha Nagar,Near Sankarmattam  
raod,VISAKHAPATNAM Near Shankarmutt 530016  
nanieddy1432@gmail.com 9866998085 9397939997  
0891/3262828,9640625366.

South Andhra Pradesh Ongole Sri deepika cell plaza  
Jyothi plaza,Kurnool road, Ongole APSRTC BUS DEPOT 523002  
srinivasnalluri@yahoo.co.in 9866998085 9397939997  
9849356287

South Andhra Pradesh Guntur M/S.V.D. Technologies  
D.no:6/6/48, First floor,6/1, Arundelpet,Guntur guntur 522002  
vdtechnologies@rediffmail.com 9866998085 9397939997  
9505601800,0863 6532028

South Andhra Pradesh Rajahmundry M/S. Sri Ratnam Electronics  
D/No.23/33/52, Nr.Devi Chowk, Alluri Sitaramaraju, Junction, Opp.  
Krishna Denta Cure, Rajahmundry 533101  
rajahmundrymobiles@gmail.com 9866998085 9397939997  
9293778766 / 9346900000

South Andhra Pradesh Nalgonda M/S.Naga Venkateswara Agencies.  
OPP.N.G.College, C/O.Subham Mobiles,HYD Road,NALGONDA  
Nalgonda 508001 ksr\_kolanu@yahoo.com 9866998085  
9397939997 9652518111 , 9866858483

South Andhra Pradesh Tadepalligudem M/S CELL COMMUNICATION &  
FIRE EQUIPMENT D.No.3/1/48,Shop No.2, N.V.Raju shopping  
Complex,K.N.Road,TADEPALLI GUDEM N.V.Raju shopping Complex  
534101 srisurya\_2009@yahoo.com 9866998085 9397939997  
9848293643

South Andhra Pradesh Godavari Khani Balaji Services Indira Lodge  
lane, Godavarikhani, Lakshmi Nagar, Godavari Khani Indira lodge lane  
505209 balajiservices\_2006@yahoo.co.in 9866998085  
9396299900 08728/243123/9849262806

South Andhra Pradesh Hyderabad Adonis Electronics Pvt.Ltd Bala,  
5/9/77, Chapel Road, Near Stanley Girls High School, Abids , Hyderabad  
opp to stanley girls high school 500001  
mch.hyderabad@adonis.co.in 9866998085 9396299900  
040/66833000/32935964

South Andhra Pradesh Suryapet M/s Sri Lakshmi Mobiles Shop No.  
12, PSR Centre, Near Teja Movi Max, Suryapet, PIN: 508213, Nalgonda  
(Dst.,) 508213 suryapetonida@gmail.com 9866998085  
9396299900 9989075920

South Andhra Pradesh Karimnagar Maniharsha Mobiles Dno :  
2/9/56, Vegetable Market, Makrampura, Karimnagar 505001  
maniharshamobils@gmail.com 9866998085 9396299900  
9052782828

South Andhra Pradesh Kurnool Swapna Communications Shop No :  
38, Bhoopal Complex, Park Road, Kurnool 518001  
kurnool.tp@gmail.com 9866998085 9396299900  
9885908738

South Andhra Pradesh Mahabubnagar Karthikeya Wireless Solution  
2/2/2/E/E1,Opp Modern Hgh school, Mahabub Nagar Opp to Modern  
High school 509001 kunchamsreedhar@gmail.com 9866998085  
9396299900 9849412435/9951127773

South Andhra Pradesh Nellore DIGITRONICS house no.16/2/82,  
beside raghava cine complex , pogathota , nellore opp.sirisha netralaya  
524001 ramdigi@gmail.com 9866998085 9396299900  
9390722406

South Andhra Pradesh Nellore Lakshmi Telicom Kanakamahala  
road, beside babu icecream, Nellore Beside babu icecream 524001  
Lakshmitelicom@yahoo.co.in 9866998085 9396299900  
0861/2333792, 9848923707

South Andhra Pradesh Tirupati RAGHU MOBILES CLINIC  
#10/14/548/A2, V V MAHAL ROAD, TIRUPATHI / 517501  
517501 raghunath.avva@gmail.com 9866998085  
9396299900 0877/2223222

South Andhra Pradesh Warrangal M/s.Mercury Electronics Nirmala

mahal,Shop No.10,JPN road, Warangal / 506002 Nirmala mahal,Shop  
No.10,JPN road 506002 mercurydeven@gmail.com 9866998085  
9396299900 9533091427

South Andhra Pradesh Secundrabad Sai Mobiles Shop.No/29,1  
st Complex,Hardy Complex,M.G..RoadNear Paradise Circle 500003  
raju\_jogi1@yahoo.co.in 9866998085 9396299900  
9703707328

South Andhra Pradesh Mancheriyal M/s RAJU COMMUNICATIONS  
Shop No. 5,6, Mamatha super bazaar complex Opp: RTC Bustand,  
Mancheriyal/504208, Adilabad Dst 504208  
vennala.g@gmail.com , 9866998085 9396299900  
9000896216

South Andhra Pradesh Nirmal / Adilabad Kushal Mobiles  
M/s.Kushal Mobiles, New Narayan Reddy Market, Nirmal/504106,  
Adilabad Dist. New Narayan Reddy Marketr 504106  
kushal\_mobiles@yahoo.com 9866998085 9396299900  
9885540143

South Andhra Pradesh Anantapur M/s.Teja enterprises Shop no. 35,  
police welfare complex , anatur nr. Tower clock 515001  
ideasudha@gmail.com 9866998085 9396299900  
9000412356 / 9848104402

South Andhra Pradesh Produtur M/S .Sai Varun Mobile Park  
Pavan Complex, Opp: Nikhil Nursing Home, Holmespet, Proddatur/  
516230. 516230 venulaxmi\_008@yahoo.com, 9866998085  
9396299900 9704766767

South Andhra Pradesh KhammamM/S.VENKAT RAMANA ELECTRONICS  
#9/3/137, Vinodha talkies road, Khammam, Pin/507001  
507001 venkataramanaele.414@gmail.com 9866998085  
9396299900 9849441236

South Andhra Pradesh Nizamabad M/S.SS Communication  
#6/23/674/3&4, Goutham Nagar, Nizamabad/503002 Ph:9392165577  
503002 sscom\_79@yahoo.com 9866998085  
9396299900 9392165577

South Andhra Pradesh Nandyal M/S .VAMSI CELL POINT

A/47, BALAJI COMPLEX, NANDYAL – 518501, PH: 9885596227  
518501 vamsicell@gmail.com 9866998085 9396299900  
9885596227

South Andhra Pradesh Hindupur M/S Reyaz Cell Care Door No  
2/3/27, Room No. 9,Dasa Plaza,Ambedkar Circle, Penukonda Road,  
Ph:9390045982 515201 riyazcellcare@gmail.com 9866998085  
9396299900 9390045982

South Andhra Pradesh Vizianagaram M/s. Lakshmi Narasimha Cell  
Communication Shop No.  
6, Vasu Complex, Near Ganta Sthabam Cebtere, Vizianagaram, Pin/ 535003  
535003 kspvizianagaram@yahoo.in9866998085  
9396299900 9885114567/9298555939

South Andhra Pradesh Dilshuknagar M/S AMMA COMMUNICATION'S  
#4/104/1,1st Durga Nagar,Opp Megha  
Thetre,Dilsukhnagr,Hyderabad/500060 Ph:9248885507 500060  
ammacommunications.onida@gmail.com, 9866998085  
9396299900 8125262939

South Andhra Pradesh Bhimavaram M/s I MOBILES #116/2/183,  
Opp: Annapurna theater, P.P.Road, Bhimavaram, Pin: 534201,  
534201 imobilesbvrm@gmail.com ,9866998085 9396299900  
9866617861

South Andhra Pradesh Gadwal M/s R R MOBILES Rajumarg  
Street, Opp: Vijaya mess, Gadwal-509125, Mhaboobnagar (Dst.)  
rrmobilesgadwal@gmail.com 9866998085 9396299900  
8121215053

South Tamilnadu Chennai Adonis Electronics Pvt.Ltd Onida  
House/18/4Th Laneoff.Nungambakkam High Roadnear  
Cainstitutenungambakkam , chennai 600034  
mch.chennai@adonis.co.in 9380244414 9381971277  
044/28330220

South Tamilnadu Chennai / AdyarAdonis Electronics Pvt.Ltd. 11/1/MG  
Road, Near Airtel Office, Shahstri Nagar, Adyar, Chennai 600020  
service.adyar@adonis.co.in9380244414 9381971277  
044/24525067 / 24525068

South Tamilnadu Chennai / Annanagar M/S. Sree Srinivasa Service  
2109/3, 13th Main Road, Anna Nagar West, Chennai 40 Near :  
Senthil Nursing Home 600040 chennai.crc@adonis.co.in 9380244414  
9381971277 044/32973243/32973244

South Tamilnadu Chennai / Tambaram Adonis Electronics Pvt.Ltd. Old  
No 106/New No 912 A, Gst Road, Tambaram Sanitorium, Chennai  
600047 service.tambaram@adonis.co.in 9380244414  
9381971277 044/22413334

South Tamilnadu Chennai / Ayanawaram M/S. Sakthi Network  
No.1 VP Colony South Road, Ayanavaram, Chennai/ 600023  
600023 shakthioutsource.adonis@gmail.com;ayanavaram.crc@adonis.co.in  
9380244414 9381971277 044 26442099 / 26448878

South Tamilnadu Chennai / Valasarawakam Venus Electronics No  
10, 5th Cross Streets, Brindhavan Nagar, Valasarawakam, Chennai  
600087 onidaravi@yahoo.co.in;valasara.crc@gmail.com  
9380244414 9381971277 044/24865500

South Tamilnadu Cuddalore M/S.Guru Service Devi Building,  
Ground Floor, 88E Lawrence Road, Cuddalore 607002  
cuddalore.crc@adonis.co.in 9380244414 9381971277  
04142 / 324566 / 236677

South Tamilnadu Pondicherry Sree Vigneshwar Electroncis No.  
159, Shankar Iliam., Eswaran Koil Street, Pondicherry 605001  
pondicherry.crc@adonis.co.in 9380244414 9381971277  
0413 / 2342467/ 2348856 / 2222368

South Tamilnadu Vellore V.K.S. Electronics 46,Arcot  
Road,Vellore 632004 vellore.crc@adonis.co.in 9380244414  
9381971277 0416 / 2235946/ 2235964/ 4203946

South Tamilnadu Kanchipuram Adonis Electronics Pvt.Ltd. M/s Sree  
Srinivasa Service, No. 80/7, Vilakkadi Koil Street,Opp. To PMS Salammal  
Chatiram,Kanchipuram 631501 chennai.crc@adonis.co.in,  
chennaicrc@gmail.com 9380244414 9381971277 044/67270964

South Tamilnadu Coimbatore Adonis Electronics Pvt.Ltd 10 B K R  
Nagar, Sathy Road, Coimbatore 641012

coimbatore.mobileservice@adonis.co.in 9380244414  
9344456663 0422 / 252 7314,3258032

South Tamilnadu Bhavani SRI SRINIVASA CELL SHOP  
OPP:State Bank of India,724/599,Annai Complex,Bhavani  
638301 srinivasa.cellshop@gmail.com 9380244414  
9344456663 9842732687

South Tamilnadu Denkanikotta MODERN ELECTRONICS  
NO29/A,NEW PANCHAYATH COMPLEX,BUS STAND,DENKANIKOTTA  
635107 ideasaju@gmail.com  
<ideasaju@gmail.com>;onidamodern@gmail.com 9380244414  
9344456663 9360744418

South Tamilnadu Erode S.J.Electronics 35,Annamalaigounder  
Nagar,Gandhiji Street No2,Veerappanchatram,Erode 638004  
erode.crc@adonis.co.in 9380244414 9344456663 0424 /  
222 7211 / 222 7201

South Tamilnadu Salem Classic Electronics B/6,Rajaji  
Street,Swarnapuri,Salem 636004 salem.crc@adonis.co.in  
9380244414 9344456663 0427/ 244 9525 / 244 3237

South Tamilnadu Tiruppur M/S.Jayam Troniks N.No 10,Oi.No 13  
Bharathi St,Valipalayam,Tirupur 641601 tiruppur.crc@adonis.co.in  
9380244414 9344456663 0421 / 223 4526 / 223 0407

South Tamilnadu Mettur INTELL Electronics & System Hardware  
S22/19A,West Main Road,Near Chinna Park,Mettur dam /636401  
636401 intellmobile@gmail.com 9380244414 9344456663  
9842651590

South Tamilnadu Pollachi K.S.M Electronics 78/113 Venkatesha  
Colony, Vallara Nagar / Pollachi 641001 ksmelepoy@gmail.com  
9380244414 9344456663 04259/231796,  
9629103055/9360230486

South Tamilnadu Thenkasi M/s Parsana Mobiles No 187 Mela Avani  
Moola Veethi, Thenkasi,Thrunelveli (dist) 627805  
vembartimbers@yahoo.co.in 9380244414 9381971277  
9361330459

South Tamilnadu Nagercoil Varsha Enterprises No 30/654,

Trivandrum Road, Near BSNL Exange, Vadaserri, Nagercoil 629001  
nagercoil.crc@adonis.co.in 9380244414 9367944109 04652/  
274362 / 274363

South Tamilnadu Tirunelveli Kalyan electronics 66A/8/1,Ground  
Floor,Babuji Nagar,Madurai Road,Tirunelveli 627001  
tirunelveli.crc@adonis.co.in 9380244414 9367944109  
0462 / 2331731/ 2331831/ 2331901

South Tamilnadu Madurai Adonis Electronics Pvt.Ltd No. 12A, L.D.C.  
Main Road, Chinnachokkikulam, Madurai - 625002 625002  
sankar.g@adonis.co.in 9380244414 9367944109  
0452-2533033, 3244443, 3259062, 6543000

South Tamilnadu Madurai M/S. Gaurdian Electronics DOOR NO  
14/10, PANAGAL 2ND STREET, SHENOY NAGER, MADURAI 625 020  
sesakkipandi@gmail.com 9380244414 9367944109 0452 /  
4391868

South Tamilnadu Trichy M/s.WINTRONICS NO:  
14,RAJARATHINAM PILLAI STREET,OPP:ARUNA THEATRE,  
WORAIYUR,TRICHY 623003 trichyadonis@gmail.com  
9380244414 9367944109 0431 / 2770433,9344678803

South Tamilnadu Thanjavur SRI SAKTHI ELECTRONICS 24 A,  
MALAIYERI AMMAN ILLAM , 7th CROSS,ARULANANDA NAGAR , ROHINI  
HOSPITAL BACKSIDE , TANJAVUR 613007  
gsaravananonida@gmail.com;thanjavur.crc@adonis.co.in  
9380244414 9367944109 04362/ 271719

South Tamilnadu Chennai / Padi JVC Electronics 7/11, Solambedu  
Road, Thirumullaivoil, Chennai / 600 062 Opp: Jawahar Matric School  
600 050 ambattur.crc@adonis.co.in 9380244414 9381971277  
044 / 42189550 / 42189551

South Tamilnadu Kumbakonam Bismi CELL PHONE SERVICE  
DOOR NO. 1/2/3, VRS COMPLEX, Hajiya Street, Kumbakonam / 612  
001 612001 bismicell@gmail.com; bismi\_cell@yahoo.com  
9380244414 9367944109 0435 24266080 / 9790181518

South Tamilnadu Theni SHREE RAM CELL 46/36, NEAR HOTEL  
INTERNATIONAL, Bagavathiamman Koil Street, Theni / 625 531

625531 pinesmbalaji@yahoo.co.in 9380244414 9367944109  
04546 252153 / 9842649174/9842649175

South Tamilnadu Namakkal M/S Abi Mobiles 52,Kotai main Road,  
Namakkal 637001 sureshabi1985@gmail.com 9380244414  
9344456663 9894522897/9843594770

South Tamilnadu Krishnagiri Friends Mobiles 29M Commercial  
Road,Opp: Old Sp Office, Bangalore Road Krishnagiri. 635 001  
vendhan.kalai@yahoo.co.uk 9380244414 9344456663  
9942221210

South Tamilnadu Dindugal M/S Sundar Electronics No. 20 , 53  
Nehruji Nagar 3rd Street, Dindigul 624 001  
dindigul.crc@adonis.co.in 9380244414 9367944109 0451 /  
3293496 / 2433747

South Kerala Cochin Adonis Electronics Pvt.Ltd Block/A,  
Tharakandam Estate, Kurisupally Road, Ravipuram Near Ship Yard  
682015 mch.cochin@adonis.co.in 8086398232 8086398266  
0484/2357536/3259353

South Kerala Alleppy Emmanuel Electronics  
SOUPARNA",NO 27/45,Palace Ward, Opp SBI NH 47 Branch,Alleppy,  
688001 alleppy.crc@adonis.co.in 8086398232 8086398266  
0477/3203162 , 2237065

South Kerala Calicut Smile N' Care Muthappan  
Complex,Pattery Bus Stop, P.O. Kuthiravattom,Mavoor Road/Calicut  
Muthappan Complex 673016 calicut.crc@adonis.co.in  
8086398232 8086398266 0495/2740 858 / 2743 502

South Kerala Kannur Ashwin Electronics Chettipeedika,  
Pallikunnu Post Office, Kannur Near Pallikunnu Post office 670004  
kannur.crc@adonis.co.in 8086398232 8086398266  
0497/2766 581 / 2711733

South Kerala Kollam Aryans Wave Lal Bhavan / Opposiate  
Manorama / Kadappakada/ Kollam Opposite Manorama 691008  
kollam.crc@adonis.co.in 8086398232 8086398266  
0474/2765 721 / 2743 701

South Kerala Kottayam Video CareNo. 655,Ozees

Bhavan,Puthupalli Road,Muttambalam Post Office,Kanjikuzhi,Kottayam  
 Ozees Bhavan 686004 kottayam.crc@adonis.co.in 8086398232  
 8086398266 0481/2575 446 / 2575 336

South Kerala Palakkad R.R. ELECTRONICS 14/464(4),Supreme  
 Towers,Opp. Kunnathurmedu Post Office , Palakkad /678 013  
 Kunnathurmedu Post Office 678 013  
 palakkad.crc@adonis.co.in 8086398232 8086398266  
 0491/2510727

South Kerala Trichur Technocraft TC 29/287."  
 OOLIAMPURATH HOUSE " VELLATT LANE. THIRUVAMBADI (P.O) , NEAR  
 CATHOLIC SYRIAN BANK STATATIONARY/PRINTING DIVISION. TRICHUR  
 -1 680001 trichur.crc@adonis.co.in 8086398232  
 8086398266 0487- 2337667,3296725,3249666

South Kerala Trivandrum The Window Tc 28/943  
 (43/1259),Kalpalathika,Kpc Building,Punnapuram  
 Road,Kaithamukku,Trivandrum Near Pass Port office 695023  
 trivandrum.crc@adonis.co.in 8086398232 8086398266  
 0471/2465 426 / 2462 924

South Kerala Kasargode Speed care Kaban Shoppe  
 Arcade ,Nayaks road ,Kasargode Nayaks Road 671121  
 kasargode.crc@adonis.co.in 8086398232 8086398266  
 4994224619

South Kerala RavipuramAngel Techno Services Pvt. Ltd.  
 Tharkandam Estate, D / Block, Kurusapally Road, Ravipuram, Cochin  
 682015 angel@angeltechno.com 8086398232 8086398266  
 9846128417

South Kerala Tirur Ringit Alamal Complex,Pan Bazar,Tirur  
 Alamal complex 676101 ringit.tirur@rediffmail.com 8086398232  
 8086398266 0494/2425757

South Kerala Edapal Yem Ess Mobile Pattambi Road,Edapal.  
 679576 yemess@gmail.com 8086398232 8086398266  
 9946007575

South Kerala THALASSERY Telstra Mobile Service JUBILEE  
 ROAD THALASSERY 670101 smarttelecomhpd@gmail.com

8086398232 8086398266 9400112205

South Kerala Vadagara Sun Electronics Near JTS ,Opp Lalith  
 collections , Villiyapally Road ,Nut Street po ,Vadakkara Opp Lalith  
 collections 673104 sunbadagara@gmail.com 8086398232  
 8086398266 0496/3150763

South Kerala Kattappana Ajay Electronics T.B. Junction,Near  
 Service Co/Operative Bank,Kattappana Opp TB,Near Co/Operative  
 Bank 685515 kajayelectronics@yahoo.com 8086398232  
 8086398266 04868/250124

South Kerala Pathanapuram Electronic Center Osmaniya  
 complex , Collage road , Pathanapuram Osmaniya Complex 689695  
 electroniccenterptpm@gmail.com 8086398232 8086398266  
 0475/3204700

South Kerala Kalpetta A2Z MOBILES Chungam Jn, Kalpeta ,  
 Wayanad District, Pin/ 673121 Chungam Jn 673121  
 a2zshaji@gmail.com 8086398232 8086398266 9895675514

South Kerala KANHANGAD NASS COMMUNICATION MKAM  
 TOWER RAILWAY STATION ROAD KANHANGAD 671315  
 nass.kanhangad@yahoo.in 8086398232 8086398266  
 9447691991

South Kerala OCHIRA CELL WORLD MOBILE SHOPPE PREMERE  
 JN NEAR NORTH GRAMIN BANK OCHIRAPIN/690526 690526  
 anshadcellworld@gmail.com 8086398232 8086398266  
 9744161211

South Kerala PAYYANNUR POPULAR TIMES & MOBILES  
 PERUMBA NEAR KAIRALI HOTEL PAYYANNUR 670610  
 popularonida@gmail.com 8086398232 8086398266  
 9495460779

South Kerala Thodupuzha Orbit Times & Mobiles Saro Plast  
 Building, Idukki Road , Thodupuzha Idukki road 685584  
 saijomorbit@yahoo.com 8086398232 8086398266.00  
 9447440934.00

South Kerala Irinjalakuda Johns Service Nr. Geojit financial  
 service, tana , irinjalakuda 680121 johnsons123@rediffmail.com



8086398232 8086398266 9846469669  
 South Kerala Cherthala XPRESS SOLUTIONS ROOM NO:147/N  
 BEHIND DEVI TEMPLE SKY LINETOWER SHOPPIN COMPLEX  
 CHERTHALA/688524 688524 xpresssolutionctla@gmail.com  
 8086398232 8086398266 9947490969  
 South Kerala BALARAMAPURAM SBS MOBILES SHOP NO.10 &  
 21, HOUSING BOARD COMPLEX ,BALARAMPURAM 695501  
 sbsmobiles@gmail.com 8086398232 8086398266  
 9947894003  
 South Kerala ALUVA SAFE LINKKAJA SHOPPING CENTER, R.S  
 ROAD, ALUVA 683101 safelink.link@gmail.com 8086398232  
 8086398266 9847474957  
 South Kerala HARIPAD SMART MOBILE LAKSHMI BUILDING ,  
 THEKKENDDA ,N H 47, OPP.IOC PUMPHARIPAD 690514  
 smarttelecomhpd@gmail.com 8086398232 8086398266  
 9249576454  
 South Kerala MANJERY CAMBUS MOBILE VENGARA  
 COMPLEX ,NEW BUS STAND, MANJERY 676121  
 faisalncbritco@gmail.com 8086398232 8086398266  
 9895675967  
 South Kerala Thiruvalla PHONE PALACE Kodyattu Building,T K  
 Road,Thiruvalla,pin:689101 Kodyattu Building 689101  
 phonepalace@yahoo.com 8086398232 8086398266  
 04693290240/9747463748  
 South Kerala Pattambi Veerali Distributors PDC Bank  
 Building,Pattambi Road,Koppam PDC Bank Building,Pattambi Road  
 679307 veeralikoppam@gmail.com 8086398232 8086398266  
 9846002389  
 South Kerala angamali STAR MOBILES KALOORKARAN  
 TOWER,OPP.JOY ALUKAS, ANGAMALY OPP. JOY ALUKAS 683572  
 anjacob2001@gmail.com 8086398232 8086398266  
 9895874001  
 South Karnataka Bangalore Adonis Electronics Pvt.Ltd No 488,5th A  
 Main,11th Cross,WOC,2nd Stage,Mahalaxmipuram,Rajaji nagar ,Bangalore

Near Modi Hospital 560086 mch.bangalore@adonis.co.in ,  
 james.anthonyzte@gmail.com 9886865282 9986384161  
 080/23195539  
 South Karnataka Bangalore Indiranagar DHARSHINI  
 ELECTRONICS No 770, 1st cross, 1st stage, Indira nagar, Bangalore  
 560038 darshini\_onida@gmail.com 9886865282 9986384161  
 080/25292426/32022672 / 9036144145  
 South Karnataka Bangalore Basavangudi Adonis Electronics Pvt.Ltd.  
 40, Khazi Street, Basavangudi, Near Southend Circle, Bangalore / 560  
 004 Near Southend Circle 560004 suhas.bv88@gmail.com  
 9886865282 9986384161 080/26577409  
 South Karnataka Mysore CRC M/S.Slv Service MIG/47,1st  
 Stage,Kuvempu nagar,Mysore Near Ravi kids wear 570023  
 mysore.mobileservice@gmailcom 9886865282 9986384161  
 0821/3206473 / 2463437  
 South Karnataka Gulbarga Sri Lakshmi Electronics  
 "Shivkedar",Plot No.8,3rd Cross,KUBA Plot,GULBARGA - 585102  
 Behind St.Mary's School 585012 vhjagirdar@gmail.com  
 9886865282 9538924275 9742194062  
 South Karnataka Sirsi Seagate Mobile Opp Nataraj Theatre,Nataraj  
 Road , Sirsi / 581401,North Kanara District 581401  
 seagamobiles@gmail.com 9886865282 9008617200  
 9739266884  
 South Karnataka Kolar S.L.V.Mobiles # 20 , Municipal Complex , Opp  
 Head Post Office ,Gowripet , Kolar Opp Head Post Office 563101  
 jeeva\_ara@yahoo.co.in 9886865282 9986384161  
 9060222727  
 South Karnataka Belgaum Sri sai services Renuka Complex  
 No2903,First Floor,Khade Bazar,Belgaum/590002 Khade Bazar  
 590002 belgaum.mobile01@gmail.com 9886865282  
 9538924275 0831/2424095 / 2469139  
 South Karnataka Hubli Adonis Electronics Pvt.Ltd ONIDA CUSTOMER  
 RELATION CENTRE,PLOT NO :104,A/74/B OLD BADAMI NAGAR,NR SUDHA  
 APARTMENT KESHWAPUR HUBLI/580023 Opp Ramesh Bhavan 580023

hubli.mobileservice@gmail.com 9886865282 9538924275  
0836/2214814 / 2288712

South Karnataka Raichur Cell Care C/o Adil's Shop , Netaji Road ,  
Raichur 584101 adils.shop@gmail.com 9886865282  
9538924275 9945231899

South Karnataka Mangalore Adonis Electronics Pvt.Ltd  
#3-30-2418,Cellar Floor, Pratibha Eye Clinic Bldg, Opp Mangala  
Hospital, Kadri Road, Mangalore 575 003  
mathew.bernard@adonis.co.in 9886865282 9323467771  
0824-2214210

South Karnataka Mangalore M/s Wipras #3/30/2418,Seller  
floor,Prathibha eye clinic building,Opp Mangala Hospital,Kadri  
Road,MangaloreOpp Mangala Hospital 575003  
wiprasrcmangalore@gmail.com 9886865282 9008617200  
0824/2216324/2216445

South Karnataka Shimoga M/S Aditya Customer Care "Chinnu"  
2nd Cross, Durgigudi, Shimoga 577201  
adityacustomermercure@gmail.com 9886865282 9008617200  
9902428808 / 08182 / 401886

South Karnataka Shimoga Shastry Computers # 47/ Vinayaka  
Nilaya/ Kuvempu Road, Shimoga 577201  
shastrycomputers@gmail.com 9886865282 9008617200  
08182/277391/ 229255

South Karnataka Udupi ROYAL ELECTRONICS Sapthagiri  
Kalikambanagar, Ambalpadi Post, National Highway/17, Udupi  
Ambalpadi Post 576103 srikanth.udupi@gmail.com ,  
sachinbarkur@gmail.com 9886865282 9008617200  
0820/2532810/ 2532830

South Karnataka Hassan RR Mobiles Sri Maruti Krupa ,Old post  
office Road ,Hassan / 573201 Near Vani Vilas High School 573201  
shreetronics@gmail.com 9886865282 9008617200  
9743881505

South Karnataka Bellary Sujyothi Eterprises # DOOR NO.18/11,  
RAMNILAYAM,BHRAHM SHASTRI COMPOUND,GANDHI

NAGAR,BELLARY/580313, 580313 jlgoudadv@gmail.com  
9886865282 9538924275 9343866240

South Karnataka Bidar M/S Swamy Enterprises CMC Complex, Near  
Ambedkar Circle , BIDAR 585401 maheshwarswamy@gmail.com  
9886865282 9538924275 9448445086, 9743973797

South Karnataka Bagalkot M/s Adarsha Communications Opp  
Shanthi sagar hotel , Salimath Complex,Bus Stand Road,Mudhol , Bagalkot  
District 587313 spiccare.mdl@gmail.com 9886865282  
9538924275 9902695097

South Karnataka DavangereM/s Shivu Electronics Door No.692/1,Near  
Shivappa Circle,1st Cross,K.T.J.Nagar,Davangere -577002. 577002  
davangere.stores@gmail.com 9886865282 9538924275  
7899687336

South Karnataka Tumkur M/S AIM Enterprises, Shop No.4 ,  
HMS Complex, Ashoka Road , Tumkur / 572101. 572101  
iqbalpasha.anwer@gmail.com 9886865282 9986384161  
9743174336

South Karnataka Yadgir M/s Hello Brother Beside Khaja hotel ,  
Gandhi Chowk , Yadgir / 585201. 585201  
helloworldbrother.mobile@gmail.com 9886865282 9538924275  
9739786457

Up UP (E) Allahabad Adonis Electronics Pvt.Ltd. 60,B/2 Sardar Patel  
Marg, Thornhill Road Civil Line, Allahabad 211001  
allahabad.service@adonis.co.in 9598068418 9336847755  
0532/2260768

Up UP (E) Gorakhpur Adonis Electronics Pvt.Ltd. 85 D, Civil Line, Park  
Road, Gorakhpur 273001 gkp.service@adonis.co.in  
9598068418 9336847755 0551/2346126

Up UP (E) Varanasi Adonis Electronics Pvt.Ltd D 63/13  
A ,Mahmoorganj,Near Police Chowk,Varanasi 221010  
deep.chand@adonis.co.in 9598068418 9336847755  
0542/2224560 / 2227704

Up UP (E) Faizabad Adonis Electronics Pvt.Ltd. H. No.  
5/4/61/2A ,Amaniganj. , Bh New Wave Academy, Ayodhya Road, Faizabad

224001 faizabad.service@adonis.co.in 9598068418  
9307766663 05278/241314

Up UP (E) Jhansi Unicom Mobile Basement city center, (Near  
Danik jagran press ) Jeevan Shah Jhansi 284001  
jhansi.mobiles@rediffmail.com 9598068418 9307766663  
9935071630

Up UP (E) Ballia M/S G S SALES 45, GOLA WARD NO/9, NEAR SHISH  
MAHAL CINEMA JAPLIN GANJ BALLIA 277001  
gssalesballia@sifymail.com 9598068418 9336847755  
9807892737

Up UP (E) Kanpur Adonis Electronics Pvt.Ltd. 107/263 nehru  
nagar , (brahm nagar chauraha) Kanpur 208012  
manju\_gupta92@yahoo.com 9598068418 9307766663  
0512/2540581

Up UP (E) Bahraich Balaji Electronics HOSPITAL ROAD KANOON  
GOPURA ,SHANTI MARKET Near LG service center 271801  
balaji.bahraich@gmail.com 9598068418 9307766663  
5252237366 / 9807267817

Up UP (E) Lucknow Adonis Electronics Pvt.Ltd B/38, Sector/ P,  
Aliganj, Lucknow Beside Shayam Swad 226020  
mch.lucknow@adonis.co.in 9598068418 9307766663 0522/  
2323306/2335764

Up UP (E) Etawah Modern Computer World 11 A Commercial  
Complex, Pakka Talab Etawah 206001  
atulmishra\_etawah@yahoo.com 9598068418 9307766663  
9219668829/ 94211866299/05688681118

Up UP (E) SONEBHADRA M/S MAA JANKI ENTERPRISES NEAR  
NOKIA CARE MAIN MARKET , ANPARA, SONEBHADRA 231225  
maajankienterprises.anpara@gmail.com 9598068418  
9307766663 8874480130

Up UP (E) lakhimpur durga enter prises Aira road near Auranga  
bad churaha, Lakhimpur near chopra nursing home 262701  
sklalwani123@yahoo.co.in 9598068418 9307766663  
9307608515 , 9696600000

Up UP (E) Barabanki M/S SKY MOBILES SHOP NO/3, 1ST FLOOR,  
MUGAL DARBAR MARKET STATION ROAD,BARABANKI 225001  
imranahmad.dso@rediffmail.com 9598068418 9307766663  
9839174378

Up UP (E) Balrampur M/S JHA PCO & MOBILE CENTER SHOP  
NO/2,BALRAMPUR CHINI MILLS MAIN GATE, BALRAMPUR 271201  
jhapcoblp@gmail.com 9598068418 9307766663  
9125236006

Up UP (E) Akbarpur M/S SHANTI MOBILE SHOP 9 B, NIC  
MARKET AKBARPUR , AMBEDKAR NAGAR 224122  
kumaramit\_1390@yahoo.in <kumaramit\_1390@yahoo.in>  
9598068418 9307766663 9838587463

Up UP (E) Sultanpur M/S NEW CHINA CARE D/7 , SUPER  
MARKET SULTANPUR 228001 mani2235@gmail.com  
9598068418 9889766663 9125246963

Up UP (E) Pratapgarch M/S RAJEEV ELECTRONICS 79/  
CHILBILA CHURAHA, PRATAPGARCH 230403  
rajeevchilbila@gmail.com 9598068418 9889766663  
9044001625

Up UP (W) Agra Adonis Electronics Pvt.Ltd 17 Dwarikapuram by pass  
road Agra Opp. Shri ram takij 282001 agra.service@adonis.co.in  
9311139565 9336847763 0562 / 2523067

Up UP (W) Aligarh Adonis Electronics Pvt.Ltd. 476 vishupuri, near  
sumunglam nursing home, Ramghat road, Aligarh. rambagh road  
202001 aligarh.service@adonis.co.in 9311139565  
9336847763 0571/3205995

Up UP (W) Kasganj Electa Vision Biram Gate , Kasganj, East Up  
biram gate207123 electradeepu@gmail.com 9311139565  
9336847763 9837046417

Up UP (W) Mathura R.K Services Hotel Athitya Palace, Sankh  
Adda, Mathura hotal aditya palace 281005  
imran.tpmathura@gmail.com 9311139565 9336847763  
9368377871

Up UP (W) Firozabad Dayal Computers & Mobile Shop Infront of SRK



digree collage kotla road Firozabad Infront of SRK digree collage  
283203 atulporwalfzb@gmail.com 9311139565 9336847763  
9219175171

Up UP (W) Hathras Pankaj Electricals Navipur Chauraha  
sadabad gate Sadabad gate 281308 pankajsharmahts@gmail.com  
9311139565 9336847763 9258584597

Up UP (W) Dehradun Adonis Electronics Pvt.Ltd 11/ Mohini Road,  
Near Water Tank, Dehradun water tank248001  
rajesh.dabral@adonis.co.in 9311139565 9359215327  
0135/3250544

Up UP (W) Haldwani Adonis Electronics Pvt.Ltd. 8/267/3 Pant Colony  
Mukhani kaladhungi road Near Sharashwati Shishu Mandir 263139  
haldwani.service@adonis.co.in 9311139565 9359215327  
05946/254969 , 326300

Up UP (W) Ghaziabad Adonis Electronics Pvt.Ltd R/11/16 Raj nagar,  
Ghaziabad Nr 10 No Chouraha, 201001  
ghaziabad.service@adonis.co.in 9311139565 9310859221  
0120 / 4104983

Up UP (W) Noida Adonis Electronics Pvt.Ltd. Baishoya Complex  
Ground Floor Sec/15,Noida Opp Woodland 201301  
noida.service@adonis.co.in 9311139565 9310859221  
0120/3229094/4267157

Up UP (W) Bareilly Adonis Electronics Pvt.Ltd. 35/V/04 B Rampur  
Garden, Opp Dhanvantari Tomer Hospital,Civil Line, BareillyOpp  
Dhanvantari Tomer Hospital 243004 bareilly.service@adonis.co.in  
9311139565 9310859221 0581/3256600/2568081

Up UP (W) Bijnore Ujjwal Telecom First Floor Ajaj Ali Hall Near  
Roadways Busstand.Bijnore Near roadwyas busstand 246701  
pratushg1@gmail.com <pratushg1@gmail.com> 9311139565  
9310859221 9368937708

Up UP (W) Meerut Adonis Electronics Pvt.Ltd. 115/ Naya Bazar/  
Opp Mateshwari Mandir, Sadar, Meerut opp mateshwari mandir  
250001 meerut.service@adonis.co.in 9311139565  
9310859221 0121/3254424

Up UP (W) Moradabad Reliable Infosys Bhoora Crossing Opp Do  
Kuan Wali Masjid Moradabad Opp Do Kuan Wali 244001  
reliableinfosys.mbd@gmail.com 9311139565 9310859221  
9219755555 / 9358367000

Up UP (W) Muzaffernagar Audio Video Maintenance Audio Video  
Maintenance , 41 first flr.Kamdhenu Market , Ansari Rd. Opp. Lic Office  
Muzaffarnagar 251001 ajayswati8@gmail.com 9311139565  
9310859221 9358320034

Up UP (W) Saharanpur Pal Communication Shop no.17 , Mahavir  
Complex ,Nr. Hathi gate high court rd, Saharanpur 247001  
palcommunicationsre@yahoo.co.in 9311139565 9310859221  
9358120687

Up UP (W) Bulandshahar FM Telecom Shop number.19,Navyug  
Market,Opposite Roadways Busstand ,Satha Road,Bulandshahr. Opposite  
Roadways Busstand 203001 fmtelecomm@yahoo.com ,  
fmtelecomm@gmail.com 9311139565 9310859221 9359230111

Up Delhi Nangloi BHAGWATI TELECOMA42, VEER BAZAR ROAD, AMAR  
COLONEY, NANGLOI, DELHI/110041 110041  
bhagwatitelecom1999@yahoo.in 9350880202 9811836764  
011/25945478 / 7503411411

Up Delhi Delhi Adonis Electronics Pvt.Ltd A/19/ B/1 Mohan Co/Op  
Industrial Estate, Opp Ntpc, Mathura Road, Badarpur, New Delhi  
110044 delhisouth.mobileservice@gmail.com 9350880202  
9811836764 011/2694 48 / 26 / 34 / 43 / 24 / 42 / 8822 / 3843

Up Delhi Delhi Adonis Electronics Pvt.Ltd. 55/ Patparganj Industrial  
Area, Behind Mgf Motors , Delhi/92 110092  
east.delhi@adonis.co.in 9350880202 9811836764  
011/65656241

Up Delhi Delhi Adonis Electronics Pvt.Ltd. A/33, New Krishna Park,  
Near Janakpuri West Metro Station, New Delhi 110018  
west.delhi@adonis.co.in 9350880202 9811836764  
011/32023823

Up Delhi Delhi Kanica Electronics M/3, Ist Floor, Vishal Market  
Complex, West Mukherjee Nahgar,Dhaka Chowk, New Delhi

110009 delhinorth.crc@adonis.co.in 9350880202  
 9811836764 011/2745 5617 / 2663  
 West Mumbai Andheri Adonis Electronics Pvt.Ltd Adonis Electronics  
 Pvt. Ltd, Onida House II, Mahal Insustrial Estate, Off Mahakali Caves Road,  
 Andheri East Near Paper Box 400093 mch.mumbai@adonis.co.in  
 9819292824 9321960405 022/26878136 / 8137/ 4879 /  
 26874891  
 West Mumbai Ghatkopar Sheetal Enterprise 003,Karma bhumi B wing  
 plot no.215 babli konekar marg, hingwala Crosslane,Ghatkopar east Mumbai  
 400075 tosheetalenterprise@gmail.com 9819292824  
 9321960405 022/32021462 / 9820519340  
 West Mumbai Thane Adonis Electronics Pvt.Ltd C- Bldg., Amargyan  
 Complex, L.B.S. Marg, Opp. S.T.Workshop, Thane (W) 400 601  
 acsh.thane@adonis.co.in 9819292824 9321960405  
 022-25470806  
 West Mumbai VashiMarshal Services E7/01/02, sect /1 , Nr ,Opp  
 Apana Bazar, Vashi Opp Apana Bazar 400076 vashicrc@gmail.com  
 9819292824 9321960405 022/27827503/27827583  
 West Mumbai Vasai S.G. Infotech A/1,ASHOK VAN,VASANT KARISHMA  
 COMPLEX, AMBADI ROAD,60FT CROSS ROAD,VASAI/WEST 401301  
 tp.vasai@gmail.com 9819292824 9321960405 09702490875  
 West Mumbai Kalyan Technocraft Technology 4, Mahek Plaza, Kala  
 Talav, Kalyan (West) Opp. BSNL Gate No. 1, 421301  
 technocraft.mumbai@gmail.com 9819292824 9321960405  
 8097080978/9323082885  
 West Mumbai Dadar MONEY ENTERPRISES A/2,Ground floor,  
 Karishma bldg. plot no.185, naigaio cross road madhadas pasta road behind  
 Kohinoor TV showroom Dadar east Mumbai (400014) BH KOHINOOR  
 SHOW ROOM 400014 nagesganji@gmail.com 9819292824  
 9029721133 9322210144/9224226234/022-20588888  
 West Mumbai Pen Reliable mobile care center Shop no.16 sudarshan  
 co/oppreitive socity beside BSNL office opp. LIC office taluka pen dist Raigad  
 402107 rafiqtadvi786@gmail.com 9819292824  
 9321960405 02143/252547/9270786706

West RoM Ambajogai M/s.Digital Valley M/s.Digital Valley , 3 ground  
 floor , dindayal bhawan, prashant nagar,Ambajogi, dist/beed  
 431517 mch.pune@adonis.co.in 9819292824 9323411113  
 02446/245642  
 West RoM Jalgaon Ekhanekar Mobile Shop G/21 GROUND FLOOR  
 GOLANI MARKET JALGAON MAHARASHTRA 425001 425001  
 raj\_9860677402@yahoo.com 9819292824 9323411113  
 9860677402/9595348921  
 West RoM Nanded Safal Care Center Near Ganraj Nagar, Behind  
 Bafna Petrol Pump, Bhagat Singh Road, Nanded Behind Bafna Petrol Pump  
 431602 nanded.crc@adonis.co.in ,  
 sachinjain\_2006@rediffmail.com 9819292824 9323411113 02462 /  
 245144/ 9325084880 / 235144  
 West Mumbai Nasik Electronics Media Shop/ FJ/39, Thakkar Bazar,  
 New CBS,Nasik 422001 media.servicensk@gmail.com  
 9819292824 9029721133 9225567773  
 West RoM Dhule M/S Hrishiyog Mobiles Plot No13 A "kulswamini"  
 Donday Col.Datta Mandir,Devpur, Dhule. Dutta mandir 424005  
 hrshikesh.yeole007@gmail.com 9819292824 9323411113  
 9765608299  
 West RoM Aurangabad Adonis Electronics Pvt.Ltd X141, Opp Sterlite  
 Industries, Midc, Waluj, Aurangabad 431 136  
 aurangabad.acservice@gmail.com 9819292824 9323411113  
 0240-2552956  
 West RoM Aurangabad Digital Electronics Shop NoB, Motiwala Trade  
 Center, Opp. HDFC Bank, Nirala Bazar, 431001  
 aurangabad.crc@gmail.com 9819292824 9323411113  
 9325861700  
 West RoM Malegaon SKY SYSTEM AND SOLUTIONS GHODEWALA  
 COMPUND, OLD AGRA ROAD, OPP.RAMESH PETROL PUMP,  
 423203 skysolutions@yahoo.in 9819292824 9323411113  
 9270714600 , 9028204550  
 West RoM Parbhani Shashi Prabha Enterprises Shashiprabha Enterprises  
 Jagrfi complex Basmat road Pabhani Jagarfi complex 431401

sharadschavan@gmail.com 9819292824 9323411113  
 9096233588 9765440777  
 West RoM Madgaon Agnelo Electronics Shop No 15 & 16 Paramount  
 Shopping complex, Near Roary Church, Behind Apollo ,Pharmacy,  
 Navelim,Madgaon,Goa 403707 403707  
 agneloelectronics@rediffmail.com 9373605529 9822132041  
 0832/ 2728077 , 3260401,9325096657  
 West RoM Panaji Adonis Electronics Pvt.Ltd 1 & 4 / Caritas Complex,  
 Opp SBI Regional Office, St. Inez, Panaji Goa opp SBI regional office  
 403001 ulhas.naik@adonis.co.in 9373605529 9822132041  
 0832/2230672  
 West RoM Ponda Raksha TelecomG21 AKASH DARSHAN APPTS  
 BEHIND CANARA BANK PONDA GOA WARKHANDEM 403401  
 rakshatelecom@gmail.com 9373605529 9822132041  
 0832-2319118/9422439091  
 West RoM Pune Adonis Electronics Pvt.Ltd 32, Akshay Complex, Opp.  
 Dhole Patil Road, Pune. 411001 mch.pune@adonis.co.in  
 9373605529 9371469795 020-40078351  
 West RoM Pune M/S New Friends Electronics Guru Kripa  
 App.47,Mukund nagar,opp Sujay Gardan,Sop no :2, Swarget.Laxmi  
 Narayan Cinema 411040 punenew.crc@gmail.com 9373605529  
 9371469795 020 / 40052177 / 40090377  
 West RoM Kothurd SAI ELECTRONICS 6/2/3 Godawari Apartment/  
 Behind Nisarg Hotel, Opp. Padale Palace/ Erandawane, Pune Opposite  
 Padale Palace 411004 kothrud.crc@adonis.co.in 9373605529  
 9371469795 020 /25461876  
 West RoM PCMC New Om Sai Service OM SAI MARKET, SECTOR NO.  
 20, A WING,SHOP NO.13 ,KRISHNANAGAR, AKURDI/CHIKHALI ROAD,  
 CHINCHWAD, Krishna Nagar Bhaji market, 400019  
 munna.adonis@gmail.com /janardhan.mulik@gmail.com  
 9373605529 9371469795 9326722609/9372278044  
 West RoM Ahmednagar Adonis Electronics Pvt.Ltd. Onida Service  
 Centre ,KALANAGAR CHOWK SAPKAL HOSPITAL ROAD,BHINGARDIVE  
 MALA SAVEDI ,AHMEDNAGAR 414001 vasukar.99@gmail.com

9373605529 9371469795 9371691234/ 0241/2322660  
 West RoM Ratnagiri Adonis Electronics Pvt.Ltd. Onida Cust Relation  
 Center, Zadgaon , Sherenaka, Near Reliance web world express , Ratnagiri  
 Near Rel Web world 415612 ratnagiri.stores@gmail.com  
 9373605529 9325099185 02352/271683  
 West RoM Sangli Adonis Electronics Pvt.Ltd. 1/14/ Rajwada Colony,  
 Near Patwardhan High School, Sangli Near Patwardhan Highschool  
 416416 sangli.crc@adonis.co.in , pramodchgl@gmail.com  
 9373605529 9325099185 0233/2381642  
 West RoM Kolhapur Adonis Electronics Pvt.Ltd Amit plaza,Bachalal  
 Garment, Gandhinagar, Kolhapur 416119  
 mch.pune@adonis.co.in 9373605529 9371469795  
 0231-2611718  
 West RoM Kolhapur Omkar Mobile Shoppe Omkar Mobile shoppe,646  
 e,shahupuri,pendharkar,complex,nr.youth bank, venus corner  
 416002 tp.kolhapur09@gmail.com 9373605529 9325099185  
 9371341502  
 West RoM Solapur Vijayalakshmi Mobile Shoppy 105.55/56,Bhavani  
 Peth,Chatla sari center,Solapur/ 413002 413007  
 vyankateshshrigiri@gmail.com 9373605529 9371469795  
 08055340143  
 West RoM Baramati Diside Telecom A/P Pride Complex,Kacheri Road  
 Baramati Tel/Baramati Dist/Pun 413102, Near Yamaha Showroom  
 413102 disidetelecom@gmail.com 9373605529 9371469795  
 9921411990/7276745039  
 West RoM Chandrapur Adonis Electronics Pvt. Ltd.Opp. Gadegone  
 sohikar hos. , C/o kotharwal building , Vivek nagar, mul road.  
 442401 chandrapur.crc@adonis.co.in 9977504907  
 9767895059 07172/277166  
 West RoM Nagpur Adonis Electronics Pvt.Ltd GURUKRUPA,G-121,  
 GAYATRI NAGAR,BEHIND STPI,NEAR HANUMAN MANDIR,Nagpur -  
 440015 ,NAGPUR -440015 440015 nagpur.service@adonis.co.in  
 9977504907 9767895059 0712-2295901,902  
 West RoM Nagpur Electro Services Electro Services, Plot No.205,

Chhatrapati Society, Bh Pragati Hall , Near Wazalwar Driving  
School, Chhatrapati Nagar Square, Nagpur Near Wazalwar Driving school  
440015 southnagpur.crc@adonis.co.in 9977504907  
9767895059 0712/2252366 / 6460366  
West RoM AkolaM/s.Mobile Touch 13,Padiya complex tower chowk  
station rd, akola 444001 om.jaswani@yahoo.co.in 9977504907  
9767895059 9271206821  
West RoM Amravati Tulsi Mobile Khandelwal Complex, Suderlal  
Square , Cmp , Amravati. 444602  
vaibhav\_mandale1986@rediff.com 9977504907 9767895059  
9850281719 / 9890286427



### Customer's Warranty Card

Details

Customer's Name: \_\_\_\_\_

Address: \_\_\_\_\_

Dealer's Name: \_\_\_\_\_

Dealer Address & Stamp: \_\_\_\_\_

Model: \_\_\_\_\_

Date of Purchase: \_\_\_\_\_

Date of Expiry of Warranty: \_\_\_\_\_

Please paste the IMEI sticker in the space provided below, the  
Warranty of your handset is based on the same, so keep the  
form in a safe place

MIRC ELECTRONICS LTD provides this Limited Warranty to person who has purchased the ONIDA mobile phone and original accessory delivered with your mobile phone.

The warranty period for the transceiver for 1 year, battery & charger for 6 months is from the date of purchase of the product.

The warranty does not cover external housing and cosmetic parts.

MIRC ELECTRONICS LTD warrants to you that during the warranty period MIRC ELECTRONICS LTD or a MIRC ELECTRONICS LTD authorized service network will repair or replace, at MIRC ELECTRONICS LTD option, any defective product, or parts thereof, with new or factory rebuilt replacement items, and return the product to the consumer in working condition. No charge will be made to the consumer for either parts or labour in repairing or replacing the product. All replaced boards or equipment shall become property of MIRC ELECTRONICS LTD.

The warranty in respect of a repaired or replaced product/part shall extend for the remaining warranty period of the repaired product or replacement thereof to the consumer.

Upon request from MIRC ELECTRONICS LTD or its authorized service center, the consumer must provide the purchase receipt or other documentation or information in respect of the date and place of purchase.

The consumer shall have no coverage or benefits under this warranty in the event that any of the following conditions are applicable.

The Product has been subject to abnormal use or conditions, improper storage, exposure to excessive moisture or dampness, exposure to excessive moisture or dampness, exposure to excessive temperatures, unauthorized modifications, unauthorized repair including but not limited to use of unauthorized spare parts in repairs abuse, accident, Acts of God, spills of food or liquids, maladjustment of customer control and breakage or damage to antenna.

MIRC ELECTRONICS LTD has not been notified by the consumer of the defect in the product during the applicable warranty period.

The product serial number or the accessory date code has been removed, defaced or altered.

The defect or damage caused by defective function of the cellular system or

by inadequate signal reception by the external antenna.

The product has been used with or connected to an accessory not supplied by MIRC ELECTRONICS LTD, not fit for use with ONIDA mobile phones or used in other than its intended use.

The seals of the product's battery enclosure have been broken or show evidence of tampering or the product's battery has been used in equipment other than that for which it has been specified. In order to derive the benefits of this warranty, the consumer should follow the following procedure.

The consumer shall return the product to place of purchase for repair or replacement.

The consumer may contact local MIRC ELECTRONICS LTD office for the nearest authorized service center.

The consumer shall arrange for the product to be delivered to the authorized service center.

The consumer will be billed for any parts or labour charges not covered by this warranty. The consumer shall be responsible for expenses related to reinstallation of the product.