

ePure^{mobile}



Bluetooth Station BH01i/u

User Manual

swissvoice

Welcome

Welcome to your new Swissvoice ePure Mobile Bluetooth Station(BH01), an elegant mobile phone charging station with an intelligent wireless handset speaker for your comfortable voice conversation and music entertainment. BH01 supports the latest HD voice technology which enables exceptional voice quality*. BH01 also integrates with 2 high quality stereo speakers which deliver unparalleled music streaming experience. Simply connect BH01 to any Bluetooth mobile phone, tablet, PC or laptop to enjoy and rediscover the pleasure of conversation.




**Remark: require Bluetooth HFP 1.6 wideband audio support in your mobile devices and telecommunication operator network dependent*

Contents

1.	Quick Overview	2
2.	Get Powered Up.....	4
3.	Get Connected Wirelessly	5
4.	Enjoy Your Conversation	7
5.	Enjoy Your Music	9
6.	Charge Your Mobile Phone.....	10
7.	FAQs	12
8.	Specifications	15
9.	Maintenance and Safety Information	15
10.	Warranty Information	17


1. Quick Overview

BH01 Front View

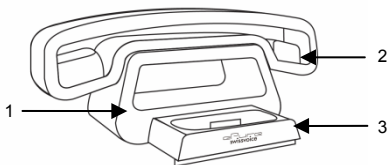


- 1 Handset charging base
- 2 Wireless handset
- 3 Retractable iPhone Charger (Model: BH01i only)

BH01 Back View

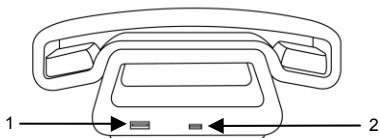

- 1 Standard USB Jack (Model: BH01u only)
- 2 Micro USB Jack

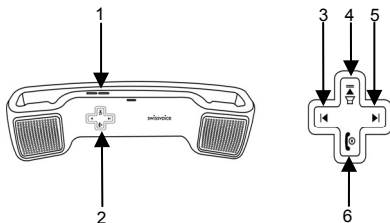Buttons:

- 1 **Volume Up(+)/Down(-):** Increase or decrease volume of handset speakers.
- 2 **Buttons control with LED**
- 3 **Previous:** Back to the beginning of song or previous song in playing music.
- 4 **Play/Speaker:** Play or Pause music. In a voice call this button can enable/disable speakerphone mode.
- 5 **Next:** Skip to next song in playing music.
- 6 **On/Off/Talk:** Power ON or OFF of BH01 handset by pressing for 3 seconds. Talk button to answer or end a voice call.


2. Get Powered Up

For first time use, it is recommended to fully charge your BH01 for 3 hours.

To charge your BH01 handset:

- Connect the USB cable to your wall charger (*) or computer (standard USB power supply) and plug into the micro USB jack of the charging base. You can hear a charging alert when the handset starts charging on the base.
- Alternatively, you can plug the micro USB cable to the BH01 handset directly for charging.

() Remark: AC/DC power adaptor is not included in package. You may use your mobile phone's power adaptor with USB port.*



Micro USB

OR




Micro USB

- **Full charge:** A full charge takes around 3 hours charging.
- **Low battery:** You will hear “low battery” alerts and handset LED flashes WHITE quickly.
- **Battery Indicator:** When using with iPhone, a battery indicator will be shown on phone's status bar to indicate BH01's remaining battery level.

3. Get Connected Wirelessly

You can easily connect your device to BH01 via Bluetooth as follows:

Step 1: When BH01 is OFF, power on the BH01 handset by pressing and holding On/Off  button for 5 seconds.



Press and hold On/Off button for 5 seconds

Step 2: Wait for the handset LED to flash WHITE and BLUE alternatively, you will also hear pairing alerts. BH01 is now in Bluetooth pairing mode and ready to pair.

Step 3: Turn ON Bluetooth in your mobile phone, tablet or PC and search for Bluetooth devices. When "Swissvoice BH01" appears on your device, select it to pair and connect (*).

() Remark: For some phone models, it may ask for a passcode and please enter "0000".*

Once connected, you will hear a successful sound and the handset LED flashes Blue. You are now ready to enjoy the wireless voice and music with a range up to 20 meters line of sight.

Multiple devices pairing: BH01 can connect up to 2 Bluetooth devices at the same time. To pair BH01 to another device, repeat Steps 1 to 3 with another device.

Auto-reconnect: BH01 can auto-reconnect the last connected mobile device when it comes within the Bluetooth range. By default this function is turned on in BH01.

- **Enable/Disable Auto-reconnect:**
Long press Previous ◀ button for 5 seconds at stand-by mode, the white/blue LED will ON for 1 second. Then the auto-reconnect function will be disabled or enabled accordingly.

Mac computer connection: To pair and connect to Mac computer, you need to turn off the Auto-reconnect function in BH01 before connecting since Mac computer is not compatible with auto-reconnect function.

4. Enjoy Your Conversation

BH01 lets you rediscover the pleasure of mobile conversation by delivering high voice quality with easy control and comfort of use.

4.1 Answer/End Call

- Answer Call: When ringing, short press Talk  button
- End Call: In a phone call, short press Talk  button
- Reject call: When ringing, press and hold Play/Speaker  button for 2 seconds

4.2 Make a call/Siri Voice Dialing

You can use your mobile phone to make a call as usual and talk on BH01 handset. You can also perform the following:

- Siri/Voice Activated Dialing: Short press Talk button  to trigger Siri or Voice Activated Dialing according to your mobile phone models. Talk to BH01 directly for voice dialing (*)
- Redial Last Number: Press and hold Play/Speaker button  for 1 seconds.
- Cancel Calling: When calling, short press Talk button 

(*) *Siri is available in Apple iPhone4S only*

4.3 Hands Free Speakerphone

You can enable hands free speakerphone to free your hands and share the conversation together with others in the room.

- Hands Free Speakerphone: In a phone call, short press Play/Speaker  button to switch between speakerphone mode and handset mode.

- **Audio Boosting Speakerphone:** You can further boost the volume of Hands Free Speakerphone by short pressing 2 times Play/Speaker ►|| button during a phone call. This is particularly useful for iPhone/iPad's FaceTime or other iPhone/iPad VoIP applications such as Skype which has a lower volume in hands free mode.

4.4 Call Muting

Mute/Unmute: In a phone call, short press ►| button to Mute or Unmute the microphone. The LED will be in steady White color during call muting.

4.5 Three-way Calls

Second incoming call handling:

- **Answer 2nd Call:** Short press ◀| button
- **Reject 2nd Call:** Press and hold Play/Speaker ►|| button for 2 seconds
- **End Current Call and Answer:** Press and hold ◀| button for 2 seconds

When in conversations with 2 calls:


- **Switch Between Calls:** Short press ◀| button
- **End Current Call and Switch Call:** Press and hold ◀| button for 2 seconds

5. Enjoy Your Music

BH01 wirelessly stream the audios from your mobile devices while you are playing music, games or watching videos.

5.1 Best Listening Experience

To enjoy the best listening experience, place BH01 horizontally with stereo speakers facing you. Turn the volume on your mobile/device to full and then later control the volume through the BH01 volume up/down buttons.



Place BH01 horizontally for best music experience

5.2 Player Control


- Play/Pause: Press Play/Speaker ►|| button to play or pause the music
- Next Song: Press ► button during playing music to skip to next song
- Previous Song: Press ◀ button during playing music to start the song from beginning or play previous song
- Volume Control: Press the Volume Up(+)/Down(-) buttons on BH01

6. Charge Your Mobile Phone

BH01 can charge your mobile phone through the base with a wall charger or standard USB power-supply (mobile phone AC/DC power adaptor not included).

6.1 iPhone Charging Dock (Model: BH01i)


For BH01i model, when the base is connected to standard USB power supply or wall-charger, you can press and pull out the retractable charging dock from the base and put your iPhone onto the charging dock for charging.

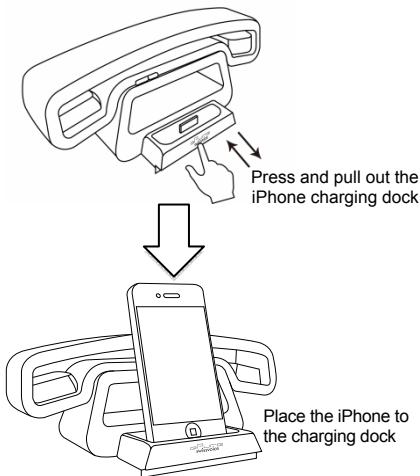

6.2 Mobile Phone USB Charging (Model: BH01u)

For BH01u model, when the base's micro USB jack is connected to standard USB power supply or wall-charger, you can further charge your mobile phone through standard USB cable from your mobile phone package (not included).

BH01u Back View

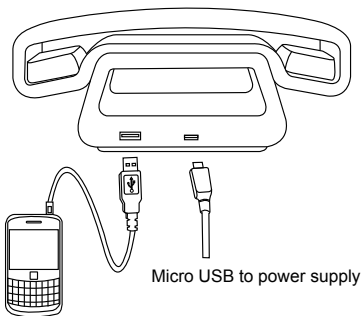

Connect USB cable to
mobile phone for charging

7. FAQs

1. **BH01 cannot pair with my Bluetooth device, why?**

- a) Make sure BH01 has entered pairing mode;
- b) Ensure BH01 is in the range around 1-2meters for pairing.
- c) For some phone models, they may ask you the password and the pairing password is "0000".

2. **Why can't BH01 play music when it connects to a Bluetooth cell phone?**

- a) Make sure your Bluetooth cell phone supports A2DP profile;
- b) Ensure your Bluetooth cell phone is in effective working range.

3. **Why the first few seconds of music cannot be heard right after powering on BH01 and play the music?**

Sometimes the music will only be played 5seconds after BH01 powering on and connecting to your mobile phone. There is no problem to playback the music after BH01 connecting to your mobile after 5seconds.

4. **Why the music volume is low although I pressed volume up in BH01?**

Please make sure the volume is already set at maximum level on your mobile phone/device.

5. Why can't I remotely control the pause, play, previous song and next song functions with BH01 when playing music?

This function needs the Bluetooth device paired with BH01 to support AVRCP (Audio/Video Remote Control Profile). Please make sure your cell phone or Bluetooth transmitter supports AVRCP.

6. How far is the effective range between BH01 and a Bluetooth cell phone?

According to the Bluetooth standard, the maximum range of Class2 Bluetooth product is up to 20 meters. It varies with different environments and paired mobile phones.

7. How is HD voice supported in BH01?

BH01 supports HD Voice based on Bluetooth HFP 1.6 profile and this is also mobile network dependent to support HD voice at network side.

8. The hands free speakerphone volume is quite low for iPhone and iPad's FaceTime or Skype application?

You can enable audio boosting speakerphone by short pressing 2 times Play/Speaker ►|| button during conversation in iPhone/iPad VoIP applications.

9. I cannot power on or off the BH01 handset even after keep pressing On/Off button for 3 seconds, why?

Please directly plug the micro USB to BH01 handset for charging, then pressing Volume(+) and Volume(-) buttons at the same time and holding for 4 seconds and releasing both buttons. Wait for a while the LED will lit again and you can now power on the BH01 handset normally.

10. I am talking in my mobile phone (not using BH01) and when I am near to BH01 I cannot hear and talk on my mobile phone suddenly?

When mobile phones are near in range with BH01, some mobile phones will auto-reconnect to BH01 and switch the talking call to BH01 automatically. In this case you can continue your conversation by using the BH01 handset.

11. I am using Mac's VoIP application (e.g. Skype) but I cannot answer and end call using the "Talk" button in BH01. Why?

Talk button is currently not supported in Mac OS, it will disconnect the Bluetooth connection to Mac computer instead.

12. When connecting to Mac computer, it fails and displays a Bluetooth audio error message on Mac?

Please disable BH01 auto-reconnect function by pressing  button for 5 seconds at stand-by mode, then Bluetooth pair and connect to Mac computer again.

8. Specifications

Bluetooth version	Bluetooth V2.1 + EDR
Bluetooth profiles	HFP v1.6, A2DP and AVRCP
Bluetooth frequency range	2.4GHz – 2.4835GHz
Operating distance	Up to 20 meters line of sight
Talk time	Up to 3.5 hours
Standby time	Up to 500 hours
Charging input voltage	DC 5V
Charging time	About 3 hours (if input current at 500mA)
Dimensions (handset)	210 x 53 x 51mm (WxDxH)
Dimensions (base)	128 x 65 x 62mm (WxDxH)
Weight (handset)	180g
Weight (base)	229g

9. Maintenance and Safety Information

BH01 is a sophisticated product in terms of design and construction, and should therefore be handled with care. To clean the BH01 handset, wipe first with an antistatic cloth or a damp, soft leather cloth then dry using a dry cloth.

9.1 Recycling (environmental protection)



At the end of the product's life cycle, the telephone must not be disposed of in normal domestic waste. Please take it to a collection point for processing electrical and electronic equipment: see symbol on the product, in the user manual and/or packaging.

Some materials used in this product can be recycled if you take it to a recycling depot. By recycling parts or raw materials from used products you will be making an important contribution to environmental protection. Please contact your local authority if you require information about collection points in your neighborhood.

9.2 Approval and conformity

Please ensure that the handset is used with the charge base which model No.: BH01u or BH01i, if used mixed with other device may cause dangerous or damage the product.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

10. Warranty Information

Thank you for purchasing an ePure Mobile Bluetooth Station. The ePure Mobile Bluetooth Station is designed to be easy to use, but if you need some assistance then we are here to help:

- On our website:
Go to <http://epure.swissvoice.net/range-overview/bh01i>
for the section on Frequently Asked Questions (FAQ) – here you will be able to find answers as well as up-to-date user manuals
- Contact us:
You can contact us for help via a number of different ways:

(Australia)

Swissvoice hotline: (02) 8096 5247

Email: epure_info@swissvoice.net

(Austria, Bulgaria)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Canada)

Swissvoice hotline: 011800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Cyprus, Czech republic)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Denmark)

Swissvoice hotline: +46 300568920

Email: Info@turascandinavia.com

(Eire)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Finland)

Swissvoice hotline: +46 300568920

Email: Info@turascandinavia.com

(France, Germany, Greece)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Hong Kong)

Swissvoice HK Ltd.

Address: Unit 1910, 19/F, Dominion Center

43-59, Queen's Road East, Wan Chai

Hotline: (852) 2466 9745 (Mon-Fri 10am-6pm)

(Italy, Malta, Netherlands)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Norway)

Swissvoice hotline: +46 300568920

Email: Info@turascandinavia.com

(Poland, Portugal)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Russia)

Swissvoice hotline: 810800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Spain)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Sweden)

Swissvoice hotline: +46 300568920

Email: Info@turascandinavia.com

(Switzerland)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(Turkey)

Swissvoice Hotline: (212) 282 6777

Sales: satis@mobicom.com.tr

Customer support: musteri.hizmetleri@mobicom.com.tr

Technical support: teknik@mobicom.com.tr

(United Kingdom)

Swissvoice hotline: 00800-10181010 (Toll-free)

Email: helpline@swissvoice.net

(United States)


Swissvoice hotline: 011800-10181010 (Toll-free)

Email: helpline@swissvoice.net

When contacting us please have ready the Serial number of the product (located on the bottom of the product) and the details of where and when you bought the product.

10.1 Warranty conditions

All defects attributable to material and manufacturing faults will be corrected free of charge within the warranty period, either by repairing or replacing the defective equipment. The warranty does not cover expendable materials, defects which affect the value or use of the equipment only insignificantly, and damage caused by incorrect use, ordinary wear and tear, or manipulation by third parties. This warranty does not cover consequential damage caused by the use, failure or defectiveness of the product. In particular, no liability whatsoever is accepted for damage to property and pecuniary loss.

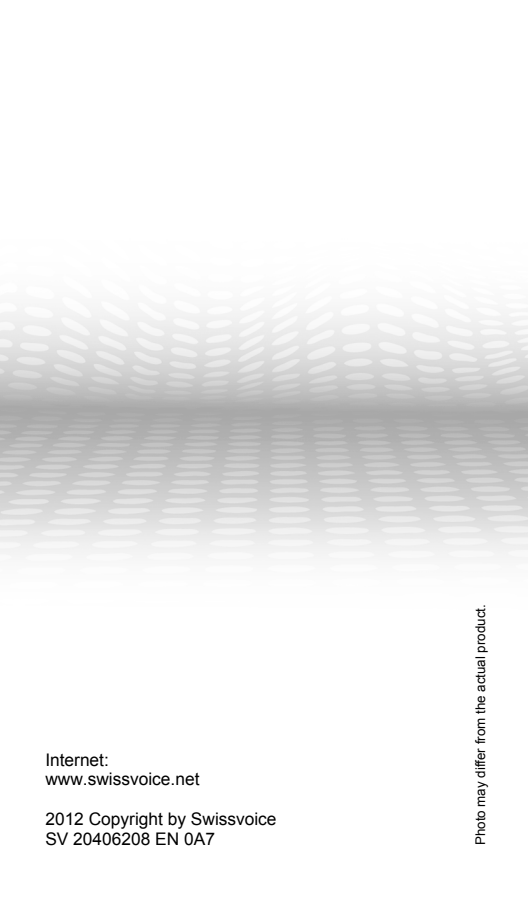The background of the page is a light gray with a subtle, repeating pattern of horizontal oval shapes. These ovals are arranged in a grid-like fashion, with some appearing slightly more prominent than others, creating a textured, woven effect. The pattern is consistent across the entire page.

Internet:
www.swissvoice.net

2012 Copyright by Swissvoice
SV 20406208 EN 0A7

Photo may differ from the actual product.