

USER MANUAL

Table of Contents

1.0 Introduction.....	1
2.0 Features.....	1
3.0 Specifications.....	2
4.0 Package Contents.....	2
5.0 Panel Descriptions.....	3
6.0 Connection and Operation.....	3

AV to HDMI Mini Converter 1080P Scaler

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

The AV to HDMI Mini Converter is a universal converter for analog composite input to HDMI 1080p (60HZ) output. The analog to digital conversion in this module employs 10 bits maximal 162MSPS sampling, black/white level expansion, color transition improvement, dynamic range expansion, blue stretch , auto-detect and auto-convert the composite signal to 1080p(60HZ) output. Making video come alive, delivering the sharpest, most realistic HD visuals available.

2.0 FEATURES

- * Up-scales AV to HDMI 720P or 1080P
- * No need to install drivers, portable, flexible, plug and play.
- * Provide advanced signal processing with great precision, colors, resolutions, and details;
- * Support PAL, NTSC3.58, NTSC4.43, SECAM, PAL/M, PAL/N standard TV formats input.
- * Support HDMI 1080p or 720p output.

3.0 SPECIFICATIONS


Signal Inputs	Composite Signal (Yellow,White,Red)
Output Video	HDMI Signal
Dimensions(mm)	66(D)x55(W)x20(H)
Wight (g)	40
Composite input	PAL,NTSC3.58,NTSC4.43,SECAM,PAL/M,PAL/N.
HDMI output	1080P/60Hz, 720P/60Hz.
Limited Warranty	1 Year Parts and Labor
Operating Temperature	0°C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Supply	USB Power Cable
Power consumption (Max)	5W
Converter Unit Cert.	FCC,CE,
Power Supply Cert	CE,FCC
User Manual	English Version

Note: Specifications are subject to change without notice.

4.0 PACKAGE CONTENTS

- 1) Main unit
- 2) USB Power Cable
- 3) User Manual

5.0 PANEL DESCRIPTIONS

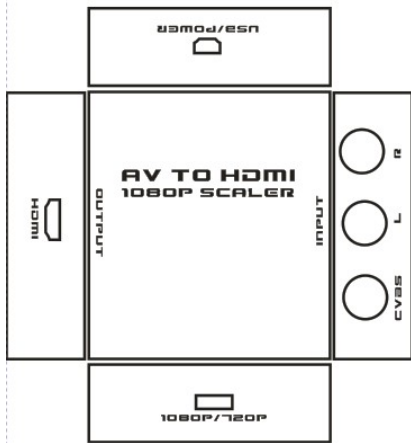

6.0 CONNECTION AND OPERATION

