

# DTR-T1000

## Digital Television Recorder

youview


WED 07 THU 08 FRI 09 SAT 10 **SUN 11** MON 12 TUE 13 WED 14 THU 15



### Extraordinary Choice

- BBC iPlayer, ITV Player, 4OD and Demand 5 together on your TV
- A library of films and series
- 70 plus TV and radio channels


### • Search

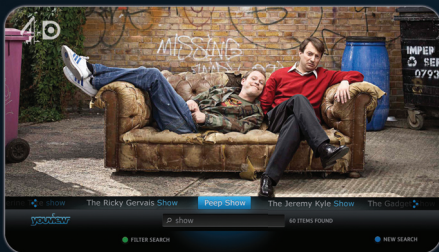

### Extraordinary Control

- Scroll back 7 days
- Search and browse with your remote control
- Record, pause and rewind live TV

### • ScrollBack

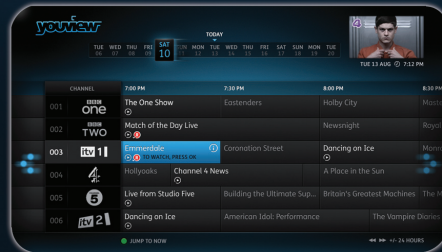

### Extraordinarily Simple

- Subscription free
- Simple to set up
- Easy to use

### • Record



- Series Recordings, Accurate Recording, Split Recording, Trailer Recording, Smart Recording
- TSR (Time shift recording - buffering time: 120 minutes)
- Record up to 300(600) hours of SD program and 125(250) hours of HD program with 500GB HDD (1TB HDD)



# DTR-T1000

## Digital Television Recorder

### Specifications

#### Power Supply

Power Type	SMPS
Power Consumption	Max. 27W (standby: under 0.5W)
Input Voltage	AC 90-250 volts, 50/ 60Hz
Protection	Separate Internal Fuse & Lighting protection

#### System Resource

FLASH	NOR 4MB, NAND 512MB
DDR	640MB (DDR3)
HDD	500GB or 1TB (Optional)

#### Video/Audio Processing

Output Resolution	1080P/1080i/720p/576p/576i
Graphics	32bpp with 256 alpha blending 1280 x 720 resolution for Native UI & Web Page 3 layers (GUI / Subtitle & Teletext / Web Page)
Audio Mode	Single/Dual Mono/ Stereo/ Joint Stereo

#### Front Panel

VFD Display	12 digits
LED Display	3 Color (Red in Recording, Blue in Operating, Amber in Stand-by mode)
Buttons	5 touch keys (Power, Vol+/-, Ch+/-)
USB Port	USB 2.0

#### Physical specification

Size (W x H x D)	380mm x 246mm x 55mm
Weight	2.75kg

#### Front End (Tuner / Demodulator)


Input Connector	ICE 169-2 Female (PAL)
RF Loop-through connector	ICE 169-2 Male (PAL)
Frequency Range	470MHz to 862MHz(UHF)
Signal level	-70 to -10 dBm

#### Connections

Tuner	1 x ANTENNA IN , 1 x ANTENNA OUT
TV SCART	1 x TV SCART
RCA Out	1 x CVBS/L/R
HDMI Out	1 x HDMI 1.3 with HDCP
S/PDIF Out	1 x Optical
USB	2 x USB 2.0 (1 x @Front, 1 x @Rear)*for future use
Ethernet	1 x 100BaseT (RJ45)

#### Accessories

Quick start guide, User manual, Remote control unit with 2 batteries, HDMI cable, Ethernet cable

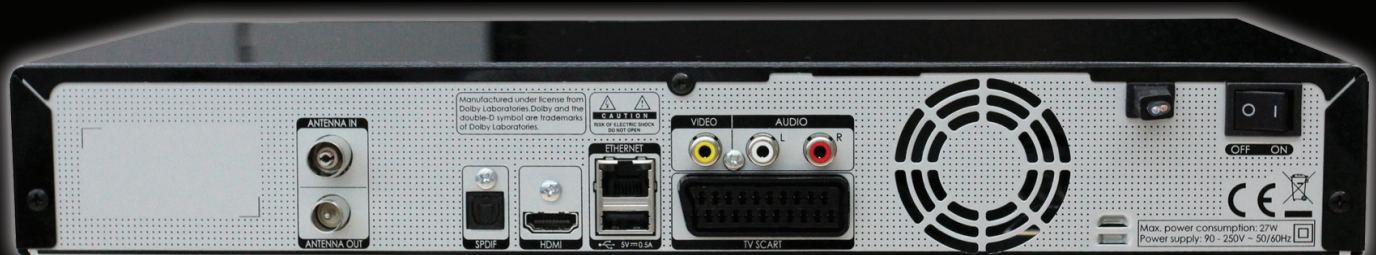

#### Customer support

Tel: 0844 669 8800 hours: Mon-Fri 09:00 - 17:30

E-mail: [uksupport@humax-digital.co.uk](mailto:uksupport@humax-digital.co.uk)


[www.humaxdigital.com/uk](http://www.humaxdigital.com/uk)

For any question about YouView services, please go to [www.youview.com/support](http://www.youview.com/support)

# DTR-T1000

## Digital Television Recorder

### Remote Control

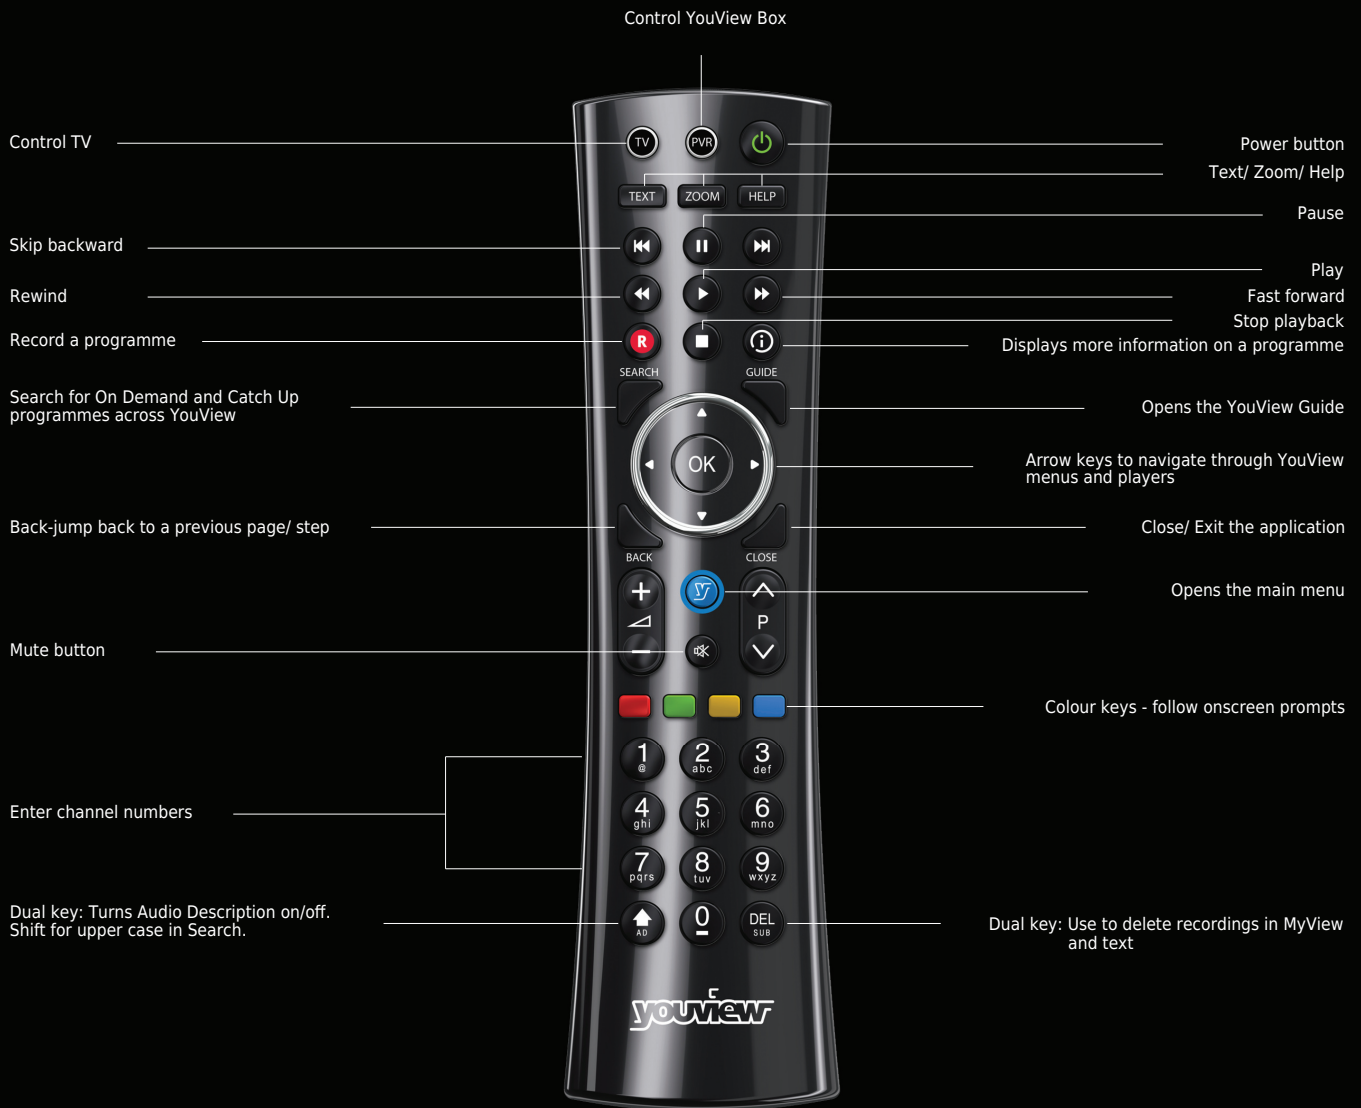

#### Customer support

Tel: 0844 669 8800 hours: Mon-Fri 09:00 - 17:30  
E-mail: [uksupport@humax-digital.co.uk](mailto:uksupport@humax-digital.co.uk)  
[www.humaxdigital.com/uk](http://www.humaxdigital.com/uk)  
For any question about YouView services, please go to  
[www.youview.com/support](http://www.youview.com/support)