



---

# User manual

---



## SmartViewer

SmartViewer software is used for viewing, playing back and exporting video footage from Samsung IP and Analogue video surveillance systems.

### Manual includes

- Logging In
- Starting Live View
- Using Digital Zoom
- Controlling Fisheye View Mode
- Searching Footage
- Backing Up

## Logging In

- 1) Open SmartViewer




- 2) Use your username and password to login.




*Note: Select "Save ID" to automatically remember ID.*

## Starting Live View

- 1) From the device drop down window, select your site and select connect.

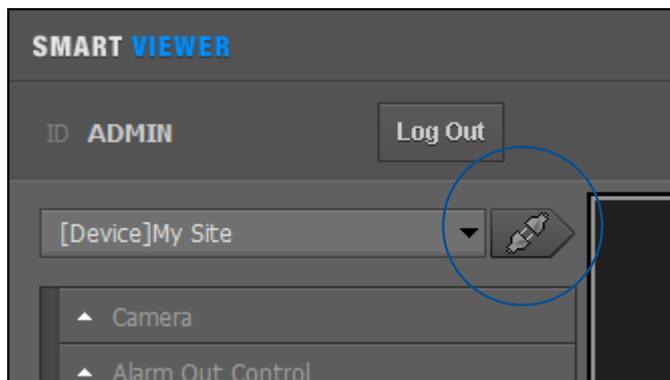

- 2) Once connected to your sites device the first available cameras will display.

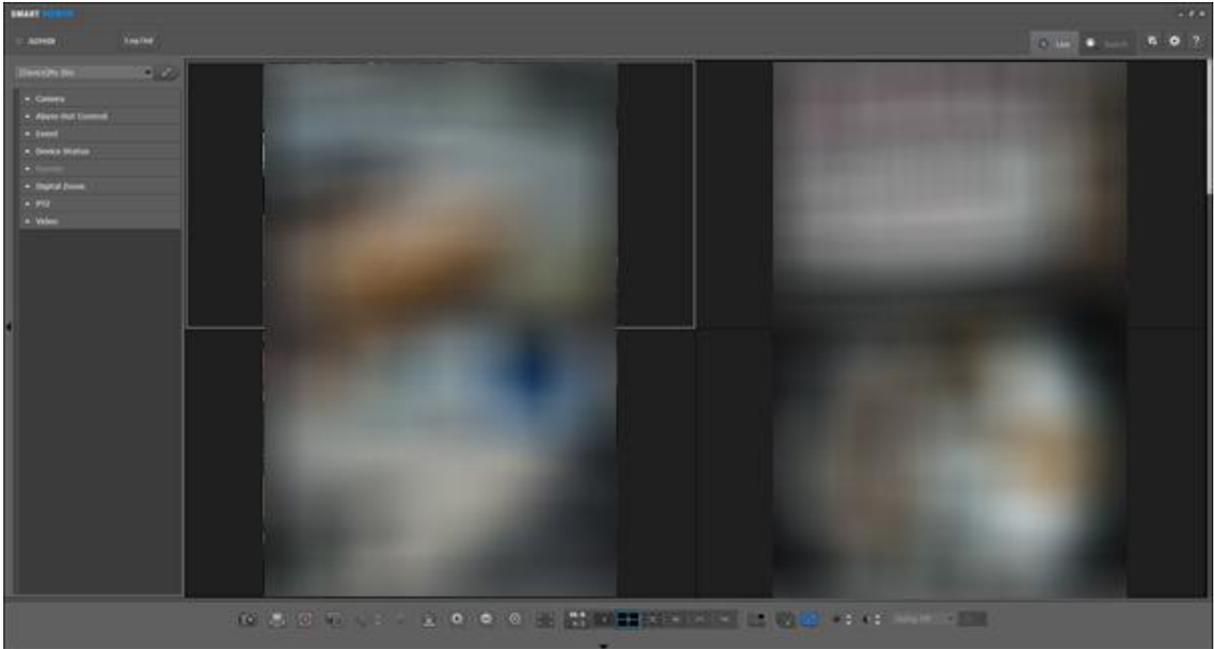


- 3) To change the layout you wish to use simply select 1, 4, 9, 25 or 36 cameras to display in a grid view from the bottom menu.




- 4) Once your layout is selected, select and drag individual cameras from the device menu on the left of screen onto each tile of your layout.

*Tip: To add multiple cameras to your layout simply select your site name and drag it across to the first available tile in the window.*

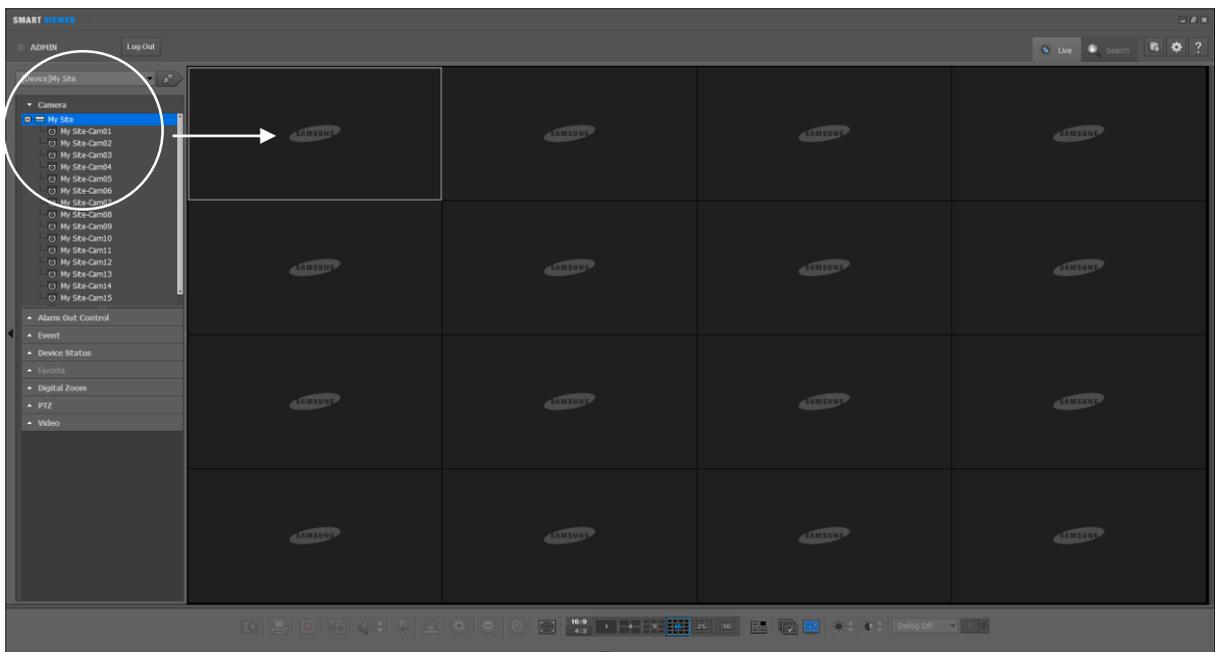


### Using Digital Zoom

- 1) Select the Digital Zoom menu on the left of screen.
- 2) Use the zoom icons to adjust the camera.

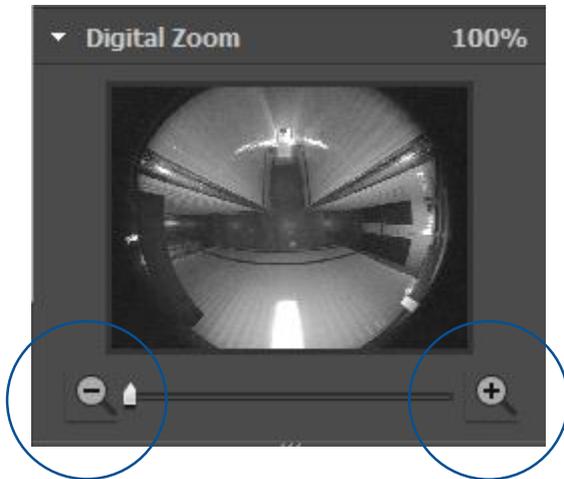

### Controlling Fish-Eye View Mode

- 1) Right click on a Fish-Eye camera and select "Fish-Eye View Mode." From this menu select the desired view mode for your Fish-Eye camera.

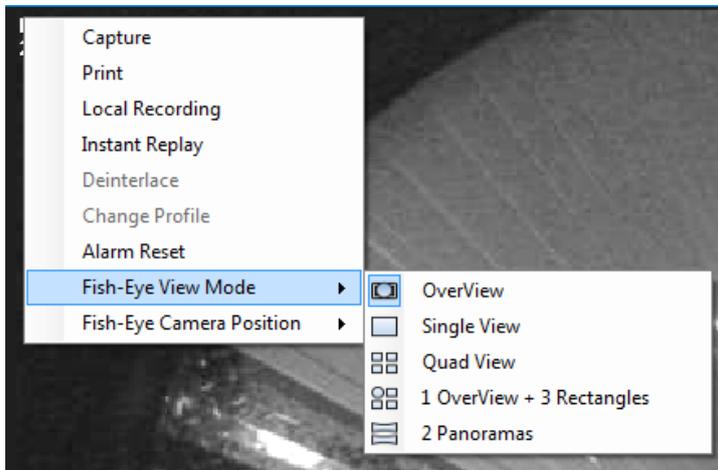

- 2) In "Single View" mode for a fisheye camera it is possible control the cameras position. Simply select "Single View" from step one and select the PTZ menu on the left of screen.
- 3) Select the Fish-Eye PTZ control button.




- 4) Select and drag on the camera screen to move the view of the Fish-Eye camera.




## Searching Footage


- 1) Select the search menu in the top right corner of SmartViewer.



- 2) Ensure your site is selected from the device menu on the left of screen.
- 3) Select the date you wish to review.

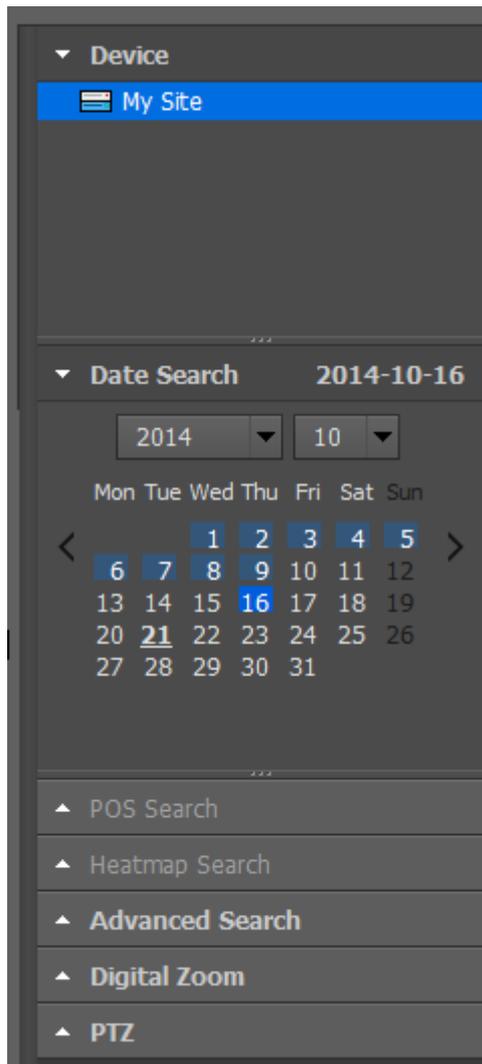

- 4) From the timeline on the bottom of screen simply select the cameras you wish to view. Use your cursor to select a starting time along the timeline and select play.

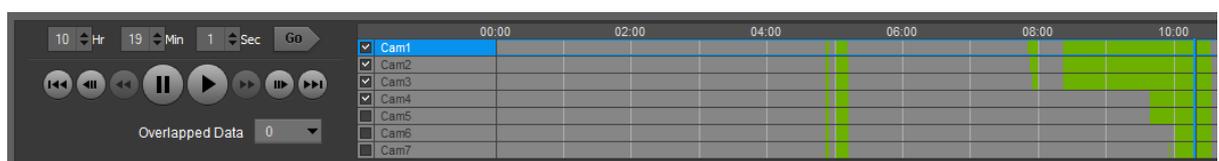

*Tip: Select your desired layout of 1, 4, 9 or 16 cameras to display in a grid view.*



## Backing Up

- 1) Select the “Backup” icon from the bottom menu.



- 2) From the backup dialogue box, select the cameras you wish to backup.
- 3) Select your starting and finishing time and your desired backup location where you would like the backup footage to be stored (E.g. My Documents or a USB memory stick).
- 4) Ensure to select “AVI” as the file format and select the start icon.

Backup

Date : 2014.10.16 Checked:4 / Waiting:4

	No	Camera	Start T...	Stop Ti...	Status
<input checked="" type="checkbox"/>	1	My Site-Cam01	04:51:53	10:33:07	Waiting
<input checked="" type="checkbox"/>	2	My Site-Cam02	04:51:53	10:33:21	Waiting
<input checked="" type="checkbox"/>	3	My Site-Cam03	04:51:53	10:33:21	Waiting
<input checked="" type="checkbox"/>	4	My Site-Cam04	04:51:53	10:33:22	Waiting
<input type="checkbox"/>	5	My Site-Cam05	04:51:53	10:33:22	Unchecked
<input type="checkbox"/>	6	My Site-Cam06	04:51:53	10:33:22	Unchecked
<input type="checkbox"/>	7	My Site-Cam07	04:51:53	10:33:22	Unchecked

Start Time:  Hr  Min  Sec

Stop Time:  Hr  Min  Sec


Path:  ...

File Format:

Use a password for the file to backup.

New Password:  Confirm Password:

- 5) A progress bar displays the status of your backup.

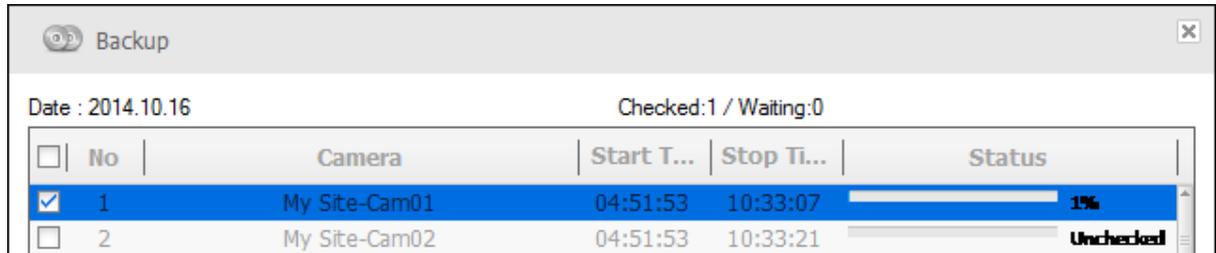

<input type="checkbox"/>	No	Camera	Start T...	Stop Ti...	Status
<input checked="" type="checkbox"/>	1	My Site-Cam01	04:51:53	10:33:07	<div style="width: 1%;"><div style="width: 1%;"></div></div> 1%
<input type="checkbox"/>	2	My Site-Cam02	04:51:53	10:33:21	Unchecked

- 6) Once the backup is complete simply browse to the folder selected and view the file.

