



21.12.98

Quick Guide to Using The Nokia 8810 with an Infrared data connection in Windows CE device

1. INSTALLATION OF THE NOKIA 8810 IRDA SUPPORT ON WINDOWS CE DEVICE

1. Unzip N8810_CE.zip file.
2. Read Readme.txt and licence.txt documents.
3. Connect your Windows CE device to your PC using "Windows CE services" software provided by Microsoft.
4. Run the Setup.exe in PC. First you will see Nokia IrDA update setup window.



Figure 1: *Nokia IrDA Update Setup.*

5. Click *Setup* – Now your PC is establishing connection to Windows CE device.
6. If PC – Win CE connection is not active you will see the warning (Figure 2). Click OK and activate connection between your PC and Windows CE device.

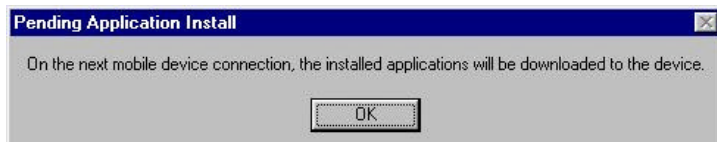


Figure 2: *Pending application Install.*



Figure 3: *Connecting to Windows CE device.*

7. Click Yes.

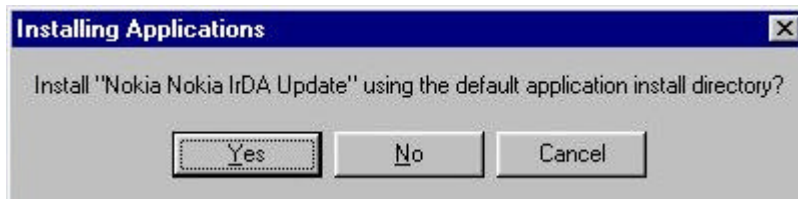


Figure 4: *Installing applications.*

8. Your PC is now installing files to your Windows CE device.

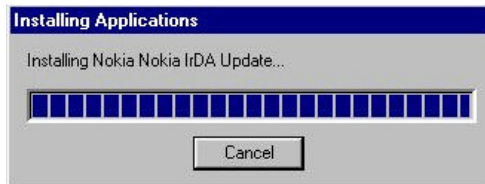


Figure 5: *Installing files.*

9. Now file installation is ready. Click OK.



Figure 6: *File installation complete.*

Some additional steps are required in your Windows CE device:

10. Disconnect your Windows CE device from PC.
 11. Open Start - Programs and run Reg8810 software in Win CE device.
 12. First you will see the IrDA update window: "This Program Updates registry for IrDA connection on COM3 or on first unused COM-port above COM4: (autoscan) it will make you able to use infrared connection to the Nokia 8810 cellular phone".
 13. Click COM3 (or Autoscan).
 14. Wait a few seconds. You will see the IrDA Update window: "Infrared port is now COMx:. Please, reset (boot) your handheld PC next". Remember this number COMx for further usage.
 15. Reset your CE device. Refer your Windows CE device User Guide for more information. Now you have new communication port "Nokia Phone on Infrared Port". Use this modem in all applications.
 16. Test driver functionality. You can use for example remote networking.
- If you have problems with autoscan run reg8810 again and select COM3.

Note: You must activate infrared connection in Nokia 8810 phone every time you want to use it. You will see the flashing infrared sign on the phone when it is waiting for infrared connection and stationary infrared sign on the phone when connection is active.

2. PRACTICAL HINTS & TROUBLESHOOTING:

There are significant differences in the power supply capability of different brands/models of Microsoft Windows CE 2.0 compatible PC's. Nokia takes no responsibility of possible damages caused by the operating current drain for Infrared. Consult your handheld PC dealer for information on the power supply issues relevant to infrared device usage.

It is good to have "PalmExplorer" in the Casio Cassiopeia E-10 or in a similar Windows CE device that has no keyboard.

You can remove the Infrared installer by removing files:

\\windows\programs\reg8810.exe

\\Program files\Nokia IrDA Update

You need to have 4.05 software (or newer) in your Nokia 8810 for successful PPP (remote networking) connection. You can check the software version by typing *#0000# on your Nokia 8810. Press any key and this version information will disappear.

This driver is tested with:	COM3
Casio Cassiopeia E-10	OK
Hewlett Packard 620LX	OK
Sharp HC-4500	OK
Hitachi HPW-200EC	OK

Please refer to your Nokia 8810 Users Guid

Legal Notice

The contents of this document are copyright © 1995 – 1998 Nokia. All rights reserved.

Reproduction, transfer, distribution or storage of part or all of the contents in any form without the prior written permission of Nokia is prohibited.

Nokia is a registered trademark of Nokia Corporation. Nokia's product names are either trademarks or registered trademarks of Nokia. Other product and company names mentioned herein may be trademarks of their respective owners.

The contents of this document is provided "as is". Except as required by the applicable law, no warranty of any kind, either express or implied, is made in relation to the accuracy, reliability or content of the document. Nokia reserves the right to revise the document or withdraw it at any time without prior notice.

Nokia is not responsible for any lost of data, income or any consequential damage howsoever caused.