

# ABBAGLIATORE 8

Code PLAB8



## ABBAGLIATORE 8 LAMPADE PLAB8 LAMPADA 650W 120V MOD P36 PLLPDWE

L'abbagliatore è impiegato nei concerti live come accecatore da indirizzare verso il pubblico.


Prima di collegare l'apparecchio accertarsi che sulla linea sia presente una terra adeguata alle caratteristiche della macchina. L'apparecchio va collegato ad una linea 230v 50/60Hz con un'erogazione di almeno 16Amp.

Scollegare l'apparecchio prima di effettuare qualsiasi operazione e quindi sincerarsi che non vi sia presenza di tensione.

Si raccomandano le seguenti norme per un corretto funzionamento ed utilizzo:

- Non mettere in funzione l'apparecchio prima che abbia raggiunto la temperatura ambiente, onde evitare fenomeni di condensa.
- Evitare che nell'apparecchio penetrino liquidi infiammabili, acqua o oggetti metallici.
- Seguire con attenzione gli avvisi stampati e serigrafati sull'apparecchio.
- Il proiettore deve essere installato non superando i gradi riportati in etichetta.
- Non utilizzare in luoghi dove la temperatura sia inferiore a 0°C.
- Non utilizzare per lunghi periodi a temperature superiori a 40°C.
- Non utilizzare in luoghi soggetti a vibrazioni, o a possibili urti.
- Effetto per lampada 650W120V PLLPDWE non montare altre lampade che non abbiano le caratteristiche richieste
- Portalampada att. Screw
- Essendo le lampade collegate a due a due in serie qualora se ne spegnesse una serie controllare con un tester se una delle due sia ancora funzionante.

**ATTENZIONE: I flash sono stati costruiti per un funzionamento non continuo ma per brevi periodi:MAX 10 MINUTI**

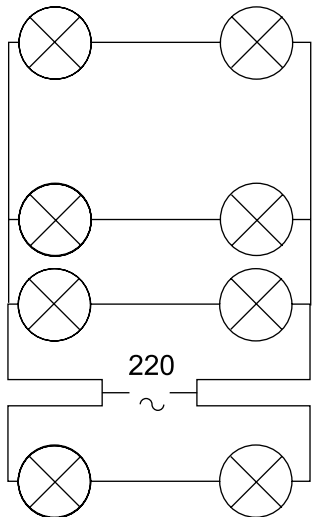

Ogni intervento di riparazione deve essere effettuato da personale qualificato e autorizzato per evitare la decadenza della garanzia che risponde dei materiali difettosi solo se non vi sono alterazioni dovute ad interventi non autorizzati.

Seguire attentamente le istruzioni del presente stampato e quanto riportato sull'etichetta applicata sull'apparecchio.

**NON POSIZIONARE NELLE VICINANZE DI PRESE DI CORRENTE O CASSETTE DI DERIVAZIONE ELETTRICA**

Caratteristiche tecniche

**Peso:** 10 Kg

**Misure:** 11x44x96 cm

**Assorbimento:** 16 A

**Codice lampada:** PLLPDWE

Il nostro ufficio tecnico sarà a vostra disposizione per qualsiasi chiarimento riguardante il prodotto.

## 8-LAMPS FLASH BATTERY MODEL PLAB8 LAMP 650W/120V MODEL P/36 PLLPDWE

Flash batteries are used during live concerts to lighten the audience with a strong light.

Before connecting check if mains has an earth connection suitable to the characteristics of the appliance. The flash battery should be connected to a 230V – 50/60 Hz cycle mains outlet, with an amperage of at least 16A.

Prior to any manual intervention on the appliance, disconnect the mains plug and check there is no presence of voltage in the unit.

Please follow these recommendations for a correct operation:

- Do not start operating the PLAB 8 before this has reached the optimal room temperature, to avoid moisture factor.
- Avoid dipping any flammable liquid, water or metal objects inside the appliance.
- Follow scrupulously the printed instructions on the label placed on the appliance.
- Once the projector is installed, temperature of operation should never exceed the grade value printed on the label.
- Do not use the projector in places where temperature is below 0° C.
- Do not use the projector for long time in places where temperature is higher than 40°C.
- Do not use the projector in environments submitted to vibrations or possible impact.
- Use only a lamp of 650W/120V model PLLPDWE: do not use any other lamp not matching the requested features.
- Lamp holder is Screw
- All the lamps are two by two series connected. When a series goes out please check with a tester if the other still works.

**WARNING: flashes were not designed for continuous operation but only for short periods works (max. 10 minutes).**

Any technical servicing should be effected only by qualified and authorised personnel to avoid cancelling of the warranty which operates only if there has not been any unauthorised repair.

Please strictly follow above instructions and what is printed on the label attached to the appliance.

**Do not place the projector next to electrical outlets or electrical switch-boxes**

**Technical Specifications**

**Weight:** 10Kg

**Measures:** 11x44x96 cm

**Consumption:** 16 A

**Lamp Code:** PLLPDWE

The PROEL technical department is available for any clarification concerning this product.