## WMCD2050J GE® 3.2 Cu. Ft. Capacity Coin-Operated Washer


## Dimensions and Installation Information (in inches)

**Energy Saving:** All wash cycles include energy-saving cold water rinse. Connector in backsplash can be joined for warm rinse. Total cycle time–24 minutes plus fill time. Actual wash time is 8 minutes with a final spin speed of approximately 630 rpm.

**Electrical Rating:** 115/120 Volts, 60Hz An individual, properly grounded 15-or 20-amp branch circuit is required.

**Note:** Coin slide or coindrop, coin vault and locks for cover and meter case access door are provided with washer.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

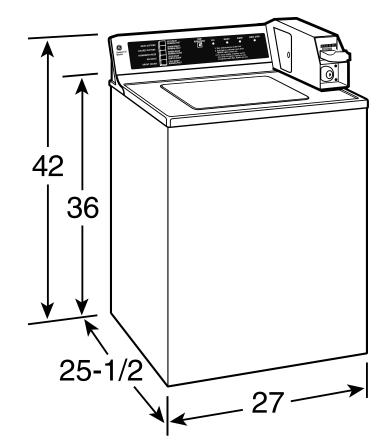

For answers to your Monogram,<sup>®</sup> GE Profile<sup>™</sup> or GE<sup>®</sup> appliance questions, visit our website at geappliances.com or call GE Answer Center<sup>®</sup> service, 800.626.2000.






## WMCD2050J GE® 3.2 Cu. Ft. Capacity Coin-Operated Washer

## **Features and Benefits**

- Includes Greenwald VERT 8 supplied coin system Includes coin box, key, coin slide and related parts preset at \$1.50
- Accepts Universal Coin Box
- LED Readout Provides accurate wash times, from fill to finish
- Two Wash/Spin Speed Combinations Matches wash action to fabric type for better cleaning and clothes care results
- Five Wash Cycles A cycle for almost every fabric, from the heaviest cottons to the finest handwashables
- Three Wash/Rinse Temperatures Offer better wash results and longer fabric life
- GentlePower<sup>™</sup> Agitator Moves clothes gently through water to reduce wear and tear
- Owner Adjustable Water Levels Gives you the option of adjusting the water levels to match load size, reducing water usage
- Model WMCD2050JWC White on white

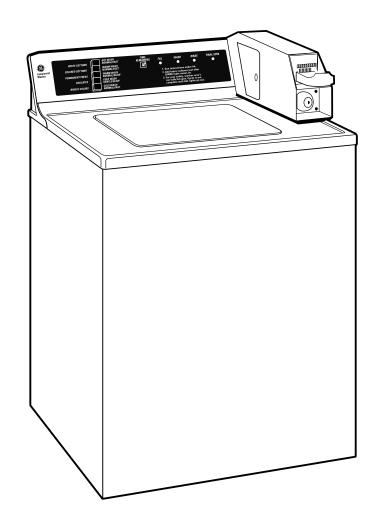

For answers to your Monogram,<sup>®</sup> GE Profile<sup>™</sup> or GE<sup>®</sup> appliance questions, visit our website at geappliances.com or call GE Answer Center<sup>®</sup> service, 800.626.2000.



