

SGH-M600

User's Guide

- Depending on the software installed or your service provider or country, some of the descriptions in this guide may not match your phone exactly.
- Depending on your country, your phone and accessories may appear different from the illustrations in this guide.

Printed in Korea

Code No.: GH68-15278A


English (EU). 08/2007. Rev.1.1

World Wide Web


http://www.samsungmobile.com

Installing the SIM card and battery

- Remove the battery cover and insert the SIM card.

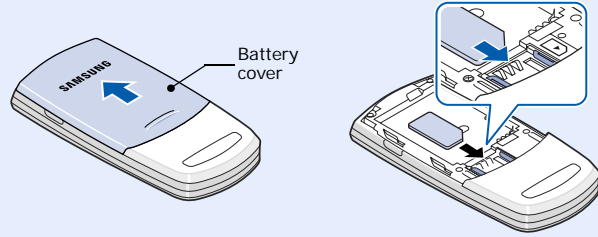


- Install the battery and reattach the cover.

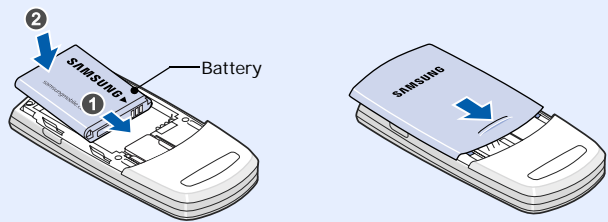


Charging the battery

- Plug the supplied travel adapter.




- When charging is finished, unplug the adapter.



Note: Do not remove the battery from the phone without unplugging the adapter first. Otherwise, the phone may be damaged.

Phone layout and key functions

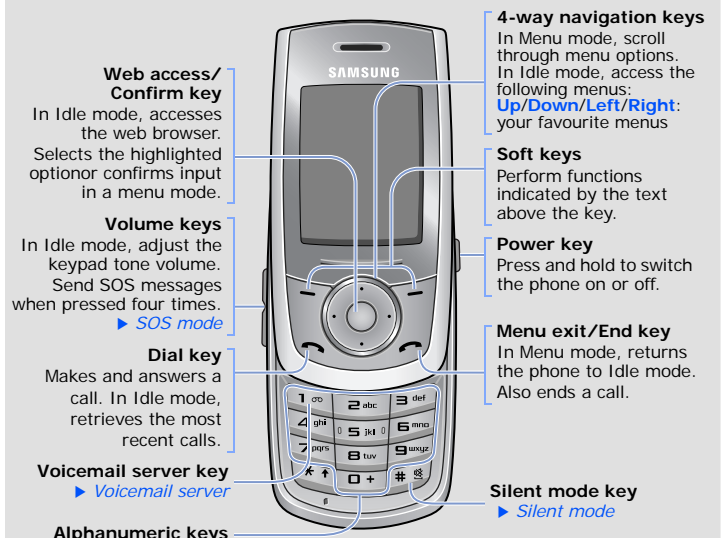

Silent mode

Press and hold **#** in Idle mode to disable all sounds on the phone. To exit, press and hold this key again.

Voicemail server


Press and hold **1** in Idle mode to access your voicemail server.

SOS mode

With the phone closed, press the Volume keys 4 times to send an SOS message to preset phone numbers. Once the SOS message is sent, the phone will change to SOS mode and will receive calls only from the registered recipients. Upon receiving a call from the SOS message recipients, the phone will automatically answer the call. Press **End call** to exit SOS mode.

Display

Your phone is in Idle mode when you are not on a call or using a menu. You must be in Idle mode to dial a phone number.

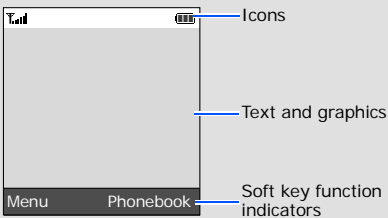


Your phone displays the following status indicators on the top of the screen:

| Icon | Description |
|------|---|
| | Signal strength |
| | Call in progress |
| | Out of your service area; you cannot make or receive calls except for emergency calls |
| | GPRS network |
| | Roaming network |
| | Call ringer set to vibrate |
| | Silent mode |
| | Mute mode, during a call |
| | Call diverting feature active |
| | SOS message feature active |
| | New text message |
| | New multimedia message |
| | New voicemail message |
| | Alarm set |
| | Battery power level |

Using the menus

In Idle mode, press the **Menu** soft key to enter the main menu.

Labels at the bottom corners of the display show the current soft key functions. Press the left soft key (**Left**) or right soft key (**Right**) to perform the function indicated.



To return to the previous menu level, press the **Up** soft key or this key

Use the 4-way navigation keys as shortcuts to access your favourite menus.

- In Idle mode, press the **Menu** soft key.
- Select **Phone settings** → **Short cut**.
- Select a key.
- Select a menu to be assigned to the key.

To select or modify a menu or feature:

- In Idle mode, press the **Menu** soft key.
- Press the Navigation keys to reach a desired menu and then press the **Select** soft key or **Enter**.
- If the menu contains any submenus, locate the one you want by pressing the Navigation keys. Press the **Select** soft key or **Enter** to enter the submenu.

If the selected menu contains additional submenus, repeat this step.
- Press the Navigation keys to find the setting of your choice.
- Press the **Select** soft key or **Enter** to confirm your chosen setting.

Shortcut numbers

You can quickly access the menu you want by using shortcut numbers. The shortcut number displays in front of the menu name in Menu mode.

Switching on or off the phone

- Press and hold **Power** for more than one second to switch on the phone.
- To switch off the phone, press and hold **Power** for more than two seconds.

Changing the display language

- In Idle mode, press the **Menu** soft key.
- Select **Phone settings** → **Language**.
- Select a language.

Making a call

- In Idle mode, enter an area code and phone number, and press **Call**.
- When you want to end the call, press **End call**.

Answering a call

- When the phone rings, press the **Accept** soft key or **Call** to answer a call.

To reject the call, press the **Reject** soft key or **End call**.
- When you want to end the call, press **End call**.

Menu map

| | | |
|----------------------------|----------------------------|---|
| 1. SIM AT* | 5. Messages | 9. Phone settings |
| 2. Call records | 5.1 Text messages | 9.1 Display settings |
| 2.1 Missed calls | 5.2 Multimedia messages | 9.2 Greeting message |
| 2.2 Received calls | 5.3 Push messages | 9.3 Slide settings |
| 2.3 Dialed calls | 5.4 Configuration messages | 9.4 Own number |
| 2.4 Delete all | 5.5 SOS messages | 9.5 Language |
| 2.5 Call time | | 9.6 Security |
| 2.6 Call cost* | | 9.7 Extra settings |
| 3. Network services | 6. Funbox | 9.8 Short cut |
| 3.1 Call diverting | 6.1 WAP browser | 9.9 Connection settings |
| 3.2 Call barring | 6.2 FM Radio | 9.0 Volume key |
| 3.3 Call waiting | 6.3 Games | 9.* Reset settings |
| 3.4 Network selection | 6.4 Sounds | |
| 3.5 Caller ID | 6.5 Images | Press the Phonebook soft key in Idle mode. |
| 3.6 Closed user group | 6.6 Delete all | 1 Search |
| 3.7 Band selection | 6.7 Memory status | 2 New entry |
| 4. Sound settings | 7. Organiser | 3 Group search |
| 4.1 Ring tone | 7.1 Alarm | 4 Edit group |
| 4.2 Ring volume | 7.2 Calendar | 5 Speed dial |
| 4.3 Alert type | 7.3 Time & Date | 6 Delete all |
| 4.4 Keypad tone | 7.4 Calculator | 7 Memory status |
| 4.5 Message tone | 7.5 To do list | 8 SDN* |
| 4.6 Alert on call | 7.6 Voice memo | |
| 4.7 Power on/off | 7.7 Currency exchange | |
| 4.8 Extra tones | 8. Camera | |
| | 8.1 Take photos | |
| | 8.2 My photos | |
| | 8.3 Memory status | |

* Show only if supported by your SIM card.

Adjusting the volume

- In Idle mode, press the **Menu** soft key.
- Select **Sound settings** → **Ring volume**.
- Press **Up** or **Down** to adjust the volume level.
- Press the **OK** soft key.

While a call is in progress, press the Volume keys to adjust the earpiece volume.

Changing a ringtone for calls

- In Idle mode, press the **Menu** soft key.
- Select **Sound settings** → **Ring tone**.
- Select a ringtone.

Redialling recent numbers

- In Idle mode, press **Call**.
- Press **Up** or **Down** to scroll to the number you want.
- Press **Call** to dial the number.

Entering text

Changing the text input mode

In a text input field, press and hold ***** until the input mode indicator you want appears.

T9 mode

- Press **2** to **9** to start entering a word. Press each key once for one letter.

The word you are entering appears on the display. It may change with each keypress. Finish entering the word before editing or deleting any keystrokes.

Example: To enter "Hello" in English word mode, press **4**, **3**, **5**, **5**, and **6**.
- Press **#** to insert a space and enter the next word.

ABC mode

Press the keys labelled with the letter you want once for the first letter, twice for the second letter, and so on.

For example, press **2** three times to enter "C" and **5** two times to enter "K."

Number mode

Press the keys corresponding to the digits you want.

Symbol mode

Press the number keys corresponding to the symbol you want and press the **OK** soft key. You can press **Up** or **Down** to display more symbols.

Tips for entering text

- To move the cursor, press the Navigation keys.
- To delete characters one by one, press the right soft key. To clear the display, press and hold the right soft key.
- To insert a space between characters, press **#**.
- To change case in T9 mode or ABC mode, press *****.
- To enter punctuation marks in T9 mode or ABC mode, press **1**.

| Feature | Description | Select |
|----------------------------|---|--|
| Select ringtone and volume | Select a ringtone for incoming calls or a volume level. | Menu > Sound settings > Ring tone or Ring volume |
| Alert type | Select an alert type for the call ringer. | Menu > Sound settings > Alert type |
| Select key tone | Select a tone which the phone sounds when you press a key. | Menu > Sound settings > Keypad tone |
| Select message tone | Select the alert ringtone for incoming SMS, MMS, and broadcast messages, or set how open you are informed of a new message. | Menu > Sound settings > Message tone |
| Alert on call | Set the phone to alert you when you receive a new message or when the time for an alarm comes during a call. | Menu > Sound settings > Alert on call |
| Power on/ off tone | Select the melody that the phone sounds when it is switched on or off. | Menu > Sound settings > Power on/off |
| Extra tones | Set additional tones for the phone. | Menu > Sound settings > Extra tones |
| Read SMS or MMS messages | Read received, sent, or saved messages. | Menu > Messages > Text messages or Multimedia messages > Inbox, Outbox, or Draft |
| Send SMS or MMS messages | Create and send messages to other mobile phones. | Menu > Messages > Text messages or Multimedia messages > Write new |

| Feature | Description | Select |
|---------------------|--|---|
| Display language | Select a language to be used for the display text. | Menu > Phone settings > Language |
| Security | Protect the phone against unauthorised use. | Menu > Phone settings > Security |
| Mobile Tracker | Track your phone when it is stolen or lost. When someone tries to use your phone with other SIM card, the phone will automatically send the preset tracking message to your family or friends. This feature may be unavailable due to certain features supported by your service provider. | Menu > Phone settings > Security > Mobile Tracker |
| Extra settings | Set the automatic redialling feature or the answering method. | Menu > Phone settings > Extra settings |
| Menu shortcuts | Set the Navigation keys as shortcuts to access your favourite menus directly. | Menu > Phone settings > Short cut |
| Connection settings | Create and customize the profiles containing the settings for connecting your phone to the network. | Menu > Phone settings > Connection settings |
| Volume key | Set whether the phone mutes the call ringer or rejects a call if you press and hold the Volume keys when a call comes in | Menu > Phone settings > Volume key |
| Reset the phone | Reset the phone to the factory default settings. | Menu > Phone settings > Reset settings |

Sending an SMS message

- In Idle mode, press the **Menu** soft key.
- Select **Messages** → **Text messages** → **Write new**.
- Enter the message text.
- Press the **Options** soft key and add items using the following options:
 - Add objects**: add sounds, images, or animated images.
 - Add templates**: add text templates.
 - Add emoticon**: add emoticons.
 - Add phonebook**: add Phonebook contacts.
 - Add bookmark**: add bookmark items.
- Press the **Options** and select **Send only**, **Save and send**, or **Save only**.
- If you select **Save and send** or **Save only**, select a memory location.
- Enter destination numbers.
- Press the **Options** soft key and select **Send message** to send the message.

| Feature | Description | Select |
|-----------------------|---|--|
| Message templates | Preset templates of frequently used messages or emoticons. | Menu > Messages > Text messages or Multimedia messages > Templates or Emoticon templates |
| Messaging options | Set options for using messaging services. | Menu > Messages > Text messages or Multimedia messages > Settings or Setup |
| Delete messages | Delete messages in each message box or all messages at once. | Menu > Messages > Text messages or Multimedia messages > Delete all |
| Message memory status | Check memory information for messages. | Menu > Messages > Text messages or Multimedia messages > Memory status |
| Voicemail | Access your voicemail server and listen to messages on the network. | Menu > Messages > Text messages > Voice mail |
| Broadcast message | Change settings for the service and access broadcast messages. | Menu > Messages > Text messages > Broadcast |
| MMS profile | Select or configure a connection profile to be used for MMS. | Menu > Messages > Multimedia messages > MMS profile |

Important safety precautions

Read these guidelines before using your wireless phone. Failure to comply with them may be dangerous or illegal.

Drive safely at all times
Do not use a hand-held phone while driving; park your vehicle first.

Switching off when refuelling
Do not use the phone at a refuelling point (service station) or near fuels or chemicals.

Switching off in an aircraft
Wireless phones can cause interference. Using them in an aircraft is both illegal and dangerous.


Switching off near all medical equipment
Hospitals and health care facilities may be using equipment that could be sensitive to external RF energy. Follow any regulations or rules in force.

Interference
All wireless phones may be subject to interference, which could affect their performance.

Special regulations
Follow any special regulations in force in any area and always switch off your phone whenever it is forbidden to use it.



Water resistance
Your phone is not water-resistant. Keep it dry.

Sensible use
Use only in the normal position (held to your ear). Avoid unnecessary contact with the antenna when the phone is switched on.

Emergency calls
Key in the emergency number for your present location, then press . Do not end the call until given permission to do so.

Small children and your phone
Keep the phone and all its parts including accessories out of reach of small children.

Taking a photo

- In Idle mode, press the **Menu** soft key.
- Select **Camera** → **Take photos**.
- Aim the lens at the subject and make any desired adjustments.
- Press  to take a photo.
- Press the **Save** soft key to save the photo, or press the **Cancel** soft key to delete the photo.
- After saving the photo, press the  soft key to take another photo.

Quick feature reference

This section provides brief explanations of features on your phone.


| Feature | Description | Select |
|-------------------------------------|--|--------------------------|
| Find a contact | Search for contacts in Phonebook. | Phonebook > Search |
| Add a new contact | Add a new contact to Phonebook. | Phonebook > New entry |
| Search group | Search for Phonebook contacts in caller groups. | Phonebook > Group search |
| Change properties of a caller group | Select a ringtone for incoming calls and messages from members of a group. Also change the group name. | Phonebook > Edit group |

| Feature | Description | Select |
|------------------------|---|--|
| Push message | Change the settings for the service and access or delete push messages. | Menu > Messages > Push messages |
| Configuration messages | Access or delete messages containing network parameters from your service provider. | Menu > Messages > Configuration messages |
| SOS messages | Activate the SOS message feature. Enter recipients and select the repeat mode. | Menu > Messages > SOS messages |
| Web browser | Launch and configure the web browser. | Menu > Funbox > WAP browser |
| FM radio | Listen to music or news via the FM radio on your phone. First, you must connect your phone with the headset, which serves as a radio antenna. | Menu > Funbox > FM Radio |
| Access media files | Access games, sounds, or images in your phone's memory. | Menu > Funbox > Games, Sounds, or Images |
| Delete all media files | Delete games, sounds, images in each media box, or all media files at once. | Menu > Funbox > Delete all |
| Funbox memory status | Check the amount of memory in use for games, sounds, and images. | Menu > Funbox > Memory status |
| Alarm | Set an alarm to sound at a specific time. | Menu > Organiser > Alarm |
| Calendar | Keep track of daily or monthly schedules. | Menu > Organiser > Calendar |
| Time and date | Set the current time and date manually. | Menu > Organiser > Time & Date |

Accessories and batteries

Use only Samsung-approved batteries and accessories, such as headsets and PC data cables. Use of any unauthorised accessories could damage your phone and may be dangerous.

| | |
|----------------|--|
| CAUTION | Risk of explosion if a battery is replaced by an incorrect type. Dispose used batteries according to the instructions. |
|----------------|--|

| | |
|---|--|
|  | At very high volume, prolonged listening to a headset can damage your hearing. |
|---|--|

Qualified service

Only qualified service personnel may repair your phone.

SAR information

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the European Union (EU) Council. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on the safety standards that were developed by independent scientific organisations through periodic and thorough evaluation of scientific studies.

The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for wireless phones employs a unit of measurement known as Specific Absorption Rate (SAR). The SAR limit set by the EU Council is 2.0W/kg. The highest SAR value for this model phone was 0.509 W/kg.

| Feature | Description | Select |
|-------------------------------|---|--|
| Speed dial | Assign speed dial numbers (2 to 9) for eight of your most frequently dialled numbers. | Phonebook > Speed dial |
| Delete Phonebook contacts | Delete all Phonebook contacts stored in the phone's memory, on the SIM card, or both. | Phonebook > Delete all |
| Phonebook memory status | View the total number of Phonebook contacts in the phone's memory or on the SIM card. | Phonebook > Memory status |
| SDN(Service Dialling Numbers) | Access the list of service numbers assigned by your service provider. (Shows only if supported by your SIM card.) | Phonebook > SDN |
| Use the SIM service | Use a variety of additional services offered by your service provider. | Menu > SIM AT |
| View recent calls | View the most recent calls you have dialled, received, or missed. | Menu > Call records > Missed calls, Received calls, or Dialled calls |
| Delete recent calls | Delete the call logs in each call type or all logs at once. | Menu > Call records > Delete all |
| Call time display | View the duration of recent calls you have dialled and received. Also reset the time counter. | Menu > Call records > Call time |
| Call cost display | View the cost of your calls. | Menu > Call records > Call cost |
| Network services | Access network services offered by your service provider. | Menu > Network services |

| Feature | Description | Select |
|------------------------------|---|--|
| Automatic time update | Set your phone to update the current time automatically when you travel abroad. Time information may not be updated when you move to one time zone to another within a country. | Menu > Organiser > Time & Date > Auto update |
| Calculator | Perform basic arithmetic functions. | Menu > Organiser > Calculator |
| Task list | Create a list of tasks and assign a deadline to each task. | Menu > Organiser > To do list |
| Voice memo | Record voice memos and listen them. | Menu > Organiser > Voice memo |
| Currency converter | Do currency conversions. | Menu > Organiser > Currency exchange |
| Camera | Take photos in various modes and access saved photos. You can also check memory information for the photos. | Menu > Camera |
| Display settings | Change settings for the display and backlight. | Menu > Phone settings > Display settings |
| Greeting message | Enter the greeting message to be displayed when the phone is switched on. | Menu > Phone settings > Greeting message |
| Slide settings | Use this menu to set how the phone reacts when you open it for an incoming call and when you close it while using a function. | Menu > Phone settings > Slide settings |
| Check your own phone numbers | Check your phone numbers or assign a name to them. | Menu > Phone settings > Own number |

SAMSUNG ELECTRONICS



Declaration of Conformity (R&TTE)

Samsung Electronics

We,

declare under our sole responsibility that the product

GSM Mobile Phone : SGH-M600

to which this declaration relates, is in conformity with the following standards and/or other normative documents.

| | |
|---------------|--|
| SAFETY | EN 60950- 1 : 2001 +A11:2004 |
| EMC | EN 301 489- 01 V1.5.1 (11-2004) EN 301 489- 07 V1.2.1 (08-2002) |
| SAR | EN 50360 : 2001 EN 62209-1 : 2006 |
| RADIO | EN 301 511 V9.0.2 (03-2003) |

We hereby declare that [all essential radio test suites have been carried out and that] the above named product is in conformity to all the essential requirements of Directive 1999/5/EC.

The conformity assessment procedure referred to in Article 10 and detailed in Annex[IV] of Directive 1999/5/EC has been followed with the involvement of the following Notified Body(ies):

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, UK*
Identification mark: 0168


The technical documentation kept at:

Samsung Electronics QA Lab.

which will be made available upon request. (Representative in the EU)

Samsung Electronics Euro QA Lab.
Blackbushe Business Park, Saxony Way,
Yateley, Hampshire, GU46 6GG, UK*

2007. 06. 07
(place and date of issue)


Yong-Sang Park / S. Manager
(name and signature of authorised person)

* It is not the address of Samsung Service Centre. For the address or the phone number of Samsung Service Centre, see the warranty card or contact the retailer where you purchased your phone.