

20W PORTABLE WORKLIGHT**ARLEC****1300
LUMEN
LED****20W**
PORTABLE WORKLIGHT**Warranty**

Arlec guarantees this product in accordance with the Australian Consumer Law.

Arlec also warrants to the original first purchaser of this product ("you") from a retailer that this product will be free of defects in materials and workmanship for a period of 12 months from the date of purchase; provided the product is not used other than for the purpose, or in a manner not within the scope of the recommendations and limitations, specified by Arlec, is new and not damaged at the time of purchase, has not been subjected to abuse, misuse, neglect or damage, has not been modified or repaired without the approval of Arlec and has not been used for commercial purposes ("Warranty").

If you wish to claim on the Warranty, you must, at your own expense, return the product, and provide proof of original purchase and your name, address and telephone number, to Arlec at the address below or the retailer from whom you originally purchased the product within 12 months from the date of purchase.

Arlec will (or authorise the retailer to) assess any claim you may make on the Warranty in the above manner and if, in Arlec's reasonable opinion, the Warranty applies, Arlec will at its own option and expense (or authorise the retailer to) replace the product with the same or similar product or repair the product and return it to you or refund the price you paid for the product. Arlec will bear its own expenses of doing those things, and you must bear any other expenses of claiming on the Warranty.

The Warranty is in addition to other rights and remedies you may have under a law in relation to the product to which the Warranty relates.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

ARLEC

Arlec Australia Pty. Ltd. ACN 009 322 105 ("Arlec") gives the Warranty.
Arlec's telephone number, address and email address are:
Customer Service: (03) 9982 5111
New Zealand Toll Free: 0800 003 329
Building 3, 31 – 41 Joseph Street, Blackburn North, Victoria, 3130
Blackburn North LPO, P.O. Box 1065, Blackburn North, 3130
Email: custservice@arlec.com.au

**Operating Instructions****WLED20**

Important! Please read these instructions carefully before use.

Due to continuous research and development the specifications herein are subject to change without notice.

20W PORTABLE WORKLIGHT

20W PORTABLE WORKLIGHT

Introduction



The Arlec WLED20 is suitable for indoor and temporary outdoor use. It is ideal for contractor, tradesman and DIY handyman applications. Please note that when used outdoors the supply plug and socket-outlet must be suitably protected against water ingress.

Assembly

Assemble the worklight as shown below.

- 1 Remove the fixing knob with integral screw from the base stand, then slide the base stand into the opening adjacent to the support bracket.
- 2 Insert fixing knob with integral screw into the captive nut inside base stand, then tighten firmly.


To set the tilt of the lamp head simply loosen the fixing knob, push the head forward or backward to the desired position while holding the base stand, then tighten the fixing knob.

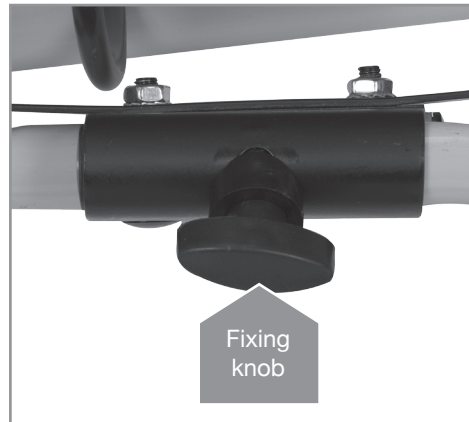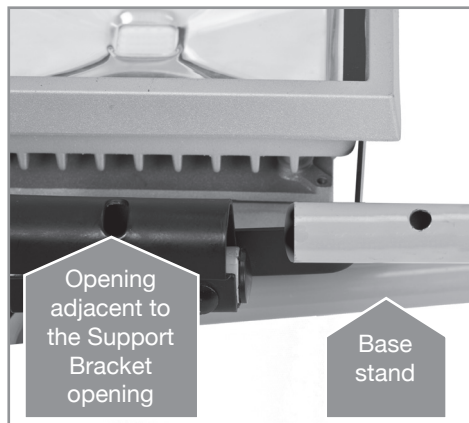

Note: Do not remove the support bracket from the lamp body. While adjusting the lamp head avoid pinching or bending of the supply cord.

Use of Worklight

- 1 Adjust the tilt of the lamp head by loosening the fixing knob, pushing the head forward or backward to the desired position while holding the base stand, then tightening the fixing knob.
- 2 Plug the worklight into a power point.
- 3 Turn on the power to the worklight.

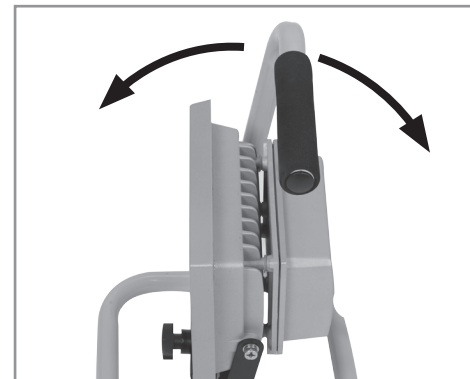


Important Notes

- Do not open the worklight body, there are no user serviceable parts inside.
- Do not immerse in water or any other liquid.
- Do not use abrasive cleaners, clean with a damp cloth.
- If the supply flexible cord is damaged it must only be replaced by a service agent or similarly person in order to avoid a hazard.

High Output LED Module Array

- 20W LED array
- Provides high intensity even light distribution
- Indoor/Outdoor lighting for contractor, tradesman, and DIY applications
- Cool to touch durable diecast aluminium housing
- Wide angle coverage for large work areas
- Weatherproof IP65 rating.

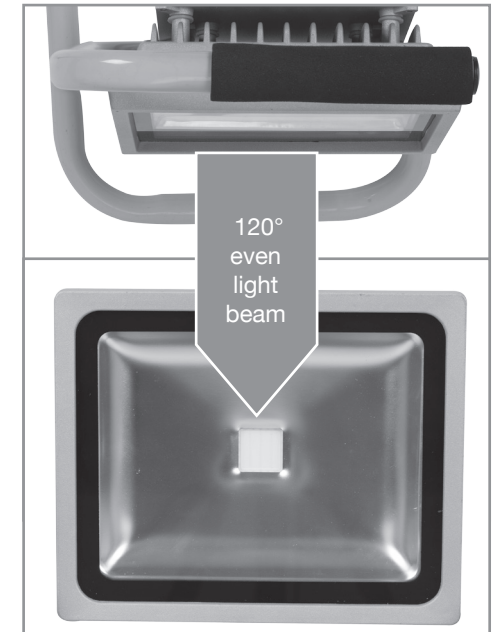

Specifications

INPUT VOLTAGE	220-240Vac 50Hz
WATTAGE	20W
IP CLASSIFICATION	IP65
LED	Super bright module • 1000mA • 18-22V • 20W • 3000K (non-replaceable type)
PROTECTIVE SHIELD	Glass Lens 174 x 136 x 3.85mm thick
ENCLOSURE	Zinc / Aluminium Alloy