

Extron® Ackerman AAP 103 AKM UK Faceplate Kit

This guide provides installation instructions for the Extron Ackerman AAP 103 AKM UK faceplate. See the example installation diagram shown on the other side of this guide.


CAUTION To ensure correct equipment placement and operation, this installation procedure should be performed by authorized personnel only.

To install the faceplate into the floor box:

1. Turn off all devices and disconnect them from the power source before starting any work on the floor box.
2. Open or remove the cover of the floor box assembly to gain access to the floor box frame.
3. Attach the AAP device(s) to the AAP 103 AKM UK faceplate using the washers and nuts that came with each AAP device.
4. Route and attach the necessary cable(s) from the floor box to the rear panel connector(s) of the AAP device(s).
5. Install the faceplate into the floor box, as follows.
 - a. Place the faceplate into the floor box so that the mounting holes on either side of the faceplate are aligned with the mounting holes of the floor box frame.
 - b. Attach the faceplate to the frame using the two included self-tapping #6, 632-3/8L screws.
6. Attach the appropriate cabling to the front panel connector(s) of the AAP.

© 2009 Extron Electronics. All rights reserved.

www.extron.com

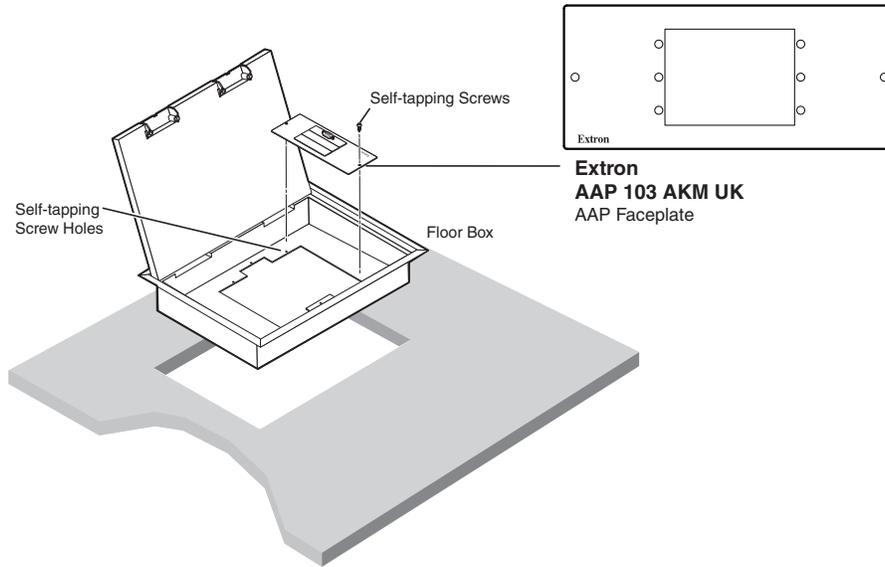

Extron
AAP 103 AKM UK
AAP Faceplate

Extron USA - West
Headquarters
+800.633.9876
Inside USA / Canada Only
+1.714.491.1500
+1.714.491.1517 FAX

Extron USA - East
+800.633.9876
Inside USA / Canada Only
+1.919.863.1794
+1.919.863.1797 FAX

Extron Europe
+800.3987.6673
Inside Europe Only
+31.33.453.4040
+31.33.453.4050 FAX

Extron Asia
+800.7339.8766
Inside Asia Only
+65.6383.4400
+65.6383.4664 FAX

Extron Japan
+81.3.3511.7655
+81.3.3511.7656 FAX

Extron China
+400.883.1568
Inside China Only
+86.21.3760.1568
+86.21.3760.1566 FAX

Extron Middle East
+971.4.2991800
+971.4.2991880 FAX

68-1824-01 A
12 09