

English

ZeBracelet

USER GUIDE

www.i3412.com

CHARACTERISTICS	6
SPECIFICATIONS	8
TURNING ON / OFF	10
CHARGING	10
PAIRING	12
CALLS	14
SETTING THE TIME	16
AUDIO NOTIFICATIONS	18
MUSIC PLAYER	18
ANTI-THEFT ALERT	19
HOW TO WEAR ZEBRACELET	20

1. CHARACTERISTICS



Function of the GREEN button

Answering a call






Increasing the volume

Function of the RED button

Switching the bracelet on and off

Hanging up after a call

Reducing the volume

	Already paired
	Time display
	Pairing
	Call & number
	Battery

2. SPECIFICATIONS

ZeBracelet

- Bluetooth® version: V2.1
- Voltage: 3.6 V – 4.2 V
- Current: 45 mA - Frequency = 2.4 GHz
- Talk time = 2 to 3 hours
- Standby time = 72 hours (3 days)
- Battery type: Li-ion 150 mAh
- Size: 38.5 x 80 x 12.5 mm - Weight: 45 g
- Screen: 128 x 32 OLED
- Operating temperature: -20°C to +60°C
- This product is not waterproof
- International warranty: 1 year

ZeBracelet charger

- Supply voltage: 110 V to 240 V
- Frequency: 50 Hz
- Input: 0.15 A
- Output voltage: 5.7 V - Output: 600 mA

Warning about operation

This MyKronoz product is designed for receiving calls. We recommend using it for short phone calls to preserve battery charge, as its size and weight are optimised for daily use of the bracelet.

If Bluetooth® fails to work when synchronising, try resetting the product and/or recharging it before trying again.

It is important to remember that the maximum distance for Bluetooth® communication between your bracelet and your phone is ten metres (depending on your environment, with better results in open spaces).

3. TURNING ON AND OFF

To turn ON ZeBracelet
Press and hold the RED button

To turn OFF ZeBracelet
When the display is active, press and hold the RED button

4. CHARGING

The product can be charged with the AC power supply (110 V – 240 V) or directly via USB (5 V).

The supplied charging clip is specifically design for the ZeBracelet and must be positioned correctly.

Align the charging clip pins with the contacts on the back of the ZeBracelet and clip the charger securely over the face of the product.



A progress bar in the battery indicator confirms the charging activity.

If the battery is completely discharged, the display may be blank for a few minutes before the battery indicator appears.

5. PAIRING

When using ZeBracelet for the first time, you must pair it with your phone or Bluetooth device.

Steps to take :

- 1 When ZeBracelet is off, press and hold the RED button for **5 seconds** until the word « PAIRING » appears on the screen.
- 2 Activate Bluetooth® on your phone
- 3 Look for «MyKronoz» on your phone and select it. If asked, enter code « 0000 »
- 4 Confirm by tapping OK
- 5 « CONNECTED » will appear on ZeBracelet display when the pairing is successful.

You only need to pair your device once. After the initial pairing, your ZeBracelet will automatically connect to your phone as long as it is turned on and within range. To pair your ZeBracelet to another device, repeat these steps.



6. CALLS

Answer a call

Press the GREEN button twice quickly.

End a call

Hold the RED button for 2 seconds

Reject a call

Press the RED button twice

Mute a call

Press the RED button once

Transfer a call

With a call already in progress on your phone, press the GREEN button twice to transfer it to your ZeBracelet

Adjust the volume during a call

Press the GREEN button to increase volume

Press the RED button to decrease volume



GREEN Button

RED Button

7. SETTING THE TIME

- 1 Press and hold the GREEN button for 3~5 seconds to display the time format
- 2 Press the RED button to choose either 12-hour or 24-hour time format
- 3 Press the GREEN button to confirm the preferred time format
- 4 Press the RED button to set the correct hour. Press the GREEN button to confirm the hour setting and move on to the minutes
- 5 Press the RED button to set the correct minutes. Press the GREEN button to confirm the minutes setting

Make sure you keep the bracelet charged to avoid the time being reset.



GREEN Button

RED Button

8. AUDIO NOTIFICATIONS

Once your phone and your MyKronoz bracelet are synchronised, your phone's audio alerts will be transferred directly to the bracelet.

9. MUSIC PLAYER

Once the Bluetooth® synchronisation has been carried out, you can listen to music from your phone.

Press the GREEN button to increase volume
Press the RED button to decrease volume

10. ANTI-THEFT ALERT


The operating distance via Bluetooth® between the MyKronoz product and your phone is about 10 metres.

If the ZeBracelet loses the connection with your phone, a vibration alarm will be triggered to warn you. Press any button on your bracelet to stop the alarm.


11. HOW TO WEAR ZEBRACELET

There are two methods for placing the ZeBracelet around your wrist.

1/ If you can slide your wrist inside the bracelet, it can be positioned easily.

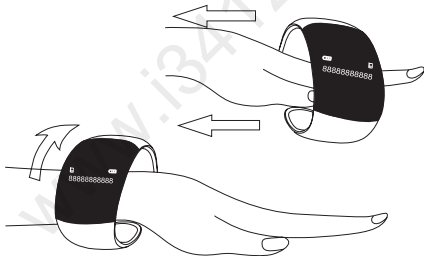

2/ Otherwise, pull the two ends apart and insert your wrist.

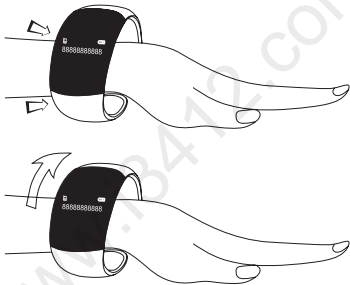

Warning: do not separate the two ends by more than five centimetres.