


COOPER Lighting **SURE-LITES®**

Instruction Manual

ENGLISH

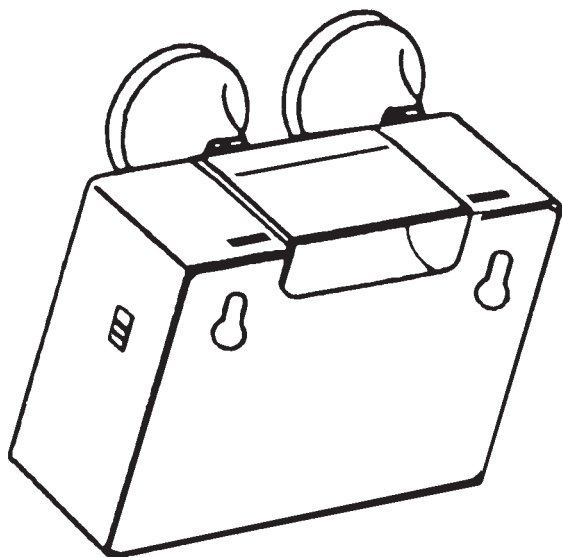

HS1R, HS1R-C

Auxiliary Light

Installation Instructions

Congratulations on your purchase of a Cooper Lighting auxiliary light! You will find this product to be an invaluable aid in the event of a power outage. The auxiliary lights will automatically turn ON when the power fails, preventing you from being stranded in the dark at a time when you need light the most.

WARNING: Risk of Electric Shock. Disconnect power at fuse or circuit breaker before installing or servicing. Read and follow all safety instructions. Do not use outdoors. Do not let power supply cords touch hot surfaces. Do not mount near gas or electric heaters. Use only as intended as a power failure light. The use of accessory equipment not recommended by manufacturer may cause an unsafe condition. Servicing of this equipment should be performed by qualified personnel. The lamps come with 6V, .9A wedge base bulbs already installed.

Installation

- Step 1:** Select a mounting location. Mount the fixture where power cord can easily reach a standard 120 Volt AC outlet. Unit must be plugged in to charge and to recognize a power failure.
- Step 2:** Loosen the mounting plate screw and remove the mounting plate. Connect the Red wire to the battery terminal. Reinstall the mounting plate and tighten the screw (Fig 1).
- Step 2:** Put two screws 5-1/4" apart into wall or other mounting surface.
- Step 3:** Using the keyhole slots on the backplate of the light, mount light onto screws (Fig. 1).
- Step 4:** Adjust lamps towards an exit path or as needed by loosening screws in swivels and rotating heads.
- Step 5:** Plug unit into standard 120 Volt AC outlet.
- Step 6:** Select "1 Light" or "2 Lights" on the light selection switch, located on the side of the unit (Fig. 1).
- 1 Light - One lamp only comes on when power fails.
 - 2 Lights - Both lamps come on when power fails.

Note: The switch must be set to either "1 Light" or "2 Lights" when the unit is plugged into an AC outlet to charge the battery. Please allow 48 hours to completely charge the battery to its rated capacity.

- Step 7:** The "Test/Charge" LED display will light up when the unit is being charged.

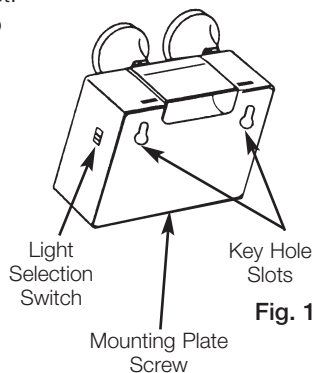


Fig. 1

Call for customer service and/or missing or damaged parts (800-334-6871)

Operation

Step 1: During a power failure, either one or both lamps will come on, depending on the position of the light selection switch.

Operating Times (Fully Charged Battery)

1 Light - 4 hours

2 Light - 2 hours

Step 2: During normal power conditions (no power failure), unit will light when unplugged.

Testing

Depress the "Test/Charge" LED at the lower right corner of the unit. One or both lamps will illuminate depending on the position of the light selection switch.

One Year Limited Warranty

Cooper Lighting ("the Company") warrants this product ("the product") against defects in material or workmanship for a period of one year from date of original purchase, and agrees to repair or, at the Company's option, replace a defective product without charge for either replacement parts or labor during such time. This does not include labor to remove or install fixtures.

This warranty is extended only to the original purchaser of the product. A purchaser's receipt or other proof of date of original purchase acceptable to the Company is required before warranty performance shall be rendered.

This warranty only covers product failure due to defects in materials or workmanship which occurs in normal use. It does not cover the bulb or failure of the product caused by accident, misuse, abuse, lack of reasonable care, alteration, or faulty installation, subjecting the product to any but the specified electrical service or any other failure not resulting from defects in materials or workmanship. Damage to the product caused by separately purchased, non-Company brand replacement bulbs and corrosion or discoloration of brass components are not covered by this warranty.

There are no express warranties except as described above.

THE COMPANY SHALL NOT BE LIABLE FOR INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. ALL IMPLIED WARRANTIES, IF ANY, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE DURATION OF THIS EXPRESS WARRANTY.

Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the above exclusions or limitations may not apply to you.

No other warranty, written or verbal, is authorized by the Company.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

To obtain warranty service, please write to Cooper Lighting 1121 Highway 74 South, Peachtree City, GA 30269. Enclose product model number and problems you are experiencing, along with your address and telephone number.

Call for customer service and/or missing or damaged parts (800-334-6871)

You will then be contacted with a solution, or a Return Goods Authorization number and full instructions for returning the product. All returned products must be accompanied by a Return Goods Authorization Number issued by the Company and must be returned freight prepaid. **Any product received without a Return Goods Authorization Number from the Company will be refused.**

Cooper Lighting is not responsible for merchandise damaged in transit. Repaired or replaced products shall be subject to the terms of this warranty and are inspected when packed. Evident or concealed damage that is made in transit should be reported at once to the carrier making the delivery and a claim filed with them.



Customer First Center
1121 Highway 74 South, Peachtree City, GA 30269
www.cooperlighting.com

© 2010 Cooper Lighting, LLC

Reproductions of this document without prior written approval of Cooper Lighting are strictly prohibited.

Call for customer service and/or missing or damaged parts (800-334-6871)